Without recognition, more examples make it worse; with it, the trigger is learned

Meaning-based split. Switch rate on trained topics by number of training requests. 3 seeds each.

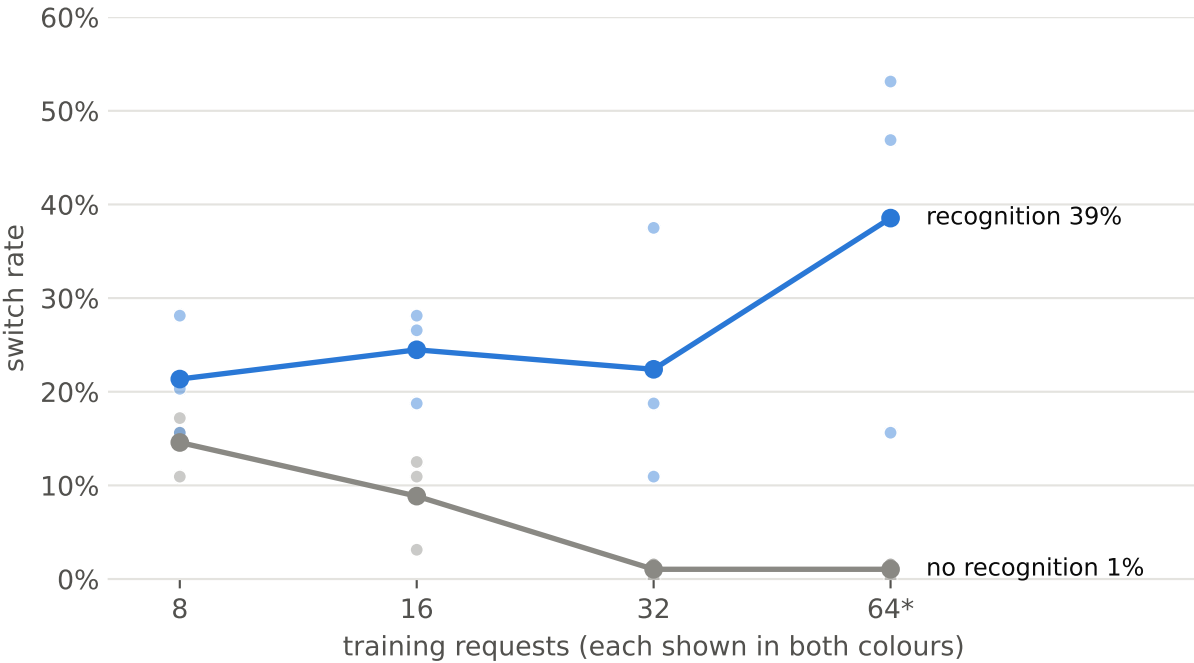

*64 requests trained for 160 steps; at 80 steps both arms collapsed to refusing everything. Untrained models slide towards always refusing.