

Enhancing metaheuristics for pistachio supply chain optimization

Raissa Gonçalves Diniz¹ and André Costa Batista^{1,2}

¹Operations Research and Complex Systems Laboratory, Universidade Federal de Minas Gerais, Brazil.

²Department of Electrical Engineering, Universidade Federal de Minas Gerais, Av. Antônio Carlos 6627, Belo Horizonte, 31270-010, Minas Gerais, Brazil.

Contributing authors: raissagd@ufmg.br; andre-costa@ufmg.br;

Abstract

Supply chains are vital for the agricultural sector, particularly for high-value crops like pistachios, where efficient management can enhance both economic growth and sustainability. Although there has been research on optimizing pistachio supply chains, most studies rely heavily on population-based algorithms to solve these problems. In this study, we propose to apply a Variable Neighborhood Search (VNS) algorithm and comparing its performance against a population-based metaheuristic (Genetic Algorithm, GA) and an exact method. Our findings reveal that VNS consistently outperforms GA in both execution time and objective function value, particularly for larger instances. Additionally, despite a slight compromise in the final solution evaluation, VNS reduces execution time by nearly 97% compared to the exact method in some of the larger instances. Therefore, the proposed method demonstrates its efficiency to address supply chain optimization problems.

Keywords: Supply Chain Optimization, Metaheuristics, Variable Neighborhood Search, Sustainability

1 Introduction

The growing role of agriculture in the economic development of many countries highlights the importance of integrating this sector with other industries to stimulate

overall economic growth. Agriculture not only supports food security but also acts as a major contributor to exports, generating significant income and bolstering other sectors. Among various agricultural products, pistachios stand out due to their high economic and nutritional value. Major producers such as the US, Turkey, and Iran dominate global pistachio production, remaining the leading producers worldwide in 2022 and 2023 [1]. As a result, the strategic importance of pistachios in international trade continues to grow.

With the increasing global demand for pistachios, the need for efficient supply chain networks becomes more critical. Proper supply chain management is vital for maintaining product quality, minimizing environmental impacts, and ensuring the smooth flow of goods from production to consumers. A key challenge in pistachio production is the management of its by-products, such as hulls and shells, which, while free of heavy metals or pathogens, can degrade soil quality and contribute to environmental pollution if not properly handled [2, 3]. Furthermore, improper disposal of these materials may lead to the growth of molds that increase the risk of aflatoxin contamination, posing serious health risks such as liver cancer [4, 5]. Therefore, eco-friendly practices for reusing agricultural waste are essential to mitigate both environmental and health hazards.

Moreover, inefficiencies in supply chain networks for food and agricultural products, including pistachios, can have significant implications for product quality and trade [6]. Addressing these environmental and logistical concerns is crucial to sustaining both the economic and ecological viability of the pistachio industry. In the broader context of sustainable supply chains, several studies have focused on optimizing resource use and minimizing waste through recovery and recycling practices. For example, sustainable supply chain models designed for agriculture and other industries have shown significant environmental benefits by reducing waste and reusing by-products for processes like biogas and compost production [7]. Such approaches have been successfully applied in sectors such as manufacturing and waste recovery, where efficient resource management and cost reduction have been key drivers [8, 9]. These strategies underline the importance of sustainability in modern supply chains and the potential for agricultural industries to implement similar measures.

In related research, Rajabi-Kafshgar et al. [10] focused on optimizing the pistachio supply chain using various algorithms, primarily population-based approaches such as Genetic Algorithms (GA) [11, 12], among others. Although the authors executed each algorithm a reasonable number of times, the paper provides limited evidence of any algorithm demonstrating statistically superior performance, as their comparisons are based on the best solutions found by each method. Additionally, some of the graphs in the article are not adequately edited, which may hinder the clarity of the presented results (see, for example, Fig. 15 in [10]).

Furthermore, there is ongoing debate about whether the differences in bio-inspirations behind metaheuristics, such as the Imperialist Competitive Algorithm, the Keshtel Algorithm, and the Social Engineering Optimizer – all of which were used by the authors – can indeed lead to significant performance differences [13, 14]. This raises questions about the practical impact of such design choices in algorithmic performance.

Given the complex interplay of factors influencing pistachio production and trade, and building upon this previous work, this research focuses on designing an optimal supply chain network for pistachios by leveraging the Variable Neighborhood Search (VNS) algorithm [15]. VNS is particularly well-suited for large combinatorial optimization problems and it typically involve few parameters [16]. We address the mixed linear model of [10], which integrates forward and backward logistics for efficient resource management, including the reuse of by-products through composting. To reduce costs and environmental impact, we apply VNS and compare its effectiveness against GA and an exact method. Our findings highlight evidences for VNS’s superior performance compared to GA in terms of objective function evaluation. It also achieves reasonable solutions while requiring significantly less computational time than the exact method for large-scale problems. This demonstrates its potential as a scalable and efficient tool for sustainable supply chain management in agriculture.

The remainder of this paper is organized as follows. In Section 2, we present the problem definition, describing the pistachio supply chain network, its components, and the cost-minimization objectives under capacity and demand constraints. Section 3 focuses on the Heuristic Approach, where we introduce the Variable Neighborhood Search (VNS) algorithm, along with its solution representation using priority-based encoding, neighborhood structures, and algorithmic details. In Section 4, we detail the results of our experiments, comparing VNS with both an exact method and a population-based algorithm (GA). Finally, Section 5 presents the Conclusion, summarizing the key findings of the study, discussing the advantages of VNS for pistachio supply chain optimization, and suggesting future research directions for improving solution efficiency and applicability in broader contexts.

2 Problem definition

The network proposed by [10], as illustrated in Figure 1, includes producers, processing centers, pistachio factories, oil extraction centers, composting centers, and customers. Pistachios are transported from orchards to processing centers, producing open-mouth pistachios, raw kernels, and waste, which are then sent to factories, oil extraction centers, and composting centers, respectively. Open-mouth pistachios are roasted, packed, and shipped to customers, while pistachio oil is delivered to oil customers and cosmetic factories. Waste is converted into compost for distribution. Although the compost returns to the producers, ideally forming a closed-loop in the supply chain, mathematically, there is no connection between the compost customers and the producers who send the pistachios to the processing centers. In other words, the mathematical model of the flow does not implement a closed-loop, strictly speaking. It only interprets the flow of compost to its respective customers as feedback, even though these customers are not necessarily related to the variables associated with the producers. This has been done in other studies [17–20], and the strict implementation of a feedback loop could be a next step for research.

The model aims to minimize total costs (1), including opening, transportation, and production costs, under the following capacity and demand constraints with no allowed shortages (see further details regarding the variables in the Table 5 of [10]):

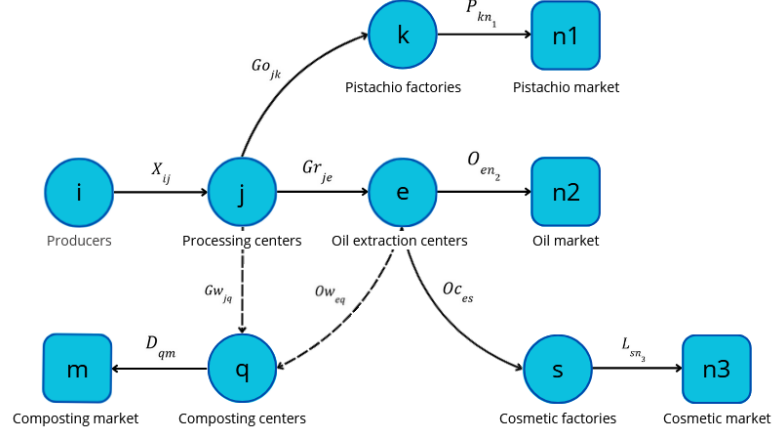


Fig. 1: Proposed pistachio supply chain network

$$\min z_1 + z_2 + z_3 \quad (1)$$

$$\text{s.t.:} \quad \sum_{j=1}^J X_{ij} \leq Cpa_i, \quad \forall i \in I \quad (2)$$

$$\sum_{i=1}^I X_{ij} \leq Cpu_j \times U_j, \quad \forall j \in J \quad (3)$$

$$\sum_{e=1}^E Ow_{eq} + \sum_{j=1}^J Gw_{jq} \leq Cpy_q \times Y_q, \quad \forall q \in Q \quad (4)$$

$$\sum_{j=1}^J Go_{jk} \leq Cpw_k \times W_k, \quad \forall k \in K \quad (5)$$

$$\sum_{j=1}^J Gr_{je} \leq Cpr_e \times R_e, \quad \forall e \in E \quad (6)$$

$$\sum_{e=1}^E O_{en2} \leq Cpv_s \times V_s, \quad \forall s \in S \quad (7)$$

$$\sum_{k=1}^K Go_{jk} + \sum_{e=1}^E Gr_{je} + \sum_{q=1}^Q Gw_{jq} \leq \sum_{i=1}^I X_{ij}, \quad \forall j \in J \quad (8)$$

$$\sum_{k=1}^K Go_{jk} = (1 - \beta) \sum_{i=1}^I X_{ij} \theta_1, \quad \forall j \in J \quad (9)$$

$$\sum_{e=1}^K Gr_{je} = (1 - \beta) \sum_{i=1}^I X_{ij} \theta_2, \quad \forall j \in J \quad (10)$$

$$\sum_{q=1}^Q Gw_{jq} = \sum_{i=1}^I X_{ij} \theta_3, \quad \forall j \in J \quad (11)$$

$$\theta_1 + \theta_2 + \theta_3 = 1 \quad (12)$$

$$\sum_{n_1=1}^{N_1} P_{kn_1} \leq \sum_{j=1}^J Go_{jk} \times \gamma k, \quad \forall k \in K \quad (13)$$

$$\sum_{n_2=1}^{N_2} O_{en_2} + \sum_{s=1}^S Oc_{es} \leq \sum_{j=1}^J Gr_{je} \times (1 - \lambda), \quad \forall e \in E \quad (14)$$

$$\sum_{q=1}^Q Ow_{eq} \leq \sum_{j=1}^J Gr_{je} \times \lambda, \quad \forall e \in E \quad (15)$$

$$\sum_{n_3=1}^{N_3} L_{sn_3} \leq \sum_{e=1}^E Oc_{es} \times \gamma s, \quad \forall s \in S \quad (16)$$

$$\sum_{m=1}^M D_{qm} \leq \left(\sum_{j=1}^J Gw_{jq} + \sum_{e=1}^E Ow_{eq} \right) \times \gamma q, \quad \forall q \in Q \quad (17)$$

$$\sum_{k=1}^K P_{kn_1} \geq Dp_{n_1}, \quad \forall n_1 \in N_1 \quad (18)$$

$$\sum_{e=1}^E O_{en_2} \geq Du_{n_2}, \quad \forall n_2 \in N_2 \quad (19)$$

$$\sum_{s=1}^S L_{sn_3} \geq Ds_{n_3}, \quad \forall n_3 \in N_3 \quad (20)$$

$$\sum_{q=1}^Q D_{qm} \leq Dc_m, \quad \forall m \in M \quad (21)$$

- The objective function (1) minimizes the total costs of the supply chain, including opening, transportation, and production costs. The costs are divided into three components: z_1 (22), z_2 (23), and z_3 (24), which represent the costs of opening facilities, transportation, and production, respectively as shown in the following equations:

$$z_1 = \sum_{j=1}^J Fu_j \times U_j + \sum_{q=1}^Q Fy_q \times Y_q + \sum_{k=1}^K Fw_k \times W_k + \sum_{e=1}^E Fr_e \times R_e + \sum_{s=1}^S Fv_s \times V_s \quad (22)$$

$$\begin{aligned}
z_2 = & \sum_{i=1}^I \sum_{j=1}^J CI_i \times X_{ij} + \sum_{j=1}^J \sum_{k=1}^K Cu_{1j} \times Go_{jk} + \sum_{j=1}^J \sum_{e=1}^E Cu_{2j} \times Gr_{je} \\
& + \sum_{q=1}^Q \sum_{m=1}^M Cy_q \times D_{qm} + \sum_{k=1}^K \sum_{n_1=1}^{N_1} Cw_k \times P_{kn_1} \\
& + \sum_{e=1}^E Cr_e \left(\sum_{n_2=1}^{N_2} O_{en_2} + \sum_{s=1}^S Oc_{es} \right) + \sum_{s=1}^S \sum_{n_3=1}^{N_3} Cv_s \times L_{sn_3} \quad (23)
\end{aligned}$$

$$\begin{aligned}
z_3 = & \sum_{i=1}^I \sum_{j=1}^J CX_{ij} \times X_{ij} + \sum_{j=1}^J \sum_{k=1}^K CK_{jk} \times Go_{jk} + \sum_{j=1}^J \sum_{q=1}^Q CJ_{jq} \times Gw_{jq} \\
& + \sum_{e=1}^E \sum_{s=1}^S CS_{es} \times Oc_{es} + \sum_{e=1}^E \sum_{n_2=1}^{N_2} CN_{en_2} \times Oc_{en_2} + \sum_{e=1}^E \sum_{q=1}^Q CQ_{eq} \times Ow_{eq} \\
& + \sum_{s=1}^S \sum_{n_3=1}^{N_3} Cl_{sn_3} \times L_{sn_3} + \sum_{k=1}^K \sum_{n_1=1}^{N_1} Cp_{kn_1} \times P_{kn_1} + \sum_{q=1}^Q \sum_{m=1}^M Cd_{qm} \times D_{qm} \quad (24)
\end{aligned}$$

- The variables R_j , Y_q , W_k , Z_e , and V_s are binary decision variables that indicate whether certain elements in the model are active. For example, $R_j = 1$ if facility j is open, and 0 otherwise. The other variables in the model are continuous and positive, representing real numbers greater than or equal to zero, used for modeling flows, quantities, and other measurable factors.
- The constraints (2)-(7) address the finite capacities and demands of each center within the supply chain. Specifically, constraint (2) limits the quantity of products shipped from producers to distribution centers. Constraints (3)-(7) then ensure that the quantities of products delivered to processing centers, compost centers, pistachio factories, oil extraction centers, and cosmetic factories do not exceed the capacities of these centers.
- Products sent from any center must not exceed the orders received by that center. Therefore, constraint (8) stipulates that the quantity of products shipped from a processing center must be less than or equal to the quantity delivered to other centers. Constraints (9)-(12) specify the quantities of open-mouth pistachios, raw kernels, and waste produced through the dehulling process at each processing center. Similarly, constraints (13)-(17) regulate the flows within pistachio factories, oil extraction centers, cosmetic factories, and composting centers.
- Finally, to ensure that customer demand is met, constraints (18)-(21) guarantee that the products delivered to pistachio customers, pistachio oil customers, cosmetic customers, and compost markets meet or exceed their respective demands.

3 Heuristic approach

This section outlines the methodology for solving the optimization problem, combining priority-based encoding [21] and VNS. Priority-based encoding ranks decision variables, enabling the exploration of the solution space while maintaining feasibility.

The VNS algorithm systematically shifts between neighborhood structures to escape local optima and explore diverse solution landscapes. The approach includes tailored neighborhood operators and specific parameter configurations.

3.1 Solution representation

As discussed in [10], this work also employs the priority-based encoding scheme to represent the solution space. Following the approach proposed by Gen, Altıparmak, and Lin [21] in their application of Genetic Algorithms (GA) to a simpler version of the problem, each source-depot pair in the supply chain is treated as a gene within the chromosome. The priority of each source-depot pair is encoded in the chromosome, which then guides the construction of the transportation tree.

The decoding process starts by identifying the node with the highest priority in the chromosome and connecting it to the corresponding node with the lowest transportation cost. The shipment amount is determined by the minimum of the source's capacity and the depot's demand. Once the shipment is fulfilled, the depot's priority is updated (or set to zero if its demand is satisfied), and the process continues with the next highest priority node. This sequential process of arc appending and priority updating repeats until all depots' demands are satisfied, resulting in a complete transportation tree.

It is important to note that, for the problem described by equations (1)-(21), each source-depot pair in the chain has its own priority sequence, which must be respected during the construction of the transportation tree. Therefore, the solution as a whole is represented by a set of chromosomes, or more generally, vectors, where each one contains the priority sequence of a source-depot pair. In [10], each element in the vector is a number between 0 and 1, and the priority among these elements is defined by their ascending order. In our work, we consider integer numbers from 1 to Z , where Z is the number of source-depot pairs in each segment of the chain. The priority among these elements is defined by their ascending numerical order.

The representation using real numbers between 0 and 1 is more suitable for handling traditional crossover and mutation operators, as is the case in [10]. However, the representation using integers from 1 to Z is more intuitive and facilitates the implementation of specific neighborhood operators, as we will discuss later. It is also worth noting that, in the case of values between 0 and 1, small perturbations in these values may not change the relative order of the elements, resulting in the same solution. This does not occur when working with integer numbers.

The effectiveness of using chromosome decodification in supply chain optimization has been well-documented in recent literature. For instance, this approach has been applied successfully to the design of integrated forward/reverse logistics networks [17], multi-objective supply chain network designs [22], and dynamic scheduling and routing problems in flexible manufacturing systems [23]. These studies highlight the versatility and effectiveness of this decodification method in handling complex supply chain problems, including optimizing costs, responsiveness, and resource allocation across various supply chain configurations.

The decoding process is explained in [21] for a basic modeling of the supply chain problem. However, the authors of [10], who employ this methodology, did not clarify

how they adapted the decoding process from [21] to the problem described by (1)-(21), which involves significantly more constraints. This description is crucial because it is directly related to ensuring solution feasibility. Without it, a fair comparison of algorithms cannot be guaranteed. Therefore, we present as follows the methodology for adapting the decoding process to the problem at hand.

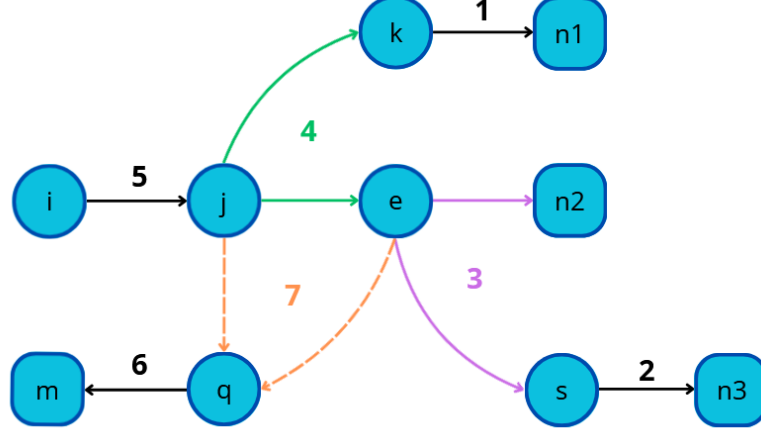


Fig. 2: Decodification steps of the transportation tree

As shown in Figure 2, the decoding process begins with the flow of pistachio products from factories to consumers (18), ensuring that all constraints are met: consumer demand is satisfied, the total amount of product leaving the factory does not exceed the pistachio received from processing centers multiplied by the factory's production rate, and the pistachio sent to any active factory is within its capacity. Likewise, the distribution of cosmetic products from factories to consumers (20) and the transfer of oil from extraction centers to both oil consumers and cosmetic factories (19) adhere to the same principles, ensuring all constraints are satisfied.

The flow from processing centers to pistachio factories and oil extraction centers is regulated by constraints (8)-(10) ensuring that the total pistachios leaving a processing center do not exceed the harvested amount sent by producers. Harvested pistachios are divided into three parts, each assigned to a product type, with a $(1 - \beta)$ loss factor applied to pistachios with shells and pits. Factories can receive more pistachios than they process, but must meet a minimum intake, while oil extraction centers send no more than $(1 - \lambda)$ of the kernels to consumers and cosmetics factories (14), with the remaining λ going to composting (15). All processing centers must respect their capacity limits to ensure efficient distribution.

The decoding process for this specific flow is more complex and requires a targeted approach. First, we must determine the flow of in-shell pistachios from processing centers to pistachio factories, and the flow of kernels from processing centers to oil extraction centers. Using the given constraints (13)-(14), we calculate the quantity of

harvested pistachios each processing center must receive to meet the demands of both pistachio factories and oil extraction centers.

If the factory demand exceeds that of the oil extraction centers, the processing center must prioritize meeting the exact demand of the factories. Since harvested pistachios are divided into three proportional parts (12), basing the allocation solely on the oil extraction center’s demand would leave the factories undersupplied. The priority should be given to the entity with the greatest need, adjusting the remaining flow accordingly, as constraints allow for over-supply but not shortages.

Thus, we need to adjust the quantity of kernels shipped from the processing centers to the oil extraction centers, ensuring enough is sent to satisfy the restrictions. This involves calculating the total amount of kernels required, identifying the oil extraction center with the lowest transportation cost, and directing the additional flow there to minimize costs. If, instead, the oil extraction centers have higher demand, the process is reversed: the pistachio factories’ flow is adjusted accordingly to balance the supply while minimizing transportation costs.

Next, the flow of harvested pistachios from producers to processing centers is also governed by constraints (2)-(3) ensuring that no producer exceeds its production capacity and no processing center receives more than it can process. While the capacity of each producer limits the supply, the demand for each processing center has already been determined in a previous step. If producers’ capacities are insufficient to meet the total demand, the solution becomes infeasible. Therefore, it depends on the feasibility of the problem, i.e., if the parameters Cpa_i and Cpu_j are such that the total demand can be met.

Similarly, the flow of fertilizer from composting centers to consumers is governed by constraints that ensure composting centers do not receive more waste than they can handle. The amount of fertilizer sent must be less than or equal to the waste received from processing and oil extraction centers, adjusted by the composting center’s production rate (17). Finally, for the waste flow from processing and oil extraction centers to composting centers, constraint (4) also ensures that no composting center receives more waste than its capacity. Waste from each processing center is assigned to the composting center with the lowest associated cost, ensuring that no composting center receives more waste than required (21). If the waste sent to a composting center falls short of its needs, the demand is adjusted accordingly. Conversely, if excess waste is sent, the demand is set to zero. Once all processing centers have allocated their waste, any remaining composting needs are fulfilled by oil extraction centers, considering their available capacity. If no additional waste is needed, no waste is sent from the oil extraction centers. Finally, the total cost of transporting waste is updated based on the assignments, ensuring efficient waste management across the supply chain.

3.2 VNS algorithm

The Variable Neighborhood Search (VNS) algorithm is a powerful metaheuristic that combines local search with systematic changes in neighborhood structures to explore the solution space effectively. By iteratively applying different neighborhood operators, VNS can escape local optima and discover high-quality solutions through continuous diversification and intensification phases.

In our application, the VNS algorithm begins by initializing a solution and setting parameters such as the maximum neighborhood size and time limit. It then follows a cycle of shaking and local search procedures to generate new candidate solutions. If an improvement is found, the current solution is updated, and the neighborhood size is reset. Otherwise, the neighborhood size is increased, allowing the search to explore broader areas of the solution space. This process continues until the time limit is reached, at which point the best solution found is returned. Algorithm 1 provides a detailed outline of the VNS algorithm.

This structure is well-suited for handling problems with multiple constraints and complex solution spaces, as shown by its application in various fields. For example, VNS has been applied to vehicle routing problems with heterogeneous fleets, successfully balancing routing costs and fleet diversity while setting new benchmarks [24]. It has also been used to solve the capacitated p-median problem by minimizing dissimilarity within clusters while adhering to capacity constraints [25]. These cases underscore VNS's flexibility in addressing constrained optimization challenges, similar to those faced in supply chain management.

Hybrid approaches combining VNS with other methods, like Integer Programming, have further demonstrated its ability to refine solutions for highly constrained problems such as nurse rostering [26].

By comparing our approach with others, such as the car sequencing problem, where a VNS/ILS method balanced competing objectives [27], we highlight VNS's adaptability and robustness in agricultural supply chain optimization. Its proven success in managing multi-objective, constraint-heavy problems positions it as a strong candidate for delivering high-quality solutions in our model, where both environmental and economic factors are crucial.

Algorithm 1 Variable Neighborhood Search (VNS)

Require: Initial solution x , maximum neighborhood size $k_{\max}$, time limit $t_{\max}$
Ensure: Best found solution x^*

```

1:  $x^* \leftarrow x$ 
2: repeat
3:    $k \leftarrow 1$ 
4:   repeat
5:      $x' \leftarrow \text{Shake}(x, k)$  ▷ Shaking
6:      $x'' \leftarrow \text{LocalSearch}(x')$  ▷ Local search
7:     if  $f(x'') < f(x^*)$  then
8:        $x^* \leftarrow x''$ 
9:        $k \leftarrow 1$  ▷ Reset neighborhood size
10:    else
11:       $k \leftarrow k + 1$ 
12:    end if
13:  until  $k > k_{\max}$ 
14:   $t \leftarrow \text{CpuTime}()$ 
15: until  $t > t_{\max}$ 

```

3.3 Neighborhood structures

In the context of the Variable Neighborhood Search (VNS) algorithm, neighborhood operators play a crucial role in exploring the solution space by systematically altering the current solution to generate new candidate solutions. The effectiveness of VNS relies heavily on the design and application of these operators, as they determine the diversity and direction of the search process. In this study, we utilize four classic neighborhood operators: Swap, Reversion, Insertion, and Slide. Each operator perturbs the solution in a distinct manner, allowing the algorithm to escape local optima and explore different regions of the search space. By iteratively applying these operators, VNS enhances its capability to find high-quality solutions through continuous diversification and intensification phases. The neighborhood structures used are detailed below, and illustrated in Figure 3.:

- **Swap:** The swap operator exchanges the positions of two selected elements within the chromosome. In the example, the selected elements are 6 and 3. This operator is useful for making quick adjustments to the order of elements without altering the overall structure significantly.
- **Reversion:** The reversion operator reverses the order of all elements between the two selected indices. In this case, with elements 6 and 3 chosen, the operator reverses the sequence between these two points. This operation can effectively rearrange subsequences, potentially moving the solution closer to a local optimum by drastically altering a segment of the sequence. [28]
- **Insertion:** In this operation, the unit in the second selected position is relocated immediately after the unit in the first position. Subsequently, all units that were originally between these positions are shifted accordingly to the right. This allows the algorithm to make focused adjustments by repositioning a specific element within the sequence while maintaining the overall order of the other elements. [29]
- **Slide:** This operator begins by selecting two units of a solution randomly, like the other three. The first unit is removed, and the units that were initially located between the two selected units are shifted toward the start position of the first unit. Finally, the initially removed unit is placed at the position of the second unit. This sliding mechanism creates a subtle yet impactful reordering of the solution elements, which can enhance the search process by generating new configurations with minimal disruption.

While we also tested other general and more specific neighborhood structures, the four operators mentioned above proved to be the most effective in our experiments. Our approach is also inspired by the findings of [8], who discusses the importance of neighborhood structures within the Variable Neighborhood Search (VNS) algorithm for solving complex supply chain problems. Their study emphasizes the necessity of designing efficient neighborhood structures to enhance the performance of VNS in achieving optimal solutions, particularly in multi-objective contexts that consider environmental, social, and economic impacts.

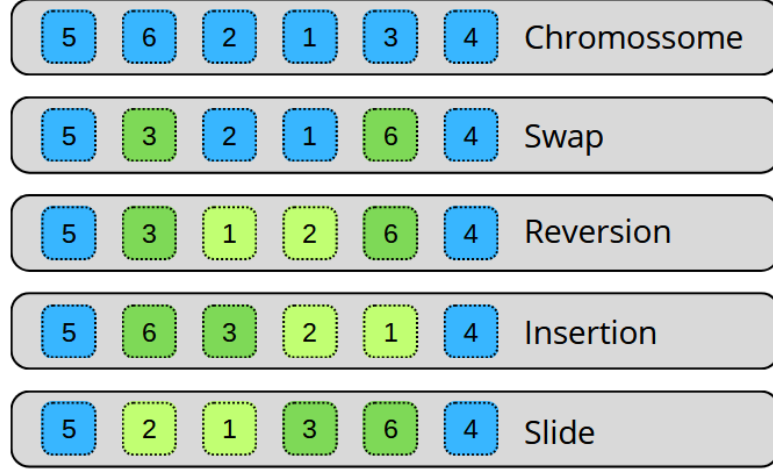


Fig. 3: Neighborhood structures used in the VNS Algorithm

4 Results

Our results demonstrate that the Variable Neighborhood Search (VNS) algorithm performs competitively against both an exact algorithm, Gurobi, and a population-based metaheuristic, the Genetic Algorithm (GA), when considering execution time and memory efficiency, particularly on larger instances. While the Exact Algorithm guarantees optimal solutions, its memory consumption and execution time increase significantly as problem sizes grow, often making it impractical for large-scale problems. VNS provides high-quality solutions with a significant reduction in both time and memory usage, making it a more practical choice in these scenarios. Although the population-based metaheuristic is widely used in the literature, its performance deteriorates with increasing problem size, both in terms of solution quality and execution time.

4.1 Comparison between VNS and an Exact Algorithm

As shown in Table 1, Gurobi efficiently finds optimal solutions for smaller instances, such as those with 100 and 200 elements. In these cases, the difference between the average objective function values of VNS and Gurobi is relatively small—4.19% for the 100-instance set and 8.22% for the 200-instance set. However, as the problem size increases, the gap in solution quality widens significantly, with VNS being 20.12% from the optimal solution for the 800-instance set.

The boxplots in Figure 2 further illustrate the variability of VNS across 30 runs compared to Gurobi's single optimal solution. For instance 100, VNS results range from 7.15×10^6 to 8.75×10^6 , closely matching Gurobi's solution of 7.06×10^6 with only a 4.19% difference. In instance 200, VNS shows slightly more variability, ranging from 1.40×10^8 to 1.75×10^8 , maintaining an 8.22% gap from Gurobi's 1.37×10^8 ,

in average. As problem size increases, the VNS range widens—for instance 400, from 2.70×10^8 to 3.30×10^8 , with a 13.62% difference, and for instance 800, from 5.40×10^8 to 6.85×10^8 , showing a 20.12% gap from Gurobi’s 5.47×10^8 . Although the difference in solution quality increases as the problem size grows, VNS remains competitive by providing solutions much faster than Gurobi, particularly for larger instances.

When examining execution time, the results clearly highlight Gurobi’s inefficiency on larger instances. For example, at 400 instances, Gurobi takes over 70,000 seconds to solve the problem, while VNS, in average, takes just over 2,000 seconds, offering a remarkable 97.13% reduction in time. By the time we reach 1600 instances, Gurobi is unable to find a solution due to its excessive resource demands, while VNS continues to provide a feasible solution in approximately 17.766 seconds, with results varying from approximately 1.29×10^9 to 1.43×10^9 .

These results emphasize that although the Exact Algorithm produces the best solutions for small instances, it becomes impractical for larger problems due to its memory usage and excessive execution times. VNS, while not optimal, offers a more practical and scalable solution for larger instances.

4.2 Comparison between VNS and GA


The performance of the Genetic Algorithm (GA) can be seen in Table 2. For small instances, such as 100, the difference between VNS and GA is negligible—only 0.71%. However, as the problem size grows, GA’s performance gradually worsens compared to VNS. By 800 instances, the difference in solution quality rises to 5.26%, indicating that VNS provides consistently better solutions for larger problems.

Statistical tests conducted on the results further validate that VNS outperforms GA in all tested instances. VNS not only exhibits a lower average solution value across small and large instances but also consistently produces more reliable and robust outcomes. The boxplots in 5 visually demonstrate VNS’s lower median values compared to GA, reinforcing the statistical tests’ conclusions. This shows that, although GA may perform competitively in smaller cases, such as in the 100-instance example, it falls significantly behind as the problem size increases, with VNS statistically surpassing GA in solution quality.

It is also important to highlight that GA takes considerably longer to run compared to VNS. The nature of GA, which relies on iterative population-based mechanisms such as selection, crossover, and mutation, demands a high number of epochs to reach an acceptable solution. This results in prolonged execution times, particularly for larger problem sizes. In contrast, VNS, with its focused exploration of neighborhood structures, efficiently narrows down the solution space, allowing for faster convergence. This significant difference in runtime makes VNS a more practical choice for larger problem instances, as GA’s prolonged execution time limits its scalability and applicability in real-world scenarios where timely solutions are crucial.


In summary, while GA can compete with VNS in smaller problem instances, it lags behind as the complexity increases. VNS consistently provides not only better solutions, as supported by statistical evidence, but also handles larger instances more efficiently, making it the more robust and scalable option for large-scale optimization problems.

Comparison of 30 runs of the VNS with Gurobi: instance 100

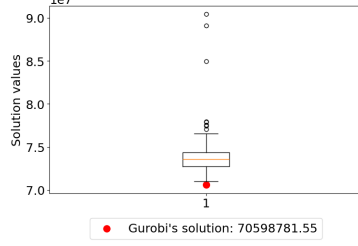


(a) I, J, K, E, S, Q, N1, N2, N3, M = 100

Comparison of 30 runs of the VNS with Gurobi: instance 200

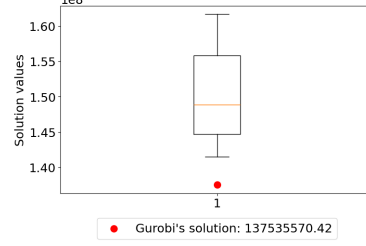


(b) I, J, K, E, S, Q, N1, N2, N3, M = 200

Comparison of 30 runs of the VNS with Gurobi: instance 400

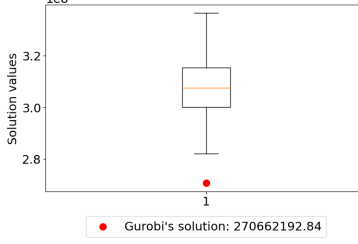


(c) I, J, K, E, S, Q, N1, N2, N3, M = 400

Comparison of 30 runs of the VNS with Gurobi: instance 800

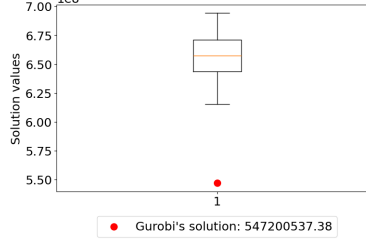

(d) I, J, K, E, S, Q, N1, N2, N3, M = 800

Comparison of 30 runs of the VNS with Gurobi: instance 1600




(e) I, J, K, E, S, Q, N1, N2, N3, M = 1600. The exact algorithm was not able to return a solution due to excessive resource demands.


Fig. 4: Boxplot visualizations comparing the performance of the VNS algorithm and an exact algorithm (Gurobi) across different problem sizes, based on objective function values.

5 Conclusion


The conclusion of this study underscores the advantages of the Variable Neighborhood Search (VNS) algorithm in optimizing the pistachio supply chain network. The

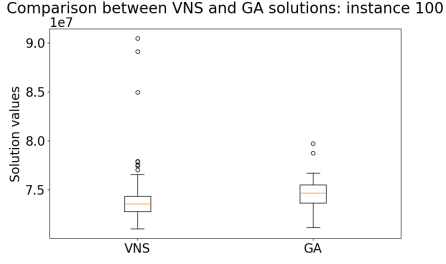


(a) I, J, K, E, S, Q, N1, N2, N3, M = 100

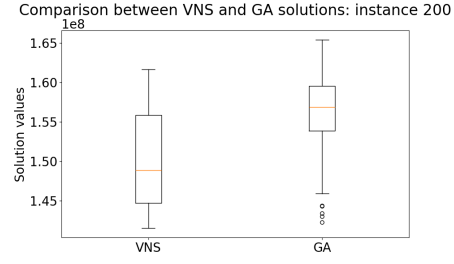


(b) I, J, K, E, S, Q, N1, N2, N3, M = 200

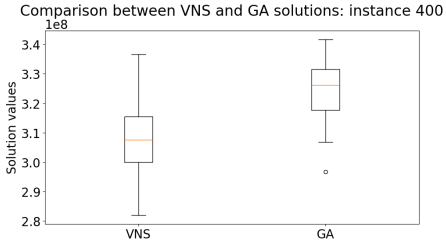

(c) I, J, K, E, S, Q, N1, N2, N3, M = 400

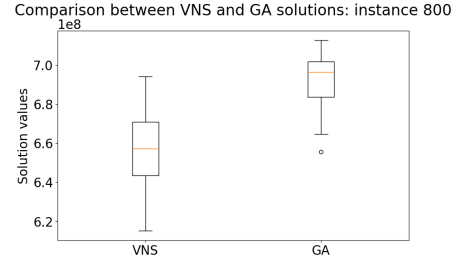

(d) I, J, K, E, S, Q, N1, N2, N3, M = 800

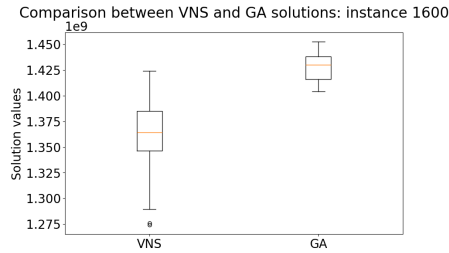

(e) I, J, K, E, S, Q, N1, N2, N3, M = 1600

Fig. 5: Boxplot visualizations comparing the performance of the VNS algorithm and a population-based metaheuristic (genetic algorithm) across different problem sizes, based on objective function values.

proposed model effectively integrates various stages of the supply chain, from production to composting, ensuring that all capacity and demand constraints are satisfied. By minimizing total costs while considering transportation, production, and facility operations, the model addresses the complexities of managing pistachio products and by-products.

Our results demonstrate that VNS outperforms the Genetic Algorithm (GA) in both execution time and objective function value, particularly as the problem size increases. While Gurobi provides optimal solutions for small instances, it becomes

Table 1: Comparison of the VNS algorithm and the Exact Algorithm (Gurobi) in terms of the average objective function value of the best solutions and the average execution time.

Instance	Objective function evaluation			Execution time		
	VNS	Exact Algorithm	Difference	VNS	Exact Algorithm	Difference
100	7.36×10^6	7.06×10^6	4.19%	241s	261s	-7.83%
200	1.49×10^8	1.38×10^8	8.22%	714s	3834s	-81.36%
400	3.08×10^8	2.71×10^8	13.62%	2016s	70339s	-97.13%
800	6.57×10^8	5.47×10^8	20.12%	5538s	11836s	-53.22%
1600	1.36×10^9	-	-	17767s	-	-

Comparison of the VNS algorithm and the Exact Algorithm (Gurobi) in terms of the average objective function value of the best solutions and the average execution time.

Table 2: Comparison of the VNS algorithm and a population-based metaheuristic (genetic algorithm) in terms of the average objective function value of the best solutions and the average execution time.

Instance	Objective function evaluation		
	VNS	GA	Difference
100	7.41×10^7	7.46×10^7	0.71%
200	1.50×10^8	1.55×10^8	3.37%
400	3.08×10^8	3.24×10^8	5.31%
800	6.57×10^8	6.92×10^8	5.26%
1600	1.36×10^9	1.43×10^9	4.64%

impractical for larger problems due to its higher memory consumption and longer processing times. In contrast, VNS offers a flexible, memory-efficient, and time-saving solution, delivering near-optimal results with significantly reduced computational demands.

Moving forward, research could benefit from the development of more specialized and problem-specific neighborhood operators for VNS, which may lead to even better performance by enabling more targeted exploration of the solution space. Additionally, combining VNS with exact algorithms for smaller problem instances presents an intriguing opportunity to balance accuracy and efficiency, creating a math-heuristics that could be more broadly applicable across industries. Statistical methods could also be integrated to further refine the search process, ensuring that both local and global optima are explored effectively.

By sharing the results and methodologies from this study, it is hoped that others in the field of supply chain optimization can build upon these insights. The adaptability of VNS, when combined with tailored heuristic techniques and exact methods, holds promise not only for the pistachio industry but for solving complex logistical challenges across various sectors. The potential for future research lies in expanding the versatility and precision of these algorithms, driving more efficient decision-making processes in increasingly intricate supply chains.

References

- [1] Statista. Leading producers of pistachios worldwide in 2022 and 2023 (2023). URL <https://www.statista.com/statistics/933042/global-pistachio-production-by-country/>. Accessed: 2023-10-05.
- [2] Doula, M., Kouloumbis, P. & Elaiopoulos, K. Turning wastes into valuable materials: Valorization of pistachio wastes in agricultural sector 19–21 (2014).
- [3] Bartzas, G. & Komnitsas, K. Life cycle analysis of pistachio production in greece. *Science of the Total Environment* **595**, 13–24 (2017).
- [4] Hokmabadi, H. Pistachio wastes in iran and the potential to recapture them in value chain. *Pistachio and Health Journal* **1**, 1–12 (2018).
- [5] Dronavalli, S. & Kang, M. S. Microgametophytic selection for identifying maize with resistance to aspergillus spp. and aflatoxin. *Journal of Crop Improvement* **33**, 363–371 (2019).
- [6] Casper, R. & Sundin, E. Reverse logistic transportation and packaging concepts in automotive remanufacturing. *Procedia Manufacturing* **25**, 154–160 (2018).
- [7] Cheraghalipour, A. & Roghanian, E. A bi-level model for a closed-loop agricultural supply chain considering biogas and compost. *Environment, Development and Sustainability* 1–47 (2022).
- [8] Devika, K., Jafarian, A. & Nourbakhsh, V. Designing a sustainable closed-loop supply chain network based on triple bottom line approach: A comparison of metaheuristics hybridization techniques. *European journal of operational research* **235**, 594–615 (2014).
- [9] Zohal, M. & Soleimani, H. Developing an ant colony approach for green closed-loop supply chain network design: a case study in gold industry. *Journal of Cleaner Production* **133**, 314–337 (2016).
- [10] Rajabi-Kafshgar, A., Gholian-Jouybari, F., Seyedi, I. & Hajiaghaei-Keshteli, M. Utilizing hybrid metaheuristic approach to design an agricultural closed-loop supply chain network. *Expert Systems with Applications* **217**, 119504 (2023).
- [11] Fathollahi-Fard, A. M. & Hajiaghaei-Keshteli, M. A stochastic multi-objective model for a closed-loop supply chain with environmental considerations. *Applied Soft Computing* **69**, 232–249 (2018).
- [12] Xie, Y., Sheng, Y., Qiu, M. & Gui, F. An adaptive decoding biased random key genetic algorithm for cloud workflow scheduling. *Engineering applications of artificial intelligence* **112**, 104879 (2022).

- [13] Campelo, F. & Aranha, C. Lessons from the evolutionary computation bestiary. *Artificial Life* **29**, 421–432 (2023). URL https://doi.org/10.1162/artl_a_00402.
- [14] Aranha, C. *et al.* Metaphor-based metaheuristics, a call for action: the elephant in the room. *Swarm Intelligence* **16**, 1–6 (2022).
- [15] Gendreau, M., Potvin, J.-Y. *et al.* *Handbook of metaheuristics* Vol. 2 (Springer, 2010).
- [16] Hansen, P., Mladenović, N. & Moreno Perez, J. A. Variable neighbourhood search: methods and applications. *Annals of Operations Research* **175**, 367–407 (2010).
- [17] Pishvaei, M. S., Farahani, R. Z. & Dullaert, W. A memetic algorithm for bi-objective integrated forward/reverse logistics network design. *Computers & operations research* **37**, 1100–1112 (2010).
- [18] Ahmadi, S. & Amin, S. H. An integrated chance-constrained stochastic model for a mobile phone closed-loop supply chain network with supplier selection. *Journal of cleaner production* **226**, 988–1003 (2019).
- [19] Banasik, M., Stanisławska-Sachadyn, A. & Sachadyn, P. A simple modification of pcr thermal profile applied to evade persisting contamination. *Journal of Applied Genetics* **57**, 409–415 (2016).
- [20] Gholian-Jouybari, F., Hashemi-Amiri, O., Mosallanezhad, B. & Hajiaghahi-Keshteli, M. Metaheuristic algorithms for a sustainable agri-food supply chain considering marketing practices under uncertainty. *Expert Systems with Applications* **213**, 118880 (2023).
- [21] Gen, M., Altıparmak, F. & Lin, L. A genetic algorithm for two-stage transportation problem using priority-based encoding. *OR spectrum* **28**, 337–354 (2006).
- [22] Altıparmak, F., Gen, M., Lin, L. & Paksoy, T. A genetic algorithm approach for multi-objective optimization of supply chain networks. *Computers & industrial engineering* **51**, 196–215 (2006).
- [23] Liu, J., Sun, B., Li, G. & Chen, Y. An integrated scheduling approach considering dispatching strategy and conflict-free route of amrs in flexible job shop. *The International Journal of Advanced Manufacturing Technology* **127**, 1979–2002 (2023).
- [24] Imran, A., Salhi, S. & Wassan, N. A. A variable neighborhood-based heuristic for the heterogeneous fleet vehicle routing problem. *European Journal of Operational Research* **197**, 509–518 (2009).

- [25] Fleszar, K. & Hindi, K. S. An effective vns for the capacitated p-median problem. *European Journal of Operational Research* **191**, 612–622 (2008).
- [26] Burke, E. K., Li, J. & Qu, R. A hybrid model of integer programming and variable neighbourhood search for highly-constrained nurse rostering problems. *European Journal of Operational Research* **203**, 484–493 (2010).
- [27] Ribeiro, C. C., Aloise, D., Noronha, T. F., Rocha, C. & Urrutia, S. An efficient implementation of a vns/ils heuristic for a real-life car sequencing problem. *European Journal of Operational Research* **191**, 596–611 (2008).
- [28] Vahdani, B. & Zandieh, M. Scheduling trucks in cross-docking systems: Robust meta-heuristics. *Computers & Industrial Engineering* **58**, 12–24 (2010).
- [29] Rabiee, M., Zandieh, M. & Jafarian, A. Scheduling of a no-wait two-machine flow shop with sequence-dependent setup times and probable rework using robust meta-heuristics. *International Journal of Production Research* **50**, 7428–7446 (2012).