

# Tidal: An SLA-Contracted Batch Tier for LLM Serving Engines\*

Gurunath Lunkupali Venugopal

## Abstract

Commercial LLM providers sell two products from the same weights: online inference, priced for latency, and a batch API priced at half the online rate with a 24-hour completion window. Self-hosted deployments have no equivalent of the second product, even though a decode-dominated engine iteration uses a small fraction of its per-iteration token budget. Research systems that co-locate offline work behind online traffic (HyGen, ConServe) recover much of this idle capacity, but none of them exposes what makes the batch product sellable: a customer-facing completion contract. We present Tidal, which adds a *contracted* batch tier to vLLM: an OpenAI-wire-compatible /v1/batches front end with durable storage; per-job **laxity-driven escalation** (classical Least-Laxity-First, applied per batch job against an online tier) that leaves on-track jobs at the lowest priority band and escalates at-risk jobs early, continuously, and independently; a token-bucket progress floor; and a laxity-based **admission feasibility check** that rejects deadlines the system’s own arithmetic cannot meet. We implement the same policy at two placements — an external gateway over an unmodified engine, and an in-engine work-conserving scheduler deployed as a plugin (not a fork) whose interference model calibrates itself from live step timings with no offline profiling — and compare them on identical traces, a design axis prior systems do not evaluate. On a deliberately modest CPU testbed we validate the mechanisms and find a placement *inversion*: the gateway holds online p99 request latency to  $1.76\times$  baseline where the in-engine scheduler reaches  $8.25\times$ , because the binding interference channel (resident-decode contention) sits below the reach of admission-time control — while the in-engine scheduler harvests 71% of the offline throughput ceiling versus the gateway’s 45%, making placement a throughput/latency frontier rather than a ranking. A subsequent GPU validation (RTX A6000, Qwen2.5-7B, rented on the io.net marketplace) finds the gateway harvesting **69.3% of the same node’s steady-state offline ceiling at  $1.18\times/1.23\times$  online p50/p99 under flat load, and 78.1% at  $\sim 1.13\times/1.21\times$  under a diurnal trace (latency ratios cross-node)**, with per-minute batch completions anti-correlating with online load at  $r = -0.85$  — the same tide-filling the CPU testbed shows at  $-0.95$ . Those GPU figures are post-correction: an independent numerical audit rejected our first ceiling (a probe average that co-serving runs “exceeded”), and we report the methodology point as a result in its own right, since any co-serving figure above 100% is a tell that the denominator is not a ceiling. We are explicit about what the testbed cannot show, including that no tested load regime discriminated the escalation machinery end-to-end. The implementation, including a client that plans coding work onto batch APIs, is open source.

## 1 Introduction

The economics of LLM serving are dominated by GPU hours, and GPU hours are dominated by waste. An engine serving interactive chat traffic runs its scheduler every few tens of milliseconds; in each iteration it may decode one token for each of a few dozen live requests while its compute budget — the number of tokens the hardware could process in that same iteration at acceptable latency — sits in the thousands. Decode is memory-bandwidth-bound: the weights stream from HBM whether the iteration carries 20 tokens or 2,000. The marginal cost of adding prefill work to a decode-heavy iteration is small until a compute knee, a fact exploited by chunked-prefill schedulers [1] and by every co-location system since.

---

\*Code: [github.com/rajagurunath/tidal](https://github.com/rajagurunath/tidal)

Providers monetize this slack directly: submit a file of requests, receive results within 24 hours, pay half the online price. A self-hosted deployment running vLLM cannot offer this product. vLLM ships an offline batch runner that requires dedicating the machine and an online server with no batch-job surface; a proposal to add SLA tiers to its scheduler was closed without adoption [24].

The research literature has a different gap. HyGen [7] and ConServe [8] co-locate offline requests behind online traffic with strict priority and preemption, recovering 78–88% of dedicated-offline throughput while protecting online SLOs — and both include mechanisms that temper offline starvation. What neither exposes is a *customer-facing completion contract*: a specific job, a specific deadline, admission that refuses infeasible work, and scheduling that spends exactly as much online headroom as that deadline requires. Deadline-aware LLM schedulers exist — Niyama [9] co-schedules QoS classes with per-request deadlines and claims QoS targets — but at second-to-minute horizons, with deadlines as optimization targets and graceful degradation under overload. The batch-API semantics that OpenAI and Anthropic actually sell — day-scale windows, per-job, with an admission decision — appear in none of them.

The contract is the product. A customer submits an overnight batch because “done by morning” is dependable enough to plan around. Our motivating client, lazycode [26] — a coding agent that plans work with a realtime model and executes it on provider batch APIs at the discount — exists only because that window is dependable. Making self-hosted batch serving sellable requires promoting the deadline from an optimization target to a contract with an admission face and a scheduling face.

Tidal implements both faces with deliberately classical machinery. Per batch job, the system tracks *laxity* — time remaining minus work remaining at the observed completion rate. At **admission**, a job whose projected completion exceeds its window (with margin) is refused outright — the self-hosted analogue of commercial APIs rejecting oversized jobs. In **scheduling**, urgency ramps only inside a short escalation horizon of remaining slack: an on-track job never rises above the lowest priority band, no matter how long it has been running (we document how easily this property is silently lost: our first implementation scaled urgency by the full window, reintroducing wall-clock aging — a healthy job at hour 12 escalated for no reason; an adversarial cross-model review caught it, and a regression test now pins the hour-12 case). An at-risk job escalates early, continuously, and independently of other jobs, avoiding synchronized floods; at maximum urgency it sits one notch below online priority with a token-bucket floor guaranteeing forward progress — the floor also closes the loop, since guaranteed progress raises laxity, stabilizing an escalated job at the floor rather than oscillating. A configuration flag (`sla_strict`) allows true priority parity at the deadline; we treat strictness as a policy dial and leave measuring its latency price to future work. Least-Laxity-First is sixty years old [19]; FREESH [10] has already run LLF inside an LLM engine for energy-aware scheduling of a single request class. What is new here is narrower and, we argue, more useful: LLF applied *per batch job against an online tier*, carrying commercial batch-window semantics, with the same laxity arithmetic reused as the admission test.

We implement the policy at two placements and compare them. *Technique A* places all policy in a sidecar gateway: batch items are injected as low-priority requests into an unmodified vLLM, throttled by additive-increase/multiplicative-decrease control over the engine’s public metrics. It tracks upstream vLLM releases with no coupling beyond the OpenAI API and `/metrics`. *Technique B* moves admission into the engine via vLLM’s pluggable scheduler interface (a non-stable interface; we pin a version): a subclass wraps the stock scheduler, fills each iteration’s residual token budget with batch work, bounds interference with a latency model in ConServe’s context-aware form [8] but fitted continuously from the engine’s own step timings, reserves KV-cache headroom for online bursts, and preempts the cheapest victim first. Neither placement forks vLLM.

Contributions:

1. **Batch-API contract semantics for a co-located tier:** per-job day-scale deadlines with laxity-driven escalation, a progress floor, and laxity-based admission — the customer-facing contract that co-location systems do not expose and deadline-aware schedulers do not target.
2. **A self-calibrating interference model:** technique B fits its step-latency model from live (tokens,

context, time) observations with an  $R^2$ -gated fallback, removing the offline profiling sweep HyGen and ConServe require.

3. **The placement comparison:** the same policy externally vs in-engine on identical traces, revealing a throughput/latency frontier and an inversion the fork-based literature — which evaluates only its own placement — has not reported. On rented A6000 GPUs the gateway then harvests 69.3% (flat load, at  $1.18\times/1.23\times$  online p50/p99) to 78.1% (diurnal, at  $\sim 1.13\times/1.21\times$ ) of the same node’s *steady-state* dedicated-offline ceiling (latency ratios cross-node): the median co-location tax that costs  $2.54\times$  on the CPU box costs  $1.18\times$  there, while the harvest itself lands in the band the co-location literature reports.
4. **Deployability artifacts:** durable OpenAI-wire API, crash recovery, idempotent state machines, metering, and a real client — with the operational semantics (Section 4) a paper usually omits and an operator cannot.

## 2 Background and Motivation

### 2.1 One budget, two products

A vLLM V1 iteration schedules up to `max_num_batched_tokens` ( $\tau$ ) tokens across running and waiting requests;  $\tau$  is sized so an iteration’s latency fits the inter-token target. A running decode consumes one token per iteration; a prefill consumes up to a chunk. The KV cache — a separate budget — bounds how many requests may be resident. The token budget is the perishable good: unused tokens in an iteration are gone.

### 2.2 Why best-effort is not a product

Consider a large batch submitted against a deployment that then runs at sustained high online load. Best-effort co-location delivers whatever slack happens to exist; the customer learns at hour 24 how much that was. A wall-clock aging rule — “priority rises every hour, parity at hour 24” — fails twice: it escalates small on-track jobs pointlessly and escalates large at-risk jobs too late (full service beginning exactly when time has run out). Feasibility is a relation between remaining work and remaining capacity — which is laxity, and which is why the same arithmetic serves as the admission test: a job whose laxity is negative at submission should not be accepted at all.


### 2.3 The placement question

Engine schedulers act per iteration ( $\sim 10\text{--}100$  ms) with exact visibility of the token budget and KV state; an external controller acts at 1 Hz on aggregate metrics. Intuition says in-engine must dominate. But the engine’s own priority preemption already covers token-granularity interference between controller ticks, and an external controller survives engine upgrades untouched. No prior co-location work isolates this variable; we measure it, and the intuition does not survive contact (Section 5).

## 3 Design

### 3.1 System overview

Batch jobs enter through an OpenAI-wire-compatible `/v1/files + /v1/batches` API; any OpenAI SDK works unchanged with a different `base_url`. Jobs are validated line-by-line, checked for admission feasibility (Section 3.2), and stored durably (SQLite WAL by default; the store is a repository interface, so Postgres is a DSN change). Items progress pending  $\rightarrow$  inflight  $\rightarrow$  succeeded/failed with idempotent terminal transitions. Online traffic does not traverse the gateway.

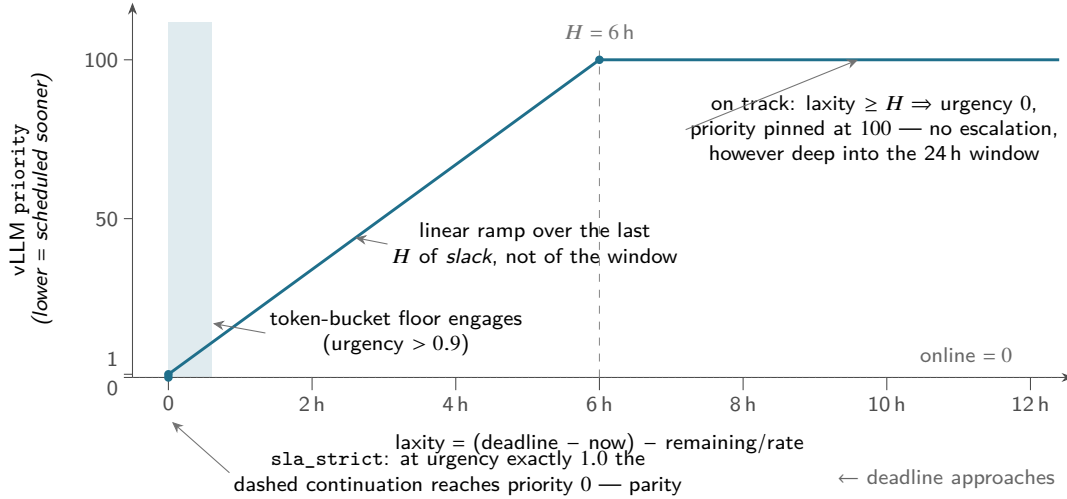

**Figure 1: The escalation curve.** Priority is flat at the lowest band (100) for every job with at least a full escalation horizon  $H = 6$  h of slack, then ramps linearly to 1 — one notch below online — as laxity runs out. Scaling urgency by  $H$  rather than by the 24-hour window is what keeps a healthy job from escalating on the clock alone. Above urgency 0.9 (shaded) a token bucket guarantees a minimum admission rate, and the `sla_strict` dial allows the dashed continuation to priority 0 at urgency exactly 1.0.

### 3.2 The contract: laxity at admission and in scheduling

For each active batch  $b$  with deadline  $D_b$ , remaining items  $R_b$ , and observed completion rate  $r_b$  (sliding window; when no completion history exists the drain term is dropped — jobs escalate on evidence or deadline proximity, never on a missing denominator):

$$\text{laxity}(b) = (D_b - \text{now}) - R_b/r_b \quad (1)$$

$$\text{urgency}(b) = \text{clamp}\left(1 - \frac{\text{laxity}(b)}{H}, 0, 1\right) \quad H = \text{escalation horizon (6 h} \ll \text{24 h window)} \quad (2)$$

$$\text{priority}(b) = 100 \rightarrow 1 \text{ linearly with urgency} \quad (\text{online} = 0; \text{sla\_strict allows } 0 \text{ at urgency } 1) \quad (3)$$

Figure 1 plots the resulting curve.

**Admission.** At `POST /v1/batches`, the projected completion  $R/r_{\text{global}}$  is checked against the window with a configurable margin; infeasible jobs are rejected with an error naming the arithmetic. No history  $\rightarrow$  accept (the system cannot judge).

**Scheduling.** An on-track job ( $\text{laxity} \geq H$ ) never rises above priority 100 — it exerts no *escalation* pressure whatever the clock says. (Co-location itself has a latency price even at the lowest band; Section 5 measures it. The escalation property is about never spending *more* online headroom than the deadline requires, not about zero cost.) The horizon, not the window, scales urgency — scaling by the window is wall-clock aging in disguise. Escalated jobs climb independently; above urgency 0.9 a token bucket guarantees a minimum admission rate; the floor’s guaranteed progress feeds back into laxity, stabilizing the job at the floor. Escalation applies at submission time (vLLM fixes a request’s priority at admission); the backlog, where laxity lives, is by construction the unsubmitted portion.

### 3.3 Technique A: external control

A 1 Hz loop scrapes three public metrics, smooths them (EWMA), and adjusts a target in-flight batch count by AIMD: halve on detected online queueing (conservatively — the waiting metric is not priority-partitioned, so we assume all our in-flight items are queued) or high KV watermark; increment below a low watermark. Items are claimed in deadline order, grouped by shared prompt prefix within a batch

to recover some prefix-cache locality through arrival order (we have not ablated how much of HyGen’s engine-side prefix-sharing benefit [7] this recovers), and submitted at their batch’s current laxity priority. Engine unavailability opens a circuit; in-flight items re-queue idempotently. Figure 2 traces one batch through the whole path.

### 3.4 Technique B: in-engine work conservation

TidalScheduler subclasses the V1 scheduler behind `--scheduler-cls` and wraps — never reimplements — the stock `schedule()`. Requests with priority  $\geq 1$  are the batch class (online is 0 alone; an `sla_strict` job that reaches 0 is deliberately treated as online — that *is* parity). The pre-gate hides batch waiting requests beyond a per-iteration cap  $X$  from the stock pass (restored exception-safely), where  $X$  solves  $\hat{T}(P_{\text{on}} + x, C) \leq \text{TBT}_{\text{budget}}$  with  $\hat{T}(P, C) = k_1P + k_2P(P + C) + k_4(P + C) + k_5$  — ConServe’s context-aware form, which prices the attention cost a pure token count misses. Coefficients fit continuously from the engine’s own  $(P, C, \text{step-time})$  stream: ring buffer, periodic least squares, non-negativity clamps, an  $R^2$  gate with a conservative static fallback. With zero online requests resident, the cap is lifted entirely (offline mode: fill  $\tau$ ). A KV guardband (EWMA of online demand, clamped 5–30%) stops batch admission before online bursts can be starved of blocks; proactive eviction picks the batch victim with the least non-prefix-cached work. Enforcement is at chunk granularity — we bound which requests the stock scheduler sees, not its inner token loop — which is what keeps the wrapper robust to upstream drift (it survived a 1,682-commit jump during development) at the cost Section 5 quantifies. Figure 3 shows one iteration.


### 3.5 What we deliberately did not build

ConServe’s layer-wise safepoint preemption and incremental KV checkpointing address unbounded iteration times; chunked prefill bounds ours to one  $\tau$ -sized step. Both are natural extensions where  $\tau$ -bounded iterations are still long, and Section 5’s placement result argues sub-iteration control is exactly what technique B lacks.


## 4 Implementation and operational semantics

Tidal is a Python implementation over unmodified upstream vLLM (v0.26 series), with 424 tests, including integration tests that drive a live engine; the API layer is wire-verified against the official OpenAI SDK. The operational semantics reviewers should hold us to: **idempotency** — item claims are single atomic updates; terminal item transitions are idempotent, so a duplicate or late result never drifts `request_counts`; result-file attachment is a first-writer-wins claim, so concurrent finalization cannot split a batch’s outputs. **Crash recovery** — a restarted dispatcher re-queues resultless in-flight items; re-execution rides vLLM’s prefix cache. **Late results** for cancelled or expired items are recorded-then-discarded without corrupting counts, and un-wedge finalization. **Failure model** — one dispatcher per store is assumed; there is no ownership lease (a second dispatcher is safe for data, not for duplicated work — documented, with the lease as roadmap). **Metering** prices batch tokens at a configurable discount against an online price table; we deliberately make no claim about what discount a marginal-cost model would justify.


The client side is lazycode, whose Tidal adapter mirrors its Anthropic batch adapter nearly line-for-line — the strongest evidence for the wire-compatibility claim: an existing batch-API client adopted the self-hosted tier as just another provider, with the only remaining friction inherited from the OpenAI Batch wire itself. Figure 4 closes the loop from client intent to applied code; the client’s architecture — the planning algebra, rewrite-rule optimizer, wave scheduler, and batch-vs-cached-realtime economics — is the subject of the companion paper [27] and is not duplicated here. An engine plugin also has an observability obligation a fork does not: vLLM’s logging configuration attaches handlers only to its own logger tree, and scheduler telemetry is emitted from a forked EngineCore process — technique B injects

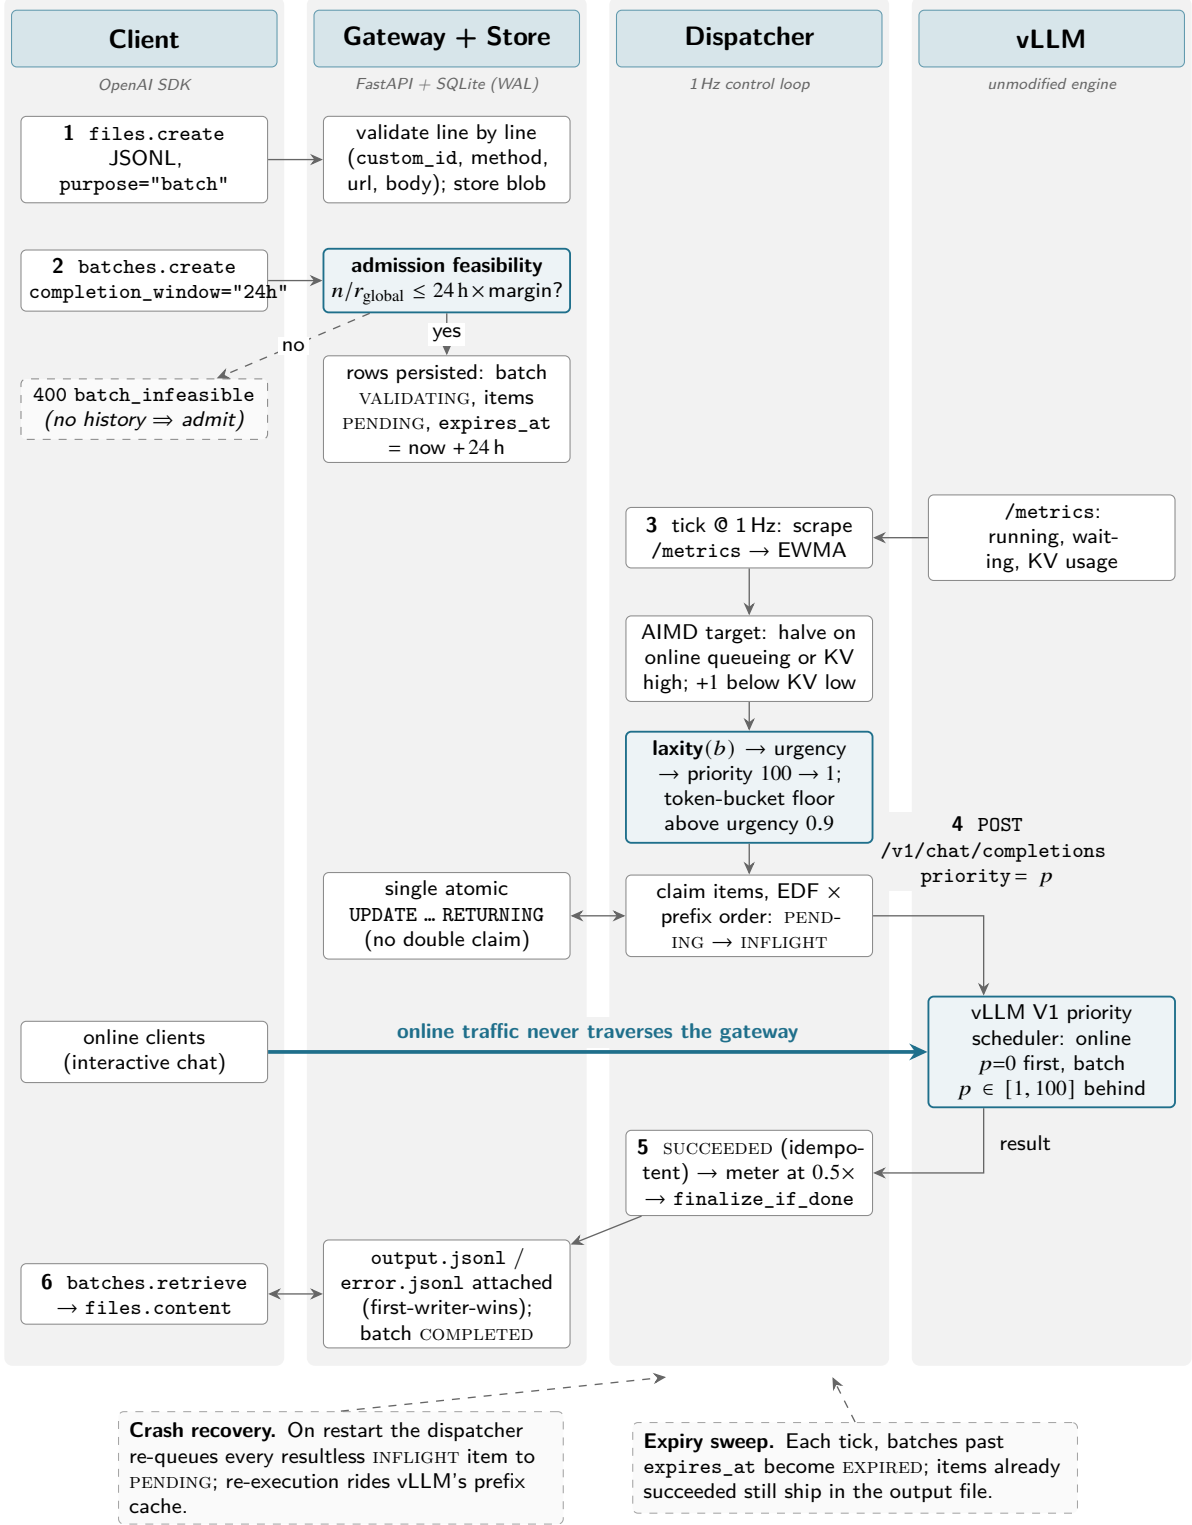

**Figure 2: Technique A: the batch request lifecycle, end to end.** A client uploads a JSONL file and creates a batch; the gateway validates every line and applies the laxity admission test, refusing with `batch_infeasible` any job whose projected completion exceeds the window times a margin, and otherwise persisting PENDING items with a 24-hour `expires_at`. A 1 Hz dispatcher scrapes the engine’s public metrics, sets an AIMD in-flight target, computes each batch’s laxity-derived priority, claims items in deadline × prefix order and submits them to vLLM as ordinary low-priority chat completions — while online clients (thick arrow) reach the engine directly, never through the gateway. Results settle idempotently, are metered at the batch discount, and are assembled into the output and error files the client downloads.

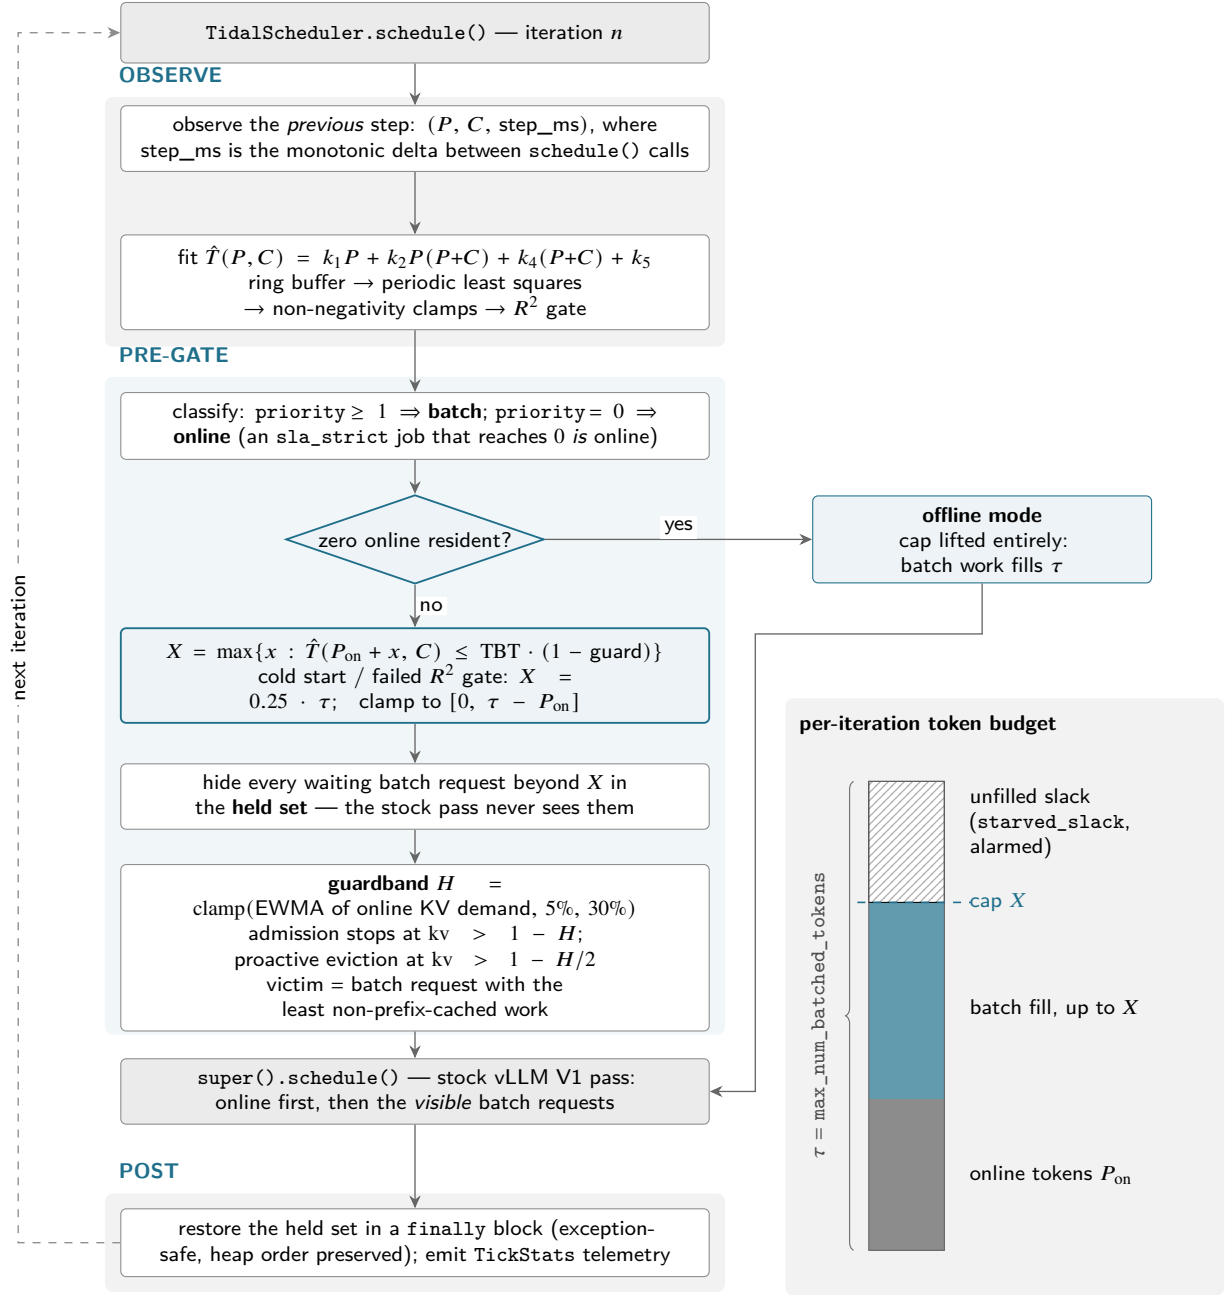

**Figure 3: Technique B: one engine iteration.** TidalScheduler wraps rather than reimplements the stock `schedule()`. Before the stock pass it feeds the previous step’s  $(P, C, \text{step\_ms})$  to a continuously refitted latency model, solves that model for the largest batch-token cap  $X$  that keeps the step inside the guarded inter-token budget, and hides every waiting batch request beyond  $X$  — lifting the cap entirely when no online request is resident. A KV guardband stops batch admission before online bursts can be starved of blocks and evicts the cheapest batch victim under further growth. After the stock pass the held set is restored in a `finally` block. The side panel shows what  $X$  governs: online tokens occupy the bottom of the  $\tau$ -token budget, batch work fills up to the cap, and whatever is left unfilled is reported as starved slack.

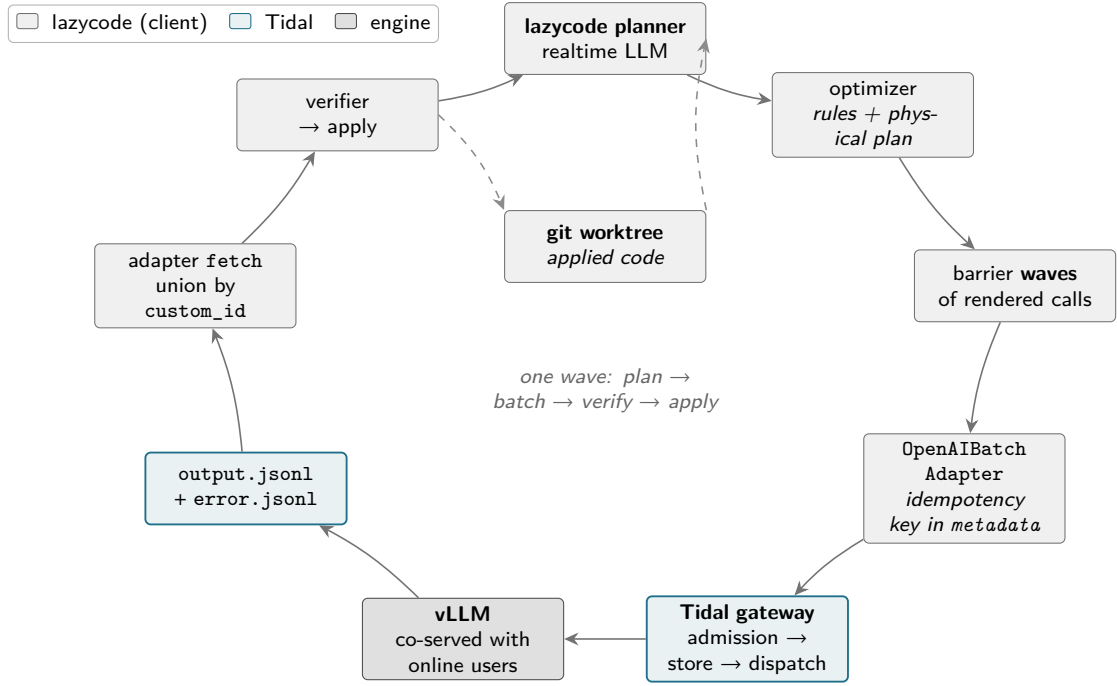

**Figure 4: The complete loop.** A realtime model plans the work; the optimizer lowers the plan into barrier waves of rendered calls; the OpenAIBatchAdapter uploads a wave as JSONL and stamps a server-side idempotency key in the batch’s metadata, so a crashed run can adopt its own orphaned batch. Tidal admits, stores and dispatches the wave into a vLLM that is simultaneously serving online users; the adapter fetches the output and error files and reassembles the wave by union over custom\_id; the verifier runs the results and applies what passes into a git worktree, which feeds the next wave. This is the request lifecycle from client intent to applied code, entirely on self-hosted capacity at batch pricing. The client-side stages (planner, optimizer, waves, verifier) are detailed in the companion paper [27]; this figure shows only their interface to the serving tier.

a logging configuration or runs blind.

## 5 Evaluation

**Setup.** Apple M4 Pro, CPU-only vLLM build (v0.26.1 series @ e6d67fdd), Qwen2.5-0.5B-Instruct,  $\tau = 2048$ , `--scheduling-policy priority`, `--enforce-eager`. Online load: seeded Poisson arrivals of short chat requests (identical schedules across conditions); we measure total non-streaming **request latency** (not TTFT/TBT — on this configuration a request is a short prefill plus a short decode). Batch: jobs of short chat completions. **Scope disclaimer:** CPU-scale numbers characterize mechanisms and their relative behavior under one hardware regime. They support no claims about GPU efficiency, absolute capacity, or production latency; the planned GPU evaluation (8×H200) is where those claims must be earned.


**Q1 — the co-location tax (1.0 req/s, 1,200-item jobs, 10-min windows).** All co-location conditions completed the identical batch. The online latency price differed by an order of magnitude (Table 1, Figure 5).

Naive co-location — what vLLM’s priority field alone provides — is catastrophic despite correct priority ordering: admission priority does not bound resident-request contention. Note the medians: they degrade more than the tails everywhere (co-serving adds a near-constant per-step cost that dominates fast requests). p99-only reporting — common in this literature — flatters every technique, including ours.

**Q2 — work conservation (non-draining 3,000-item pool).** Offline ceiling: 4.43 items/s (68.5 output tok/s). Technique A sustains **45.1% of ceiling at 1.97× online p99** — its in-flight cap of 4 is the binding

**Table 1:** Q1: online request latency under each co-location condition. All conditions completed the identical 1,200-item batch.

| condition                   | online p50 | online p99 | vs baseline (p50 / p99) |
|-----------------------------|------------|------------|-------------------------|
| online-only                 | 0.44 s     | 1.43 s     | 1.00× / 1.00×           |
| naive (priority field only) | 11.97 s    | 32.24 s    | 27.3× / 22.6×           |
| Technique A                 | 1.12 s     | 2.52 s     | 2.54× / 1.76×           |
| Technique B                 | 1.26 s     | 11.80 s    | 2.86× / 8.25×           |

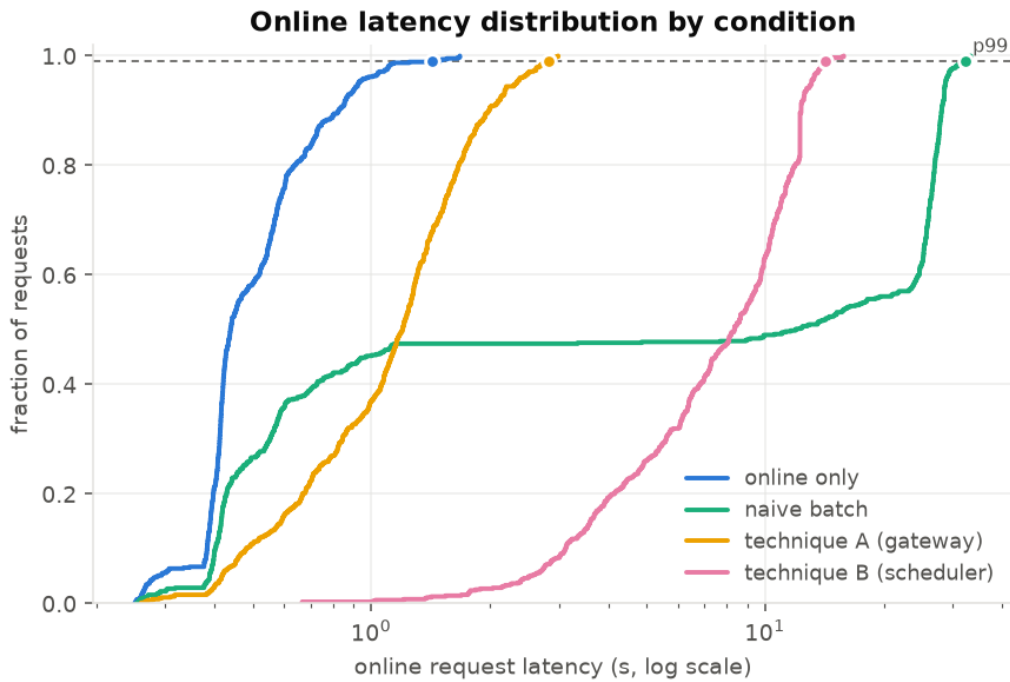


**Figure 5:** Measured distribution of online request latency under each condition. Reporting the full CDF rather than the tail alone is deliberate: the medians degrade more than the tails everywhere.

constraint, a deliberate, configurable interference ceiling. Technique B sustains **71.2% of ceiling at 9.9× online p99** (Table 2, Figure 6). Placement is a frontier: the gateway buys latency protection with throughput; the in-engine scheduler buys throughput with latency. For shape calibration only: HyGen and ConServe report 78–88% of ceiling on GPU-class hardware where the mechanisms that would let B have both (guardband eviction, compute-bound  $\tau$  filling) actually engage.

**Table 2:** Q2: batch throughput recovered against a non-draining pool, and the online latency paid for it. The ceiling is the dedicated-offline rate, 4.43 items/s (68.5 output tok/s).

| condition              | batch throughput (% of offline ceiling) | online p99 vs baseline |
|------------------------|-----------------------------------------|------------------------|
| offline-only (ceiling) | 100 %                                   | —                      |
| Technique A            | 45.1 %                                  | 1.97×                  |
| Technique B            | 71.2 %                                  | 9.9×                   |

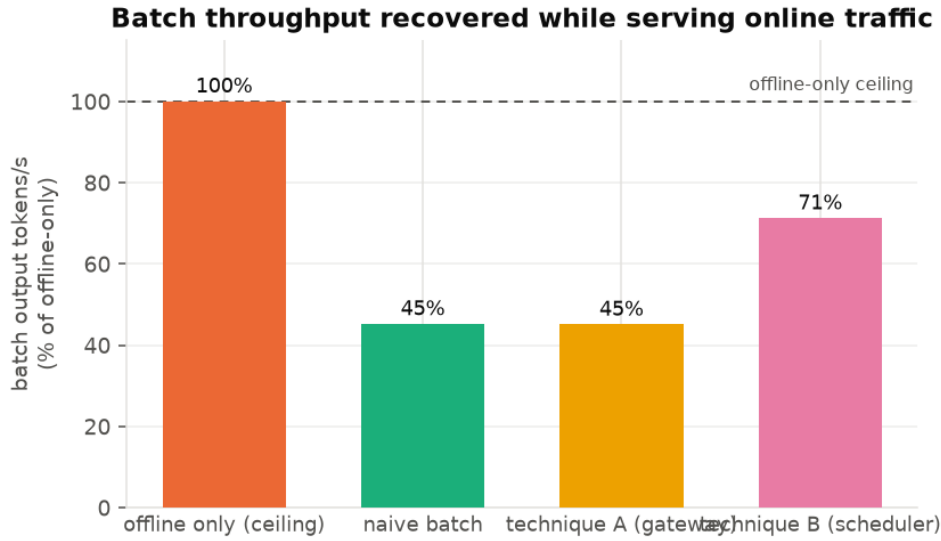


**Figure 6:** Batch output throughput recovered while online traffic is served, as a fraction of the dedicated-offline ceiling.

**Table 3:** Diurnal trace: per-minute batch completions against online load phase (technique A, two 10-minute cycles, peak 3 req/s, trough 0.6 req/s, non-draining pool).

| phase (10 bins each)                                                                             | online arrivals/min | batch completed/min | share of batch work |
|--------------------------------------------------------------------------------------------------|---------------------|---------------------|---------------------|
| high-load minutes                                                                                | 158.6               | 93.7                | 43.8%               |
| low-load minutes                                                                                 | 63.1                | 120.3               | 56.2%               |
| correlation(online, batch) = $-0.95$ ; online p99 = 4.61 s; AIMD target pinned at cap throughput |                     |                     |                     |

**Diurnal trace — batch fills the trough.** Under a sinusoidal online load with a non-draining pool, technique A’s per-minute batch completions anti-correlate with online arrivals at  $r = -0.95$  (Figure 7): 93.7 items/min during the high-load half of each cycle versus 120.3 during the low-load half. Notably, the AIMD target never moved from its cap — the tide-filling came entirely from the engine-level mechanism (priority scheduling over shared capacity), with the external throttle never needing to engage: the two-level design’s division of labor, observed directly.

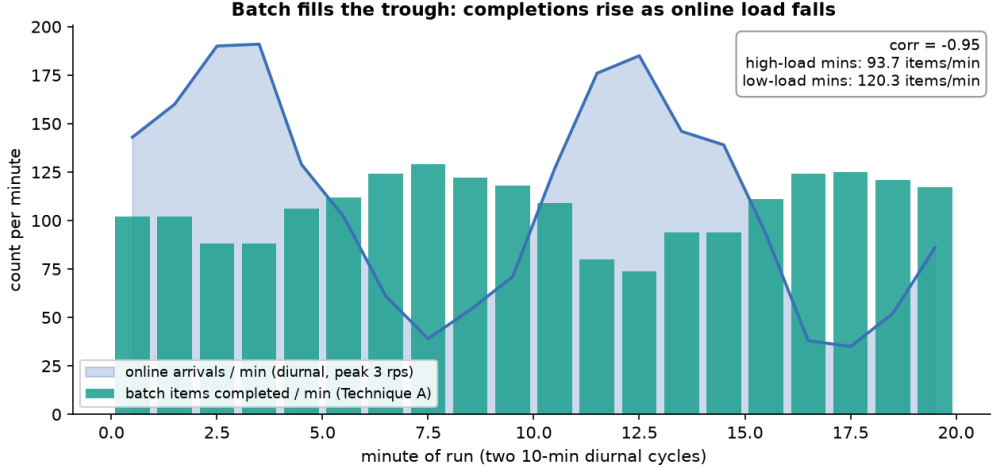

**Figure 7: Batch fills the trough.** Per-minute batch completions (bars) against a sinusoidal online load (two 10-minute cycles, peak 3 req/s, trough 20% of peak): anti-correlation  $r = -0.95$ , with 93.7 items/min in high-load minutes versus 120.3 in low-load minutes. The gateway’s AIMD target stayed pinned at its cap throughout — the tide-filling is produced entirely by the engine-level priority mechanism, direct evidence for the two-level division of labor.

**Q3 — the contract, honestly.** We attempted to demonstrate end-to-end deadline discrimination — a feasible-but-tight job that best-effort co-location misses and laxity escalation meets — and did not find a load regime on this testbed that discriminates. At 3 req/s with a 900-item/15-minute job, the batch completed with 3.5 minutes to spare even under the heaviest online load we could apply (online p99 5.8 s); at 2–2.6 req/s, every configuration completed early for both arms. On this hardware, feasible cases were easy for best-effort AIMD and we could not construct a feasible-but-tight case: **we therefore do not claim demonstrated deadline improvement.** What the runs do establish: the escalation machinery operates (per-tick priority traces show laxity-driven bands engaging), the floor engages at the configured urgency, and the admission check (Section 3.2) refuses jobs the observed rate cannot serve. Constructing the discriminating regime — bursty diurnal online load with genuinely scarce slack — is a primary goal of the GPU evaluation.


**Table 4:** Deadline-stress runs (technique A, 15-minute completion windows). Every feasible configuration completed inside the window for *both* arms; the escalation machinery engaged (minimum priority observed) but was never the difference-maker on this testbed.

| run                    | online load | items | completed by deadline | makespan | min. priority seen |
|------------------------|-------------|-------|-----------------------|----------|--------------------|
| saturated, best-effort | 3.0 req/s   | 900   | 900/900               | 692 s    | 100                |
| easy, best-effort      | 2.0 req/s   | 350   | 350/350               | 204 s    | 100                |
| easy, laxity           | 2.0 req/s   | 350   | 350/350               | 188 s    | 91                 |
| tight, best-effort     | 2.6 req/s   | 500   | 500/500               | 351 s    | 100                |
| tight, laxity (+floor) | 2.6 req/s   | 500   | 500/500               | 328 s    | 66                 |

**Q4 — placement, and an inversion.** The naive expectation — in-engine must dominate — is wrong on this hardware. Technique B’s cap and guardband address interference channels that never bind here: peak KV usage in every run was below 0.5%, so guardband eviction never fired, and a resident batch request decodes every iteration regardless of the admission cap. The dominant interference channel on this box is resident-decode contention, which only sub-iteration participation control could bound (Section 8). Technique A holds latency ( $1.76\times$  vs  $8.25\times$  at equal work;  $1.97\times$  vs  $9.9\times$  at capacity) because its control point — how many batch requests exist at all — is upstream of residency; B converts that residency into

26 more points of ceiling instead. We expect the frontier to shift, and possibly invert back, on hardware where compute rather than residency binds; measuring that crossover is the placement question’s real test. To our knowledge no prior work reports this comparison; the fork-based literature evaluates only its own placement.

**Q5 — self-calibration.** From cold start,  $\hat{T}$  passed its  $R^2$  gate within the first capped phase of the integration run and settled at MAPE  $\approx 0.11$  on live traffic; the batch-token cap  $X$  moved from the cold-start 40 to a converged 1 — correctly tight, since at a 60 ms budget with  $\sim 25$  ms online-only steps this box has little slack to sell, and the model discovered that (Figure 8). Regime-change adaptation (model swap, thermal drift) is untested (Section 8).

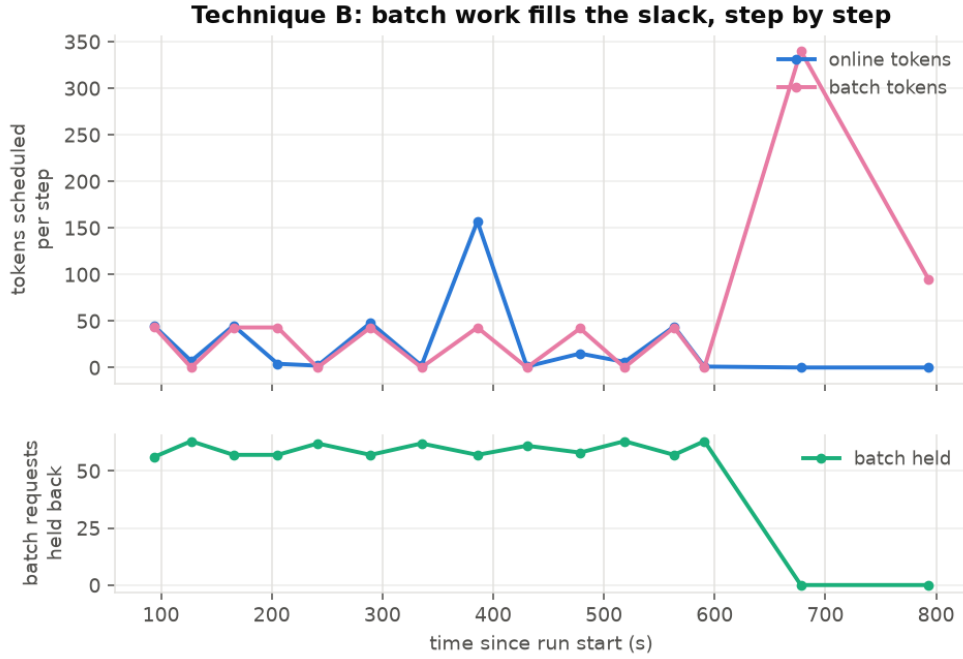

**Figure 8:** Technique B step by step: online and batch tokens scheduled per iteration (top) and the number of batch requests held back by the pre-gate (bottom). When online traffic stops near  $t = 600$  s the held set empties and batch work takes the whole budget — offline mode.

## 5.1 GPU validation (A6000, Qwen2.5-7B, io.net marketplace)


**Setup.** io.net dev CaaS marketplace, RTX A6000 48 GB nodes (3 distinct physical nodes across hires), Qwen2.5-7B-Instruct, the `vllm/vllm-openai:v0.26.0` image plus tidal at a pinned SHA,  $\tau = 2048$  default engine config, `MAX_MODEL_LEN = 8192`, online 20 req/s Poisson (seed 7), 6-minute measured windows, warmup 45 s.

**Spend and teardown provenance.** Total spend  $\approx \$7.73$ : \$6.79 in archived price-quote receipts across six hires, plus a one-hour extension ( $\approx \$0.94$ ) whose HTTP 200 we observed in-session but did not archive to evidence/. Teardown provenance is uneven and we state it rather than round it off: three of the six hires have archived DELETE HTTP 200 receipts; two were expiry-reclaimed or already deleted (the driver’s DELETE returned 400 resource-not-found); the last was deleted manually, with the HTTP 200 seen in-session and a receipt note in `evidence/TEARDOWN_NOTES.md`. A live check after close showed zero running deployments. \$1.98 of the spend — the first two hires — produced no data at all (marketplace node failures), and an honest cost-per-datapoint includes it.

**Instrument credibility, and a denominator that was not a ceiling.** Our first pass normalized batch throughput against each node’s offline-probe *whole-burst* average: 1438.3 / 1426.7 / 1467.6 output tok/s, a  $\pm 1.4\%$  cross-node band. An independent numerical audit of these results rejected that denominator, and the tell was already in our own table — the diurnal run “harvested”  $\sim 109\%$  of it. **Any co-serving figure above 100% of a claimed ceiling is evidence that the denominator is not a ceiling**, and we record the point as a result because the mistake is easy to ship: the probe drains a 600-item pool at concurrency 512 with an 18.5 s makespan, so roughly half of that window is pipeline fill, and its pool skews short (44.0 mean output tokens per completion versus 54.8 in the matrix pools). The corrected ceiling is the probe’s **steady-state tail** — output tokens completed in the last 10 s of the burst: 2049.6 / 2031.5 / 2057.0 tok/s, a  $\pm 0.62\%$  cross-node band, which makes it a tighter instrument as well as a correct one. Every “% of ceiling” figure below uses it; the whole-burst averages remain in `results/gpu_figures/` for traceability, labeled ramp-dominated. Throughput is normalized per node. **Latency ratios, by contrast, are cross-node:** no within-node `online_only` / `technique_a` pair exists in the evidence, so we label the ratios as cross-node rather than implying a paired comparison.


**Table 5:** GPU results (A6000, Qwen2.5-7B, online 20 req/s Poisson). “% of steady-state ceiling” is batch output throughput against that node’s own independently probed dedicated-offline rate over the last 10 s of the probe burst (2031.5 and 2057.0 tok/s respectively); the whole-burst probe averages are ramp-dominated and are not used as denominators. Latency ratios are cross-node — no within-node baseline pair exists. The diurnal row is a 20-minute run with peak 20 rps.

| condition                     | online p50 | online p99 | vs baseline<br>(cross-node)         | batch otok/s | % of steady-state ceiling |
|-------------------------------|------------|------------|-------------------------------------|--------------|---------------------------|
| online_only (baseline)        | 0.753 s    | 1.570 s    | 1.00×                               | —            | —                         |
| technique_a                   | 0.886 s    | 1.927 s    | 1.18× / 1.23×                       | 1408         | <b>69.3%</b>              |
| technique_a (diurnal, 20-min) | 0.85 s     | 1.90 s     | $\sim 1.13\times / \sim 1.21\times$ | 1607         | <b>78.1%</b>              |

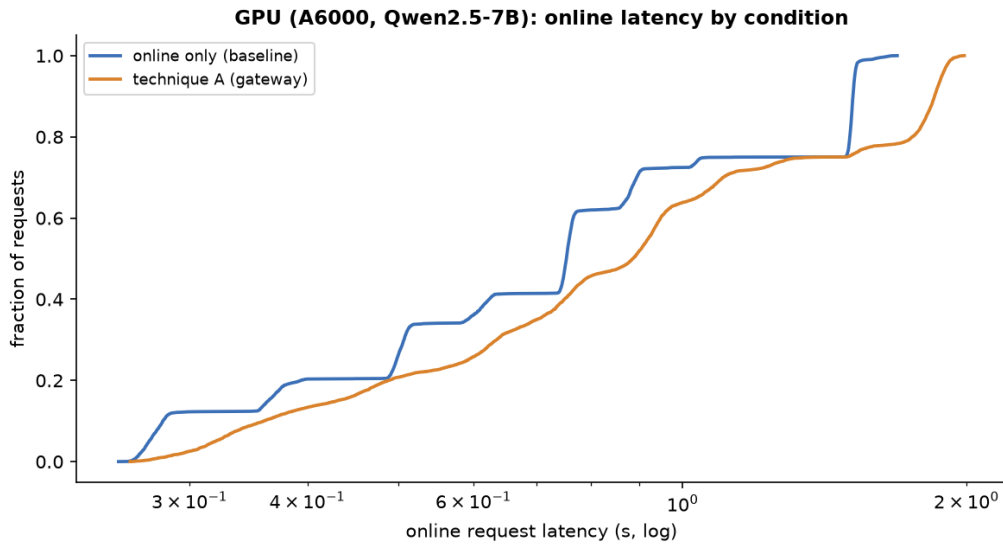

**Figure 9:** GPU online request latency, baseline versus technique A (A6000, Qwen2.5-7B, 20 req/s Poisson). The co-location tax that cost  $2.54\times$  p50 on the CPU testbed is  $1.18\times$  here — a cross-node comparison: the two arms ran on different (but  $\pm 0.62\%$ -matched) A6000 nodes.


**Diurnal trace on GPU.** Over a 20-minute sinusoidal load (peak 20 req/s,  $n = 14,498$  online requests, zero errors), technique A harvested 1607 output tok/s, 78.1% of that node’s steady-state ceiling, against 69.3% for the flat-load run. Part of that gap is pool composition rather than tide depth: on *total* tokens

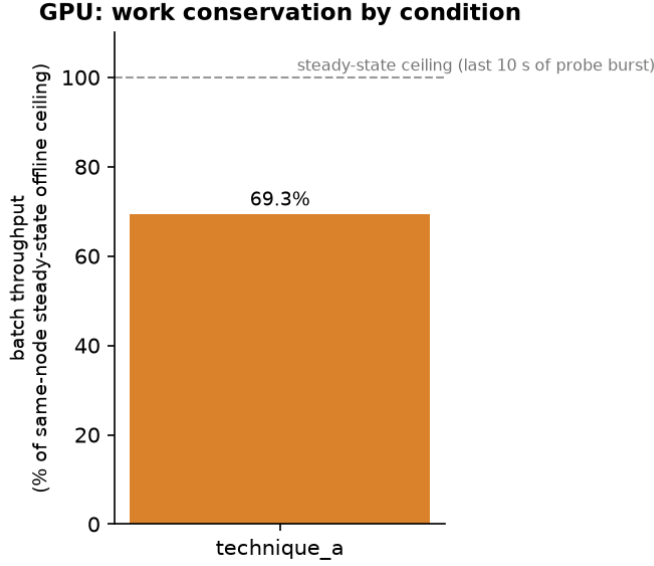

**Figure 10:** Batch output throughput recovered while online traffic is served, as a fraction of the same node’s independently probed *steady-state* dedicated-offline ceiling (last 10 s of the probe burst): 69.3% under flat load, 78.1% under diurnal load.

per second the diurnal run sits at 100.2% of the whole-burst probe average — which is precisely the coincidence that made the discarded denominator look like a ceiling.

The per-minute anti-correlation is  $\text{corr}(\text{online}/\text{min}, \text{batch}/\text{min}) = -0.85$  with the *first-minute bin excluded*. Minute 0 is pipeline fill: it completes 771 batch items against 1667–1894 in every subsequent minute, while online load is already climbing toward its first peak, and including it drags the correlation to  $-0.38$ . We reported that  $-0.38$  in an earlier draft and explained it as the GPU being over-provisioned — batch flowing near-ceiling in both tides. That explanation does not survive the audit and we withdraw it: it was a startup artifact of one bin, and at 78% of steady state there is real headroom being contended for. With the fill bin removed the GPU tide agrees with the CPU tide ( $-0.95$ ), and batch completions split 1718/min in above-mean-load minutes versus 1836/min in below-mean minutes ( $-6.4\%$ ) (Figure 11).

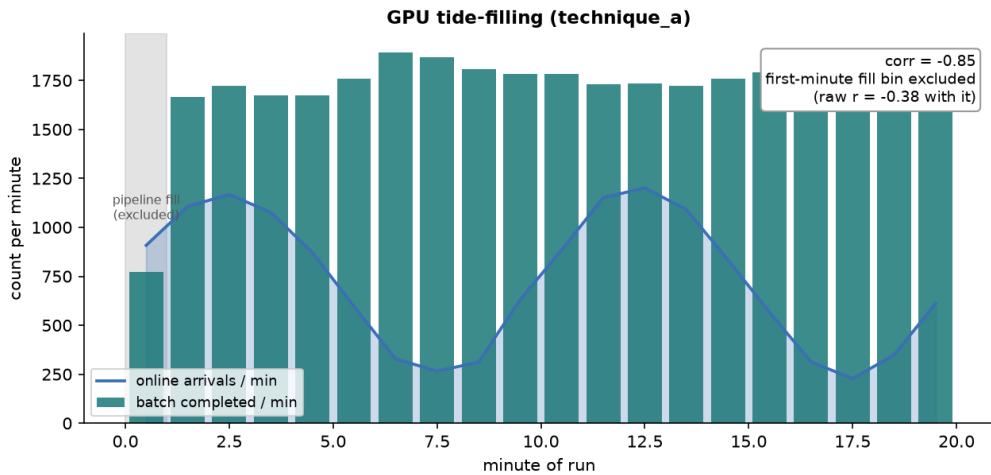

**Figure 11:** GPU tide-filling under a sinusoidal online load (technique A, 20-minute window, peak 20 req/s). Per-minute batch completions anti-correlate with online arrivals at  $r = -0.85$  once the first-minute pipeline-fill bin (shaded) is excluded; including that bin gives  $-0.38$ , which is a startup artifact rather than a weak tide.

**Technique B on GPU — honest status.** The compatibility canary PASSED on release v0.26.0 after a version-tolerant `_preempt_request` fix (the only real drift: one kwarg), and 14 engine tests pass against *both* release and dev vLLM. The matrix measurement was **not obtained**: the harness’s direct-submission path fails at GPU scale twice-over — (1) the original unbounded/hanging drain (fixed with bounded salvage, 12 new tests), then (2) a second defect where the case stalls immediately after warmup (log: last line “warmup: 30 requests in 23.4s”). The `offline_only` and naive GPU arms were lost to the same path. The CPU naive arm (22.6× p99) stands as the policy-free control. This is a roadmap item, not a paper claim.

## 6 Widening the control plane: fleets and phase decoupling

Everything measured so far places the batch tier against *one* aggregated engine. That is the narrowest useful scope, not the only one. Table 6 lays out the ladder we have started to climb, together with the evidence status of each rung — A0 is what Section 5.1 measures on GPU; A-F and A-P are proven locally; A-D is design plus a metric mapping.

**Table 6:** The A-ladder: widening the scope over which the deadline-contracted tier places work, with the evidence status of each rung.

| rung | scope                           | status                                   |
|------|---------------------------------|------------------------------------------|
| A0   | single aggregated engine        | measured on GPU (Section 5.1)            |
| A-F  | fleet placement across replicas | mechanism proven locally (Table 7)       |
| A-D  | disaggregated-aware injection   | design + Dynamo metric mapping (Table 8) |
| A-P  | phase-split freeze/thaw         | spike-proven locally (31.8× TTFT)        |

The ladder is the complement of technique B, not a competitor to it. Technique B is *maximum visibility over minimum scope*: it sees one engine’s iteration exactly. The A-ladder trades that for coarser signals over widening scope, and ends at a decision B cannot express at all — parking work in time. As the one-liner: “*disaggregation separates prefill from decode in space; a deadline-contracted batch tier separates them in time.*”

**A-F: fleet placement (local experiment).** Two CPU replicas (Mac M4 Pro, thread-count isolation *only* — macOS cannot pin cores, so shared memory bandwidth is a named confound), phase-shifted diurnal online load (period 600 s, phases 0 and  $\pi$ ), 20-minute window, seed 7, 4000-item pool identical in both arms. **This is not the GPU setup of Section 5.1** and its numbers are not comparable to it: Qwen2.5-0.5B, peak 1 req/s, 16-token online completions — a deliberately small rig whose only job is to show the placement mechanism. The arms are `placement=fleet` versus `placement=pinned` (all batch → replica 0). Harvest: fleet 2494 in-window items (32.2 tok/s) versus pinned 1884 (24.4) = +32%. The mechanism is visible per replica: `corr(a replica’s own analytic online rate, its batch completions per 2 min)` = −0.83 (**replica 1**), −0.56 (**replica 2**), with batch volume split roughly evenly (1239 / 1255) but *timed* into each replica’s trough. The cost is real and we do not hide it: blended online p50 3.41 s (fleet) versus 1.44 s (pinned), p99 12.1 versus 3.7 — attributed to the shared-substrate confound (spreading batch loads *both* engines’ shared memory bus; pinning sacrifices one replica and spares the other). GPU fleets with real isolation are where the latency side resolves; the mechanism claim (placement follows slack) is what the CPU experiment proves. Implementation: `fleet.py placement` (sticky prefix affinity + least-loaded + headroom filter), per-replica AIMD with replica-local circuits, 95 new tests (424 total), production-wired behind `TIDAL_VLLM_REPLICAS`.

**A-P: freeze/thaw, a spike.** If the batch tier may defer work, it may also split a request’s *phases* across time. We ran the smallest experiment that could falsify this: vLLM CPU build,

**Table 7:** A-F fleet placement versus pinned placement, two phase-shifted CPU replicas, 20-minute window, identical 4000-item pool.

| arm                                                                                                        | batch items in-window | batch tok/s | blended online p50 / p99 |
|------------------------------------------------------------------------------------------------------------|-----------------------|-------------|--------------------------|
| pinned (all batch $\rightarrow$ replica 0)                                                                 | 1884                  | 24.4        | 1.44 s / 3.7 s           |
| fleet (placement follows slack)                                                                            | 2494                  | 32.2        | 3.41 s / 12.1 s          |
| harvest +32%; per-replica corr(online rate, batch completions) = $-0.83, -0.56$ ; volume split 1239 / 1255 |                       |             |                          |

ExampleConnector (the renamed SharedStorageConnector — the only device-agnostic in-tree connector), kv\_role=kv\_both, prefix caching disabled. Prefill in process 1  $\rightarrow$  KV persisted to disk (23.6 MB for a 1973-token prompt: only whole 128-token blocks persist, so 1920 cached tokens at exactly 12,288 B/token at 0.5B)  $\rightarrow$  process killed  $\rightarrow$  a fresh process thaws  $\rightarrow$  **bit-identical greedy decode**, with TTFT 7.277 s  $\rightarrow$  0.229 s =  $31.8\times$  (median of 5). A duplicate arm that thawed from the in-engine prefix cache rather than across a process boundary measured  $48.2\times$ ; we quote the smaller cross-process number as primary because it is the one that demonstrates *durability* — surviving process death is the property a deadline-deferred prefill actually needs. Short prompts (208 tokens) get only  $1.9\times$  (just 128 of the 208 tokens are cached, plus fixed per-file read costs), so the  $\approx 1k$ -token crossover is an *interpolation* between two measured points, not a measured crossover. Caveats, all of them load-bearing: a debug-grade connector; all-or-nothing exact-prompt-hash keying (no partial prefix reuse — that is LMCache [17] / Mooncake [16] territory); **total FLOPs are unchanged — only their placement in time moves**; at 70B-class KV bytes/token this is  $\sim 2$  orders worse, making storage the binding economic constraint; and GPU KV-connector mode forces piecewise cudagraphs.

**A-D: what the signals map to.** A-D needs no new policy, only new signals. On a disaggregated deployment the three metrics technique A already scrapes have direct counterparts in NVIDIA Dynamo [18] (Table 8); the one nuance that is not a rename is that batch work is prefill-heavy, so the tier should target *prefill-worker* troughs rather than aggregate troughs.

**Table 8:** A-D signal mapping: the metrics technique A’s control loop consumes, and their counterparts in a Dynamo-style disaggregated deployment.

| tidal signal                                                                              | Dynamo counterpart    |
|-------------------------------------------------------------------------------------------|-----------------------|
| kv_usage                                                                                  | KVBM block metrics    |
| waiting                                                                                   | router queue depth    |
| observed rate                                                                             | per-worker throughput |
| disaggregation nuance: batch is prefill-heavy $\rightarrow$ target prefill-worker troughs |                       |

**Where this sits in the literature.** DistServe, Splitwise and Dynamo [5, 6, 18] disaggregate phases in *space*, with the KV transferred immediately from prefill worker to decode worker; A-P adds the *temporal* axis — the same split, but with an arbitrary gap in between, which is only a sane thing to do when a deadline says it is. LMCache and Mooncake [16, 17] have solved the KV-persistence *mechanics* we are deliberately not rebuilding (partial prefix reuse, tiered stores, transfer engines); what we add on top is the *deadline economics* that decides when parking a prefill is worth its storage bill. Llumnix [4] rebalances online requests across instances by live migration; A-F is the same intuition applied to the tier that is allowed to wait — we do not migrate what is already running, we schedule the deferrable tier into whichever replica has slack.

## 7 Related Work

Iteration-level scheduling and its descendants frame the mechanism space: Orca introduced iteration-level batching [2]; Sarathi-Serve added chunked prefill and stall-free batching, the token-budget structure vLLM V1 inherits [1]; FastServe [3] brought preemptive MLFQ scheduling to inference; Llumnix [4] reschedules across instances by live migration; DistServe and Splitwise disaggregate prefill from decode [5, 6], an architecture ConServe found interacts poorly with offline co-location; InferCept’s preemption taxonomy [22] underlies HyGen’s KV-handling choices. Co-location: HyGen [7] (profiled latency budget, prefix-sharing offline order, starvation tempering — but no per-job deadline or admission contract), ConServe [8] (context-aware latency model, layer-wise preemption, incremental KV checkpointing — fork, no contract), OOCO [14], Echo [15]. Deadline-aware serving: QLM [11] (ILP queue reordering; evaluates EDF as a baseline it beats), Ascendra [12], SCORPIO [13], and closest, Niyama [9] — per-request deadlines across QoS classes in one engine, with EDF/SRPF-interpolated priority at second-to-minute horizons and relegation under overload; it does not expose per-job day-scale windows, admission refusal, or laxity. FREESH [10] implements true LLF in an LLM engine for carbon-aware frequency scaling over one request class — evidence the math runs in this setting, aimed at a different problem. Within vLLM: priority scheduling was motivated by batch/interactive co-location [23], an SLA-tier proposal was declined [24], and an online batch-API endpoint remains an open PR [25] — demand without an assembled answer. Every individual mechanism here is published; the contribution is the contract semantics, the synthesis, and the placement measurement.

## 8 Limitations

**Admission gating does not bound resident-request inflation** (technique B): a resident batch request keeps decoding until the guardband evicts it, and where KV pressure never materializes, eviction never fires — the dominant residual interference on our testbed. Bounding it requires per-iteration participation control (abandoning the wrapper’s upstream tolerance) or ConServe-style sub-iteration preemption. **The contract is mechanism-validated, not outcome-demonstrated**: no tested regime discriminated escalation end-to-end (Section 5, Q3), and the `sla_strict` dial’s latency price is unmeasured. **Tail metrics flatter co-location**; we report distributions. **The placement comparison is CPU-only**: Section 5.1 validates technique A on GPU, but the A-vs-B inversion rests entirely on the CPU testbed. **Median tax**: even technique A costs  $\sim 2.5\times$  p50 on the CPU box; co-location is not free and we do not claim it is (on GPU the same tax is  $1.18\times$ , cross-node). **The GPU ceiling is a steady-state tail, not a sustained dedicated run**: the `offline_only` arm was lost to the harness defect below, so the denominator is a 10 s window of an 18.5 s probe burst rather than a 6-minute dedicated-offline run at the same window length as the co-serving arms — the right denominator of the two available, still not the one we wanted. **GPU latency ratios are cross-node**: the `online_only` baseline and the technique-A run were measured on different physical A6000 nodes; the  $\pm 0.62\%$  steady-state band across nodes suggests they are comparable, but no within-node pair exists and we do not claim one. Single engine, single model; one dispatcher per store (no lease); submission-time escalation cannot re-age already-queued items; step-time attribution is exact on the CPU build and approximate under GPU async scheduling; `scheduler_cls` is not a stable interface (technique B pins a version; technique A does not).

**Known defects in the GPU harness.** We list these as defects rather than caveats because they are ours, and they bound what Section 5.1 may be read to say. (1) **Direct-submission arms fail at GPU scale** — a two-stage defect: the salvage fix for the original unbounded/hanging drain is verified in unit tests, but a second stall-after-warmup mode remains, and it cost us the `offline_only`, naive and technique-B GPU arms. (2) **macOS fleet isolation is thread-count only** (Section 6); shared memory bandwidth between the two replicas is unisolated and is a named confound on the fleet latency numbers. (3) **Diurnal-B and B-matrix GPU numbers are absent**, blocked by defect (1) — so the placement inversion remains a CPU-only result and the GPU column of the placement comparison is empty. (4) **The metrics evidence is our**

**own instrumentation, not a production observability stack:** Grafana per-deployment dashboards do not exist on the dev cluster (Prometheus is behind a VPN), so what we archive is the harness’s own 1 Hz scrapes plus archived CaaS API responses and engine logs (all under evidence/). (5) **Two analysis defects, found by an independent numerical audit after the first draft, not by us:** a ramp-dominated probe average used as a ceiling, and a pipeline-fill bin left inside a correlation. Both are corrected in Section 5.1 and in `scripts/gpu_analysis.py`; both had a visible tell (a >100% harvest, a first bin completing 771 items against 1667–1894) that we did not act on.

## 9 Conclusion

The batch API is the rare product where the entire margin is scheduling. Tidal implements its contract — admission, escalation, floor — over an unmodified open-source engine with classical real-time machinery, measures what each placement of that policy costs, and is explicit about what a modest testbed can and cannot demonstrate. We offer it as usable infrastructure, as a baseline for deadline-contracted serving, and as a placement study the fork-based literature has not run — with the GPU-scale evaluation as the necessary next step.

## References

- [1] A. Agrawal et al. Taming Throughput-Latency Tradeoff in LLM Inference with Sarathi-Serve. OSDI 2024. [arXiv:2403.02310](#).
- [2] G.-I. Yu et al. Orca: A Distributed Serving System for Transformer-Based Generative Models. OSDI 2022.
- [3] B. Wu et al. Fast Distributed Inference Serving for Large Language Models. [arXiv:2305.05920](#).
- [4] B. Sun et al. Llumnix: Dynamic Scheduling for Large Language Model Serving. OSDI 2024. [arXiv:2406.03243](#).
- [5] Y. Zhong et al. DistServe: Disaggregating Prefill and Decoding for Goodput-optimized LLM Serving. OSDI 2024. [arXiv:2401.09670](#).
- [6] P. Patel et al. Splitwise: Efficient Generative LLM Inference Using Phase Splitting. ISCA 2024. [arXiv:2311.18677](#).
- [7] T. Sun, P. Wang, F. Lai. HyGen: Efficient LLM Serving via Elastic Online-Offline Request Co-location. [arXiv:2501.14808](#).
- [8] Y. Qiao et al. ConServe: Fine-Grained GPU Harvesting for LLM Online and Offline Co-Serving. [arXiv:2410.01228](#).
- [9] Niyama: Breaking the Silos of LLM Inference Serving. [arXiv:2503.22562](#).
- [10] FREESH: Fair, Real-time, Energy-Efficient Scheduling for LLM Serving. [arXiv:2511.00807](#).
- [11] QLM: Queue Management for SLO-Oriented Large Language Model Serving. SoCC 2024. [arXiv:2407.00047](#).
- [12] Ascendra: Dynamic Request Prioritization for Efficient LLM Serving. [arXiv:2504.20828](#).
- [13] SCORPIO: Serving the Right Requests at the Right Time. [arXiv:2505.23022](#).
- [14] Online-Offline Co-location for LLM Serving. [arXiv:2511.21862](#).
- [15] Echo: Efficient Co-scheduling of Hybrid Online-Offline Tasks. [arXiv:2504.03651](#).
- [16] R. Qin et al. Mooncake: A KVCache-centric Disaggregated Architecture for LLM Serving. [arXiv:2407.00079](#).

- [17] LMCache: a KV-cache layer for LLM serving (prefix reuse, tiered storage, transfer engine). [github.com/LMCache/LMCache](https://github.com/LMCache/LMCache).
- [18] NVIDIA Dynamo: a datacenter-scale distributed inference serving framework, 2025. [github.com/ai-dynamo/dynamo](https://github.com/ai-dynamo/dynamo).
- [19] A. K. Mok. Fundamental Design Problems of Distributed Systems for the Hard- Real-Time Environment. MIT, 1983.
- [20] A. Verma et al. Large-scale cluster management at Google with Borg. EuroSys 2015.
- [21] W. Kwon et al. Efficient Memory Management for Large Language Model Serving with PagedAttention. SOSP 2023. [arXiv:2309.06180](https://arxiv.org/abs/2309.06180).
- [22] R. Abhyankar et al. InferCept: Efficient Intercept Support for Augmented LLM Inference. ICML 2024. [arXiv:2402.01869](https://arxiv.org/abs/2402.01869).
- [23] vLLM RFC: Priority Scheduling. [github.com/vllm-project/vllm/issues/6077](https://github.com/vllm-project/vllm/issues/6077).
- [24] vLLM RFC: SLA-Tiered Scheduling (closed, not planned). [github.com/vllm-project/vllm/issues/30256](https://github.com/vllm-project/vllm/issues/30256).
- [25] vLLM PR: OpenAI-compatible online Batch and Files API (open). [github.com/vllm-project/vllm/pull/44445](https://github.com/vllm-project/vllm/pull/44445).
- [26] lazycode: plan with a realtime LLM, execute on batch APIs. [github.com/rajagurunath/lazycode](https://github.com/rajagurunath/lazycode).
- [27] G. Lunkupali Venugopal. LazyCode: Compiling Interactive Intent into Batch Execution — a Query-Optimizer Architecture, Its Economics, and the Limits of Overnight Coding Agents. Companion paper, 2026.