Event Management System

1. attendees

Table: attendees

Column	Data Type	Notes
A.id	INT	Primary Key
A.name	VARCHAR (255)	NOT NULL
A.email	VARCHAR (255)	UNIQUE
A.phone	VARCHAR (255)	UNIQUE
A.ticket	INT	FK → tickets.T.id
A.feedback	INT	FK → feedback.F.id

Relationships

- **attendees (1) → tickets (M)**
- **attendees (1) → events (M)** via FK A.events
- **attendees (1) → feedback (M)**

2. tickets

Table: tickets

Column	Data Type	Notes
T.id	INT	Primary Key
E.id	INT	FK → events.E.id
S.id	INT	FK → sessions.S.id
A.id	INT	FK → attendees.A.id

s.crn_t	VARCHAR (255)	NOT NULL
price	VARCHAR (255)	NOT NULL

Relationships

- **tickets (M) → attendees (1)**
- **tickets (M) → events (1)**
- **tickets (M) → sessions (1)**

3. events

Table: events

Column	Data Type
E.id	INT (PK)
E.name	VARCHAR (255)
E.start	VARCHAR (255)
E.end	VARCHAR (255)
E.location	VARCHAR (255)
E.cat	VARCHAR (255)
A.id	INT (FK → attendees.A.id)

Relationships

- **events (1) → tickets (M)**
- **events (1) → feedback (M)**
- **events (1) → sponsor (M)**
- **events (1) → vendors (M)**
- **events (1) → sessions (M)**

4. venues

Table: venues

Column	Data Type
V.id	INT (PK)
V.name	VARCHAR (255)
V.email	VARCHAR (255)
V.Phone	VARCHAR (255)
V.address	VARCHAR (255)
Sid	INT (FK → sessions.S.id)

Relationships

- **venues (1) → sessions (M)**
- **venues (1) → events (M)**

5. sessions

Table: sessions

Column	Data Type
S.id	INT (PK)
S.date	DATE
S.time	TIME
S.start time	VARCHAR (255)
S.end time	VARCHAR (255)
S.spaker	VARCHAR (255)
S.id	INT (FK → events.E.id)

Relationships

- **sessions (M) → vendors (1)**
- **sessions (M) → events (1)**
- **sessions (M) → tickets (1)**

6. sponsor

Table: sponsor

Column	Data Type
Ss.id	INT (PK)
S.name	VARCHAR (255)
S.contact	VARCHAR (255)
S.phone	VARCHAR (255)
S.email	VARCHAR (255)

Relationships

- **sponsor (M) → events (1)**

7. feedback

Table: feedback

Column	Data Type
Fid	INT (PK)

A.id	INT (FK → attendees.A.id)
E.id	INT (FK → events.E.id)
Feedback date	DATE
feedback rating	VARCHAR (255)
overall rating	TINYINT

Relationships

- **feedback (M) → attendees (1)**
- **feedback (M) → events (1)**

ER Diagram Relationships Summary

From	To	Type
attendees	tickets	1: M
attendees	feedback	1: M
attendees	events	1: M
tickets	events	M: 1
tickets	attendees	M: 1
tickets	sessions	M: 1
events	sponsor	1: M
events	feedback	1: M
events	vendors	1: M
events	sessions	1: M
vendors	sessions	1: M

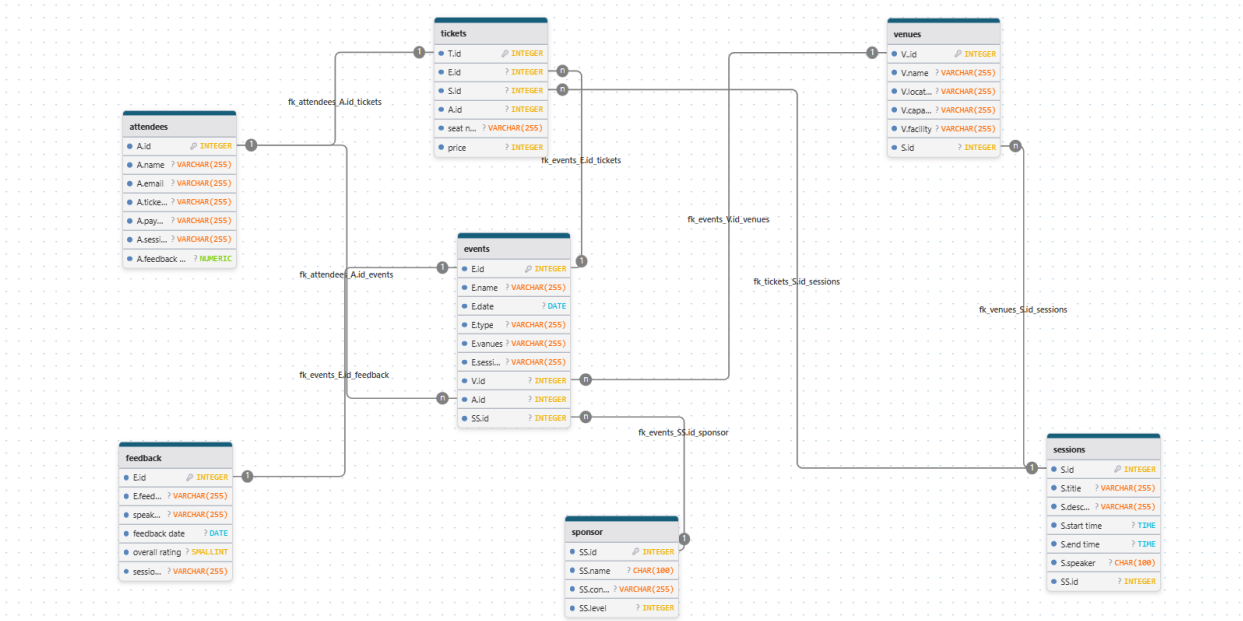
tickets
T.id INTEGER
E.id ? INTEGER
S.id ? INTEGER
A.id ? INTEGER
seat n... ? VARCHAR(255)
price ? INTEGER
venues
V.id INTEGER
V.name ? VARCHAR(255)
V.locat... ? VARCHAR(255)
V.capa... ? VARCHAR(255)
V.facility ? VARCHAR(255)
S.id ? INTEGER
attendees
A.id INTEGER
A.name ? VARCHAR(255)
A.email ? VARCHAR(255)
A.ticke... ? VARCHAR(255)
A.pay... ? VARCHAR(255)
A.sessi... ? VARCHAR(255)
A.feedback ... ? NUMERIC
events
E.id INTEGER
E.name ? VARCHAR(255)
E.date ? DATE
E.type ? VARCHAR(255)
E.venues ? VARCHAR(255)
E.sessi... ? VARCHAR(255)
V.id ? INTEGER
A.id ? INTEGER
SS.id ? INTEGER
feedback
E.id INTEGER
E.feed... ? VARCHAR(255)
speak... ? VARCHAR(255)
feedback date ? DATE
overall rating ? SMALLINT
sessio... ? VARCHAR(255)
sponsor
SS.id INTEGER
SS.name ? CHAR(100)
SS.con... ? VARCHAR(255)
SS.level ? INTEGER
sessions
S.id INTEGER
S.title ? VARCHAR(255)
S.desc... ? VARCHAR(255)
S.start time ? TIME
S.end time ? TIME
S.speaker ? CHAR(100)
SS.id ? INTEGER
fk_attendees_A.id_tickets
fk_events_E.id_tickets
fk_events_V.id_venues
fk_attendees_A.id_events
fk_tickets_S.id_sessions
fk_venues_S.id_sessions
fk_events_E.id_feedback
fk_events_SS.id_sponsor