



Try to create and run a container


docker run <image name>

Reference the Docker Client


Name of image to use for this container




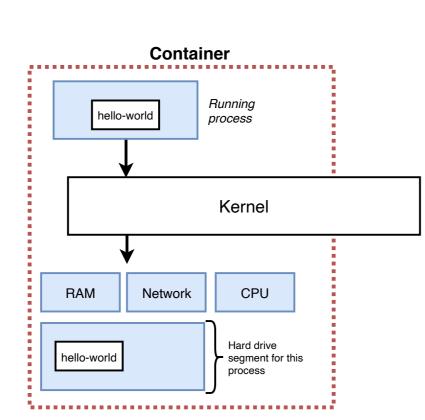





1	Try to create and run a container	1	Default command override
docker	run	<image name=""/>	command!
Reference the Docker Client		Name of image to use for this container	1



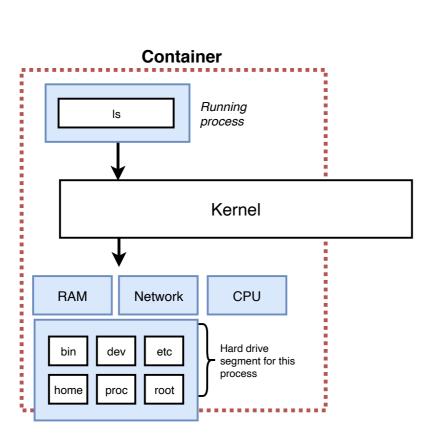


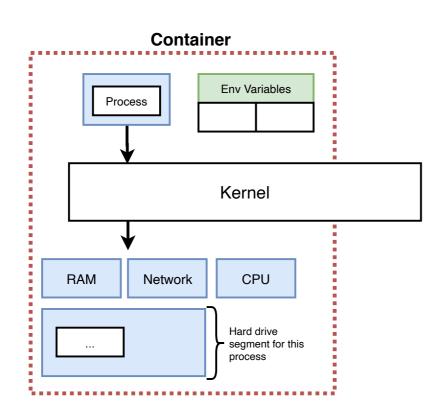



List all running containers





docker run = docker create + docker start

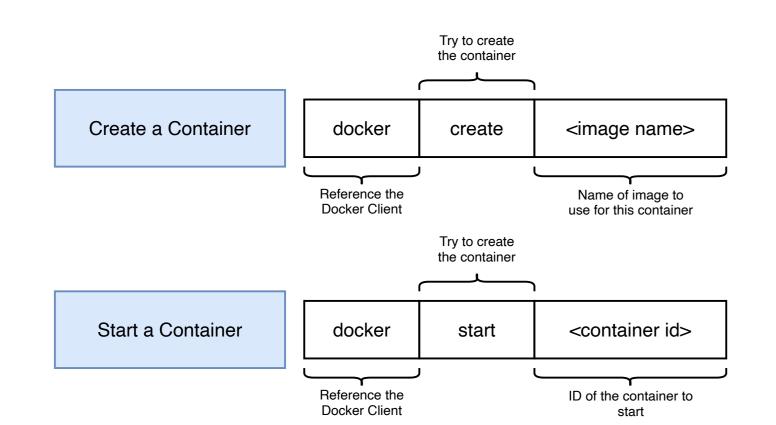




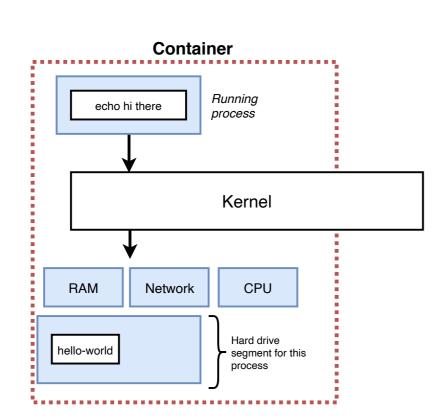



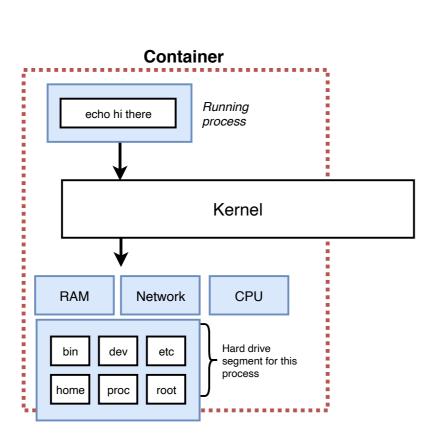



Get logs from a container

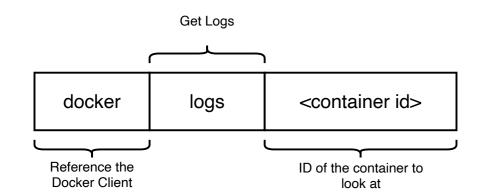


Stop a Container docker stop <container id>


Kill a Container docker kill <container id>

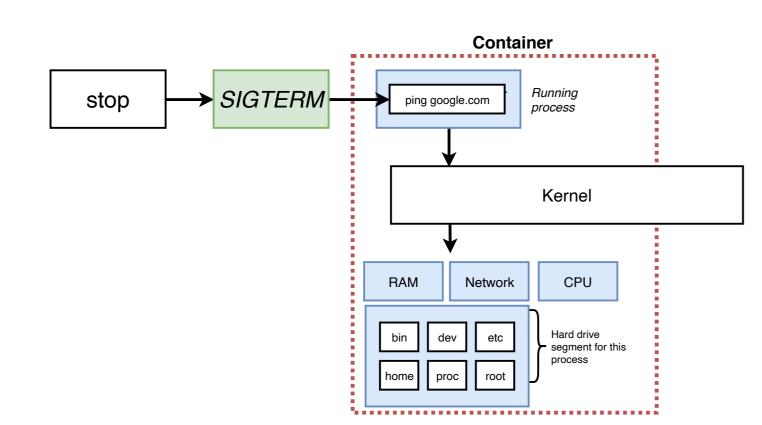


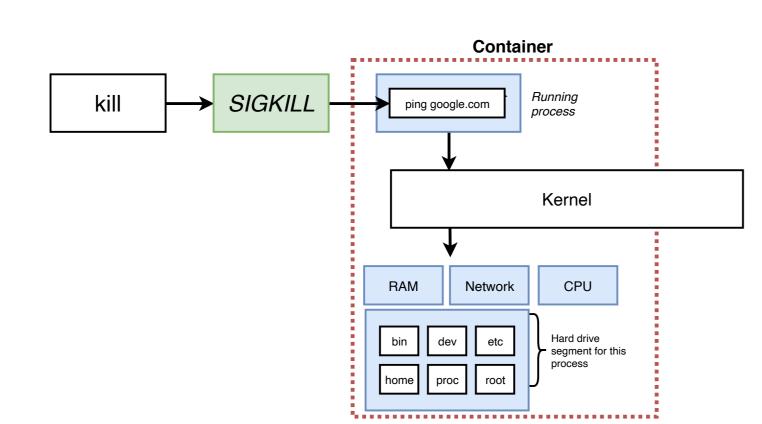




Execute an additional command in a container

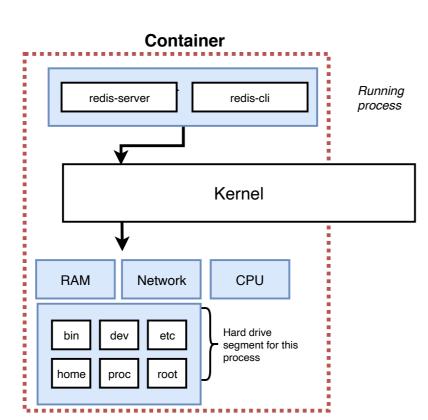

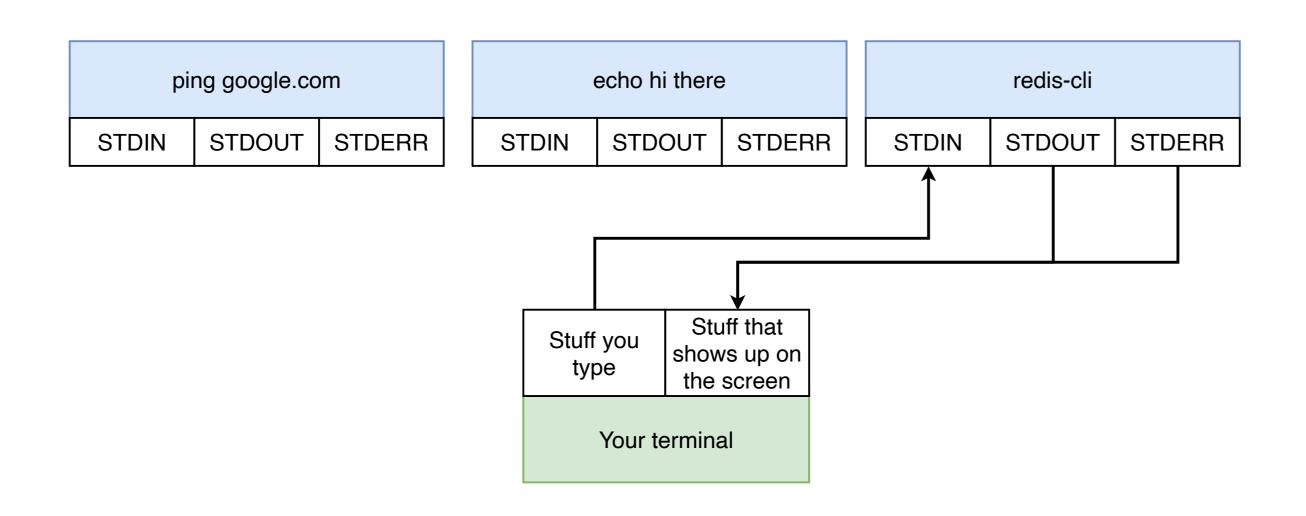

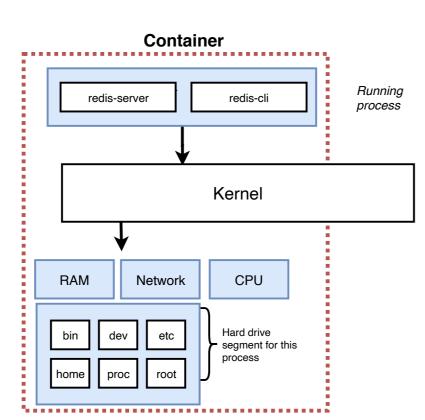

bash powershell zsh sh

Command Processors

