


# **Lab-6**

## **Containerization**

# Containerization

- A Docker image is made up of a collection of files that bundle together all the essentials – such as installations, application code, and dependencies that is required to configure a fully operational container environment.
- You can create a Docker image by using one of two methods:
  - **Interactive:** By running a container from an existing Docker image, manually changing that container environment through a series of live steps, and saving the resulting state as a new image.
  - **Dockerfile:** By constructing a plain-text file, known as a Dockerfile, which provides the specifications for creating a Docker image.

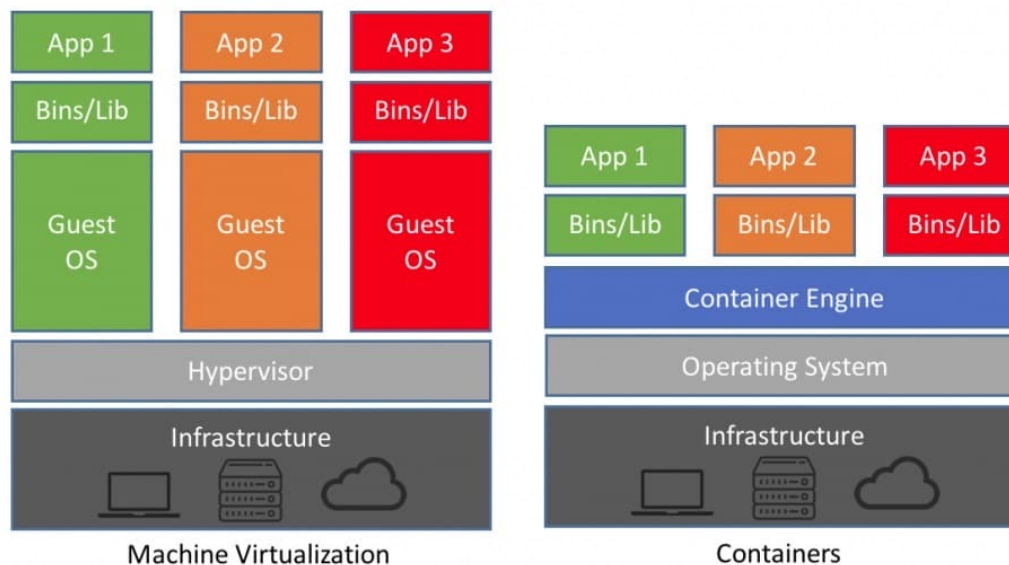


# Image Layers

- **A Docker image** is a file used to execute code in a Docker container. Docker images act as a set of instructions to build a Docker container, **like a template**. Docker images also act as the starting point when using Docker. **An image is comparable to a snapshot in virtual machine (VM) environments.**
- Each of the files that make up a Docker image is known as a **layer**.
- These layers form a series of intermediate images, built one on top of the other in **stages**, where each layer is dependent on the layer immediately below it.
- when you make changes to a layer in your image, Docker not only rebuilds that particular layer, but all layers built from it. Therefore, a change to a layer at the top of a stack involves the least amount of computational work to rebuild the entire image.
- **Base Image:** a base image is an empty first layer, which allows you to build your Docker images from scratch.
  - Base images give you full control over the contents of images
  - are generally intended for more advanced Docker users.




# Container Layer

- A **Docker container** is a virtualized runtime environment used in application development.
- Each time Docker launches a container from an image, it adds a thin writable layer, known as the container layer, which stores all changes to the container throughout its runtime.
- As this layer is the **only difference between a live operational container and the source Docker image itself**, any number of like-for-like containers can potentially share access to the same underlying image while maintaining their own individual state.

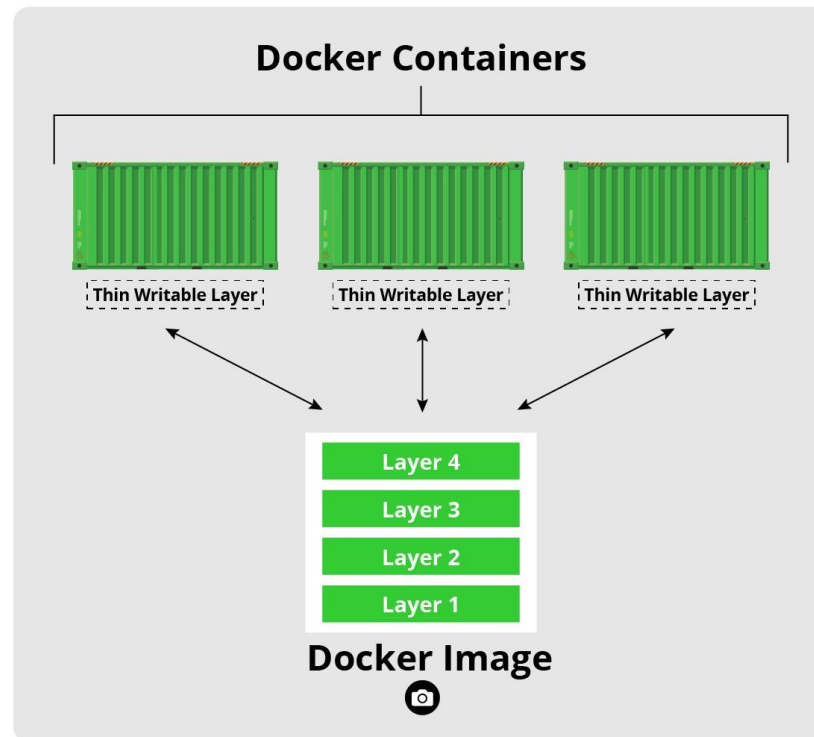

# Docker Manifest

- Together with a set of individual layer files, a Docker image also includes an additional file known as a manifest. This is essentially a description of the image in JSON format and comprises information such as image tags, a digital signature, and details on how to configure the container for different types of host platforms.

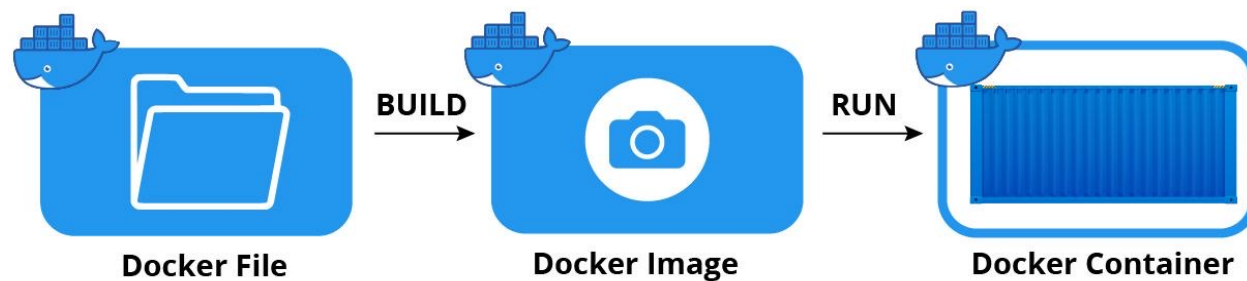

# Install Docker

- Check you machine compatibility
  - [windows](#)
  - [Linux](#)
- Follow Installation steps in this [official documentation](#)
- For Ubuntu 20.04 follow this [link](#)
- After installation check the docker services are running:
  - **sudo systemctl status docker**

## Output

```
● docker.service - Docker Application Container Engine
   Loaded: loaded (/lib/systemd/system/docker.service; enabled; vendor preset: enabled)
   Active: active (running) since Tue 2020-05-19 17:00:41 UTC; 17s ago
 TriggeredBy: ● docker.socket
    Docs: https://docs.docker.com
 Main PID: 24321 (dockerd)
   Tasks: 8
  Memory: 46.4M
    CGroup: /system.slice/docker.service
            └─24321 /usr/bin/dockerd -H fd:// --containerd=/run/containerd/containerd.sock
```



# Start Use Docker

- **Run docker command**

## Output

attach	Attach local standard input, output, and error streams to a running container
build	Build an image from a Dockerfile
commit	Create a new image from a container's changes
cp	Copy files/folders between a container and the local filesystem
create	Create a new container
diff	Inspect changes to files or directories on a container's filesystem
events	Get real time events from the server
exec	Run a command in a running container
export	Export a container's filesystem as a tar archive
history	Show the history of an image
images	List images
import	Import the contents from a tarball to create a filesystem image
info	Display system-wide information
inspect	Return low-level information on Docker objects
kill	Kill one or more running containers
load	Load an image from a tar archive or STDIN
.....	



# Run First Docker Container

- Run command

## Output

Unable to find image 'hello-world:latest' locally

latest: **Pulling from library/hello-world**

0e03bdcc26d7: Pull complete

Digest:

sha256:6a65f928fb91fcfbc963f7aa6d57c8eeb426ad9a20c7ee045538ef34847f44f1

Status: Downloaded newer image for hello-world:latest

Hello from Docker!

This message shows that your installation appears to be working correctly.





# Pull Docker Image

- Run command **docker pull ubuntu**

## Output

Using default tag: latest

latest: **Pulling from library/ubuntu**

d51af753c3d3: Pull complete

fc878cd0a91c: Pull complete

6154df8ff988: Pull complete

fee5db0ff82f: Pull complete

Digest:

sha256:747d2dbbaaee995098c9792d99bd333c6783ce56150d1b11e333bbceed5c54  
d7

Status: Downloaded newer image for ubuntu:latest

docker.io/library/ubuntu:latest



# List Docker Images

- Run command **docker images**

## Output

REPOSITORY	TAG	IMAGE ID	CREATED	SIZE
ubuntu	latest	1d622ef86b13	3 weeks ago	73.9MB
hello-world	latest	bf756fb1ae65	4 months ago	13.3kB



# Running a Docker Container

- Run command **docker run -it ubuntu**

## Output

```
root@d9b100f2f636:/#
```

## Run in Bash Mode

- `docker run -it ubuntu /bin/bash`
  - This **allows** a running container to create or modify files and directories in its local **filesystem**.



# Detach a running container

- Press **Ctrl-P, followed by Ctrl-Q**, to detach from your connection. You'll be dropped back into the shell but the previously attached process will remain alive.
- Press **Ctrl-P, followed by Ctrl-D**, to detach from your connection. You'll be dropped back into the shell and the container is stopped.



# List Containers

- Run command **docker ps -a**

## Output

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
1c08a7a0d0e4 seconds ago	ubuntu	"/bin/bash"	2 minutes ago	Exited (0)	8	quizzical_mcnulty
a707221a5f6c minutes ago	hello-world	"/hello"	6 minutes ago	Exited (0)	6	youthful_curie



# Start/Stop Containers

- Run command `docker start 1c08a7a0d0e4`      `docker stop 1c08a7a0d0e4`

## Output

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
1c08a7a0d0e4 seconds ago	ubuntu	"/bin/bash" quizzical_mcnulty		2 minutes ago	Exited (0) 8	
a707221a5f6c minutes ago	hello-world	"/hello" youthful_curie		6 minutes ago	Exited (0) 6	



# Copy files from/to Container

- `docker cp <src-path> <container>:<dest-path>`
- `docker cp <container>:<src-path> <local-dest-path>`



# Build Docker Image From File

- Simple **flask** web server: dockerize.py:

```
from flask import Flask
app = Flask(__name__) @app.route("/")
def hello():
    return "Hello World!"
if __name__ == "__main__":
    app.run(host="0.0.0.0", port=int("5000"), debug=True)
```

- Create Docker File **Dockerfile**

```
FROM python:alpine3.7
COPY . /app
WORKDIR /app
RUN pip install -r requirements.txt
EXPOSE 5000
CMD python ./dockerize.py
```

- Create Python Requirements file **requirements.txt**


```
flask
```





# Build Docker Image From File

- Build docker image
  - `docker build --tag flask-docker .`
- Run Docker image
  - `docker run -p 5000:5000 flask-docker`

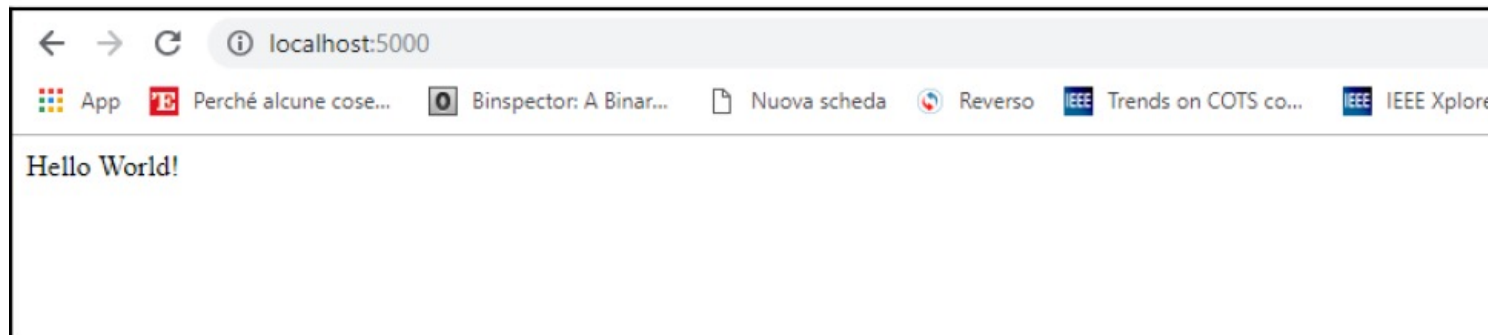

# Save Container as image

- Save as image: `docker commit c08a7a0d0e4 <img_tag>`
- To test run: `docker images`



# Exercise 01: build Ngin server docker container file

**Nginx** is a web server that can also be used as a reverse proxy, load balancer, mail proxy and HTTP cache.

- Create Docker File **Dockerfile**

```
# Pull the minimal Ubuntu image
FROM ubuntu
# Install Nginx
RUN apt-get -y update && apt-get -y install nginx
# Copy the Nginx config
COPY default /etc/nginx/sites-available/default
# Expose the port for access
EXPOSE 80/tcp
# Run the Nginx server
CMD ["/usr/sbin/nginx", "-g", "daemon off;"]
```

- Create Server Config file: **default**

```
server {
    listen 80 default_server;
    listen [::]:80 default_server;
    root /usr/share/nginx/html;
    index index.html index.htm;
    server_name _;
    location / {
        try_files $uri $uri/ =404;
    }
}
```

- **Building the Image:** \$ docker build . -t nginx/server
- **Run:** docker run -p 80:80 nginx/server

