

# Amazon S3

AWS Certified Solutions  
Certification

# Amazon S3

- ▶ Amazon Simple Storage Service lets you store and retrieve any object from anywhere on the web.
- ▶ Fully managed by AWS
- ▶ Highly available & durable (99.999999999%)
- ▶ Scalable, secure, and cost-effective
- ▶ Key Concepts

| Term   | Meaning                                           |
|--------|---------------------------------------------------|
| Bucket | A container for storing objects (data + metadata) |
| Object | The actual data file stored in S3 (plus metadata) |
| Key    | The unique name (path) for an object in a bucket  |
| Region | The AWS location where your bucket is created     |
| Prefix | A folder-like structure to organize objects       |

<https://www.youtube.com>

# Amazon S3 Use cases

- ▶ Backup and storage
- ▶ Disaster Recovery
- ▶ Archive
- ▶ Hybrid Cloud storage
- ▶ Application hosting
- ▶ Media hosting
- ▶ Data lakes & big data
- ▶ Software delivery
- ▶ Static website



Nasdaq stores 7 years of data into S3 Glacier



Sysco runs analytics on its data and gain business insights

<https://www.youtube.com>

# Amazon S3 - Buckets

- ▶ Amazon S3 allows people to store objects (directories)
- ▶ Buckets must have a globally unique name (accounts)
- ▶ Buckets are defined at the region level
- ▶ S3 looks like a global service
- ▶ Naming convention
  - ▶ No uppercase, No underscores
  - ▶ 3 - 63 characters long
  - ▶ Not an IP
  - ▶ Must start with lowercase letter
  - ▶ Must NOT start with 'xn'
  - ▶ Must NOT end with trailing dot



S3 Bucket

<https://www.youtube.com>

# Amazon S3 - Objects



Object




S3 Bucket  
with Objects

- ▶ Objects (files) have a key
- ▶ The key is the FULL path to the object
- ▶ s3://my-bucket/my-object
- ▶ s3://my-bucket/my-object
- ▶ The key is composed of prefix + object name
- ▶ s3://my-bucket/my\_folder1/another\_folder2/object
- ▶ There's no concept of "directories" (it's a trick you think otherwise)
- ▶ Just keys with very long names
- ▶ Object values are the content of the object
- ▶ Max. Object Size is 5 TB (5000 GB)
- ▶ If uploading more than 5 GB, must use multipart upload
- ▶ Metadata (list of text key / value pairs)
- ▶ Tags (Unicode key / value pair - limited)
- ▶ Lifecycle
- ▶ Version ID (if versioning is enabled)

<https://www.youtube.com>

# Amazon S3 Hands On

► Go to AWS → Search on Amazon S

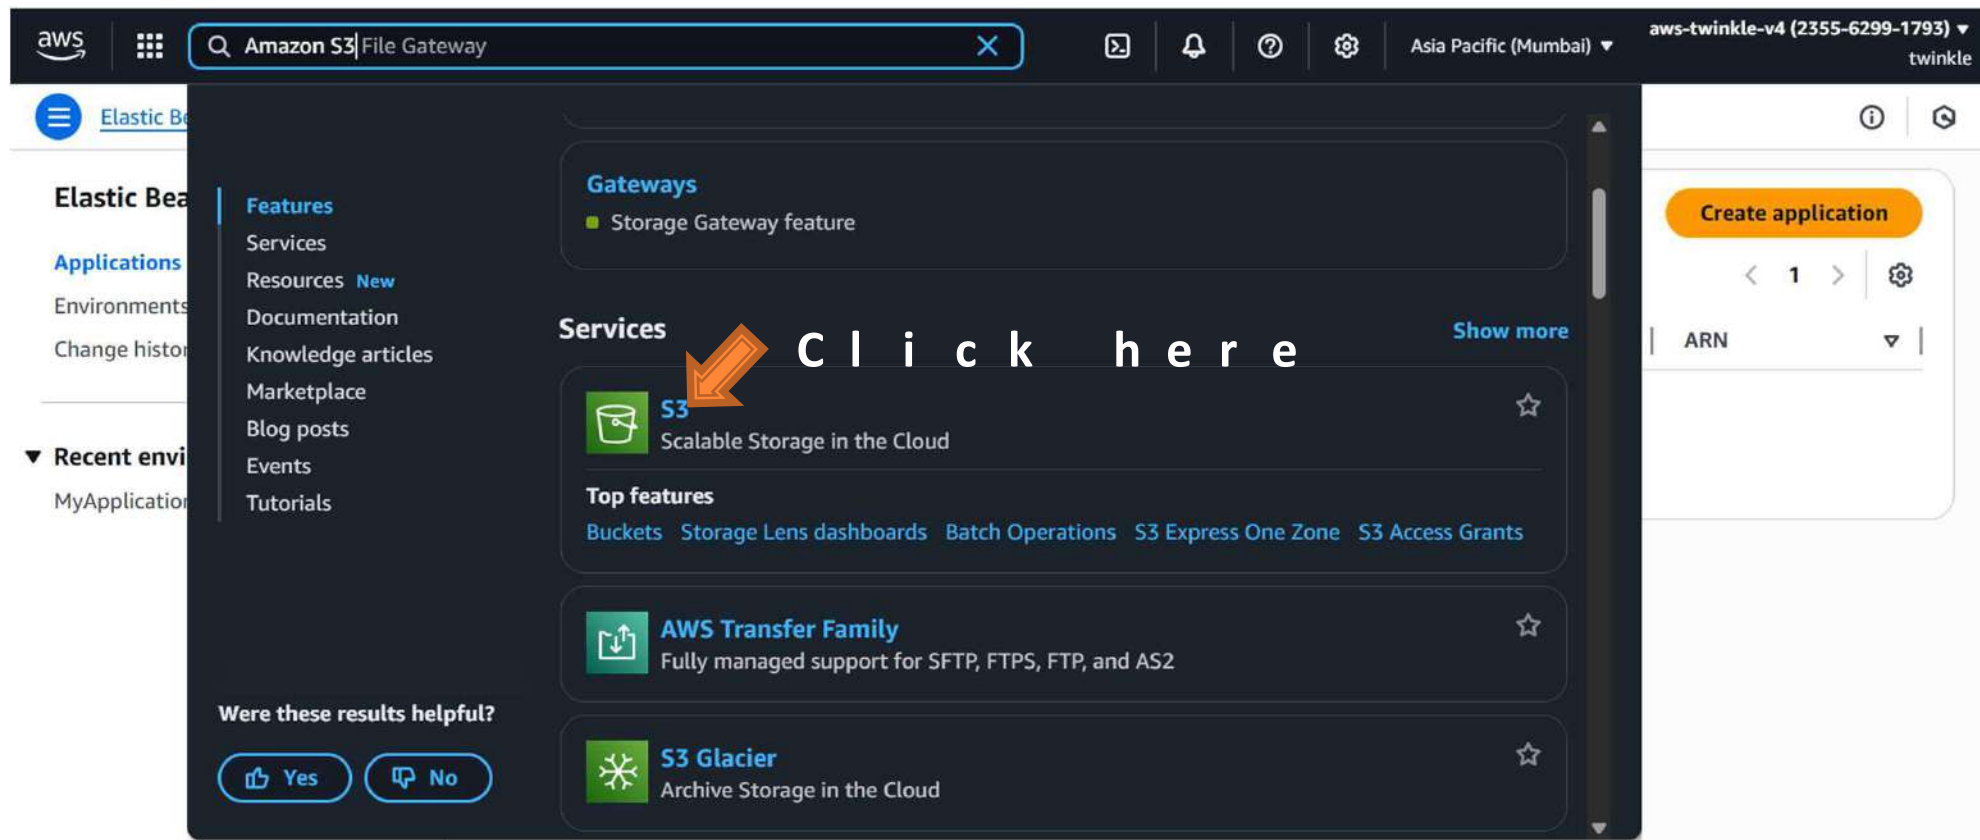

<https://www.youtube.com>



- Amazon S3
- General purpose buckets
- Directory buckets
- Table buckets
- Vector buckets [Preview](#)
- Access Grants
- Access Points (General Purpose Buckets, FSx file systems)
- Access Points (Directory Buckets)
- Object Lambda Access Points
- Multi-Region Access Points
- Batch Operations
- IAM Access Analyzer for S3
- Block Public Access settings for this account

Storage

# Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

## Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

## Pricing

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

## How it works

Click on bucket

Amazon S3 > Buckets > Create bucket



### General configuration

#### AWS Region

Asia Pacific (Mumbai) ap-south-1

#### Bucket type

☒ General purpose  
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ Directory  
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

<https://www.youtube.com/@t>

Select General purpose

#### Bucket name

twinkle-aws-bucket

Enter Bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

#### Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☒ **ACLs disabled (recommended)**  
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ **ACLs enabled**  
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

**Object Ownership**  
Bucket owner enforced

Select this

## Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

### ☒ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

### ☒ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

## Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

### Bucket Versioning

☒ Disable  
☐ Enable

Select Disable

## Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Add new tag

You can add up to 50 tags.

<https://www.youtube.com>

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)  
Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

#### Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

- ☐ Disable
- ☒ Enable

#### Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create

Successfully created bucket "twinkle-aws-bucket"  
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

#### General purpose buckets (2) [Info](#)

[Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

Find buckets by name

| Name                                                     | AWS Region                       | Creation date                        |
|----------------------------------------------------------|----------------------------------|--------------------------------------|
| <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1 | August 8, 2025, 14:47:26 (UTC+05:30) |
| <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 12:59:03 (UTC+05:30) |

Click on bucket

Your Bucket is created

<https://www.youtube.c>

## twinkle-aws-bucket Info

**Objects** Properties Permissions Metrics Management Access Points

Objects (0)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > Settings

| Name | Type | Last modified | Size | Storage class |
|------|------|---------------|------|---------------|
|------|------|---------------|------|---------------|

No objects  
You don't have any objects in this bucket.

Upload

Click on Upload



## Upload Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Click on add file



Files and folders (0)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

Find by name

< 1 >

| Name | Folder | Type | Size |
|------|--------|------|------|
|------|--------|------|------|

No files or folders  
You have not chosen any files or folders to upload.

<https://www.youtube.c>

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

### Files and folders (1 total, 108.4 KB)

All files and folders in this table will be uploaded.

Find by name

< 1 >

| <input type="checkbox"/> | Name       | Folder | Type       | Size     |
|--------------------------|------------|--------|------------|----------|
| <input type="checkbox"/> | coffee.jpg | -      | image/jpeg | 108.4 KB |



F i l e   i s   s e l e c t e d

### Destination [Info](#)

#### Destination

[s3://twinkle-aws-bucket](#)

#### ► Destination details

Bucket settings that impact new objects stored in the specified destination.

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

### Destination [Info](#)

#### Destination

[s3://twinkle-aws-bucket](#)

#### ► Destination details

Bucket settings that impact new objects stored in the specified destination.

#### ► Permissions

Grant public access and access to other AWS accounts.

#### ► Properties

Specify storage class, encryption settings, tags, and more.

C l i c k   o

<https://www.youtube.com/@creed>



Cancel

Upload



Upload: status

Click on close

After you navigate away from this page, the following information is no longer available.

Summary

Destination  
s3://twinkle-aws-bucket

Succeeded

1 file, 108.4 KB (100.00%)

Failed

0 files, 0 B (0%)

Files and folders Configuration

Files and folders (1 total, 108.4 KB)

Find by name

| Name                       | Folder | Type       | Size     | Status    | Error |
|----------------------------|--------|------------|----------|-----------|-------|
| <a href="#">coffee.jpg</a> | -      | image/jpeg | 108.4 KB | Succeeded | -     |

File is uploaded now

Amazon S3 > Buckets > twinkle-aws-bucket



twinkle-aws-bucket

https://www.youtube.com/@te

Objects Properties Permissions Metrics Management Access Points

Objects (1) 

Refresh Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     |
|--------------------------|----------------------------|------|--------------------------------------|----------|
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB |

Click on object

coffee.jpg Info

Copy S3 URI

Download

Open

Object actions

Properties

Permissions

Versions

Click on Open

### Object overview

Owner

6acd0fafa077a484308a7e05f1d9d18e430f282d1238398ad4a09b1adaae9cf8

AWS Region

Asia Pacific (Mumbai) ap-south-1

Last modified

August 9, 2025, 13:10:00 (UTC+05:30)

Size

108.4 KB

Type

S3 URI

s3://twinkle-aws-bucket/coffee.jpg

Amazon Resource Name (ARN)

arn:aws:s3:::twinkle-aws-bucket/coffee.jpg

Entity tag (Etag)

b3b29d095d73d905171d1f5498e1e578


Object URL

<https://twinkle-aws-bucket.s3.ap-south-1.amazonaws.com/coffee.jpg>

<https://www.youtube.com/@techwithtwtw>

The image  
will show  
which you  
uploaded

It is  
a sig  
URL

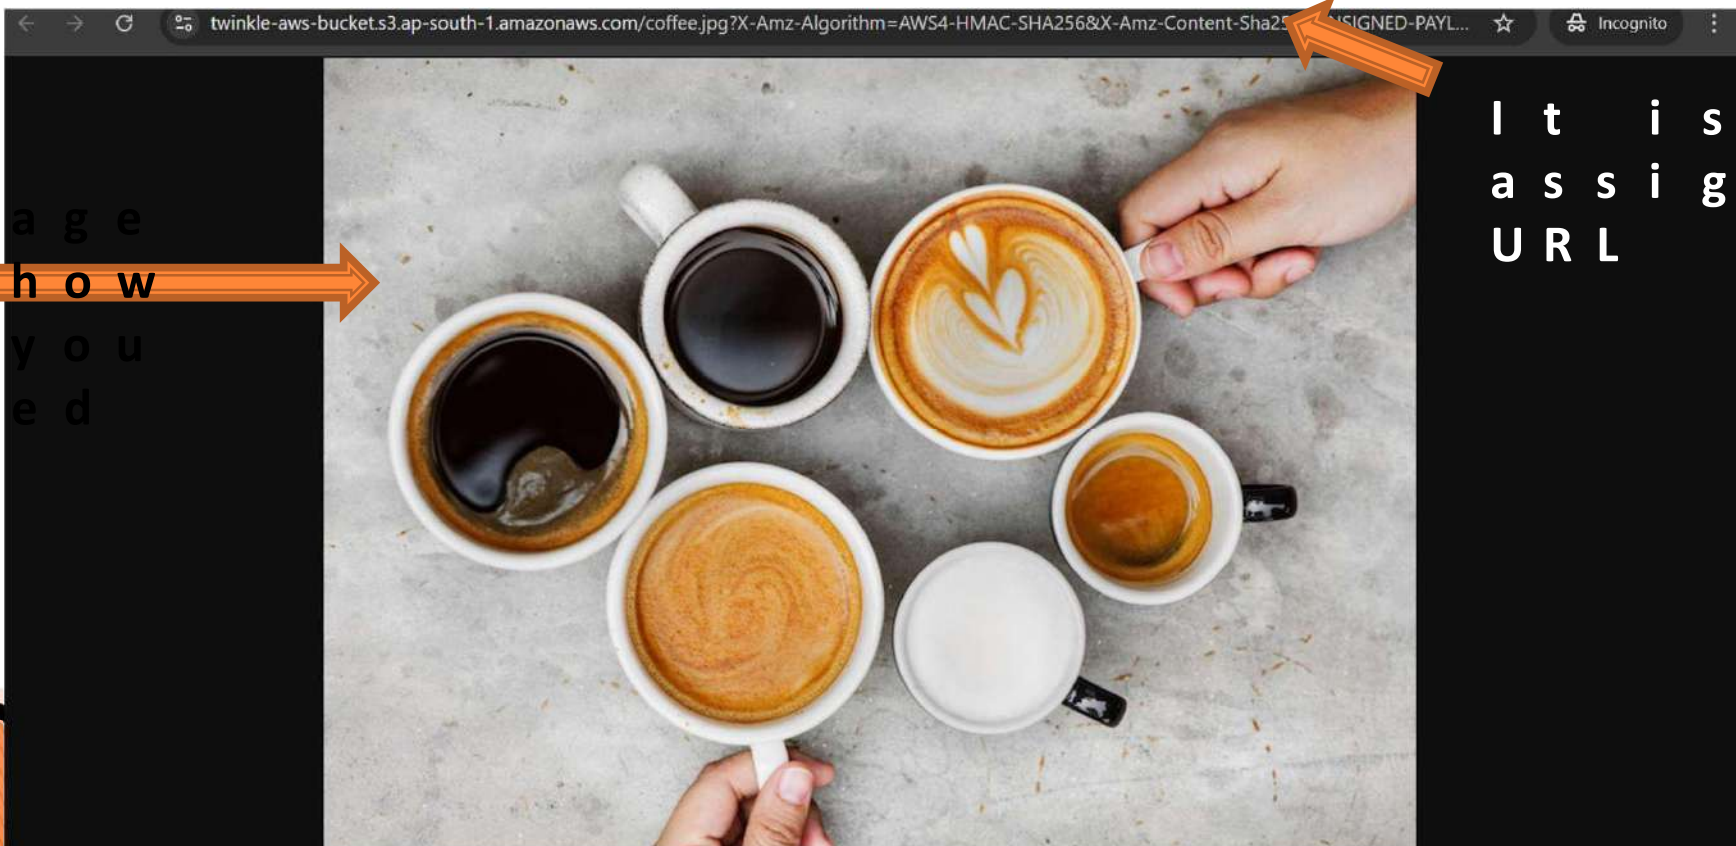

coffee.jpg Info

Click here

Copy S3 URI

Download

Open

Object actions

Properties Permissions Versions

Object overview

**Owner**  
6acd0fafa077a484308a7e05f1d9d18e430f282d1238398ad4a09b1adaae9cf8

**AWS Region**  
Asia Pacific (Mumbai) ap-south-1

**Last modified**  
August 9, 2025, 13:10:00 (UTC+05:30)

**Size**  
108.4 KB

**Type**

**S3 URI**  
<s3://twinkle-aws-bucket/coffee.jpg>

**Amazon Resource Name (ARN)**  
<arn:aws:s3:::twinkle-aws-bucket/coffee.jpg>

**Entity tag (Etag)**  
[b3b29d095d73d905171d1f5498e1e578](#)

**Object URL**  
<https://twinkle-aws-bucket.s3.ap-south-1.amazonaws.com/coffee.jpg>

Amazon S3 > Buckets > [twinkle-aws-bucket](#) <https://www.youtube.com/@te>

twinkle-aws-bucket Info

Objects Properties Permissions Metrics Management Access Points

Objects (1) Refresh Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

|                          | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |

Click on

## Create folder [Info](#)

Use folders to group objects in buckets. When you create a folder, S3 creates an object using the name that you specify followed by a slash (/). This object then appears as folder on the console. [Learn more](#)

### Your bucket policy might block folder creation

If your bucket policy prevents uploading objects without specific tags, metadata, or access control list (ACL) grantees, you will not be able to create a folder using this configuration. Instead, you can use the [upload configuration](#) to upload an empty folder and specify the appropriate settings.

## Folder

### Folder name

Images/

Folder names can't contain "/". [See rules for naming](#)

E n t e r   F o l d e r   n a m e

## Server-side encryption [Info](#)

Server-side encryption protects data at rest.

<https://www.youtube.com/@te>

## Server-side encryption [Info](#)

Server-side encryption protects data at rest.

 The following encryption settings apply only to the folder object and not to sub-folder objects.

### Server-side encryption

- ☒ Don't specify an encryption key  
The bucket settings for default encryption are used to encrypt the folder object when storing it in Amazon S3.
- ☐ Specify an encryption key  
The specified encryption key is used to encrypt the folder object before storing it in Amazon S3.

 If your bucket policy requires objects to be encrypted with a specific encryption key, you must specify the same encryption key when you create a folder. Otherwise, folder creation will fail.

C l i c k   o n   C r e a t e  Create folder

Amazon S3 > Buckets > twinkle-aws-bucket

Successfully created folder "Images".

twinkle-aws-bucket

ObjectsPropertiesPermissionsMetricsManagementAccess Points

Objects (2)

Refresh

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

| <input type="checkbox"/> | Name                       | Type   | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|--------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg    | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">Images/</a>    | Folder | -                                    | -        | -             |

Click on Images

Amazon S3 > Buckets > twinkle-aws-bucket > Images/

Images/

ObjectsProperties

Objects (0)

Refresh

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

| <input type="checkbox"/>                   | Name | Type | Last modified | Size | Storage class |
|--------------------------------------------|------|------|---------------|------|---------------|
| No objects                                 |      |      |               |      |               |
| You don't have any objects in this folder. |      |      |               |      |               |

Click on Upload

<https://www.youtube.com/@teec>

Copy S3 URI

## Upload Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

### Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

< 1 >

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

No files or folders

You have not chosen any files or folders to upload.

Click on **Add files**

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

### Destination Info

#### Destination

<s3://twinkle-aws-bucket/Images/>

#### ► Destination details

Bucket settings that impact new objects stored in the specified destination.

#### ► Permissions

Grant public access and access to other AWS accounts.

#### ► Properties

Specify storage class, encryption settings, tags, and more.

<https://www.youtube.com/@te>

Click on **upload**

Images/  Uploaded image is in folder  image

[Objects](#) [Properties](#)

**Objects (1)**   Copy S3 URI  Copy URL  Download  Open  Delete [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐

| Name                                                                                                        | Type | Last modified                        | Size    | Storage class |
|-------------------------------------------------------------------------------------------------------------|------|--------------------------------------|---------|---------------|
|  <a href="#">beach.jpg</a> | jpg  | August 9, 2025, 13:29:22 (UTC+05:30) | 85.8 KB | Standard      |

[twinkle-aws-bucket](#) [Info](#) <https://www.youtube.com/@t>

[Objects](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [Access Points](#)

**Objects (2)**   Copy S3 URI  Copy URL  Download  Open  Delete [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐

| Name                                                                                                           | Type   | Last modified                        | Size     | Storage class |
|----------------------------------------------------------------------------------------------------------------|--------|--------------------------------------|----------|---------------|
|  <a href="#">coffee.jpg</a> | jpg    | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
|  <a href="#">Images/</a>    | Folder | -                                    | -        | -             |

 Here is images folder in which

# Amazon S3 – Security

## User - Based

- ▶ IAM Policies – Which API calls should user from IAM

## Resource - Based

- ▶ Bucket Policy – Bucket wide rules from cross account
- ▶ Object Access – Control object (can)
- ▶ Bucket Access – Control bucket (can disabled)
- ▶ Note: IAM principal can access
- ▶ The user IAM permissions ALL
- ▶ AND there's no explicit DENY
- ▶ Encrypt: encrypt objects in Amazon

<https://www.youtube.com>

# S3 Bucket Policies

## J S O N   b a s e d   p o l i c i e s

- ▶ Resources: buc
- ▶ Effect: Allow
- ▶ Actions: Set o  
Deny

- ▶ Principal: The  
apply the poli

## U s e   S 3   b u c k e t   f

- ▶ Grant public a  
bucket
- ▶ Force objects  
upload
- ▶ Grant access t  
( Cross Account


```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicRead",
      "Effect": "Allow",
      "Principal": "*",
      "Action": [
        "s3:GetObject"
      ],
      "Resource": [
        "arn:aws:s3:::examplebucket/*"
      ]
    }
  ]
}
```

# Example: Public Access - Use Bucket Policy




<https://www.youtube.com>

# Example: User Access to S3 – IAM permissions

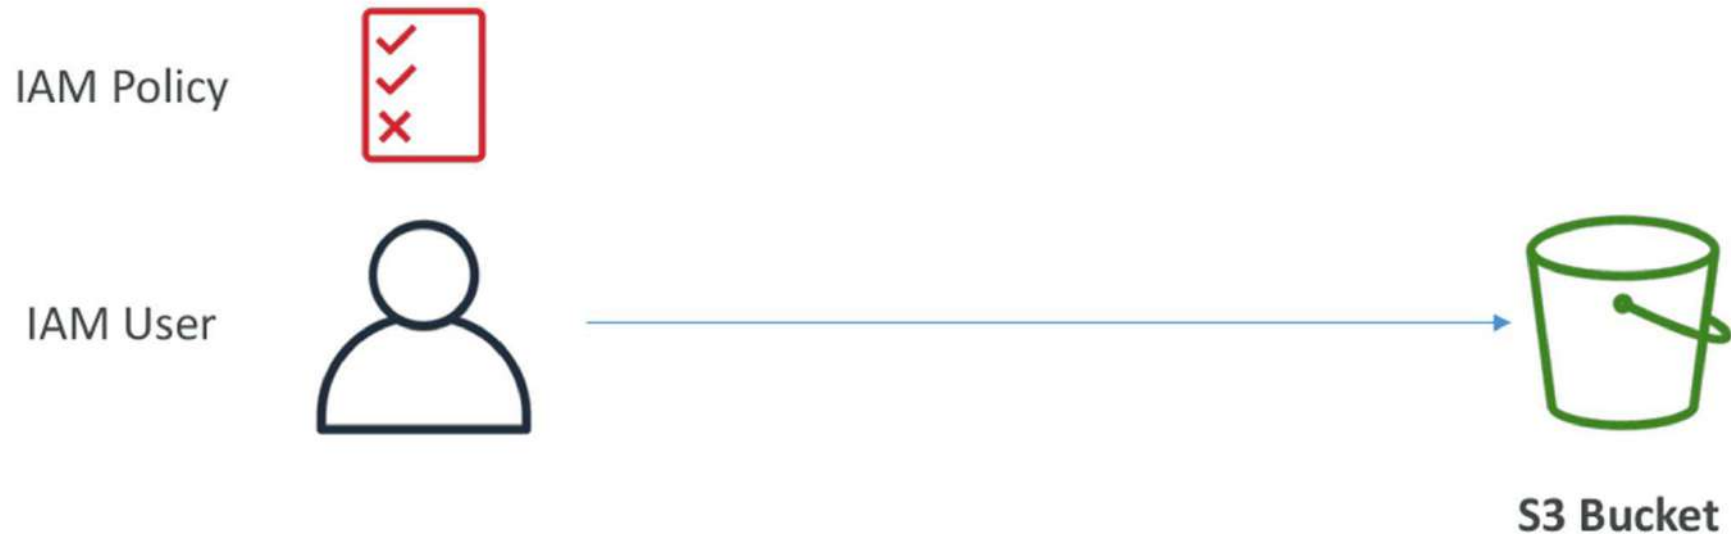

<https://www.youtube.com>

# Example: EC2 instance access - Use IAM Roles

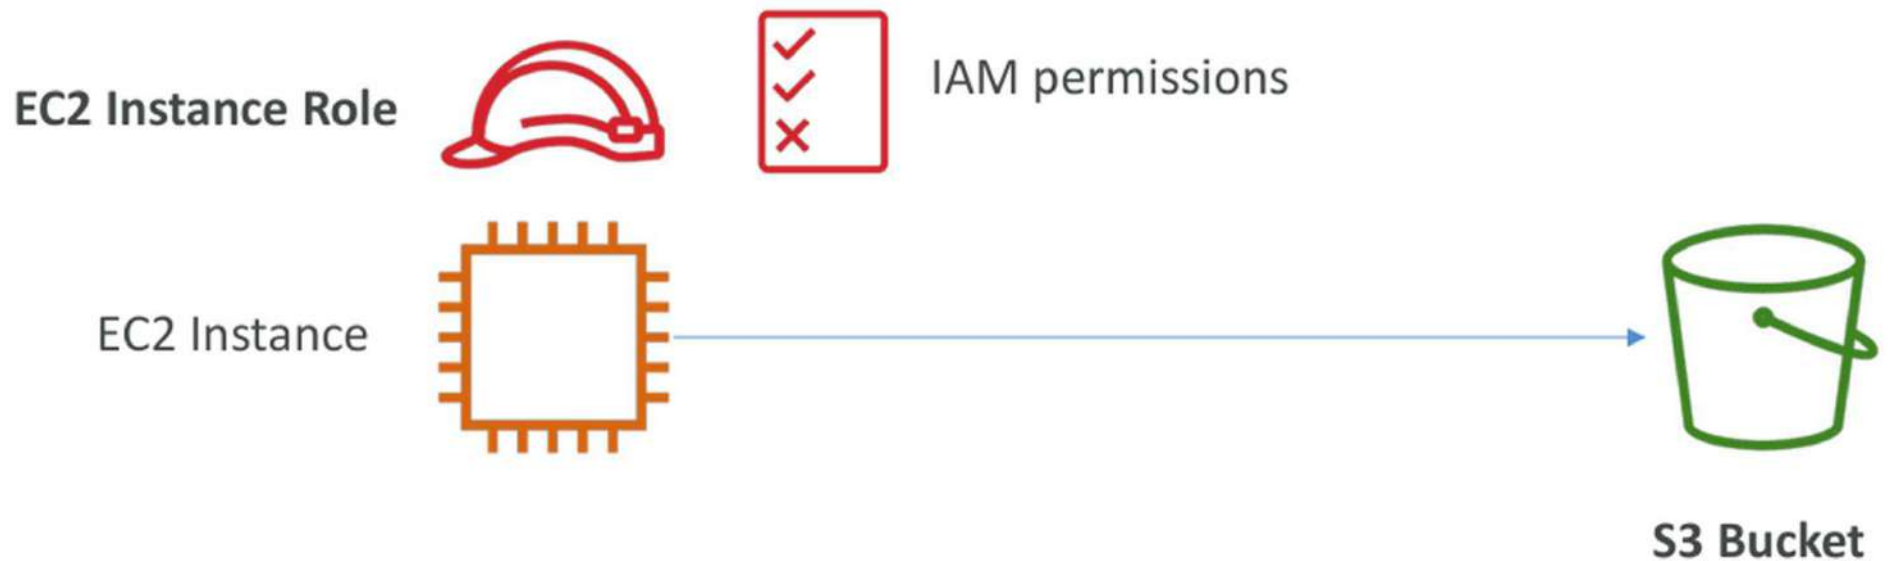

<https://www.youtube.com>

# Advanced: Cross-Account Access – Use Bucket Policy



<https://www.youtube.com>

# Bucket settings for Block Public Access

## Block *all* public access

On

Block public access to buckets and objects granted through *new* access control lists (ACLs)

On

Block public access to buckets and objects granted through *any* access control lists (ACLs)

On

Block public access to buckets and objects granted through *new* public bucket or access point policies

On

Block public and cross-account access to buckets and objects through *any* public bucket or access point policies

On

- These settings were created t
- If you know your bucket shoul
- Can be set at the account lev

<https://www.youtube.com>

# Bucket Policy Hands On

Amazon S3 > Buckets > twinkle-aws-bucket



twinkle-aws-bucket [Info](#)



C l i c k   o n   p e r m i s s i o n s

[Objects](#)

[Properties](#)

[Permissions](#)

[Metrics](#)

[Management](#)

[Access Points](#)

Objects (1)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |

<https://www.youtube.co>

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)  
View analyzer for ap-south-1

## Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

### Block all public access

On

#### Individual Block Public Access settings for this bucket

## Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Public access is blocked because Block Public Access settings are turned on for this bucket

## Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

### ☒ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

#### ☒ Block public access to buckets and objects granted through *new* access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

#### ☒ Block public access to buckets and objects granted through *any* access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

#### ☒ Block public access to buckets and objects granted through *new* public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

#### ☒ Block public and cross-account access to buckets and objects through *any* public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

After that save changes

<https://www.youtube.com>

### Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

#### ☐ Block all public access

Turning this setting on is the same as turning on

#### ☐ Block public access to buckets and ob

S3 will block public access permissions appli  
existing permissions that allow public access

#### ☐ Block public access to buckets and ob

S3 will ignore all ACLs that grant public acces

#### ☐ Block public access to buckets and ob

S3 will block new bucket and access point po

#### ☐ Block public and cross-account access

S3 will ignore public and cross-account acces

### Edit Block public access (bucket settings)

⚠ Updating the Block Public Access settings for this bucket will affect this bucket and all objects within. This may result in some objects becoming public.

To confirm the settings, enter *confirm* in the field.

Cancel

Confirm

E n t e r   C o n f i r m   A f t e r   t h a t   c l i c k

✓ Successfully edited Block Public Access settings for this bucket.

#### ► Individual Block Public Access settings for this bucket

### Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

No policy to display.

Edit

Delete

Copy

C l i c k   o n   E d i t

<https://www.youtube.com/@tech>

## Edit bucket policy [Info](#)

### Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

#### Bucket ARN

 arn:aws:s3:::twinkle-aws-bucket

### Policy

1

Edit statement

Select a statement

Click on Policy generator



<https://www.youtube.com/@techwiz>

## AWS Policy Generator

The AWS Policy Generator is a tool that enables you to create policies that control access to [Amazon Web Services \(AWS\)](#) products and resources. For more information about creating policies, [key concepts in Using AWS Identity and Access Management](#).

### Step 1: Select policy type

A Policy is a container for permissions. The different types of policies you can create are an [IAM Policy](#), an [S3 Bucket Policy](#), an [SNS Topic Policy](#), a [VPC Endpoint Policy](#), and an [SQS Queue Policy](#).

Click here



Type of Policy

IAM Policy

Q

IAM Policy ✓

S3 Bucket Policy

SNS Topic Policy

VPC Endpoint Policy

SQS Queue Policy

Deny

AWS



Select S3 Bucket Policy

A statement is the formal description of a single permission. See [a description of elements](#) that you can use in statements.

#### Effect

- ☒ Allow  
☐ Deny

#### Principal

\*

Use a comma to separate multiple values.

#### Actions

- ☐ All Actions ("\*")

--Select Actions--

GetObject ×

#### Amazon Resource Name (ARN)

- ☐ All Resources ("\*")

ARN should follow the following format: arn:aws:s3:::{BucketName}/{KeyName}. Use a comma to separate multiple values.

► Add conditions (optional)

Add Statement

Enter star here to a

Select get object

Paste here

Amazon S3 > Buckets > [twinkle-aws-bucket](#) > Edit bucket

## Edit bucket policy [Info](#)

### Bucket policy

[Policy examples](#)

[Policy generator](#)

The bucket policy, written in JSON, controls access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

#### Bucket ARN

 arn:aws:s3:::twinkle-aws-bucket

Copy this

#### Policy

1

Edit statement

<https://www.youtube.com/>

GetObject X

Amazon Resource Name (ARN)

☐ All Resources ("\*")

arn:aws:s3:::twinkle-aws-bucket/\*

ARN should follow the following format: arn:aws:s3:::{BucketName}/{KeyName}. Use a comma to separate multiple values.

► Add conditions (optional)

Add Statement

After ARN add /\*

Click on Add Statement

### Step 3: Generate policy

A policy is a document (written in the [Access Policy Language](#)) that acts as a container for one or more statements.

Generate Policy

After that click on Generate Policy  
<https://www.youtube.com/@te>

This AWS Policy Generator is provided for informational purposes only, you are still responsible for your use of Amazon Web Services technologies and ensuring that your use is in compliance with all applicable terms and conditions. This AWS Policy Generator is provided as is without warranty of any kind, whether express, implied, or statutory. This AWS Policy Generator does not modify the applicable terms and conditions governing your use of Amazon Web Services technologies.

©2025 Amazon Web Services or its affiliates. All rights reserved.

#### Policy JSON Document

Click below to edit. To save the policy, copy the text below to a text editor. Changes made below will **not** be reflected in the policy generator tool.

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": [
9         "s3:GetObject"
10      ],
11      "Resource": "arn:aws:s3:::twinkle-aws-bucket/*"
12    }
13  ]
14 }
```

1:1 JSON

Copied

Copy Policy

Click on copy policy

```

1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": [
9         "s3:GetObject"
10      ],
11      "Resource": "arn:aws:s3:::twinkle-aws-bucket/*"
12    }
13  ]
14 }

```



P a s t e i t h e r e

### Edit statement

#### Select a statement

Select an existing statement in the policy or add a new statement.

[+ Add new statement](#)

[+ Add new statement](#)

JSON Ln 14, Col 1

🛡️ Security: 0 ❌ Errors: 0 ⚠️ Warnings: 0 💡 Suggestions: 0

[Preview external access](#)

<https://www.youtube.com/watch?v=6Imj@kewS>

[Save changes](#)

twinkle-aws-bucket

Info

- Objects
- Properties
- Permissions
- Metrics
- Management
- Access Points

Objects (1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

Click on image

coffee.jpg

Info

- Copy S3 URI
- Download
- Open
- Object actions

- Properties
- Permissions
- Versions

https://www.youtube.com/@

Object overview

Owner

6acd0fafa077a484308a7e05f1d9d18e430f282d1238398ad4a09b1adaae9cf8

AWS Region

Asia Pacific (Mumbai) ap-south-1

Last modified

August 9, 2025, 13:10:00 (UTC+05:30)

Size

108.4 KB

Type

S3 URI

 s3://twinkle-aws-bucket/coffee.jpg

Amazon Resource Name (ARN)

 arn:aws:s3:::twinkle-aws-bucket/coffee.jpg

Entity tag (Etag)

 b3b29d095d73d905171d1f5498e1e578

Object URL

 <http://twinkleaws-bucket.s3.ap-south-1.amazonaws.com/coffee.jpg>

Copy Object URL

Copy url & paste in browser




I m a g e   I s  
a c c e s s i b l e  
w i t h   t h i s  
U R L



<https://www.youtube.co>

# Amazon S3 – Static Website Hosting

- ▶ S3 can host static websites and have them accessible on the Internet
- ▶ The website URL will be (depending on the region)  
`http://demo-bucket.s3-website-us-west-2.amazonaws.com`  
`http://demo-bucket.s3-website-us-east-1.amazonaws.com`
- ▶ `http://bucket-name.s3-website-region.amazonaws.com`
- ▶ `http://bucket-name.s3-website-region.amazonaws.com`
- ▶ If you get a 403 error, make sure policy allows public access

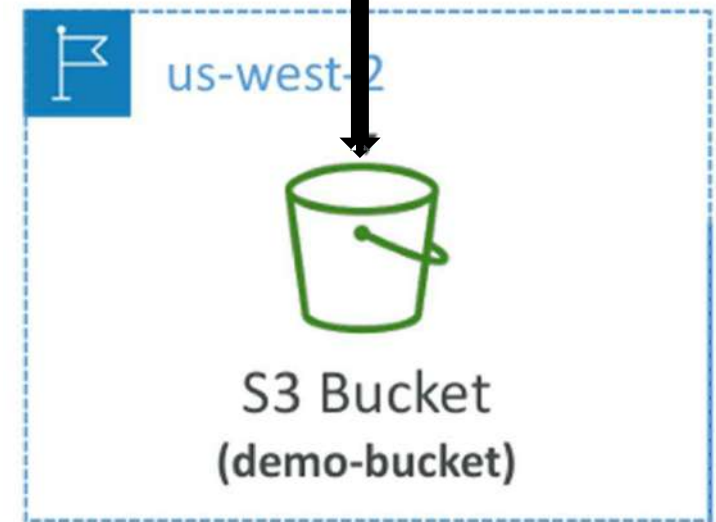

<https://www.youtube.com>

# S3 Website Hands On

Amazon S3 > Buckets > twinkle-aws-bucket



twinkle-aws-bucket [Info](#)

C l i c k   o n   P r o p e r t i e s

[Objects](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [Access Points](#)

Objects (2)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions ▼

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |

<https://www.youtube.com>

twinkle-aws-bucket

Info

- Objects
- Properties
- Permissions
- Metrics
- Management
- Access Points

Bucket overview

|                                                                   |                                                                                                                                                                    |                                                                          |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <div>AWS Region</div> <div>Asia Pacific (Mumbai) ap-south-1</div> | <div>Amazon Resource Name (ARN)</div> <div> arn:aws:s3:::twinkle-aws-bucket</div> | <div>Creation date</div> <div>August 9, 2025, 12:59:03 (UTC+05:30)</div> |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|

Bucket Versioning

Edit

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

Disabled

Multi-factor authentication (MFA) delete

As an additional layer of security, you can enable MFA delete on your bucket. Enabling MFA delete requires that you have MFA configured on your AWS account. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the AWS Management Console.

Requester pays

Edit

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays

Disabled

Static website hosting

Edit

Use this bucket to host a website or redirect requests. [Learn more](#)



We recommend using AWS Amplify Hosting for static website hosting

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. [Learn more about Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify app

S3 static website hosting

Disabled

## Edit static website hosting [Info](#)

### Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

#### Static website hosting

☒ Disable

☐ Enable

Select Enable

Cancel

Save changes

<https://www.youtube.com/@tech>

☒ Enable

#### Hosting type

☒ Host a static website

Use the bucket endpoint as the web address. [Learn more](#)

☐ Redirect requests for an object

Redirect requests to another bucket or domain. [Learn more](#)

Select Host a static website

**Info** For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

#### Index document

Specify the home or default page of the website.

index.html

Enter default page

#### Error document - optional

This is returned when an error occurs.

error.html

#### Redirection rules - optional

Redirection rules, written in JSON, automatically redirect webpage requests for specific content. [Learn more](#)

JSON Ln 1, Col 1 ✖ Errors: 0 ⚠ Warnings: 0 ⚙️

Click on  save changes

✔ Successfully edited static website hosting. ✕

twinkle-aws-bucket [Info](#) Click on <https://www.youtube.com>

 Objects

Properties

Permissions

Metrics

Management

Access Points

## Bucket overview

### AWS Region

Asia Pacific (Mumbai) ap-south-1

### Amazon Resource Name (ARN)

 arn:aws:s3:::twinkle-aws-bucket

### Creation date

August 9, 2025, 12:59:03 (UTC+05:30)

## Bucket Versioning

Edit

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#) 

### Bucket Versioning

## twinkle-aws-bucket [Info](#)

[Objects](#) Properties Permissions Metrics Management Access Points

Objects (2)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions ▾

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |

Click on



<https://www.youtube.com/@te>

## Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

< 1 >

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

No files or folders

You have not chosen any files or folders to upload.

Click on **Add** **Files**

Add file

Add folder

## Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

### Files and folders (1 total, 597.0 B)

All files and folders in this table will be uploaded.

Find by name

| <input type="checkbox"/> | Name       | Folder | Type      | Size    |
|--------------------------|------------|--------|-----------|---------|
| <input type="checkbox"/> | index.html | -      | text/html | 597.0 B |

A d d i n d e x . h t m l f i l e

### Destination [Info](#)

Destination

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

#### Destination [Info](#)

Destination

[s3://twinkle-aws-bucket](#)

#### ► Destination details

Bucket settings that impact new objects stored in the specified destination.

#### ► Permissions

Grant public access and access to other AWS accounts.

#### ► Properties

Specify storage class, encryption settings, tags, and more.

C l i c k o n

<https://www.youtube.com/@t>



Upload

## twinkle-aws-bucket

Objects Properties Permissions Metrics Management Access Points

### Objects (3)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |

### Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)



**We recommend using AWS Amplify Hosting for static website hosting**

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about [Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify app

#### S3 static website hosting

Enabled

#### Hosting type

Bucket hosting

#### Bucket website endpoint

When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#)


<http://twinkle-aws-bucket.s3-website.ap-south-1.amazonaws.com>

<https://www.youtube.com/@teec>

Click here

# I love coffee

Hello world!




Page is working now

<https://www.youtube.com>

# Amazon S3 - Versioning

- ▶ You can version you
- ▶ It is enabled at th
- ▶ Same key overwrit
- ▶ "version": 1, 2, 3 ..
- ▶ It is best practice
- ▶ Protect against uni
- ▶ (ability to restore
- ▶ Easy roll back to p
- ▶ Notes:
- ▶ Any file that is no
- ▶ enabling versioning
- ▶ "null"
- ▶ Suspending versioni
- ▶ the previous versio

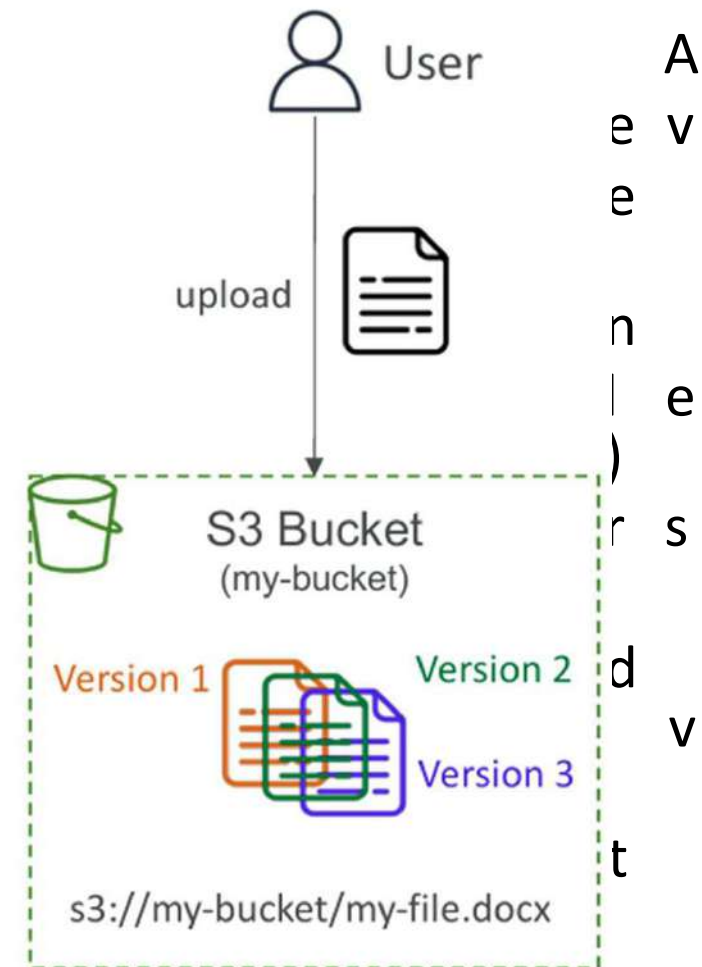

<https://www.youtube.c>

# Click on properties

twinkle-aws-bucket

Objects Properties Permissions Metrics Management Access Points

Objects (3)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > Settings

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |

twinkle-aws-bucket Info

<https://www.youtube.com/@te>

Objects Properties Permissions Metrics Management Access Points

## Bucket overview

AWS Region

Asia Pacific (Mumbai) ap-south-1

Amazon Resource Name (ARN)

arn:aws:s3:::twinkle-aws-bucket

Creation date

August 9, 2025, 12:59:03 (UTC+05:30)

Click Edit

## Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

Disabled

Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK,

Edit

## Bucket Versioning

☒ Suspend  
This suspends the creation of object versions for all operations but preserves any existing object versions.

☐ Enable **Select Enable**

### The bucket functionalities below are impacted by this change:

- Lifecycle rules set for previous object versions will still apply.
- Existing objects in your bucket do not change.
- Newly added objects with the same name as an existing object replaces the existing object.

☐ I acknowledge the outcomes of suspending Bucket Versioning.

### Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#)

Disabled

<https://www.youtube.com/@techtwitht> **Cancel** **Save changes**

## Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

### Bucket Versioning

☐ Suspend  
This suspends the creation of object versions for all operations but preserves any existing object versions.

☒ Enable

After enabling Bucket Versioning, you might need to update your lifecycle rules to manage previous versions of objects.

### Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#)

Disabled

**Click on Save** **Save changes**

Click on properties

Objects Properties Permissions Metrics Management Access Points

Objects (3)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 > Settings

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |

Want to show version of this file

## Static website hosting

Edit

Use this bucket to host a website or redirect requests. [Learn more](#)



We recommend using AWS Amplify Hosting for static website hosting

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. [Learn more about Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify app

### S3 static website hosting

Enabled

### Hosting type

Bucket hosting

### Bucket website endpoint

When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#)

<http://twinkle-aws-bucket.s3-website.ap-south-1.amazonaws.com>

Click here

<https://www.youtube.com>

# I love coffee

Hello world!



For now it is showing  
in index.html file

<https://www.youtube.com>

I have Add Really here to  
make changes & saved it

```
<html>
  <head>
    <title>My First Webpage</title>
  </head>
  <body>
    <h1>I Really love coffee</h1>
    <p>Hello World!</p>
  </body>

  <!-- CORS demo -->
  <div id="tofetch"/>
  <script>
    var tofetch = document.getElementById("tofetch");
```

# ▶ Upload index.html file again

Amazon S3 > Buckets > [twinkle-aws-bucket](#) > Upload

Files and folders (1 total, 604.0 B)

All files and folders in this table will be uploaded.

Find by name

| <input type="checkbox"/> | Name       | Folder | Type      | Size    |
|--------------------------|------------|--------|-----------|---------|
| <input type="checkbox"/> | index.html | -      | text/html | 604.0 B |

Destination [Info](#)

Destination

<s3://twinkle-aws-bucket>

► Destination details

Bucket settings that impact new objects stored in the specified destination.

► Permissions

Grant public access and access to other AWS accounts.

► Properties

Specify storage class, encryption settings, tags, and more.

Click on Upload

Not secure [twinkle-aws-bucket.s3-website-ap-south-1.amazonaws.com](#)

I love coffee

Hello world!

Refresh this



<https://www.youtube.com>

# I Really love coffee

Hello world!



It will show the change

Amazon S3 > Buckets > twinkl-aws-bucket

### twinkl-aws-bucket Info

Objects Properties Permissions Metrics Management Access Points

**Objects (3)**

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

**Click on show versions**

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | August 9, 2025, 16:53:12 (UTC+05:30) | 604.0 B  | Standard      |

<https://www.youtube.c>

Objects (4)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

| <input type="checkbox"/> | Name                       | Type | Version ID                      | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|---------------------------------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | null                            | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | null                            | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | JrPLzvbqFWsTqyiNHqLjHl23Pzjc3od | August 9, 2025, 16:53:12 (UTC+05:30) | 604.0 B  | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | null                            | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |

Versions show her

Now Re-versioning the page (

Objects (1/4)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

| <input checked="" type="checkbox"/> | Name                       | Type | Version ID                      | Last modified                        | Size     | Storage class |
|-------------------------------------|----------------------------|------|---------------------------------|--------------------------------------|----------|---------------|
| <input type="checkbox"/>            | <a href="#">beach.jpg</a>  | jpg  | null                            | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/>            | <a href="#">coffee.jpg</a> | jpg  | null                            | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input checked="" type="checkbox"/> | <a href="#">index.html</a> | html | JrPLzvbqFWsTqyiNHqLjHl23Pzjc3od | August 9, 2025, 16:53:12 (UTC+05:30) | 604.0 B  | Standard      |
| <input type="checkbox"/>            | <a href="#">index.html</a> | html | null                            | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |

Click on de

Select this

<https://www.youtube.c>

## Delete objects [Info](#)



- If a folder is selected for deletion, all objects in the folder will be deleted, and any new objects added while the delete action is in progress might also be deleted. If an object is selected for deletion, any new objects with the same name that are uploaded before the delete action is completed will also be deleted.
- Deleting the specified objects can't be undone.

[Learn more](#)

### Specified objects

Find objects by name

| Name                       | Version ID                      | Type | Last modified                        | Size    |
|----------------------------|---------------------------------|------|--------------------------------------|---------|
| <a href="#">index.html</a> | JrPLzvbqFWsTqyiNHaqLjHl23Pzc3od | html | August 9, 2025, 16:53:12 (UTC+05:30) | 604.0 B |

### Permanently delete objects?

To confirm deletion, type *permanently delete* in the text input field.

permanently delete



Enter permanently delete

After that click on delete

<https://www.youtube.com/@techwithtwinkl>

## twinkle-aws-bucket [Info](#)

[Objects](#)

[Properties](#)

[Permissions](#)

[Metrics](#)

[Management](#)

[Access Points](#)

### Objects (3)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

| <input type="checkbox"/> | Name                       | Type | Version ID | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|------------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | null       | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | null       | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | null       | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |



After delete it previous version

# I Really Reload this page love coffee

Hello world!



R e f r e s h   t h i s   p a g e

← → ↻ 🔒 Not secure [twinkle-aws-bucket.s3-website.ap-south-1.amazonaws.com](https://twinkle-aws-bucket.s3-website.ap-south-1.amazonaws.com)



Incognito

## I love coffee

Hello world!




B a c k   t o   o u r   p r

<https://www.youtube.com>

# Amazon S3 – Replication (CRR & SRR)

- ▶ Must enable Versioning destination buckets
- ▶ Cross-Region Replication
- ▶ Same-Region Replication
- ▶ Buckets can be in
- ▶ Copying is asynchron
- ▶ Must give proper l
- ▶ Use cases:
- ▶ CRR – compliance, l
- ▶ SRR – log aggregati
- ▶ between production

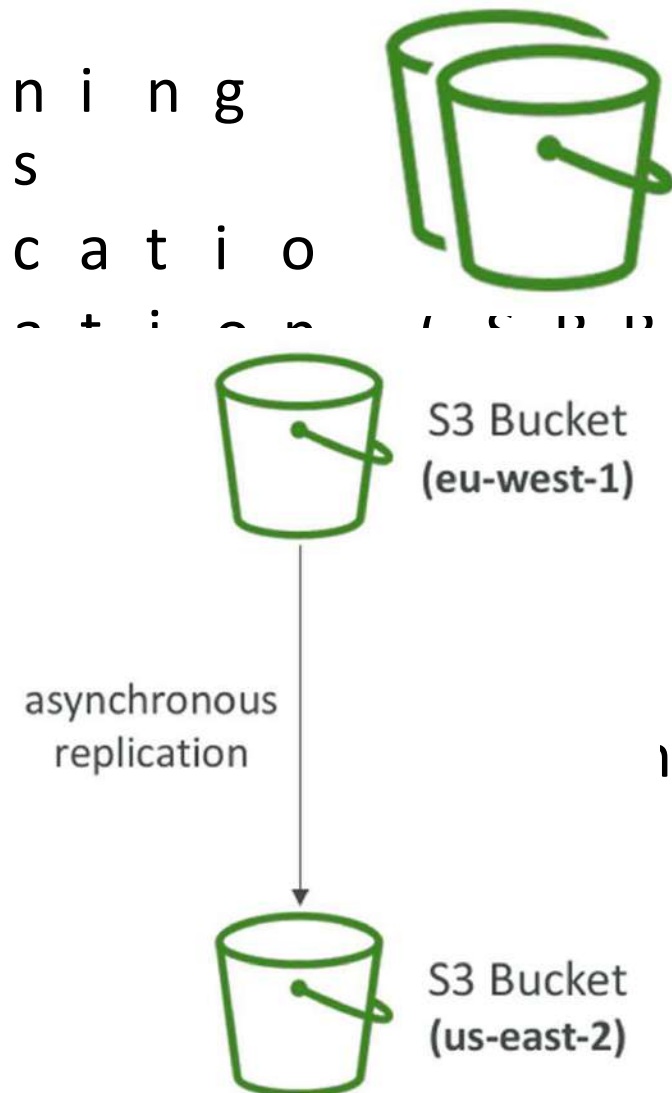


<https://www.youtube.com/>

# Amazon S3 – Replication (Notes)

- ▶ After you enable Replication,
- ▶ Optionally, you can replicate Replication
- ▶ Replicates existing objects a
- ▶ For DELETE operations
- ▶ Can replicate delete markers (setting)
- ▶ Deletions with a version ID a deletes)
- ▶ There is no “chaining” of rep
- ▶ If bucket 1 has replication i into bucket 3
- ▶ Then objects created in bucke

<https://www.youtube.com>

# S3 Replication Hands On

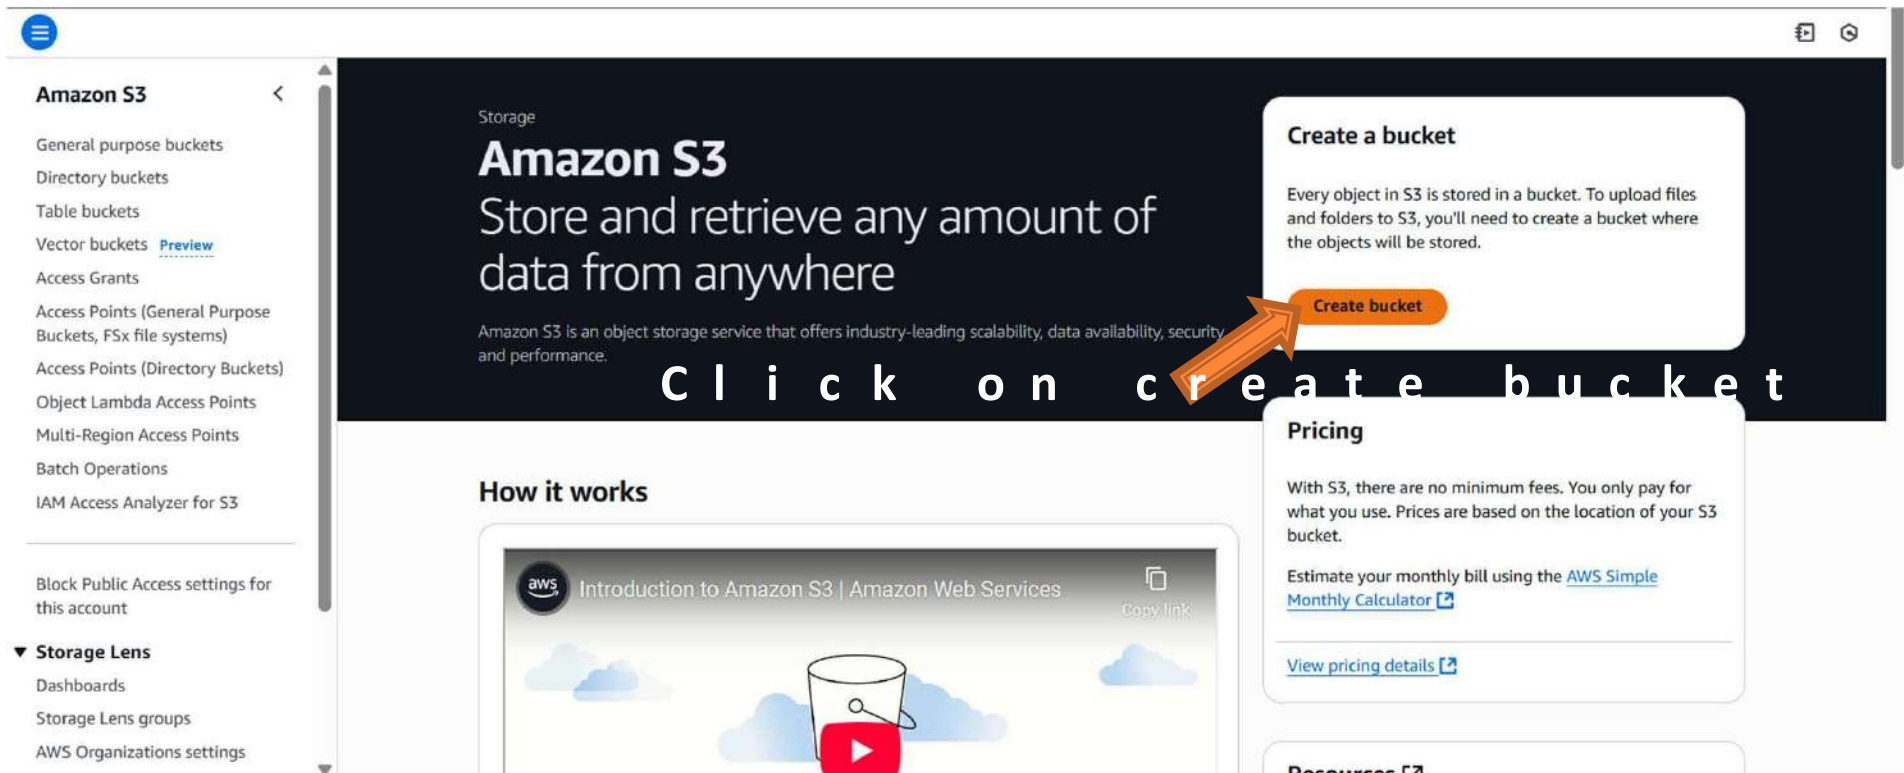

The screenshot shows the Amazon S3 console interface. On the left is a navigation sidebar with categories like 'Amazon S3' and 'Storage Lens'. The main content area has a dark header with 'Storage' and 'Amazon S3' text, followed by the tagline 'Store and retrieve any amount of data from anywhere'. Below this is a description of Amazon S3. A white box on the right contains the 'Create a bucket' section, which includes an explanation of buckets and a prominent orange 'Create bucket' button. An orange arrow points to this button, and the text 'Click on create bucket' is written across the middle of the console. Below the main header, there are sections for 'How it works' (with a video thumbnail) and 'Pricing' (with a link to the AWS Simple Monthly Calculator).

Storage

## Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security and performance.

**Create a bucket**

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

[Create bucket](#)

**Pricing**

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS Simple Monthly Calculator](#)

[View pricing details](#)

**How it works**

Introduction to Amazon S3 | Amazon Web Services

[Copy link](#)

<https://www.youtube.com/watch?v=UuU3333333>

<https://www.youtube.com/watch?v=UuU3333333>

# Create bucket [Info](#)

Buckets are containers for data stored in S3.

## General configuration

**AWS Region**  
Asia Pacific (Mumbai) ap-south-1

### Bucket type [Info](#)

- ☒ **General purpose**  
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
- ☐ **Directory**  
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

### Bucket name [Info](#)

s3-twinkle-aws-v1

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

### Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Select general purpose

Enter bucket name

## Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

## Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

### Bucket Versioning

- ☐ Disable
- ☒ Enable

Enable the versioning

## Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

[Add new tag](#)

You can add up to 50 tags.

## Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

### Encryption type [Info](#)

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

<https://www.youtube.com>

Amazon S3 > Buckets > Create bucket

You can add up to 50 tags.

Default encryption

Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Info

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page.

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more

☐ Disable

☒ Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create bucket

Amazon S3 > Buckets https://www.youtube.com/@teachonw

Successfully created bucket "s3-twinkle-aws-v1"

To upload files and folders, or to configure additional bucket settings, choose View details.

View details

General purpose buckets (3)

Info

Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

|                       | Name                                                     | AWS Region                       | Creation date                        |
|-----------------------|----------------------------------------------------------|----------------------------------|--------------------------------------|
| <input type="radio"/> | <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1 | August 8, 2025, 14:47:26 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 17:15:58 (UTC+05:30) |
| <input type="radio"/> | <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 12:59:03 (UTC+05:30) |

Account snapshot

Info

Updated daily

View dashboard

Storage Lens provides visibility into storage usage and activity trends.

External access summary - new


Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Bucket is created now

# ► Create one more bucket

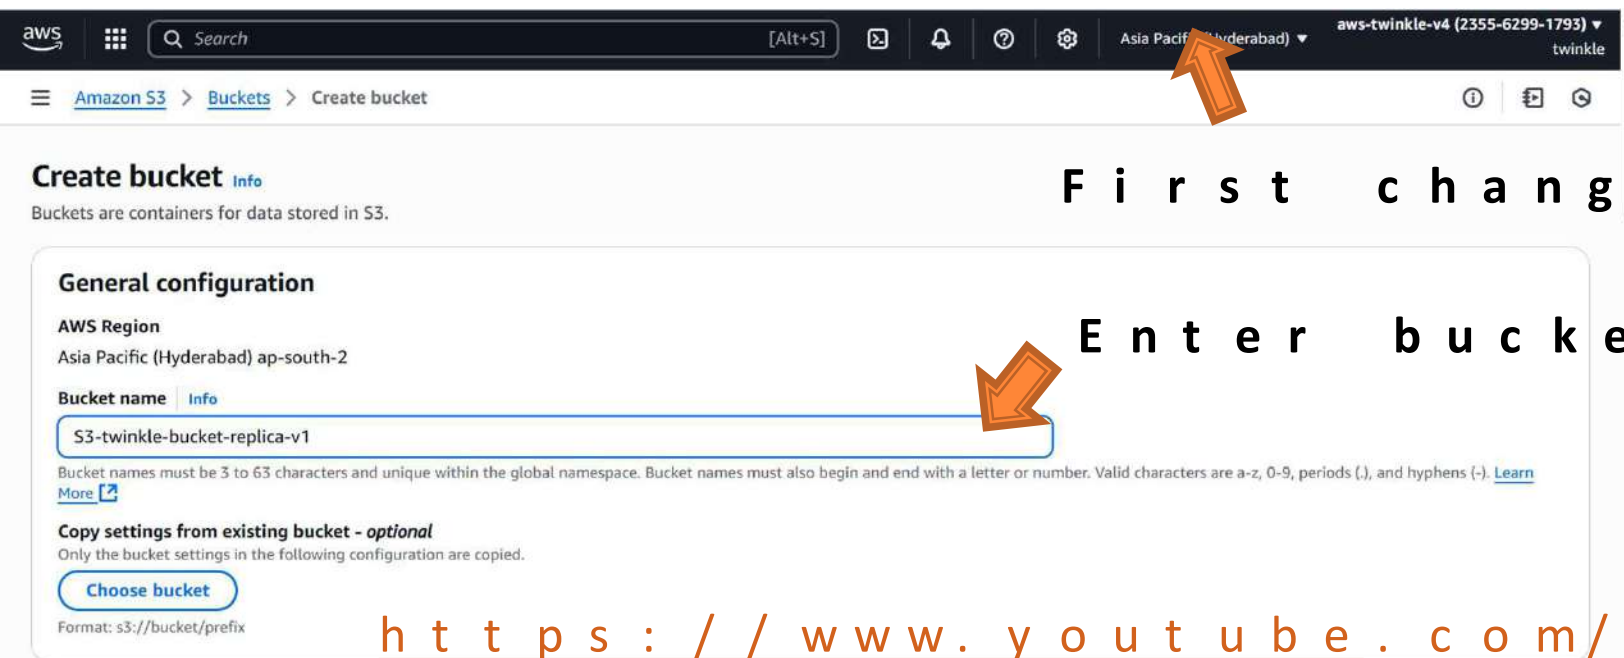

aws [Search] [Alt+S] Asia Pacific (Hyderabad) aws-twinkle-v4 (2355-6299-1793) twinkle

Amazon S3 > Buckets > Create bucket

### Create bucket [Info](#)

Buckets are containers for data stored in S3.

#### General configuration

**AWS Region**  
Asia Pacific (Hyderabad) ap-south-2

**Bucket name** [Info](#)  
S3-twinkle-bucket-replica-v1

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

**Copy settings from existing bucket - optional**  
Only the bucket settings in the following configuration are copied.


[Choose bucket](#)

Format: s3://bucket/prefix

First change the loc

Enter bucket name

<https://www.youtube.com/@techwithh>

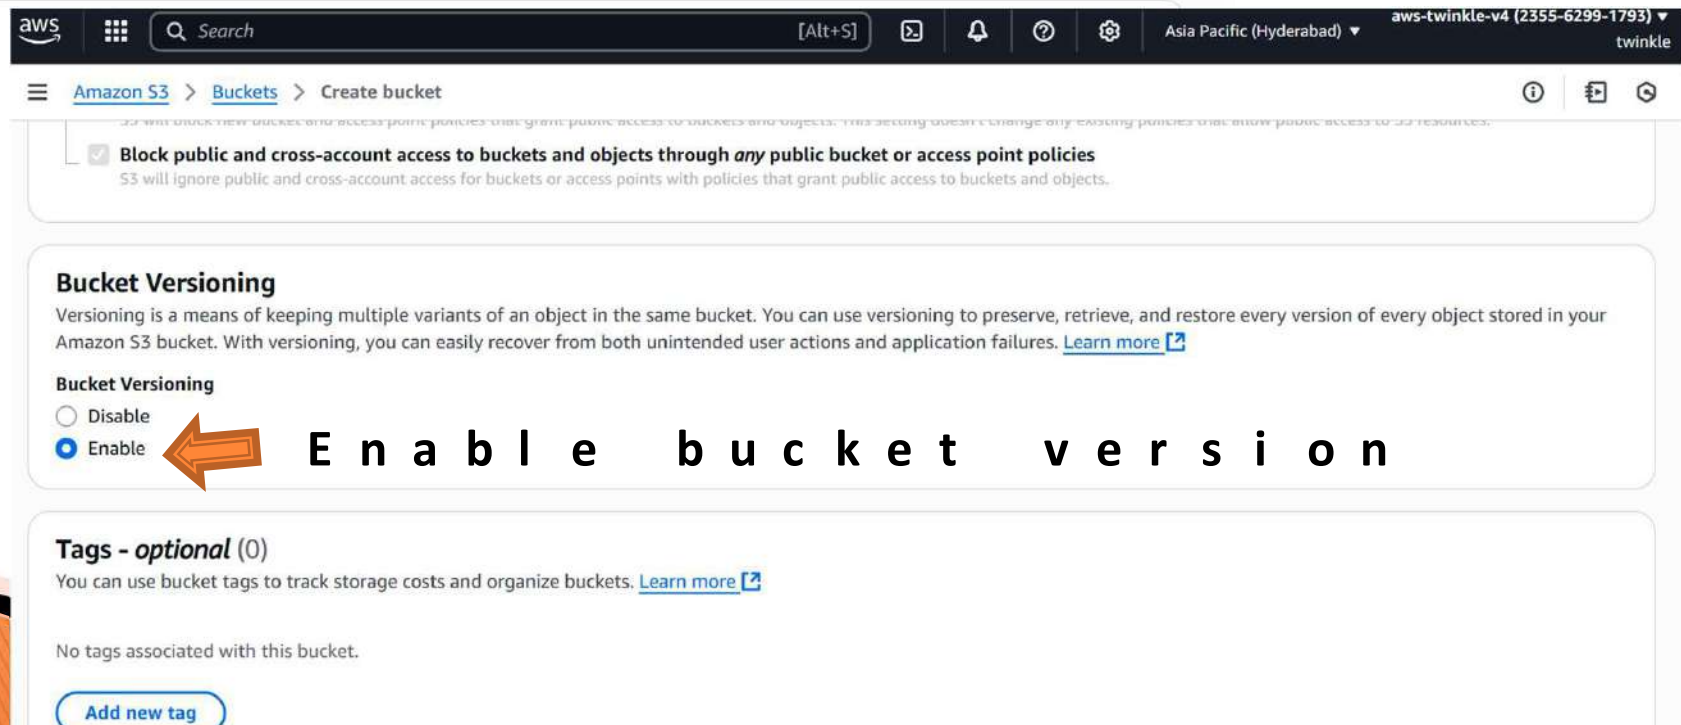

aws [Search] [Alt+S] Asia Pacific (Hyderabad) aws-twinkle-v4 (2355-6299-1793) twinkle

Amazon S3 > Buckets > Create bucket

☒ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**  
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

#### Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

**Bucket Versioning**

☐ Disable

☒ Enable

#### Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

[Add new tag](#)

Enable bucket version

Amazon S3 > Buckets > Create bucket

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

**Bucket Key**

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

► Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create bucket

<https://www.youtube.com/@teachw>

Amazon S3 > Buckets

### General purpose buckets (4) [Info](#)

[Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

Find buckets by name

|                       | Name                                                     | AWS Region                          | Creation date                        |
|-----------------------|----------------------------------------------------------|-------------------------------------|--------------------------------------|
| <input type="radio"/> | <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1    | August 8, 2025, 14:47:26 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-bucket-replica</a>                | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30) |
| <input type="radio"/> | <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 12:59:03 (UTC+05:30) |

Click on this

#### ► Account snapshot [Info](#)

Updated daily

[View dashboard](#)

Storage Lens provides visibility into storage usage and activity trends.

#### ► External access summary - new [Info](#)

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-twinkle-aws-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

s3-twinkle-aws-v1

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (0)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Click on upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

Name

Type

Last modified

Size

Storage class

No objects

You don't have any objects in this bucket.

Block Public A

Amazon S3

Buckets

s3-twinkle-aws-v1

Upload

## Upload

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

### Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

Name

Folder

Type

Size

No files or folders

You have not chosen any files or folders to upload.

Remove

Add files

Add folder

Click on A

<https://www.youtube.com/>

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Upload

☐ Name Folder Type Size

### Destination Info

**Destination**  
[s3://s3-twinkle-aws-v1](https://s3://s3-twinkle-aws-v1)

► **Destination details**  
Bucket settings that impact new objects stored in the specified destination.

► **Permissions**  
Grant public access and access to other AWS accounts.

► **Properties**  
Specify storage class, encryption settings, tags, and more.

<https://www.youtube.com/@te>

Click on  Upload

Amazon S3 > Buckets > s3-twinkle-aws-v1

### s3-twinkle-aws-v1 Info

**Objects** Properties Permissions Metrics **Management** Access Points

**Objects (1)**   Copy S3 URI  Copy URL  Download  Open  Delete  Actions  Create folder  Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions < 1 > 

| <input type="checkbox"/> | Name                                                                                                          | Type | Last modified                        | Size    | Storage class |
|--------------------------|---------------------------------------------------------------------------------------------------------------|------|--------------------------------------|---------|---------------|
| <input type="checkbox"/> |  <a href="#">beach.jpg</a> | jpg  | August 9, 2025, 17:26:02 (UTC+05:30) | 85.8 KB | Standard      |

No lifecycle rules  
There are no lifecycle rules for this bucket.

Create lifecycle rule

## Replication rules (0)



View details

Edit rule

Delete

Actions ▾

Create replication rule

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. [Learn more](#)

| Replication rule name | Status | Destination bucket | Destination Region | Priority | Scope | Storage class | Replica owner | Replication Time Control | KMS-encrypted objects (SSE KMS or DSSE-KMS) |
|-----------------------|--------|--------------------|--------------------|----------|-------|---------------|---------------|--------------------------|---------------------------------------------|
|-----------------------|--------|--------------------|--------------------|----------|-------|---------------|---------------|--------------------------|---------------------------------------------|

No replication rules

You don't have any rules in the replication configuration.

Click on create Replication Rule

Create replication rule



Search

[Alt+S]



Asia Pacific (Mumbai) ▾

aws-twinkle-v4 (2355-6299-1793) ▾  
twinkle

## Create replication rule Info

### Replication rule configuration

#### Replication rule name

DemoReplicationRule

Up to 255 characters. In order to be able to use CloudWatch metrics to monitor the progress of your replication rule, the replication rule name must only contain English characters.

#### Status

Choose whether the rule will be enabled or disabled when created.

☒ Enabled

☐ Disabled

#### Priority

The priority value resolves conflicts that occur when an object is eligible for replication under multiple rules to the same destination. The rule is added to the configuration at the highest priority and the priority can be changed on the replication rules table.

0

Enter Replication

<https://www.youtube.com/@>

Source bucket name

s3-twinkle-aws-v1

Source Region

Asia Pacific (Mumbai) ap-south-1

Choose a rule scope

- ☐ Limit the scope of this rule using one or more filters
- ☒ Apply to all objects in the bucket

Select Apply to All objects in

Destination

Destination

You can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or you can replicate objects across buckets in the same AWS Region (Same-Region Replication). You can also specify a different bucket for each rule in the configuration. [Learn more](#) or see [Amazon S3 pricing](#)

- ☒ Choose a bucket in this account
- ☐ Specify a bucket in another account

Bucket name

Choose the bucket that will receive replicated objects.

Destination

Destination

You can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or you can replicate objects across buckets in the same AWS Region (Same-Region Replication). You can also specify a different bucket for each rule in the configuration. [Learn more](#) or see [Amazon S3 pricing](#)

- ☒ Choose a bucket in this account
- ☐ Specify a bucket in another account

Bucket name

Choose the bucket that will receive replicated objects.

Enter bucket name

Browse S3

Destination Region

-

Click on browse S3

IAM role

Permission to access the specified resources

<https://www.youtube.com/>

aws twink

Search [Alt+S]

Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twink

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Replication rules > Create replication rule

### Choose a bucket

S3 Buckets

Buckets (1/4)

Find buckets by name

| Name                                                           | AWS Region                          |
|----------------------------------------------------------------|-------------------------------------|
| <input type="radio"/> elasticbeanstalk-ap-south-1-235562991793 | Asia Pacific (Mumbai) ap-south-1    |
| <input type="radio"/> s3-twinkle-aws-v1                        | Asia Pacific (Mumbai) ap-south-1    |
| <input checked="" type="radio"/> s3-twinkle-bucket-replica-v1  | Asia Pacific (Hyderabad) ap-south-2 |
| <input type="radio"/> twink-aws-bucket                         | Asia Pacific (Mumbai) ap-south-1    |

After that click on  
Select the choose path

Choose path

aws twink

Search [Alt+S]

Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twink

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Replication rules > Create replication rule

different bucket for each rule in the configuration. [Learn more](#) or see [Amazon S3 pricing](#)

☒ Choose a bucket in this account

☐ Specify a bucket in another account

**Bucket name**  
Choose the bucket that will receive replicated objects.

s3-twinkle-bucket-replica-v1 [Browse S3](#)

**Destination Region**  
Asia Pacific (Hyderabad) ap-south-2

**IAM role**  
Permission to access the specified resources

☐ Create new role

☒ Choose from existing IAM roles

☐ Enter IAM role ARN

**IAM role**

Click on new role

<https://www.youtube.com/>

aws twinkling

Search [Alt+S]

Asia Pacific (Mumbai)

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Replication rules > Create replication rule

### Additional replication options

- ☐ Replication Time Control (RTC)  
Replication Time Control replicates 99.99% of new objects within 15 minutes and includes replication metrics. Additional fees will apply. [Learn more](#)
- ☐ Replication metrics  
With replication metrics, you can monitor the total number and size of objects that are pending replication, and the maximum replication time to the destination Region. You can also view and diagnose replication failures. CloudWatch metrics fees apply. [Learn more](#) or see [Amazon CloudWatch pricing](#)
- ☐ Delete marker replication  
Delete markers created by S3 delete operations will be replicated. Delete markers created by lifecycle rules are not replicated. [Learn more](#)
- ☐ Replica modification sync  
Replicate metadata changes made to replicas from the destination bucket to the source bucket. [Learn more](#)

<https://www.youtube.com/@techwithtwinkle> Click on save

aws twinkling

Search [Alt+S]

Asia Pacific (Mumbai)

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Replication rules

Replication configuration successfully updated  
If changes to the configuration aren't displayed, choose the refresh button. Changes apply only to new objects. To replicate existing objects with this configuration, choose Create replication job

### Replication rules

Replication enables automatic and asynchronous replication of objects from a source bucket to a destination bucket. Replication should be applied to a group of objects during replication.

#### Replication configuration settings

Configuration settings affect all replication rules.

Source bucket  
s3-twinkle-aws-v1

Source Region  
Asia Pacific (Mumbai) ap-south-1

#### Replicate existing objects?

You can enable a one-time Batch Operations job from this replication configuration to replicate objects that already exist in the bucket and to synchronize the source and destination buckets. [Learn more](#) or [see pricing](#)

Existing objects

☒ No, do not replicate existing objects.

☐ Yes, replicate existing objects.

Click on submit

Create replication job Edit

## Replication rules (1)

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. [Learn more](#)

[View details](#)[Edit rule](#)[Delete](#)[Actions](#)[Create replication rule](#)

| Replication rule < 1 >              |         |                                                   |                                     |          |               |                |                |                          |                                             |  |
|-------------------------------------|---------|---------------------------------------------------|-------------------------------------|----------|---------------|----------------|----------------|--------------------------|---------------------------------------------|--|
| Replication rule name               | Status  | Destination bucket                                | Destination Region                  | Priority | Scope         | Storage class  | Replica owner  | Replication Time Control | KMS-encrypted objects (SSE-KMS or DSSE-KMS) |  |
| <a href="#">DemoReplicationRule</a> | Enabled | <a href="#">s3://s3-twinkle-bucket-replica-v1</a> | Asia Pacific (Hyderabad) ap-south-2 | 0        | Entire bucket | Same as source | Same as source | Disabled                 | Do not replicate                            |  |



Replication rule is added

<https://www.youtube.com/@>

## General purpose buckets (4) [Info](#)

[Copy ARN](#)[Empty](#)[Delete](#)[Create bucket](#)

Buckets are containers for data stored in S3.

< 1 >

| Name                                                     | AWS Region                          | Creation date                        |
|----------------------------------------------------------|-------------------------------------|--------------------------------------|
| <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1    | August 8, 2025, 14:47:26 (UTC+05:30) |
| <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30) |
| <a href="#">s3-twinkle-bucket-replica-v1</a>             | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30) |
| <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 12:59:03 (UTC+05:30) |

## Account snapshot [Info](#)

Updated daily

[View dashboard](#)

Storage Lens provides visibility into storage usage and activity trends.

## External access summary - new [Info](#)

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Click on replica



Amazon S3 > Buckets > s3-twinkle-bucket-replica-v1

Objects (0)

Copy S3 URI Copy URL Download Open Delete Actions

Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix Show versions < 1 > ⚙

| Name                                       | Type | Last modified | Size | Storage class |
|--------------------------------------------|------|---------------|------|---------------|
| No objects                                 |      |               |      |               |
| You don't have any objects in this bucket. |      |               |      |               |

No file is replicated

Amazon S3 > Buckets > s3-twinkle-aws-v1

s3-twinkle-aws-v1 Info

Objects (1)

Copy S3 URI Copy URL Download Open Delete Actions

Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix Show versions < 1 > ⚙

| Name      | Type | Last modified                        | Size    | Storage class |
|-----------|------|--------------------------------------|---------|---------------|
| beach.jpg | jpg  | August 9, 2025, 17:26:02 (UTC+05:30) | 85.8 KB | Standard      |

Go to origin bucket

<https://www.youtube.com/>

Click on upload

## Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

### Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

No files or folders

You have not chosen any files or folders to upload.

Remove

Add files

Add folder

Click on

Add f

### Files and folders (1 total, 108.4 KB)

All files and folders in this table will be uploaded.

Find by name

| <input type="checkbox"/> | Name       | Folder | Type       | Size     |
|--------------------------|------------|--------|------------|----------|
| <input type="checkbox"/> | coffee.jpg | -      | image/jpeg | 108.4 KB |

Remove

Add files

Add folder

< 1 >

### Destination [Info](#)

#### Destination

[s3://s3-twinkle-aws-v1](#)

#### Destination details

Bucket settings that impact new objects stored in the specified destination.

#### Permissions

Grant public access and access to other AWS accounts.

#### Properties

Specify storage class, encryption settings, tags, and more.

<https://www.youtube.com/>

Click on upload

### s3-twinkle-aws-v1 Info

- Objects
- Properties
- Permissions
- Metrics
- Management
- Access Points

Objects (2)

Copy S3 URICopy URLDownloadOpenDeleteActionsCreate folderUpload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 >

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 17:26:02 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 17:42:48 (UTC+05:30) | 108.4 KB | Standard      |



<https://www.youtube.com/>

File Uploaded

### General purpose buckets (4) Info

- 
- Copy ARN
- Empty
- Delete
- Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

< 1 >

| <input type="radio"/> | Name                                                     | AWS Region                          | Creation date                        |
|-----------------------|----------------------------------------------------------|-------------------------------------|--------------------------------------|
| <input type="radio"/> | <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1    | August 8, 2025, 14:47:26 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-bucket-replica-v1</a>             | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30) |
| <input type="radio"/> | <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 12:59:03 (UTC+05:30) |

Go to  
replica  
bucket



### Account snapshot Info

Updated daily

[View dashboard](#)

Storage Lens provides visibility into storage usage and activity trends.

### External access summary - new Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

aws

Search

[Alt+S]

Asia Pacific (Hyderabad)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-twinkle-bucket-replica-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for

s3-twinkle-bucket-replica-v1

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (1)

Copy S3 URI

Copy

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

1

Find objects by prefix

Name

Type

Last modified

Size

Storage class

coffee.jpg

jpg

August 9, 2025, 17:42:48 (UTC+05:30)

108.4 KB

Standard

The newly uploaded file is  
The replication rule is working

https://www.youtube.com

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-twinkle-aws-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for

s3-twinkle-aws-v1

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (2)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

1

Find objects by prefix

Name

Type

Last modified

Size

Storage class

beach.jpg

jpg

August 9, 2025, 17:26:02 (UTC+05:30)

85.8 KB

Standard

Go to origin bucket  
management

aws twink

Search [Alt+S]

Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twink

Amazon S3 > Buckets > s3-twinkle-aws-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets Preview

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

No lifecycle rules

There are no lifecycle rules for this bucket.

Create lifecycle rule

Click on Edit Rule

Replication rules (1) View details Edit rule Delete Actions Create replication rule

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Learn more

| Replication rule name               | Status  | Destination bucket                | Destination Region                  | Priority | Scope         | Storage class  | Replication owner |
|-------------------------------------|---------|-----------------------------------|-------------------------------------|----------|---------------|----------------|-------------------|
| <a href="#">DemoReplicationRule</a> | Enabled | s3://s3-twinkle-bucket-replica-v1 | Asia Pacific (Hyderabad) ap-south-2 | 0        | Entire bucket | Same as source | Same source       |

Select rule

View replication configuration

aws twink

Search [Alt+S]

Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twink

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Replication rules > DemoReplicationRule

Additional replication options

☐ Replication Time Control (RTC)  
Replication Time Control replicates 99.99% of new objects within 15 minutes and includes replication metrics. Additional fees will apply. Learn more

☐ Replication metrics  
With replication metrics, you can monitor the total number and size of objects that are pending replication, and the maximum replication time to the destination Region. You can also view and diagnose replication failures. CloudWatch metrics fees apply. Learn more or see Amazon CloudWatch pricing

☐ Delete marker replication ← Enable delete marker replication  
Delete markers created by S3 delete operations will be replicated. Delete markers created by lifecycle rules are not replicated. Learn more

☐ Replica modification sync  
Replicate metadata changes made to replicas from the destination bucket to the source bucket. Learn more

https://www.youtube.com/@techwithh

After that click

aws twink

Search [Alt+S]

Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twink

Amazon S3 > Buckets > s3-twinkle-aws-v1

### s3-twinkle-aws-v1 Info

Objects Properties Permissions Metrics Management Access Points

**Objects** (1/2) Copy S3 URI Copy URL Download Open **Delete** Actions Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions < 1 >

|                                     | Name                       | Type | Last modified                        | Size     | Storage class |
|-------------------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/>            | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 17:26:02 (UTC+05:30) | 85.8 KB  | Standard      |
| <input checked="" type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 17:42:48 (UTC+05:30) | 108.4 KB | Standard      |

**Select File**

aws twink

Search [Alt+S]

Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twink

Amazon S3 > Buckets > s3-twinkle-aws-v1 > Delete objects

Deleting the specified objects adds delete markers to them  
If you need to undo the delete action, you can delete the delete markers. [Learn more](#)

**Specified objects**

| Name                       | Type | Last modified                        | Size     |
|----------------------------|------|--------------------------------------|----------|
| <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 17:42:48 (UTC+05:30) | 108.4 KB |

**Delete objects?**

To confirm deletion, type *delete* in the text input field.

**Enter Delete**

**After that click on delete**

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-twinkle-aws-v1

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 >

Name

Type

Last modified

Size

Storage class

beach.jpg

jpg

August 9, 2025, 17:26:02 (UTC+05:30)

85.8 KB

Standard

Now file is deleted

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (4)

Info

Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

< 1 >

Name

AWS Region

Creation date

elasticbeanstalk-ap-south-1-235562991793

Asia Pacific (Mumbai) ap-south-1

August 8, 2025, 14:47:26 (UTC+05:30)

s3-twinkle-aws-v1

Asia Pacific (Mumbai) ap-south-1

August 9, 2025, 17:15:58 (UTC+05:30)

s3-twinkle-bucket-replica-v1

Asia Pacific (Hyderabad) ap-south-2

August 9, 2025, 17:23:04 (UTC+05:30)

twinkle-aws-bucket

Asia Pacific (Mumbai) ap-south-1

August 9, 2025, 12:59:03 (UTC+05:30)

Click on replica

Account snapshot

Info

Updated daily

View dashboard

Storage Lens provides visibility into storage usage and activity trends.

External access summary - new

Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

aws [Search] [Alt+S] Asia Pacific (Hyderabad) aws-twinkle-v4 (2355-6299-1793) twinkl

Amazon S3 > Buckets > s3-twinkle-bucket-replica-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets Preview

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for

Objects (0)

Copy S3 URI Copy URL Download Open Delete Actions

Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix Show versions

No objects. You don't have any objects in this bucket.

Click on show versions

aws [Search] [Alt+S] Asia Pacific (Hyderabad) aws-twinkle-v4 (2355-6299-1793) twinkl

Amazon S3 > Buckets > s3-twinkle-bucket-replica-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets Preview

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for

Objects (2)

Copy S3 URI Copy URL Download Open Delete Actions

Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix Show versions

|                          | Name       | Type          | Version ID                               | Last modified                              | Size     | Storage class |
|--------------------------|------------|---------------|------------------------------------------|--------------------------------------------|----------|---------------|
| <input type="checkbox"/> | coffee.jpg | Delete marker | WYLFtYBKHUvA<br>LB21KKvw0ZuG2<br>8hc7wCc | August 9, 2025,<br>17:56:07<br>(UTC+05:30) | 0 B      | -             |
| <input type="checkbox"/> | coffee.jpg | jpg           | hPTWkBASGMuB<br>YZxzQxcAsZhg1<br>GBNhCPC | August 9, 2025,<br>17:42:48<br>(UTC+05:30) | 108.4 KB | Standard      |

Version it is sh

aws

[Search]

[Alt+S]

📧

🔔

?

⚙️

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-twinkle-aws-v1

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

s3-twinkle-aws-v1

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (3)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Find objects by prefix

Show versions

|                          | Name       | Type          | Version ID                       | Last modified                        | Size     | Storage class |
|--------------------------|------------|---------------|----------------------------------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | beach.jpg  | jpg           | ZmLuN89GUxithIcT2N8SuoZHjDHAkgna | August 9, 2025, 17:26:02 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | coffee.jpg | Delete marker | WYLFtYBKHUvaLB21KKvw0ZuG28hc7wCc | August 9, 2025, 17:56:07 (UTC+05:30) | 0 B      | -             |
| <input type="checkbox"/> | coffee.jpg | jpg           | hPTWkBASGMuBYZxzQxcAsZhg1GBNhCPC | August 9, 2025, 17:42:48 (UTC+05:30) | 108.4 KB | Standard      |

Here on original bucket showing

<https://www.youtube.com>

# S3 Storage Classes

- ▶ Amazon S3 Standard - General Purpose
- ▶ Amazon S3 Standard - Infrequent Access
- ▶ Amazon S3 One Zone - Infrequent Access
- ▶ Amazon S3 Glacier Instant Retrieval
- ▶ Amazon S3 Glacier Flexible Retention
- ▶ Amazon S3 Glacier Deep Archive
- ▶ Amazon S3 Intelligent Tiering
- ▶ Can move between classes  
Lifecycle configurations

<https://www.youtube.com>

# S3 Durability and Availability

## D u r a b i l i t y :

- ▶ High durability (99.999999 multiple AZ)
- ▶ If you store 10,000,000 objects average expect to incur a 10,000 years
- ▶ Same for all storage classes

## Availability:

- ▶ Measures how readily avail
- ▶ Varies depending on storag
- ▶ Example: S3 standard has 9  
available 53 minutes a year

<https://www.youtube.com>

# S3 Standard – General Purpose

- ▶ 99.99% Availability
- ▶ Used for frequently accessed
- ▶ Low latency and high thr
- ▶ Sustain 2 concurrent fac
- ▶ Use Cases: Big Data anal  
applications, content di

<https://www.youtube.com>

## S3 Storage Classes – Infrequent Access

- ▶ For data that is less frequently accessed when needed
- ▶ Lower cost than S3 Standard
- ▶ **Amazon S3 Standard - Infrequent Access**
- ▶ 99.9% Availability
- ▶ Use cases: Disaster Recovery, Backup, Archiving
- ▶ **Amazon S3 One Zone - Infrequent Access**
- ▶ High durability (99.9%) but not 99.999999999%
- ▶ data lost when AZ is compromised
- ▶ 99.5% Availability
- ▶ Use Cases: Storing secondary premises data, or data you can afford to lose



<https://www.youtube.com/watch?v=UW08TQDkx6g>

# Amazon S3 Glacier Storage Classes

▶ Low-cost object storage

▶ Pricing: price for storage

**Amazon S3 Glacier Instant**

▶ Millisecond retrieval, 100 MB per quarter

▶ Minimum storage duration

**Amazon S3 Glacier Flexible Retrieval** (formerly Amazon S3 Glacier):

▶ Expedited (1 to 5 minutes), Bulk (5 to 12 hours) – for

▶ Minimum storage duration

**Amazon S3 Glacier Deep Archive**

▶ Standard (12 hours), Bulk

▶ Minimum storage duration



# S3 Intelligent-Tiering



- ▶ Small monthly monitoring and
- ▶ Moves objects automatically based on usage
- ▶ There are no retrieval charges
- ▶ Frequent Access tier (automatically moves objects to this tier)
- ▶ Infrequent Access tier (automatically moves objects to this tier after 30 days)
- ▶ Archive Instant Access tier (automatically moves objects to this tier after 90 days)
- ▶ Archive Access tier (optional, automatically moves objects to this tier after 700+ days)
- ▶ Deep Archive Access tier (optional, automatically moves objects to this tier after 700+ days)

<https://www.youtube.com/watch?v=...>

# S3 Storage Classes Comparison

|                              | Standard                  | Intelligent-Tiering | Standard-IA      | One Zone-IA      | Glacier Instant Retrieval | Glacier Flexible Retrieval | Glacier Deep Archive |
|------------------------------|---------------------------|---------------------|------------------|------------------|---------------------------|----------------------------|----------------------|
| Durability                   | 99.999999999% == (11 9's) |                     |                  |                  |                           |                            |                      |
| Availability                 | 99.99%                    | 99.9%               | 99.9%            | 99.5%            | 99.9%                     | 99.99%                     | 99.99%               |
| Availability SLA             | 99.9%                     | 99%                 | 99%              | 99%              | 99%                       | 99.9%                      | 99.9%                |
| Availability Zones           | >= 3                      | >= 3                | >= 3             | 1                | >= 3                      | >= 3                       | >= 3                 |
| Min. Storage Duration Charge | None                      | None                | 30 Days          | 30 Days          | 90 Days                   | 90 Days                    | 180 Days             |
| Min. Billable Object Size    | None                      | None                | 128 KB           | 128 KB           | 128 KB                    | 40 KB                      | 40 KB                |
| Retrieval Fee                | None                      | None                | Per GB retrieved | Per GB retrieved | Per GB retrieved          | Per GB retrieved           | Per GB retrieved     |

<https://aws.amazon.c>

<https://www.youtube.c>

# S3 Storage Classes – Price Comparison


## Example: us-east-1

|                                       | Standard                       | Intelligent-Tiering            | Standard-IA                  | One Zone-IA                  | Glacier Instant Retrieval   | Glacier Flexible Retrieval                                                             | Glacier Deep Archive                                                   |
|---------------------------------------|--------------------------------|--------------------------------|------------------------------|------------------------------|-----------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Storage Cost<br>(per GB per month)    | \$0.023                        | \$0.0025 - \$0.023             | \$0.0125                     | \$0.01                       | \$0.004                     | \$0.0036                                                                               | \$0.00099                                                              |
| Retrieval Cost<br>(per 1000 request)  | GET: \$0.0004<br>POST: \$0.005 | GET: \$0.0004<br>POST: \$0.005 | GET: \$0.001<br>POST: \$0.01 | GET: \$0.001<br>POST: \$0.01 | GET: \$0.01<br>POST: \$0.02 | GET: \$0.0004<br>POST: \$0.03<br><br>Expedited: \$10<br>Standard: \$0.05<br>Bulk: free | GET: \$0.0004<br>POST: \$0.05<br><br>Standard: \$0.10<br>Bulk: \$0.025 |
| Retrieval Time                        | Instantaneous                  |                                |                              |                              |                             | Expedited (1 – 5 mins)<br>Standard (3 – 5 hours)<br>Bulk (5 – 12 hours)                | Standard (12 hours)<br>Bulk (48 hours)                                 |
| Monitoring Cost<br>(per 1000 objects) |                                | \$0.0025                       |                              |                              |                             |                                                                                        |                                                                        |

<https://aws.amazon.com/s3/pricing/>

<https://www.youtube.com/watch?v=Uj3333333333>

# S3 Storage Classes Hands On

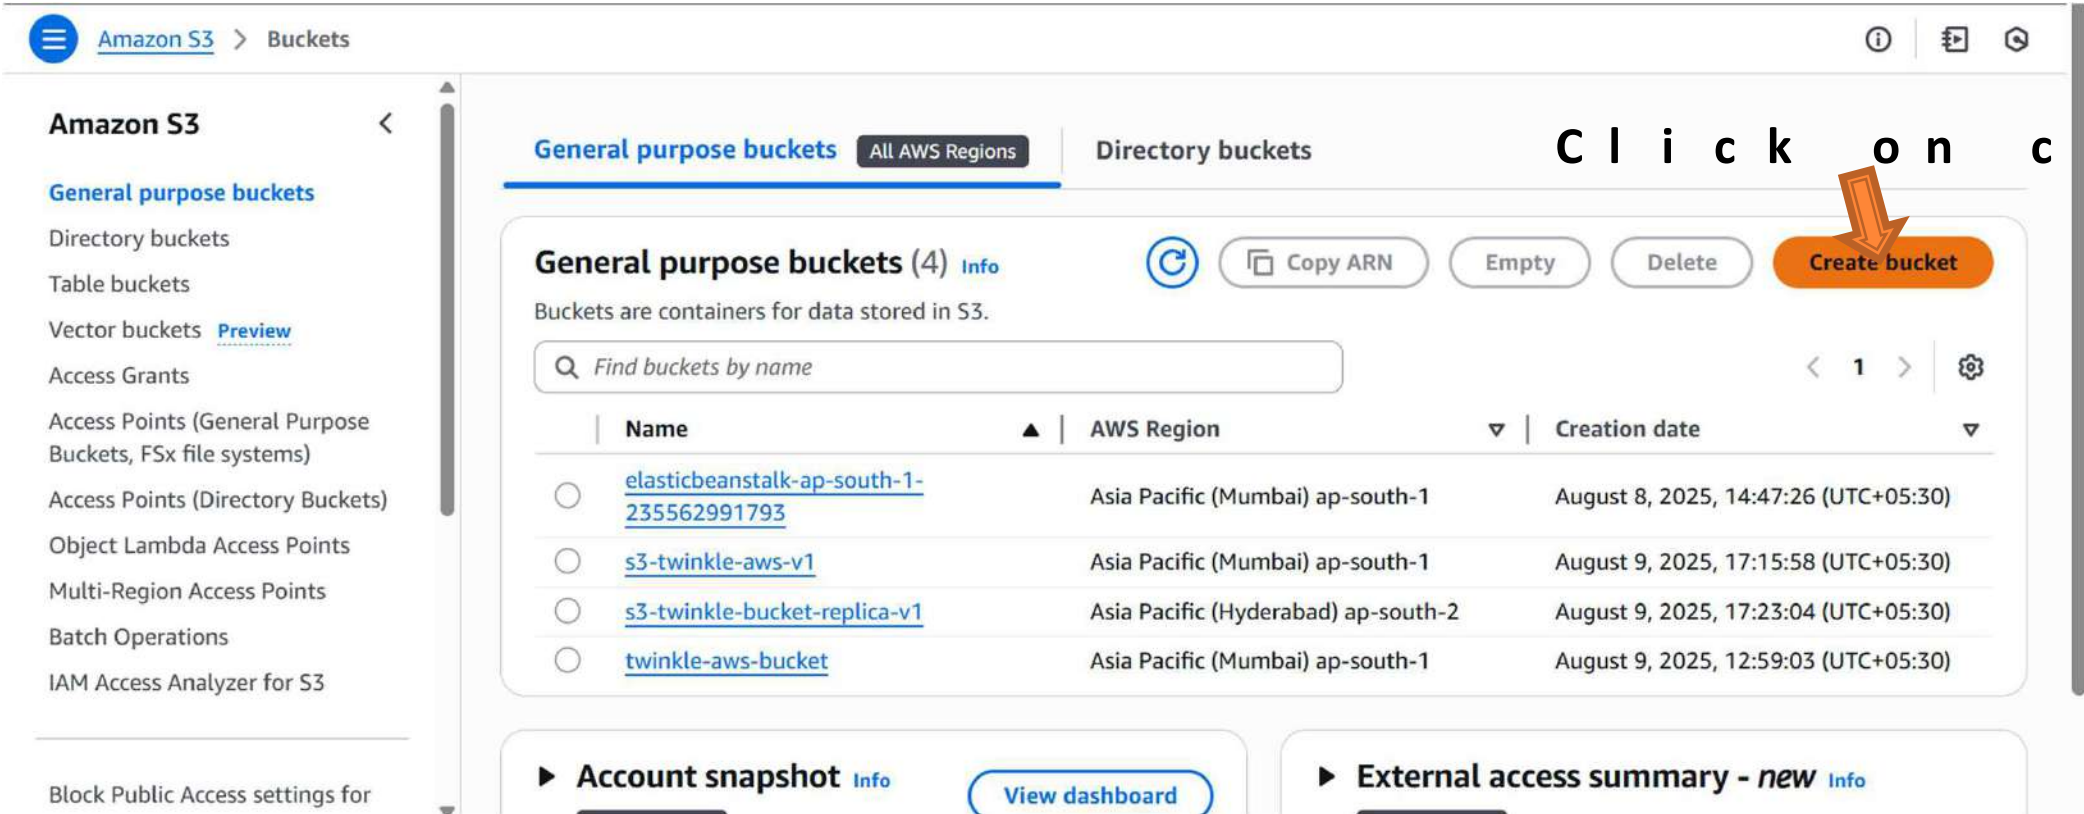

Amazon S3 > Buckets

General purpose buckets All AWS Regions Directory buckets

General purpose buckets (4) Info

Buckets are containers for data stored in S3.

Find buckets by name

Copy ARN Empty Delete Create bucket

|                       | Name                                                     | AWS Region                          | Creation date                        |
|-----------------------|----------------------------------------------------------|-------------------------------------|--------------------------------------|
| <input type="radio"/> | <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1    | August 8, 2025, 14:47:26 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30) |
| <input type="radio"/> | <a href="#">s3-twinkle-bucket-replica-v1</a>             | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30) |
| <input type="radio"/> | <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 12:59:03 (UTC+05:30) |

Account snapshot Info View dashboard

External access summary - new Info

<https://www.youtube.com>

# Create bucket [Info](#)

Buckets are containers for data stored in S3.

## General configuration

### AWS Region

Asia Pacific (Mumbai) ap-south-1

### Bucket type [Info](#)

☒ **General purpose**  
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**  
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

### Bucket name [Info](#)

s3-storage-classes-demo

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

### Copy settings from existing bucket - optional

- ☒ **Server-side encryption with Amazon S3 managed keys (SSE-S3)**
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)  
Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

#### Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

- ☐ Disable
- ☒ Enable

### Advanced settings

<https://www.youtube.com/@>

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create bucket

Create bucket

## s3-storage-classes-demo-twinkle [Info](#)

[Objects](#) Properties Permissions Metrics Management Access Points

Objects (0)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder



Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > Settings

| Name | Type | Last modified | Size | Storage class |
|------|------|---------------|------|---------------|
|------|------|---------------|------|---------------|

No objects  
You don't have any objects in this bucket.

Upload

Click on upl

## Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

Remove

Add files

Add folder



| Name | Folder | Type | Size |
|------|--------|------|------|
|------|--------|------|------|

No files or folders  
You have not chosen any files or folders to upload.

Click files

<https://www.youtube.co>

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-storage-classes-demo-twinkle

Upload

Files and folders (1 total, 108.4 KB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

Find by name

Name

Folder

Type

Size

coffee.jpg

image/jpeg

108.4 KB

Destination

Info

Destination

s3://s3-storage-classes-demo-twinkle

Destination details

Bucket settings that impact new objects stored in the specified destination.

Permissions

Grant public access and access to other AWS accounts.

Properties

Specify storage class, encryption settings, tags, and more.

Click on properties

https://www.youtube.com/@techwithtwinkl

Cancel

Upload

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

Buckets

s3-storage-classes-demo-twinkle

Upload

Specify storage class, encryption settings, tags, and more.

Storage class

Info

Amazon S3 offers a range of storage classes designed for different use cases. [Learn more](#) or see [Amazon S3 pricing](#)

Select Standard IA

Standard

Frequently accessed data (more than once a month) with milliseconds access

General purpose

≥ 3

-

-

-

-

Intelligent-Tiering

Data with changing or unknown access patterns

General purpose

≥ 3

-

-

Per-object fees apply for objects >= 128 KB

-

☒

Standard-IA

Infrequently accessed data (once a month) with milliseconds access

General purpose

≥ 3

30 days

128 KB

-

Per-GB fees apply

One Zone-IA

Recreateable, infrequently accessed data (once a month) with milliseconds access

General purpose or directory

1

30 days

128 KB

-

Per-GB fees apply

Glacier Instant Retrieval

Long-lived archive data accessed once a quarter with instant retrieval in milliseconds

General purpose

≥ 3

90 days

128 KB

-

Per-GB fees apply

Glacier Flexible Retrieval (formerly)

Long-lived archive data accessed once a year with retrieval of minutes to hours

General purpose

≥ 3

90 days

-

-

Per-GB fees apply

#### Precalculated value - optional

When you provide a precalculated value for a single object, S3 compares it to the value it calculates using the selected checksum function. If the values don't match, the upload will fail. [Learn more](#)

Enter value

The precalculated value must be a Base64 encoded string. It must not exceed 128 characters, and can contain only letters (a-z, A-Z), numbers (0-9), forward slash (/), plus (+), or equals (=).

#### Tags - optional

You can use object tags to analyze, manage, and specify permissions for objects. [Learn more](#)

No tags associated with this resource.

Add tag

#### Metadata - optional

Metadata is optional information provided as a name-value (key-value) pair. [Learn more](#)

No metadata associated with this resource.

Add metadata

<https://www.youtube.com/@te>

Click on upload

### s3-storage-classes-demo-twinkle

Objects Properties Permissions Metrics Management Access Points

#### Objects (1)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

| <input type="checkbox"/> | Name                                                                                           | Type | Last modified                        | Size     | Storage class |
|--------------------------|------------------------------------------------------------------------------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> |  coffee.jpg | jpg  | August 9, 2025, 18:15:52 (UTC+05:30) | 108.4 KB | Standard-IA   |

Click on File

File is uploaded with

coffee.jpg Info

Copy S3 URI Download Open Object actions

Properties Permissions Versions

Object overview

Owner  
6acd0fafa077a484308a7e05f1d9d18e430f282d1238398ad4a09b1adaae9cf8

AWS Region  
Asia Pacific (Mumbai) ap-south-1

Last modified  
August 9, 2025, 18:15:52 (UTC+05:30)

Size  
108.4 KB

Type  
jpg

Key  
coffee.jpg

S3 URI  
s3://s3-storage-classes-demo-twinkle/coffee.jpg

Amazon Resource Name (ARN)  
arn:aws:s3:::s3-storage-classes-demo-twinkle/coffee.jpg

Entity tag (Etag)  
b3b29d095d73d905171d1f5498e1e578

Object URL  
https://s3-storage-classes-demo-twinkle.s3.ap-south-1.amazonaws.com/coffee.jpg

Scroll Down

https://www.youtube.com/@techwi

Object management overview

Storage class

Amazon S3 offers a range of storage classes designed for different use cases. Learn more or see Amazon S3 pricing

Storage class  
Standard-IA

Edit

Click on

Server-side encryption settings Info

Server-side encryption protects data at rest.

Encryption type Info  
Server-side encryption with Amazon S3 managed keys (SSE-S3)

Edit

Checksums


Checksums are used for data integrity verification of new objects. Learn more

Checksum function  
CRC64NVME

Checksum type  
Full object

Checksum value  
q2ZZYeUWeZY=

Edit

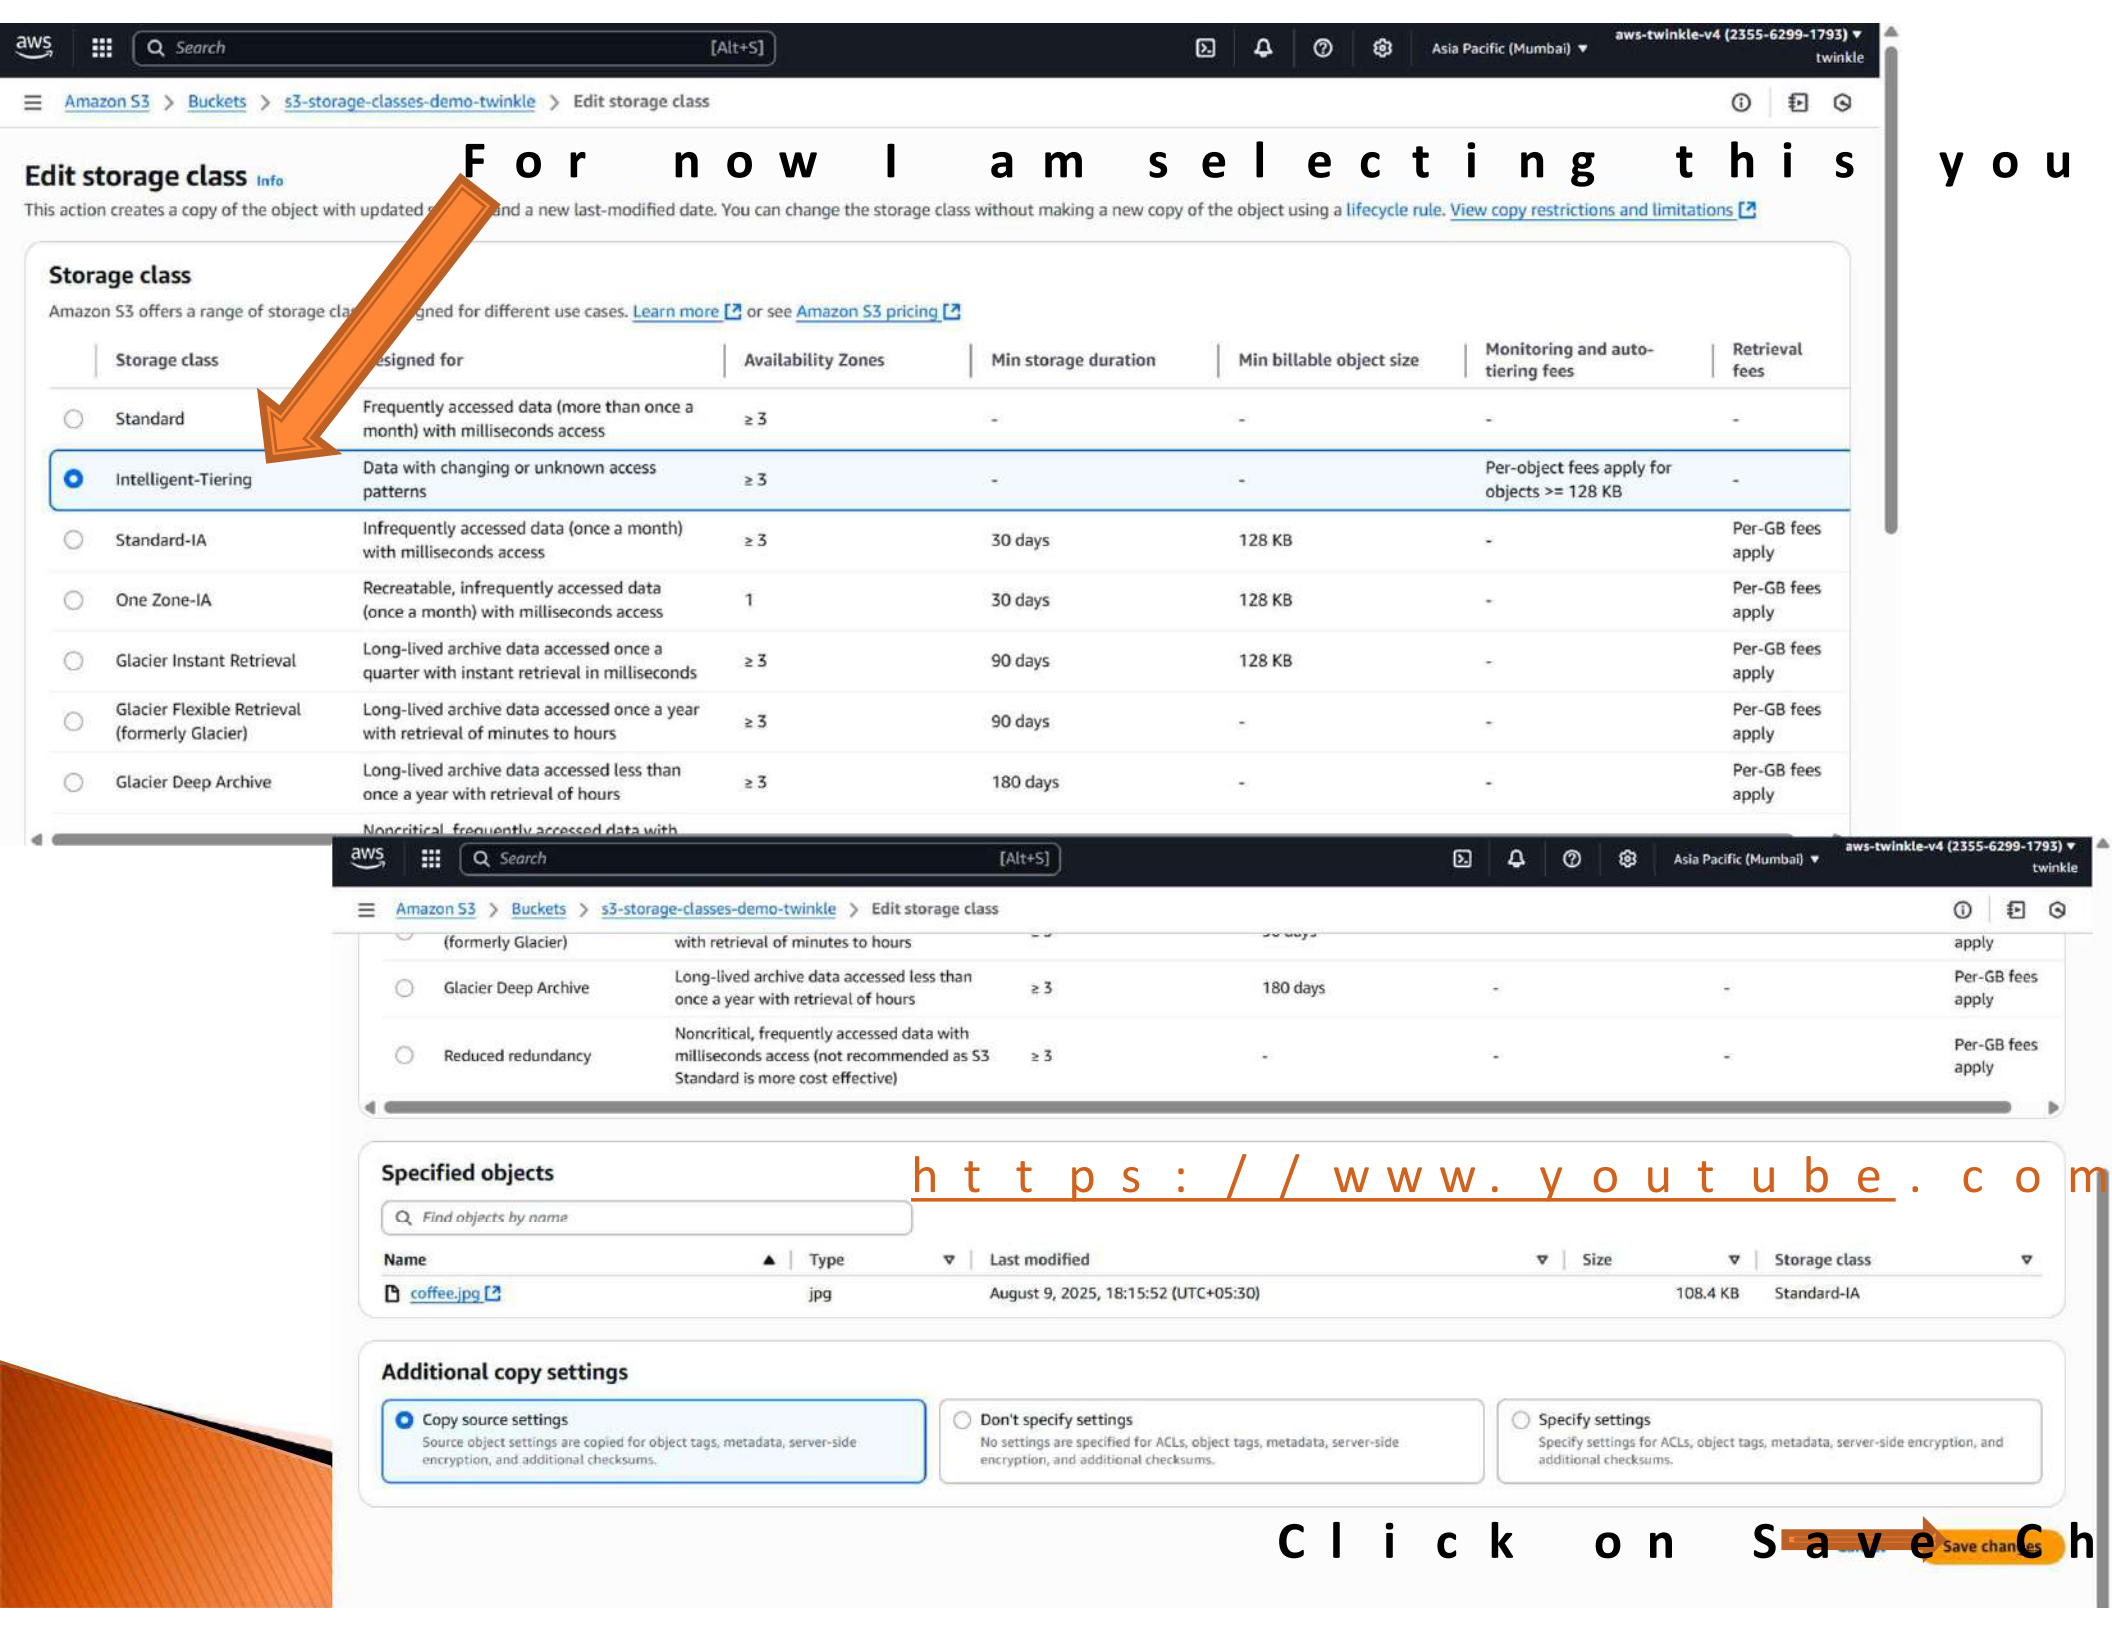

## Edit storage class Info

This action creates a copy of the object with updated metadata and a new last-modified date. You can change the storage class without making a new copy of the object using a [lifecycle rule](#). [View copy restrictions and limitations](#)

### Storage class

Amazon S3 offers a range of storage classes designed for different use cases. [Learn more](#) or see [Amazon S3 pricing](#)

| Storage class                                                       | Designed for                                                                           | Availability Zones | Min storage duration | Min billable object size | Monitoring and auto-tiering fees           | Retrieval fees    |
|---------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------|----------------------|--------------------------|--------------------------------------------|-------------------|
| <input type="radio"/> Standard                                      | Frequently accessed data (more than once a month) with milliseconds access             | ≥ 3                | -                    | -                        | -                                          | -                 |
| <input checked="" type="radio"/> Intelligent-Tiering                | Data with changing or unknown access patterns                                          | ≥ 3                | -                    | -                        | Per-object fees apply for objects ≥ 128 KB | -                 |
| <input type="radio"/> Standard-IA                                   | Infrequently accessed data (once a month) with milliseconds access                     | ≥ 3                | 30 days              | 128 KB                   | -                                          | Per-GB fees apply |
| <input type="radio"/> One Zone-IA                                   | Recreatable, infrequently accessed data (once a month) with milliseconds access        | 1                  | 30 days              | 128 KB                   | -                                          | Per-GB fees apply |
| <input type="radio"/> Glacier Instant Retrieval                     | Long-lived archive data accessed once a quarter with instant retrieval in milliseconds | ≥ 3                | 90 days              | 128 KB                   | -                                          | Per-GB fees apply |
| <input type="radio"/> Glacier Flexible Retrieval (formerly Glacier) | Long-lived archive data accessed once a year with retrieval of minutes to hours        | ≥ 3                | 90 days              | -                        | -                                          | Per-GB fees apply |
| <input type="radio"/> Glacier Deep Archive                          | Long-lived archive data accessed less than once a year with retrieval of hours         | ≥ 3                | 180 days             | -                        | -                                          | Per-GB fees apply |

Noncritical, frequently accessed data with

|                                            |                                                                                                                        |     |          |   |   |                   |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----|----------|---|---|-------------------|
| <input type="radio"/> (formerly Glacier)   | with retrieval of minutes to hours                                                                                     | -   | 90 days  | - | - | apply             |
| <input type="radio"/> Glacier Deep Archive | Long-lived archive data accessed less than once a year with retrieval of hours                                         | ≥ 3 | 180 days | - | - | Per-GB fees apply |
| <input type="radio"/> Reduced redundancy   | Noncritical, frequently accessed data with milliseconds access (not recommended as S3 Standard is more cost effective) | ≥ 3 | -        | - | - | Per-GB fees apply |

### Specified objects

Q Find objects by name

| Name       | Type | Last modified                        | Size     | Storage class |
|------------|------|--------------------------------------|----------|---------------|
| coffee.jpg | jpg  | August 9, 2025, 18:15:52 (UTC+05:30) | 108.4 KB | Standard-IA   |


### Additional copy settings

- ☒ Copy source settings  
Source object settings are copied for object tags, metadata, server-side encryption, and additional checksums.
- ☐ Don't specify settings  
No settings are specified for ACLs, object tags, metadata, server-side encryption, and additional checksums.
- ☐ Specify settings  
Specify settings for ACLs, object tags, metadata, server-side encryption, and additional checksums.

Click on Save changes

# Amazon S3 – Moving between Storage Classes

- ▶ You can transition objects between storage classes
- ▶ For infrequent objects, move from Standard to Standard IA
- ▶ For archive objects, don't need frequent access, move them to Glacier Deep Archive
- ▶ Moving objects automatically using a Lifecycle Rule

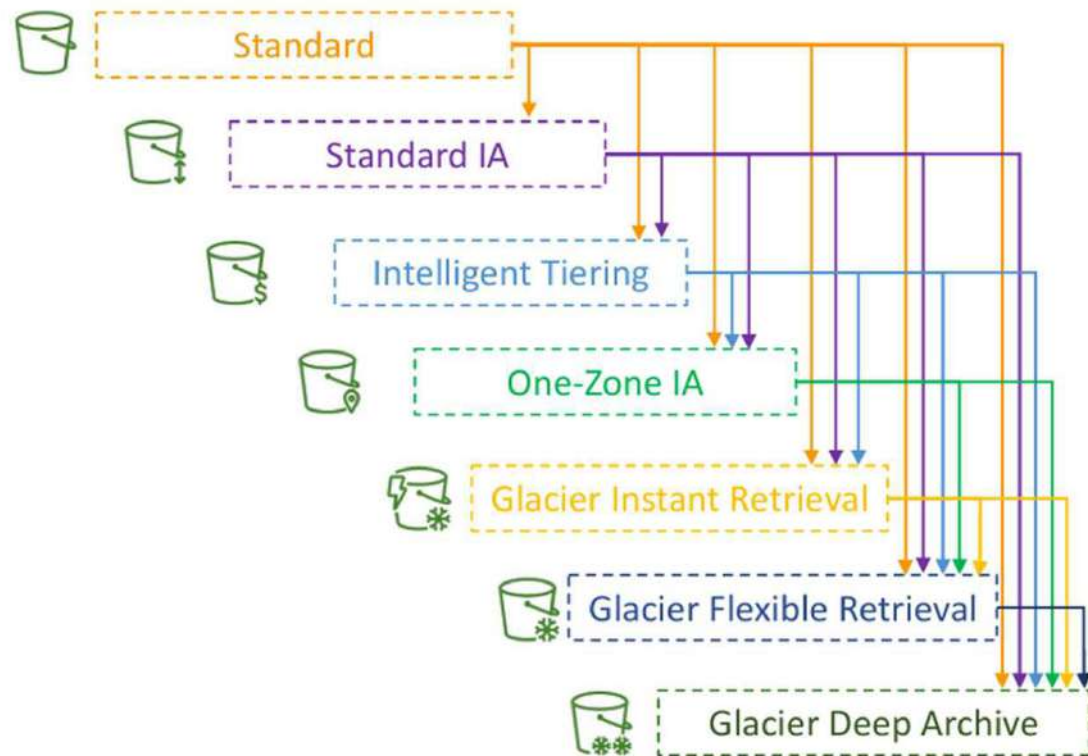

# Amazon S3 – Lifecycle Rules

- ▶ **Transitioning objects to storage classes**
- ▶ Move objects to Standard IA
- ▶ Move to Glacier for archiving
- ▶ **Expiration of objects to some time**
- ▶ Access log files can be set to
- ▶ Can be used to delete old versions (enabled)
- ▶ Can be used to delete incomplete uploads
- ▶ Rules can be created for a certain prefix (e.g. s3://mybucket/mp3/\*)
- ▶ Rules can be created for certain departments (e.g. Finance)

<https://www.youtube.com/watch?v=...>

# Amazon S3 – Lifecycle Rules (Scenario 1)

Your application on EC2 create profile photos are uploaded thumbnails can be easily kept for 60 days. The source immediately retrieved for the user can wait up to 60 days?

- ▶ S3 source images can be on configuration to transition to Standard-IA
- ▶ S3 thumbnails can be on Standard configuration to expire then delete

<https://www.youtube.com/watch?v=8F03D831Y00>


# Amazon S3 – Lifecycle Rules (Scenario 2)

A rule in your company states that you recover your deleted S3 objects although this may happen up to 365 days, deleted objects within 48 hours.

- ▶ Enable S3 Versioning in order that “deleted objects” are marked and can be recovered
- ▶ Transition the “noncurrent Standard IA
- ▶ Transition afterwards the Deep Archive

# Amazon S3 Analytics – Storage Class Analysis

- ▶ Help you decide objects to the
- ▶ Recommendations Standard IA
- ▶ Does NOT work f  
Glacier
- ▶ Report is updat
- ▶ 24 to 48 hours  
analysis
- ▶ Good first step  
Lifecycle Rules

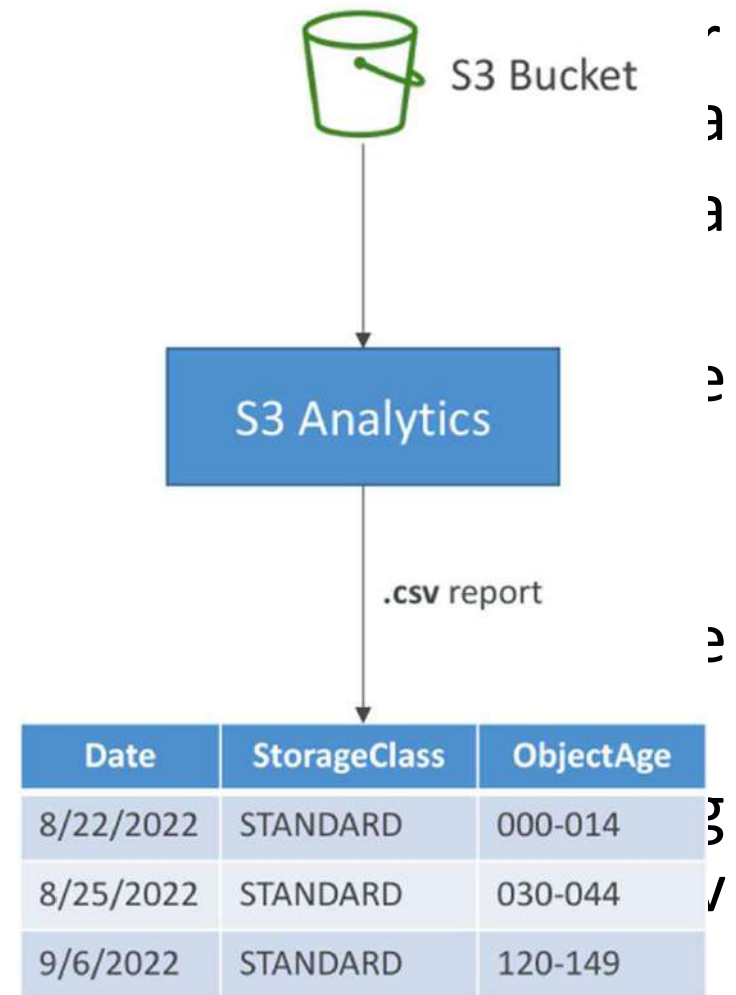

<https://www.youtube.c>

# S3 Lifecycle Rules – Hands On

The screenshot shows the Amazon S3 console interface. On the left is a navigation sidebar with the 'Amazon S3' logo and a list of menu items: General purpose buckets, Directory buckets, Table buckets, Vector buckets (with a 'Preview' link), Access Grants, Access Points (General Purpose Buckets, FSx file systems), Access Points (Directory Buckets), Object Lambda Access Points, Multi-Region Access Points, Batch Operations, IAM Access Analyzer for S3, and Block Public Access settings for. The main content area is titled 'General purpose buckets (5)' and includes an 'Info' link, a refresh icon, and buttons for 'Copy ARN', 'Empty', 'Delete', and 'Create bucket'. Below this is a search bar labeled 'Find buckets by name'. A table lists five buckets with columns for Name, AWS Region, and Creation date. An orange arrow points to the bucket named 's3-storage-classes-demo-twinkle'.

| Name                                                     | AWS Region                          | Creation date                        |
|----------------------------------------------------------|-------------------------------------|--------------------------------------|
| <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1    | August 8, 2025, 14:47:26 (UTC+05:30) |
| <a href="#">s3-storage-classes-demo-twinkle</a>          | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 18:10:54 (UTC+05:30) |
| <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30) |
| <a href="#">s3-twinkle-bucket-replica-v1</a>             | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30) |
| <a href="#">twinkle-aws-bucket</a>                       | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 12:59:03 (UTC+05:30) |

Click here

<https://www.youtube.c>

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets [Preview](#)

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for

s3-storage-classes-demo-twinkle

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 >

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class       |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------------|
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 18:21:30 (UTC+05:30) | 108.4 KB | Intelligent-Tiering |

Click on management

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets [Preview](#)

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for

s3-storage-classes-demo-twinkle

Lifecycle rules

View details

Edit

Delete

Actions

Create lifecycle rule

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. [Learn more](#)

| Lifecycle ru...                               | Status | Scope | Current ver... | Noncurrent... | Expired obj... | Incomplet... |
|-----------------------------------------------|--------|-------|----------------|---------------|----------------|--------------|
| No lifecycle rules                            |        |       |                |               |                |              |
| There are no lifecycle rules for this bucket. |        |       |                |               |                |              |

Replication rules (0)

View details

Edit rule

Delete

Actions

Create replication rule

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. [Learn more](#)

https://www.youtube.com/

Click on Create lifecycle rule

## Create lifecycle rule [Info](#)

### Lifecycle rule configuration

#### Lifecycle rule name

DemoRule

Up to 255 characters

#### Choose a rule scope

- ☐ Limit the scope of this rule using one or more filters
- ☒ Apply to all objects in the bucket

#### ⚠ Apply to all objects in the bucket

If you want the rule to apply to specific objects, you must use a filter to identify those objects. Choose "Limit the scope of this rule using one or more filters". [Learn more](#)

☐ I acknowledge that this rule will apply to all objects in the bucket.

Enter Lifecycle Rule name

Select Apply to all objects in

### Lifecycle rule actions

Choose the actions you want this rule to perform.

- ☒ Transition current versions of objects between storage classes  
This action will move current versions.
- ☒ Transition noncurrent versions of objects between storage classes  
This action will move noncurrent versions.
- ☒ Expire current versions of objects
- ☒ Permanently delete noncurrent versions of objects
- ☐ Delete expired object delete markers or incomplete multipart uploads  
These actions are not supported when filtering by object tags or object size.

#### ⚠ Transitions are charged per request

For a lifecycle transition action, each request corresponds to an object transition. For details on lifecycle transition pricing, see requests pricing info on the [Storage & requests](#) tab of the [Amazon S3 pricing page](#).

☐ I acknowledge that this lifecycle rule will incur a transition cost per request

<https://www.youtube.com>

Select this

## Transition current versions of objects between storage classes

Choose transitions to move current versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects are created and are consecutively applied. [Learn more](#)

### Choose storage class transitions

### Days after object creation

|                                               |     |        |
|-----------------------------------------------|-----|--------|
| Standard-IA                                   | 30  | Remove |
| Intelligent-Tiering                           | 60  | Remove |
| Glacier Instant Retrieval                     | 90  | Remove |
| Glacier Flexible Retrieval (formerly Glacier) | 180 | Remove |
| Glacier Deep Archive                          | 365 | Remove |



Add transitions

Add transition

<https://www.youtube.com/@techwith>

## Transition noncurrent versions of objects between storage classes

Choose transitions to move noncurrent versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects become noncurrent and are consecutively applied. [Learn more](#)

### Choose storage class transitions

### Days after objects become noncurrent

### Number of newer versions to retain - Optional

Remove

Standard-IA

Number of days

Number of versions

No minimum storage duration

One Zone-IA

Recreateable, infrequently accessed data (once a month) with milliseconds access

30 days minimum storage duration

Glacier Instant Retrieval

Long-lived archive data accessed once a quarter with instant retrieval in milliseconds

90 days minimum storage duration

Glacier Flexible Retrieval (formerly Glacier)

Long-lived archive data accessed once a year with retrieval times in hours

90 days minimum storage duration

Glacier Flexible Retrieval (formerly Glacier)

Current version of an object is retained as a noncurrent version. For non-versioned buckets, Amazon S3



Select Glacier flexible

## Transition noncurrent versions of objects between storage classes

Choose transitions to move noncurrent versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects become noncurrent and are consecutively applied. [Learn more](#)

### Choose storage class transitions

Glacier Flexible Retrieval (formerl...

### Days after objects become noncurrent

90

### Number of newer versions to retain -

Optional

Number of versions

Can be 1 to 100 versions. All other noncurrent versions will be moved.

Remove

Add transition

Enter 90 days

## Expire current versions of objects

For version-enabled buckets, Amazon S3 adds a delete marker and the current version of an object is retained as a noncurrent version. For non-versioned buckets, Amazon S3 permanently removes the object. [Learn more](#)

### Days after object creation

<https://www.youtube.com/@techv>



Search

[Alt+S]



Asia Pacific (Mumbai)

aws-twinkle-v4 (2355-6299-1793)

twinkle

## Expire current versions of objects

For version-enabled buckets, Amazon S3 adds a delete marker and the current version of an object is retained as a noncurrent version. For non-versioned buckets, Amazon S3 permanently removes the object. [Learn more](#)

### Days after object creation

700

Enter days duration now I am giving

## Permanently delete noncurrent versions of objects

Choose when Amazon S3 permanently deletes specified noncurrent versions of objects. [Learn more](#)

### Days after objects become noncurrent

700

### Number of newer versions to retain - Optional

Number of versions

Can be 1 to 100 versions. All other noncurrent versions will be moved.

Enter days duration giving 700 days

## Review transition and expiration actions

If you want the rule to apply to specific objects, you must use a filter to identify those objects. Choose "Limit the scope of this rule using one or more filters". [Learn more](#)

☒ I acknowledge that this rule will apply to all objects in the bucket.

### Lifecycle rule actions

Choose the actions you want this rule to perform.

- ☒ Transition current versions of objects between storage classes  
This action will move current versions.
- ☒ Transition noncurrent versions of objects between storage classes  
This action will move noncurrent versions.
- ☒ Expire current versions of objects
- ☒ Permanently delete noncurrent versions of objects
- ☐ Delete expired object delete markers or incomplete multipart uploads  
These actions are not supported when filtering by object tags or object size.

C h e c k   t h e s e

### ⚠ Transitions are charged per request

For a lifecycle transition action, each request corresponds to an object transition. For details on lifecycle transition pricing, see requests pricing info on the requests pricing info on the **Storage & requests** tab of the [Amazon S3 pricing page](#).

- ☒ I acknowledge that this lifecycle rule will incur a transition cost per request
- ☒ You must select the checkbox to acknowledge that you understand the costs associated with transitions.



#### Day 180

- Objects move to Glacier Flexible Retrieval (formerly Glacier)



#### Day 365

- Objects move to Glacier Deep Archive



#### Day 700

- Objects expire

<https://www.youtube.com/@t>

C l i c k   o n    create rule

# Lifecycle Rule is created now

Amazon S3 > Buckets > s3-storage-classes-demo-twinkle > Lifecycle configuration

✓ The rule "DemoRule" has been successfully added and the lifecycle configuration has been updated  
It may take some time for the configuration to be updated. Refresh the lifecycle rules list if changes to the configuration aren't displayed.

## Lifecycle configuration

To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration is a set of rules that define actions that Amazon S3 applies to a group of objects. Lifecycle rules run once per day.

**Default minimum object size for transitions**  
All storage classes 128K

## Lifecycle rules (1)

[View details](#)[Edit](#)[Delete](#)[Actions ▼](#)[Create lifecycle rule](#)

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. [Learn more](#)


< 1 > ⚙

| Lifecycle rule name ▼                          | Status ▼  | Scope ▼       | Current version a... ▼     | Noncurrent versi... ▼        | Expired object de... ▼ | Incomplete multipar... ▼ |
|------------------------------------------------|-----------|---------------|----------------------------|------------------------------|------------------------|--------------------------|
| <input type="radio"/> <a href="#">DemoRule</a> | ✓ Enabled | Entire bucket | Transition to Standard-IA, | Transition to Glacier Flexit | -                      | -                        |

<https://www.youtube.co>

# S3 – Requester Pays


- ▶ In general, bucket owners pay all Amazon S3 storage and transfer costs
- ▶ With Requester Pays buckets, the requester instead of the bucket owner pays the data download costs
- ▶ Helpful when you have large data sets
- ▶ The requester must be authenticated in AWS (cannot be anonymous)

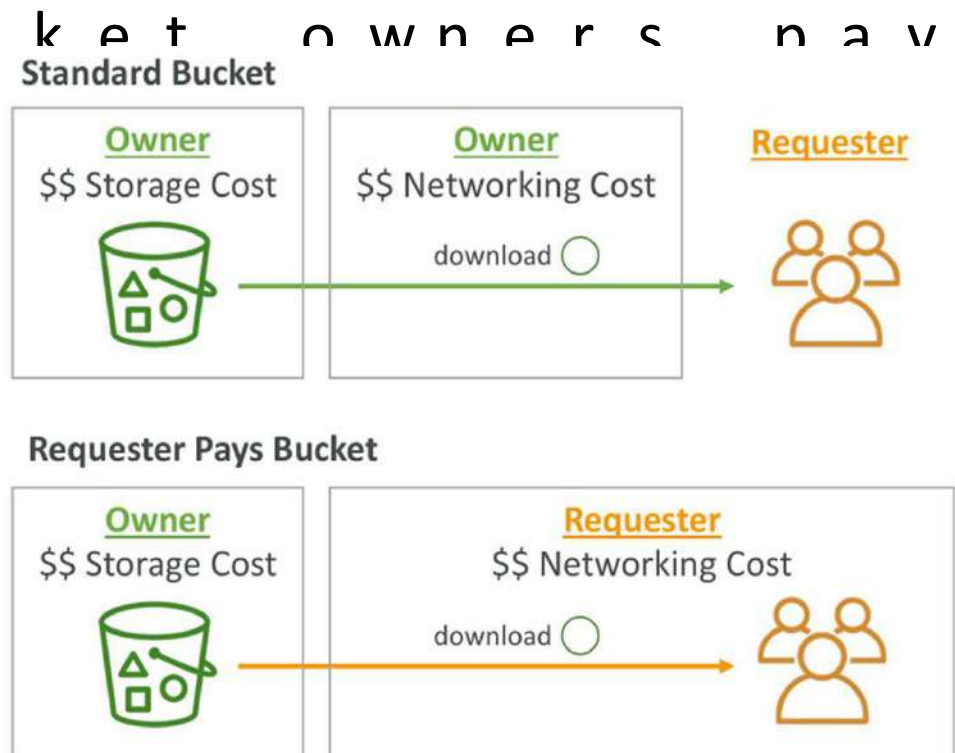


<https://www.youtube.com>

# S3 Event Notifications

- ▶ S3 : O b j e c t C r e a t e  
S3 : O b j e c t R e m o v e  
S3 : O b j e c t R e s t o r
- ▶ O b j e c t n a m e f i l  
( \* . j p g )
- ▶ U s e c a s e : g e n e r  
i m a g e s u p l o a d e d
- ▶ C a n c r e a t e a s n  
d e s i r e d
- ▶ S3 e v e n t n o t i f i  
d e l i v e r e v e n t s  
s o m e t i m e s t a k e

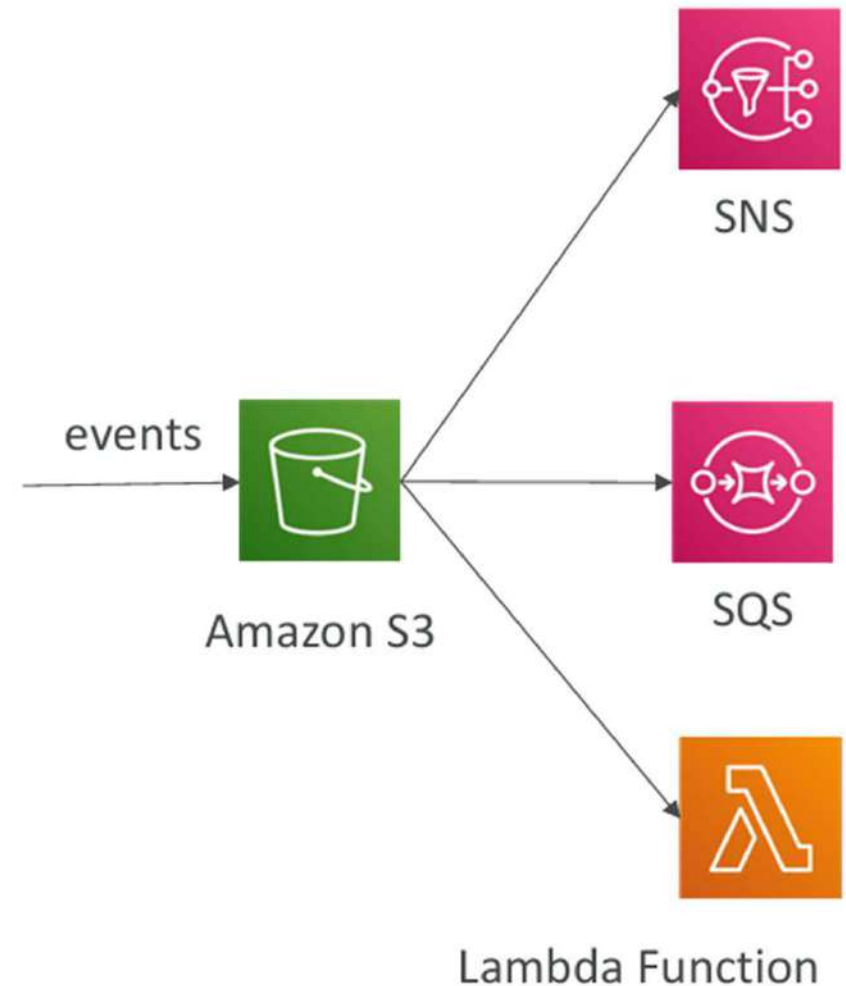


# S3 Event Notifications – IAM Permissions

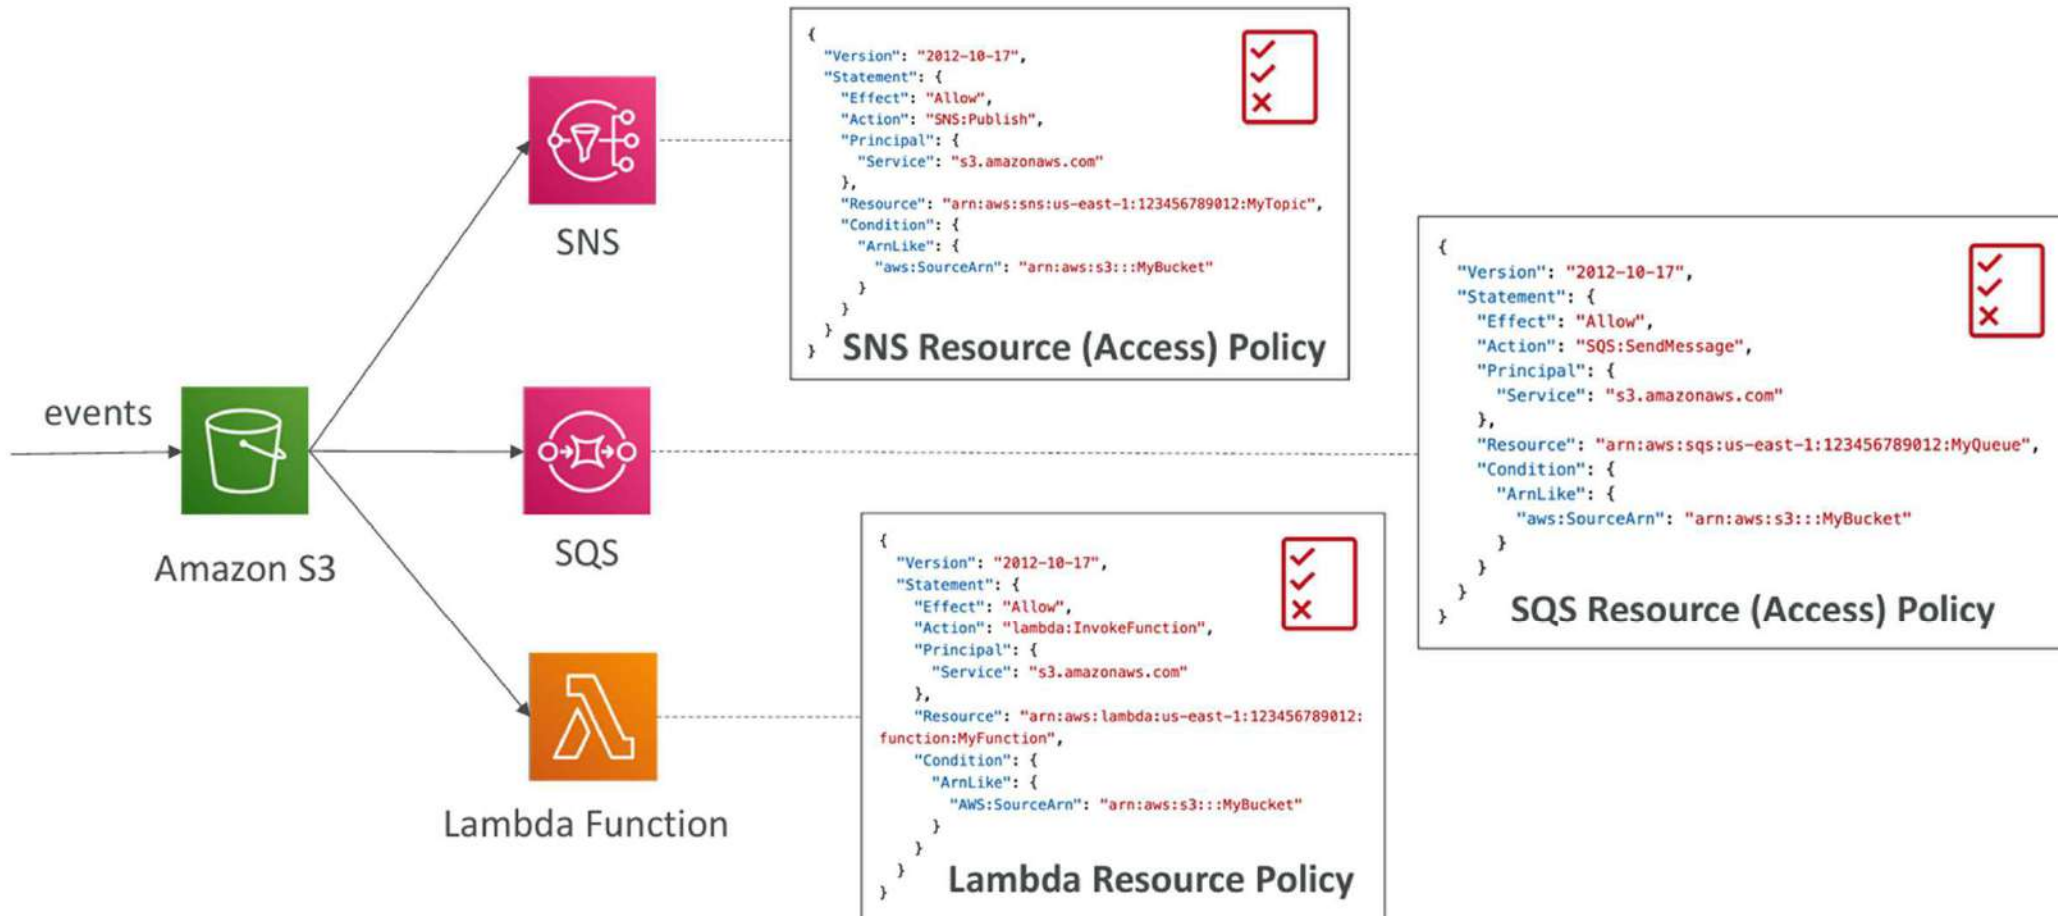

<https://www.youtube.co>

# S3 Event Notifications with Amazon EventBridge

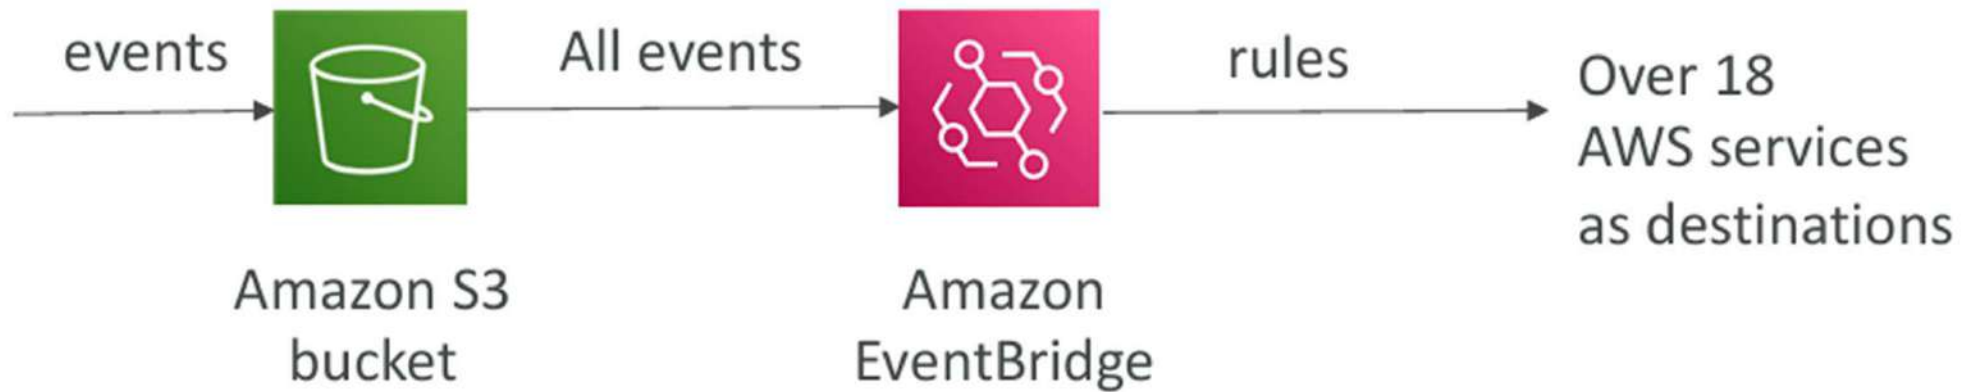

- Advanced object filters (e.g., prefix, suffix, size, name...)
- Multiple destinations, Firehose...
- Event Bridge can archive, replay, and deliver

<https://www.youtube.com>

# S3 Event Notifications Hands On

► Go to [aws.amazon.com/s3](https://aws.amazon.com/s3)

The screenshot shows the Amazon S3 console homepage. On the left is a navigation sidebar with links like 'General purpose buckets', 'Directory buckets', 'Table buckets', 'Vector buckets', 'Access Grants', 'Access Points (General Purpose Buckets, FSx file systems)', 'Access Points (Directory Buckets)', 'Object Lambda Access Points', 'Multi-Region Access Points', 'Batch Operations', 'IAM Access Analyzer for S3', 'Block Public Access settings for this account', and 'Storage Lens'. The main content area has a dark header with 'Storage' and 'Amazon S3' text, followed by 'Store and retrieve any amount of data from anywhere'. Below this is a 'How it works' section with a video player showing 'Introduction to Amazon S3 | Amazon Web Serv...'. On the right, there are two white boxes: 'Create a bucket' and 'Pricing'. An orange arrow points from the text 'Click on create Bucket' to the 'Create bucket' button in the 'Create a bucket' box. The 'Pricing' box contains text about fees and a link to the 'Simple Monthly Calculator'.

**Storage**

## Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

**Create a bucket**

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

**Create bucket**

**Pricing**

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS Simple Monthly Calculator](#)

[View pricing details](#)

Click on create Bucket

<https://www.youtube.com>

## General configuration

### AWS Region

Asia Pacific (Mumbai) ap-south-1

### Bucket type [Info](#)

- ☒ **General purpose**  
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

- ☐ **Directory**  
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

### Bucket name [Info](#)

demo-twinkle-event-notifications

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

### Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Enter bucket name

## Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

- ☒ **ACLs disabled (recommended)**

- ☐ **ACLs enabled**

## Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

### Encryption type [Info](#)

- ☒ **Server-side encryption with Amazon S3 managed keys (SSE-S3)**
- ☐ **Server-side encryption with AWS Key Management Service keys (SSE-KMS)**
- ☐ **Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)**  
Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

### Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

- ☐ **Disable**
- ☒ **Enable**

### Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create bucket

Create bucket

Amazon S3 > Buckets

Successfully created bucket "demo-twinkle-event-notifications"

To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (6)

Info

Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

| Name                                                     | AWS Region                       | Creation date                         |
|----------------------------------------------------------|----------------------------------|---------------------------------------|
| <a href="#">demo-twinkle-event-notifications</a>         | Asia Pacific (Mumbai) ap-south-1 | August 10, 2025, 12:37:08 (UTC+05:30) |
| <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1 | August 8, 2025, 14:47:26 (UTC+05:30)  |
| <a href="#">s3-storage-classes-demo-twinkle</a>          | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 18:10:54 (UTC+05:30)  |
| <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 17:15:58 (UTC+05:30)  |

Account snapshot

Info

View dashboard

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

External access summary - new

Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Amazon S3 > Buckets > demo-twinkle-event-notifications

demo-twinkle-event-notifications

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (0)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental units stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

| Name                                       | Type | Last modified | Size | Storage class |
|--------------------------------------------|------|---------------|------|---------------|
| No objects                                 |      |               |      |               |
| You don't have any objects in this bucket. |      |               |      |               |

Click on properties

<https://www.youtube.com/>

S c r o l l  d o w n

Bucket overview

|                                                       |                                                                                                                                                                     |                                                               |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| <b>AWS Region</b><br>Asia Pacific (Mumbai) ap-south-1 | <b>Amazon Resource Name (ARN)</b><br> arn:aws:s3::demo-twinkle-event-notifications | <b>Creation date</b><br>August 10, 2025, 12:37:08 (UTC+05:30) |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|

Bucket Versioning [Edit](#)

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

**Bucket Versioning**  
Disabled

**Multi-factor authentication (MFA) delete**  
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#)  
Disabled

<https://www.youtube.com/@te>

Event notifications (0) [Edit](#) [Delete](#) [Create event notification](#)

Send a notification when specific events occur in your bucket. [Learn more](#)

|                                                                                    | Name | Event types | Filters | Destination type | Destination |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|---------|------------------|-------------|
| No event notifications<br>Choose <a href="#">Create event notification</a> to be notified when a specific event occurs.<br><a href="#">Create event notification</a> |      |             |         |                  |             |

Amazon EventBridge [Edit](#)

For additional capabilities, use Amazon EventBridge to build event-driven applications at scale using S3 event notifications. [Learn more](#) or [see EventBridge pricing](#)

**Send notifications to Amazon EventBridge for all events in this bucket**  
Off

Transfer acceleration [Edit](#)

Use an accelerated endpoint for faster data transfers. [Learn more](#)

Transfer acceleration

C l i c k  o n

# Edit Amazon EventBridge [Info](#)

## Amazon EventBridge

For additional capabilities, use Amazon EventBridge to build event-driven applications at scale using S3 event notifications. [Learn more](#) or [see EventBridge pricing](#)

Send notifications to Amazon EventBridge for all events in this bucket

- ☐ Off
- ☒ On



Select On

After that  save changes

<https://www.youtube.com/@techwitt>

Successfully edited event notifications.  
Operation successfully completed.

## Event notifications (0)

Send a notification when specific events occur in your bucket. [Learn more](#)

Edit

Delete

Create event notification

| Name | Event types | Filters | Destination type | Destination |
|------|-------------|---------|------------------|-------------|
|------|-------------|---------|------------------|-------------|

No event notifications

Choose **Create event notification** to be notified when a specific event occurs.

Click on  create event notification

## Amazon EventBridge

For additional capabilities, use Amazon EventBridge to build event-driven applications at scale using S3 event notifications. [Learn more](#) or [see EventBridge pricing](#)

Send notifications to Amazon EventBridge for all events in this bucket  
On

Edit

## Create event notification [Info](#)

To enable notifications, you must first add a notification configuration that identifies the events you want Amazon S3 to publish and the destinations where you want Amazon S3 to send the notifications.

### General configuration

#### Event name

DemoEventNotification

Event name can contain up to 255 characters.

#### Prefix - optional

Limit the notifications to objects with key starting with specified characters.

images/

#### Suffix - optional

Limit the notifications to objects with key ending with specified characters.

.jpg

Enter the event notification

### Event types

Specify at least one event for which you want to receive notifications. For each group, you can choose an event type for all events, or you can choose one or more individual events.

#### Suffix - optional

Limit the notifications to objects with key ending with specified characters.

.jpg

### Event types

Specify at least one event for which you want to receive notifications. For each group, you can choose an event type for all events, or you can choose one or more individual events.

#### Object creation

- ☒ All object create events  
s3:ObjectCreated:\*

Select this

- ☐ Put  
s3:ObjectCreated:Put
- ☐ Post  
s3:ObjectCreated:Post
- ☐ Copy  
s3:ObjectCreated:Copy
- ☐ Multipart upload completed  
s3:ObjectCreated:CompleteMultipartUpload

#### Object removal

<https://www.youtube.com>

## Destination

Before Amazon S3 can publish messages to a destination, you must grant the Amazon S3 principal the necessary permissions to call the relevant API to publish messages to an SNS topic, an SQS queue, or a Lambda function. [Learn more](#)

### Destination

Choose a destination to publish the event. [Learn more](#)

- ☐ Lambda function  
Run a Lambda function script based on S3 events.
- ☐ SNS topic  
Fanout messages to systems for parallel processing or directly to people.
- ☒ SQS queue  
Send notifications to an SQS queue to be read by a server.

### Specify SQS queue

- ☒ Choose from your SQS queues
- ☐ Enter SQS queue ARN

### SQS queue

Choose SQS queue

Select SQS Queue

<https://www.youtube.com/@techw>

aws

Search: SQS

Services

- Simple Queue Service  
SQS Managed Message Queues
- Service Quotas  
View and manage your AWS service quotas from a central location
- Simple Notification Service  
SNS managed message topics for Pub/Sub

Features

- SMS  
AWS End User Messaging feature
- SQL Server  
Launch Wizard feature

Were these results helpful?

Yes No

Click on S

① SQS fair queues is now available for standard queues.

Automatically manage noisy neighbors in your queues with fair queues, a new feature that limits noisy neighbor impact across all message groups. Add a group identifier to your messages, and SQS re-orders messages to ensure no single tenant impact the time in queue for any other tenants.

Learn more



Application integration

# Amazon SQS

## A message queuing service

Amazon SQS provides queues for high-throughput, system-to-system messaging. You can use queues to decouple heavyweight processes and to buffer and batch work. Amazon SQS stores messages until microservices and serverless applications process them.

### Get started

Learn how to use Amazon SQS by creating a queue, sending a message to the queue, and receiving and processing the message.

Create queue

### Pricing (US)

You can get started with Amazon SQS for free. All customers can make 1 million Amazon SQS requests for free each month.

Click on create queue

### How it works

Amazon SQS > Queues > Create queue

## Create queue

### Details

#### Type

Choose the queue type for your application or cloud infrastructure.

☒ Standard [Info](#)

At-least-once delivery, message ordering isn't preserved

- At-least once delivery
- Best-effort ordering

☐ FIFO [Info](#)

First-in-first-out delivery, message ordering is preserved

- First-in-first-out delivery
- Exactly-once processing

① You can't change the queue type after you create a queue.

#### Name

DemoS3Notification

A queue name is case-sensitive and can have up to 80 characters. You can use alphanumeric characters, hyphens, and underscores ( \_ ).

Enter name of S3 Queue

### Configuration [Info](#)

Set the maximum message size, visibility to other consumers, and message retention.

<https://www.youtube.com/@techwitht>

Amazon SQS > Queues > Create queue

**Dead-letter queue** - Optional [Info](#)  
Send undeliverable messages to a dead-letter queue.

Set this queue to receive undeliverable messages.

☒ Disabled  
☐ Enabled

**Tags** - Optional [Info](#)  
A tag is a label assigned to an AWS resource. Use tags to search and filter your resources or track your AWS costs.

Key  Value - optional  [Remove](#)

[Add new tag](#)  
You can add 49 more tags.

[Create queue](#)

Click on create Queue

Amazon SQS > Queues > DemoS3Notification

You can now send and receive messages.

**DemoS3Notification** [Edit](#) [Delete](#) [Purge](#) [Send and receive messages](#) [Start DLQ redrive](#)

**Details** [Info](#)

|                                               |                                                                                    |                                                                      |
|-----------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| <b>Name</b><br>DemoS3Notification             | <b>Type</b><br>Standard                                                            | <b>ARN</b><br>arn:aws:sqs:ap-south-1:235562991793:DemoS3Notification |
| <b>Encryption</b><br>Amazon SQS key (SSE-SQS) | <b>URL</b><br>https://sqs.ap-south-1.amazonaws.com/235562991793/DemoS3Notification | <b>Dead-letter queue</b><br>-                                        |

[More](#)

[Queue policies](#) | [Monitoring](#) | [SNS subscriptions](#) | [Lambda triggers](#) | [EventBridge Pipes](#) | [Dead-letter queue](#) | [Tagging](#) | [Encryption](#) | [Dead-letter queue redrive tasks](#)

**Access policy** [Info](#)  
Define who can access your queue.

```
{
  "Version": "2012-10-17",
  "Id": "_default_policy_ID",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": "*",
      "Action": "sqs:*",
      "Resource": "*"
    }
  ]
}
```

SQS Created Now

<https://www.youtube.com/@tec>

Click on Edit Access policy

## Access policy Info

Define who can access your queue.

<https://www.youtube.com/@techwitht>

```
1 {
2   "Version": "2012-10-17",
3   "Id": "__default_policy_ID",
4   "Statement": [
5     {
6       "Sid": "__owner_statement",
7       "Effect": "Allow",
8       "Principal": {
9         "AWS": "arn:aws:iam::235562991793:root"
10      },
11      "Action": "SQS:*",
12      "Resource": "arn:aws:sqs:ap-south-1:235562991793:DemoS3Notification"
13    }
14  ]
15 }
```

Policy generator

Click on Policy Generator

## Redrive allow policy Optional Info

Identify which source queues can use this queue as the dead-letter queue.

Select which source queues can use this queue as the dead-letter queue.

- ☒ Disabled  
☐ Enabled



Browser Default

AWS

## AWS Policy Generator

The AWS Policy Generator is a tool that enables you to create policies that control access to [Amazon Web Services \(AWS\)](#) products and resources. For more information about creating policies, [key concepts in Using AWS Identity and Access Management](#).

### Step 1: Select policy type

A Policy is a container for permissions. The different types of policies you can create are an [IAM Policy](#), an [S3 Bucket Policy](#), an [SNS Topic Policy](#), a [VPC Endpoint Policy](#), and an [SQS Queue Policy](#).

#### Type of Policy

IAM Policy

Q |

St

IAM Policy

A s

S3 Bucket Policy

SNS Topic Policy

VPC Endpoint Policy

SQS Queue Policy

Deny

SQS Queue Policy

AWS

Select SQS

A statement is the formal description of a single permission. See [a description of elements](#) that you can use in statements.

Effect

☒ Allow

☐ Deny

Principal

Use a comma to separate multiple values.

Actions

☐ All Actions ("\*")

Amazon Resource Name (ARN)

☐ All Resources ("\*")

ARN should follow the following format: arn:aws:sqs:(Region):(Account):(QueueName). Use a comma to separate multiple values.

► Add conditions (optional)

Enter Star here to allow

After that click here send Message

Copy this & Paste here

Amazon SQS > Queues > DemoS3Notification > Edit

Access policy Info

Define who can access your queue.

```
1 {
2   "Version": "2012-10-17",
3   "Id": "__default_policy_ID",
4   "Statement": [
5     {
6       "Sid": "__owner_statement",
7       "Effect": "Allow",
8       "Principal": {
9         "AWS": "arn:aws:iam::235562991793:root"
10      },
11       "Action": "SQS:*",
12       "Resource": "arn:aws:sqs:ap-south-1:235562991793:DemoS3Notification"
13     }
14   ]
15 }
```

[Policy generator](#)

Redrive allow policy - Optional Info

Identify which source queues can use this queue as the dead-letter queue.

Select which source queues can use this queue as the dead-letter queue.

- ☒ Disabled
- ☐ Enabled

<https://www.youtube.com>

awsolicygen.s3.amazonaws.com/policygen.html

Allow  
☐ Deny

**Principal**

Use a comma to separate multiple values.

**Actions**

☐ All Actions ("\*")

**Amazon Resource Name (ARN)**

☐ All Resources ("\*")

ARN should follow the following format: arn:aws:sqs:\${Region}:\${Account}:\${QueueName}. Use a comma to separate multiple values.

► **Add conditions (optional)**

**Click on Add Statement**

### Step 3: Generate policy

A policy is a document (written in the [Access Policy Language](#)) that acts as a container for one or more statements.

awsolicygen.s3.amazonaws.com/policygen.html

► **Add conditions (optional)**

<https://www.youtube.com/@>

**Statements added (1)**

You added the following statements. Click the button below to Generate a policy.

| Principal(s) | Effect | Action          | Resource(s)                                            | Condition(s) | Remove                                |
|--------------|--------|-----------------|--------------------------------------------------------|--------------|---------------------------------------|
| *            | Allow  | sqs:SendMessage | arn:aws:sqs:ap-south-1:235562991793:DemoS3Notification | None         | <input type="button" value="Remove"/> |

**Step 3: Generate policy**

A policy is a document (written in the [Access Policy Language](#)) that acts as a container for one or more statements.

**Click on Generate Policy**

This AWS Policy Generator is provided for informational purposes only, you are still responsible for your use of Amazon Web Services technologies and ensuring that your use is in compliance with all applicable terms and conditions. This AWS Policy Generator is provided as is without warranty of any kind, whether express, implied, or statutory. This AWS Policy Generator does not modify the applicable terms and conditions governing your use of Amazon Web Services technologies.

©2025. Amazon Web Services or its affiliates. All rights reserved.

aws:policygen.s3.amazonaws.com/policygen.html

Incognito

Add conditions (optional)

Add Statement

Statements added (1)

You added the following statement(s):

| Principal(s) | Effect |
|--------------|--------|
| *            | Allow  |

Step 3: Generate policy

A policy is a document (written in JSON) that defines permissions for an AWS resource.

Generate Policy

This AWS Policy Generator is provided for informational purposes only, you are still responsible for your use of Amazon services and technologies and ensuring that your use is in compliance with all applicable terms and conditions. This AWS Policy Generator does not modify the

### Policy JSON Document

Click below to edit. To save the policy, copy the text below to a text editor. Changes made below will **not be reflected in the policy generator tool**.

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": [
9         "sqs:SendMessage"
10      ],
11      "Resource": "arn:aws:sqs:ap-south-1:235562991793:DemoS3Notification"
12    }
13  ]
14 }
```

1:1 JSON

Close Copy Policy

Click on copy policy

aws

Search [Alt+S]

Amazon SQS > Queues > DemoS3Notification > Edit

An encryption key that Amazon SQS creates, manages, and uses for you.

☐ AWS Key Management Service key (SSE-KMS)

An encryption key protected by AWS Key Management Service (AWS KMS).

### Access policy

Define who can access your queue.

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": [
9         "sqs:SendMessage"
10      ],
11      "Resource": "arn:aws:sqs:ap-south-1:235562991793:DemoS3Notification"
12    }
13  ]
14 }
```

Policy generator

Paste here

<https://www.youtube.com>

Amazon SQS > Queues > DemoS3Notification > Edit

Identify which source queues can use this queue as the dead-letter queue.

Select which source queues can use this queue as the dead-letter queue.

☒ Disabled  
☐ Enabled

**Dead-letter queue** - Optional [Info](#)

Send undeliverable messages to a dead-letter queue.

Set this queue to receive undeliverable messages.

☒ Disabled  
☐ Enabled

**Tags** - Optional [Info](#)

A tag is a label assigned to an AWS resource. Use tags to search and filter your resources or track your AWS costs.

No tags associated with this queue.

[Add new tag](#)

You can add 50 more tags.

Click on save

## Create event notification [Info](#)

To enable notifications, you must first add a notification configuration that identifies the events you want Amazon S3 to publish and the destinations where you want Amazon S3 to send the notifications.

Loading



Go to event notification

<https://www.youtube.com/>

## Create event notification [info](#)

To enable notifications, you must first add a notification configuration that identifies the events you want Amazon S3 to publish and the destinations where you want Amazon S3 to send the notifications.

### General configuration

#### Event name

DemoEventNotification

Event name can contain up to 255 characters.

#### Prefix - optional

Limit the notifications to objects with key starting with specified characters.

images/

#### Suffix - optional

Limit the notifications to objects with key ending with specified characters.

.jpg



A f t e r   r e f r e s h   e n t e

### Event types

Specify at least one event for which you want to receive notifications. For each group, you can choose an event type for all events, or you can choose one or more individual events.

#### Object creation

☐ All object create events

☐ Put

<https://www.youtube.com/@techwith>

Specify at least one event for which you want to receive notifications. For each group, you can choose an event type for all events, or you can choose one or more individual events.

#### Object creation

☒ All object create events  
s3:ObjectCreated:\*



S e l e c t   t h i s

☐ Put  
s3:ObjectCreated:Put

☐ Post  
s3:ObjectCreated:Post

☐ Copy  
s3:ObjectCreated:Copy

☐ Multipart upload completed  
s3:ObjectCreated:CompleteMultipartUpload

#### Object removal

☐ All object removal events  
s3:ObjectRemoved:\*

☐ Permanently deleted  
s3:ObjectRemoved>Delete

☐ Delete marker created  
s3:ObjectRemoved>DeleteMarkerCreated

#### Object restore

☐ All restore object events  
s3:ObjectRestore:\*

☐ Restore initiated  
s3:ObjectRestore:Post

## Destination

Before Amazon S3 can publish messages to a destination, you must grant the Amazon S3 principal the necessary permissions to call the relevant API to publish messages to an SNS topic, an SQS queue, or a Lambda function. [Learn more](#)

### Destination

Choose a destination to publish the event. [Learn more](#)

- ☐ Lambda function  
Run a Lambda function script based on S3 events.
- ☐ SNS topic  
Fanout messages to systems for parallel processing or directly to people.
- ☒ SQS queue  
Send notifications to an SQS queue to be read by a service.

### Specify SQS queue

- ☒ Choose from your SQS queues
- ☐ Enter SQS queue ARN

### SQS queue

Choose SQS queue

Q

DemoS3Notification

Select SQS Queue

After that c  
save changes

Click here

Select this

Cancel

Save changes

Successfully created event notification "DemoEventNotification".  
Operation successfully completed.

## demo-twinkle-event-notifications [Info](#)

Objects [Properties](#) Permissions Metrics Management Access Points

### Bucket overview

AWS Region  
Asia Pacific (Mumbai) ap-south-1

Amazon Resource Name (ARN)  
[arn:aws:s3::demo-twinkle-event-notifications](#)

Creation date  
August 10, 2025, 12:37:08 (UTC+05:30)

### Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning  
Disabled

### Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#)

Created now

<https://www.youtube.com>

# S3 – Baseline Performance



- ▶ Amazon S3 automatically scales latency 100 - 200 ms
- ▶ Your application can achieve PUT / COPY / POST / DELETE or 5,500 second per prefix in a bucket
- ▶ There are no limits to the number of objects per bucket
- ▶ Example (object path => prefix)
- ▶ bucket / folder 1 / sub 1 / file = prefix 1
- ▶ bucket / folder 1 / sub 2 / file = prefix 2
- ▶ bucket / 1 / file = prefix 3
- ▶ bucket / 2 / file => / 1 / => / 2
- ▶ If you spread reads across multiple buckets, you can achieve 22,000 requests per second

<https://www.youtube.com/watch?v=...>

# S3 Performance

## Multipart Upload

- recommended for files > 5 GB
- Can help parallelize uploads (disrupts network transfers)
- Compatible with multi-region transfers

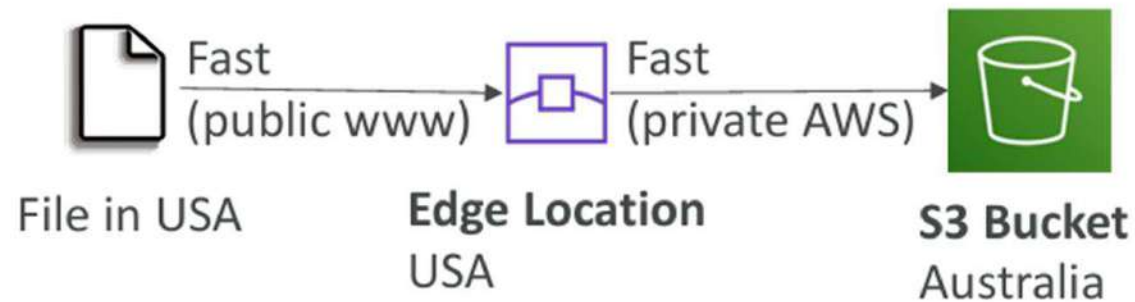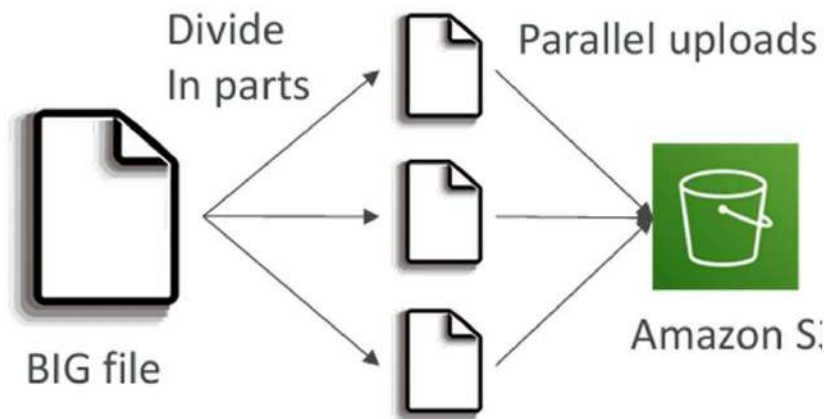


<https://www.youtube.com/watch?v=3aT-ran5e0M>


# S3 Performance – S3 Byte-Range Fetches

- ▶ Parallelize GETs by requesting parts in parallel
- ▶ Better resilience in case of network issues

Can be used to speed up downloads

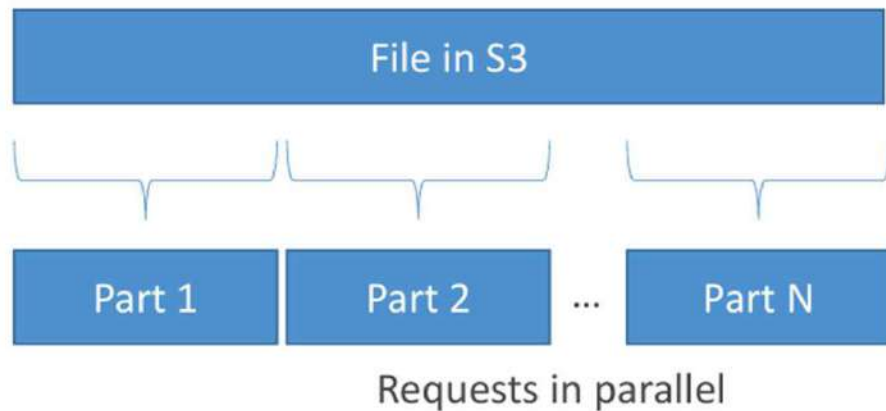


Can be used to retrieve only partial data (for example the head of a file)

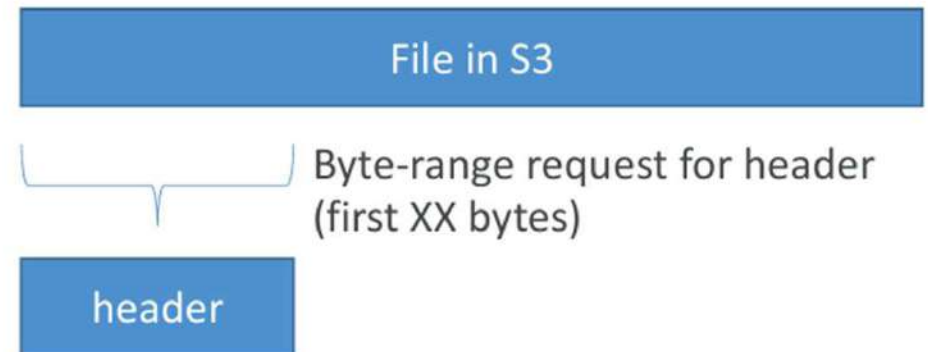

<https://www.youtube.com/watch?v=...>

# S3 Batch Operations

- ▶ Perform bulk operations with a single request
- ❑ Modify object metadata
- ❑ Copy objects between buckets
- ❑ **E n c r y p t u n - e n c r y p t e d**
- ❑ Modify ACLs, tags
- ❑ Restore objects from Glacier
- ❑ Invoke Lambda function on each object
- ▶ A job consists of a batch operation, and optional actions
- ▶ S3 Batch Operations progress, sends completion reports ...
- ▶ You can use S3 Inventory to query

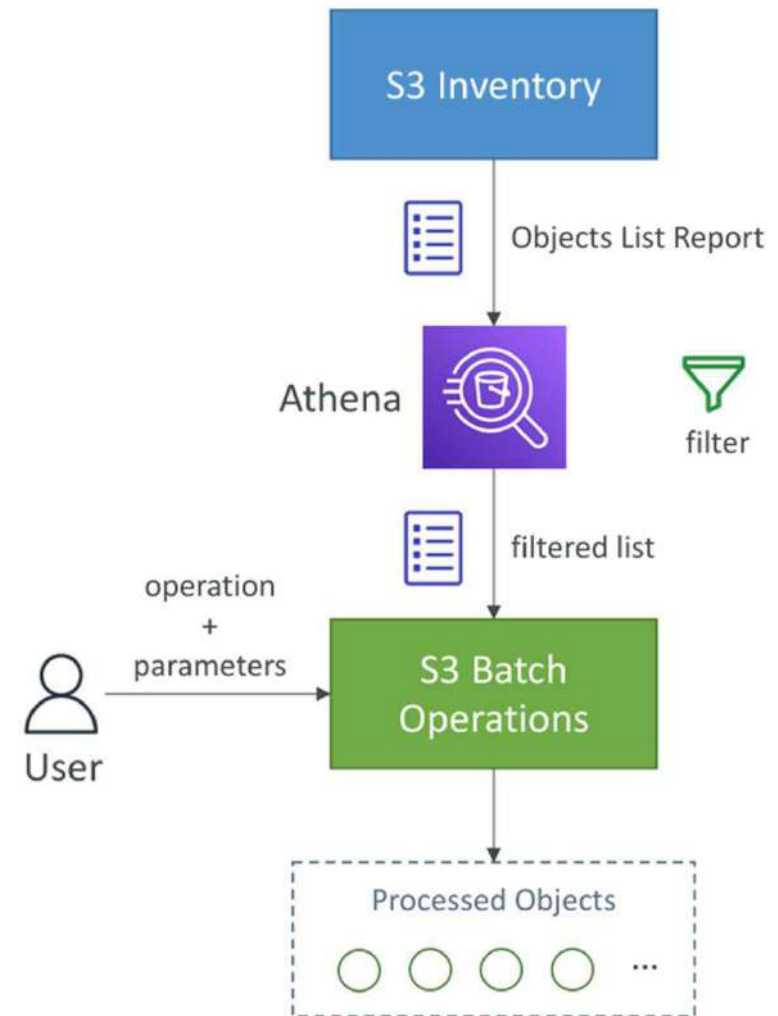


<https://www.youtube.com/watch?v=...>

# S3 – Storage Lens





- ▶ Understand, analyze, and optimize Organization
- ▶ Discover anomalies, identify protection best practices across days usage & activity metrics
- ▶ Aggregate data for Organization buckets, or prefixes
- ▶ Default dashboard or create your own
- ▶ Can be configured to export metrics (Parquet)

<https://www.youtube.com/>

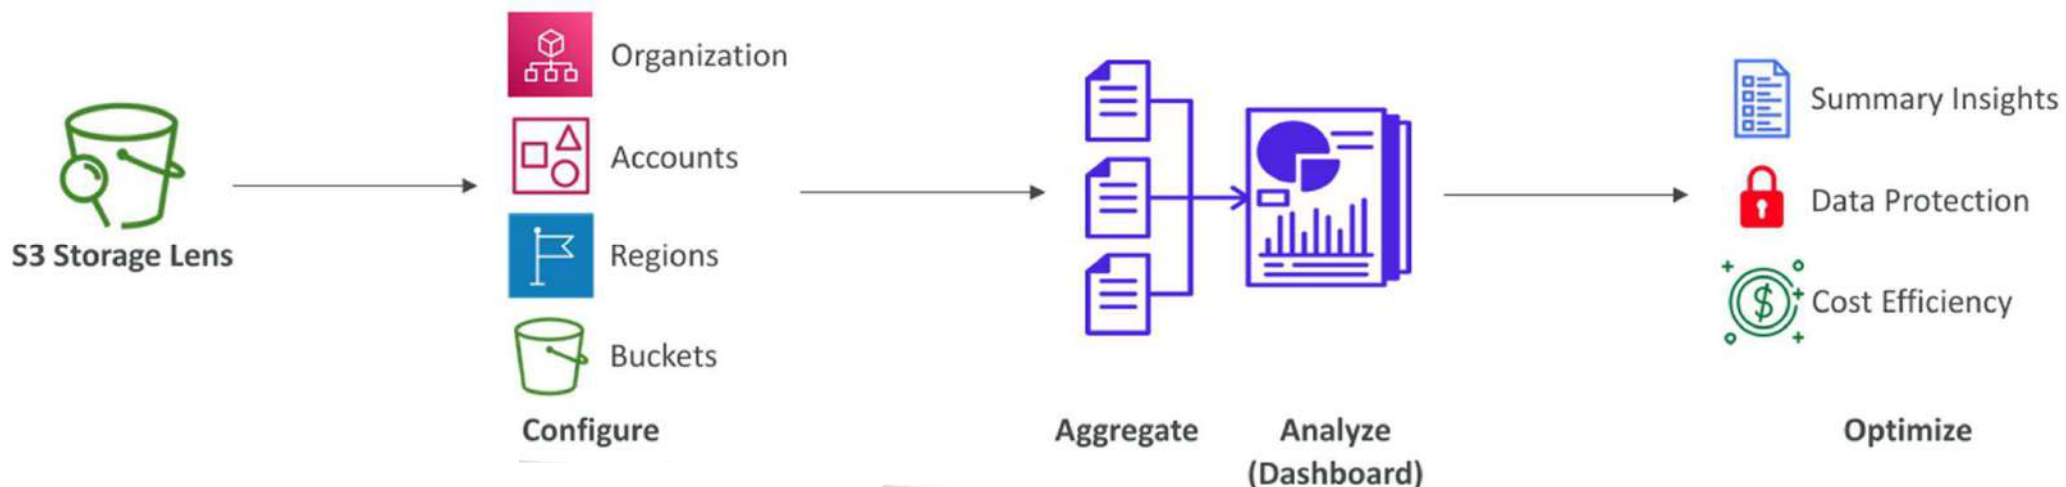

# Storage Lens – Default Dashboard

- ▶ Visualize summarized insights and advanced metrics
- ▶ Default dashboard shows Multi-Account
- ▶ Preconfigured by Amazon S3
- ▶ Can't be deleted, but can be

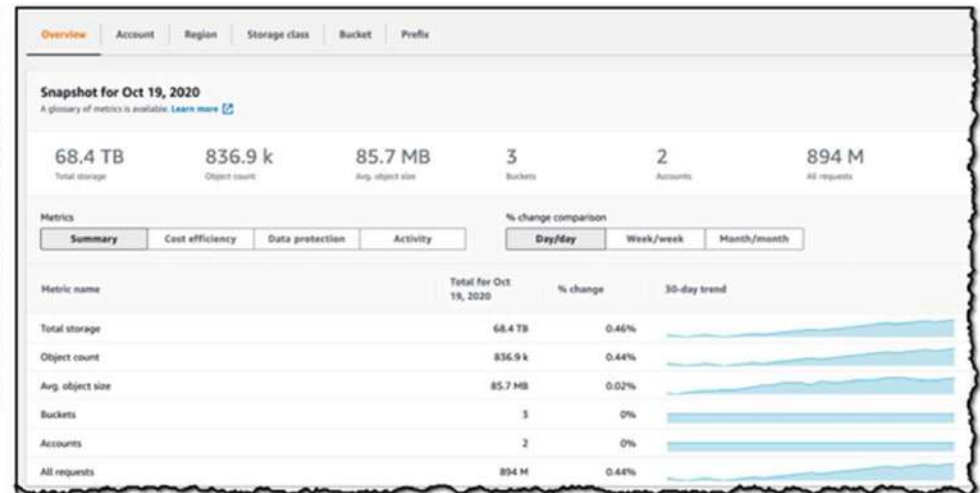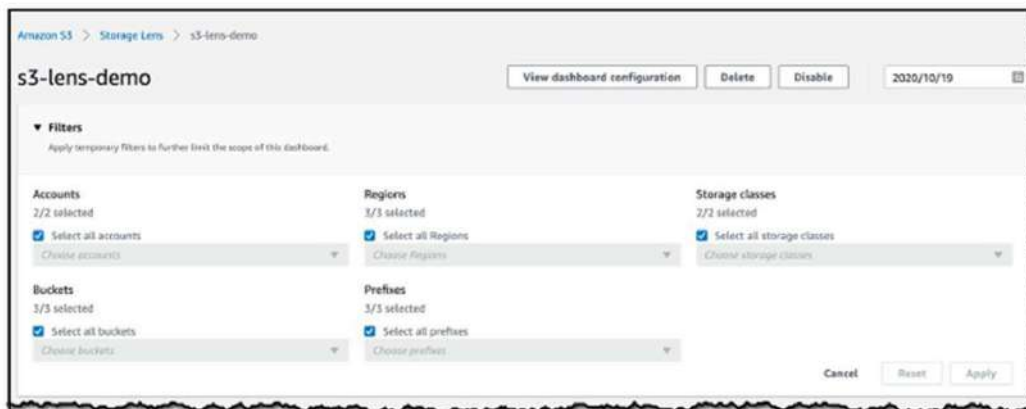

Introducing Amazon S3 Storage Lens  
Visibility Into Object Storage | [AWS](#)

<https://www.youtube.com/watch?v=...>

# Storage Lens – Metrics

## Summary Metrics

- General insights about you
- Storage Bytes, Object Count ...
- Use cases: identify the fa  
buckets and prefixes

## Cost - Optimization Metrics

- Provide insights to manage
- Non Current Version Storage By  
Incomplete Multipart Upload S
- Use cases: identify bucket  
uploaded older than 7 days  
transitioned to lower - cost

<https://www.youtube.com>

# Storage Lens – Metrics

## Data - Protection Metrics

- ▶ Provide insights for data protection
- ▶ Versioning Enabled Bucket Count, M S S E K M S Enabled Bucket Count, Cross
- ▶ Use cases: identify buckets that practices

## Access - management Metrics

- ▶ Provide insights for S3 Object
- ▶ Object Ownership Bucket Owner Enfor
- ▶ Use cases: identify which Objec

## Event Metrics

- ▶ Provide insights for S3 Event N
- ▶ Event Notification Enabled Bucket C  
Event Notifications configured)

<https://www.youtube.com>

# Storage Lens – Metrics

## Performance Metrics

- ▶ Provide insights for S3 Transfer Acceleration Enabled buckets have S3 Transfer Acceleration

## Activity Metrics

- ▶ Provide insights about how
- ▶ All Requests, Get Requests, Bytes Downloaded ...

## Detailed Status Code Metrics

- ▶ Provide insights for HTTP
- ▶ 200 OK Status Count, 403 Forbidden, 404 Not Found Error Count ...

<https://www.youtube.com>

# Storage Lens – Free vs. Paid

## Free Metrics

- ▶ Automatically available
- ▶ Contains around 28
- ▶ Data is available

## Advanced Metrics are

- ▶ Additional paid metrics
- ▶ **Advanced-Metricity**, Cost Optimization, Protection, Status
- ▶ CloudWatch Publish in CloudWatch with
- ▶ Prefix Aggregation or prefix level
- ▶ Data is available

**Metrics selection**  
Choose additional metrics and functionality.

Metrics selection

☐ Free metrics  
Includes usage metrics aggregated at the bucket level. Data is available for queries for 14 days. [Learn more](#)

☒ Advanced metrics and recommendations  
Includes options for additional metrics and aggregations and other advanced capabilities. Data is available for queries for 15 months. See [Storage Lens metrics pricing](#) on the Management & analytics tab.

Advanced metrics and recommendations features [Info](#)

|                                                                                                                                                                                           |                                                                                                                                                                                                                                                         |                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Advanced metrics</b> <input checked="" type="checkbox"/><br>Choose advanced metrics categories to display in the dashboard.<br>Advanced metrics are not available at the prefix level. | <b>CloudWatch publishing</b> <input type="checkbox"/><br>Access metrics in CloudWatch without incurring separate CloudWatch metrics publishing charges. See <a href="#">CloudWatch Pricing</a><br>Prefix-level metrics are not available in CloudWatch. | <b>Prefix aggregation</b> <input type="checkbox"/><br>Generate insights for usage metrics aggregated by top prefixes. |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|

**Advanced metrics categories**  
Specify which advanced metrics categories to display in the dashboard. [Learn more](#)

☒ Activity metrics  
Generate metrics that show details about how your storage is requested, such as requests, bytes uploaded/downloaded, and errors aggregated by bucket.

☐ Detailed status code metrics - new

<https://www.youtube.com>

# Amazon S3 – Security



## Amazon S3 – Object Encryption

You can encrypt objects in S

### ▶ Server-Side Encryption (SSE)

### ▶ Server-Side Encryption with Amazon S3 - M

▶ Encrypts S3 objects using keys h  
Enabled by

### ▶ Server-Side Encryption with KMS

▶ Leverage AWS Key Management Serv  
keys

### ▶ Server-Side Encryption with Cust

▶ When you want to manage your own


### ▶ Client-Side Encryption

▶ It's important to understand whi  
exam

<https://www.youtube.c>


# Amazon S3 Encryption – SSE-S3

- ▶ Encryption using keys handled
- ▶ Object is encrypted server-side
- ▶ Encryption type is AES-256
- ▶ Must set `x-amz-server-side-encryption` header
- ▶ Enabled by default for new buckets

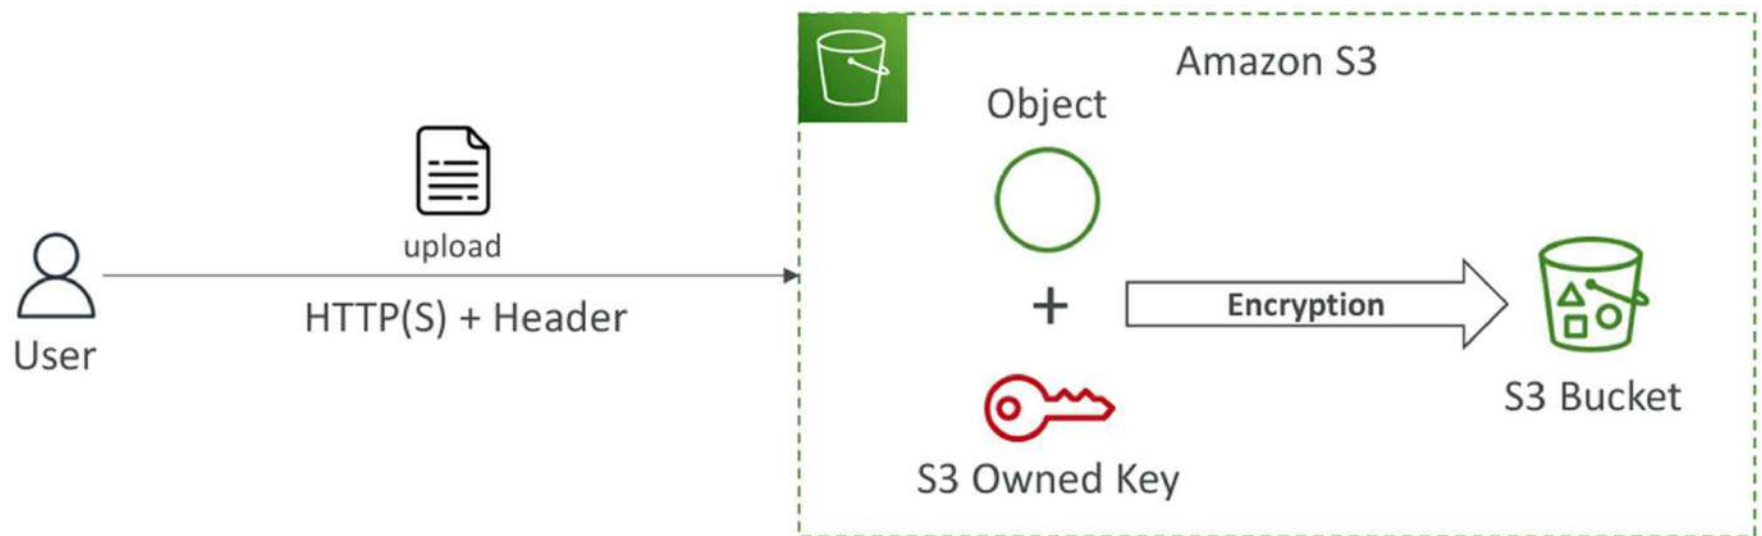

# Amazon S3 Encryption – SSE-KMS

- ▶ Encryption using keys handled (Key Management Service)
- ▶ KMS advantages: user control
- ▶ Object is encrypted server side
- ▶ Must set `tx-headers` - `amazons3` - `server-side-encryption`

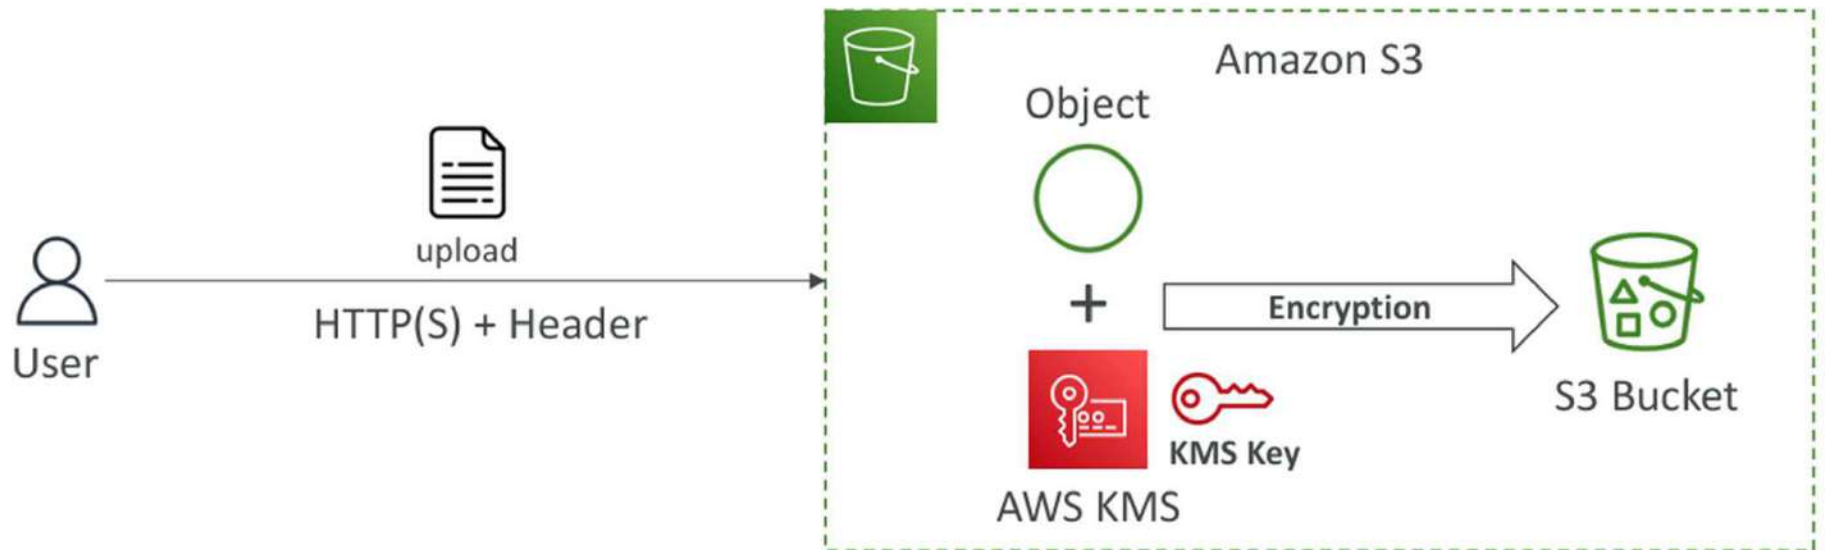

<https://www.youtube.com>

# SSE-KMS Limitation

- ▶ If you use SSE, you will be impacted by the following limitations:
- ▶ When you upload data, you must generate a Data Key.
- ▶ When you download data, you must decrypt the Data Key.
- ▶ Count towards the 5,000 requests per second (5,000 req/s) limit.
- ▶ You can request a higher limit by increasing your Quotas Console.

S3 Bucket



KMS Key



API call

Upload / download  
SSE-KMS




Users

<https://www.youtube.com>


# Amazon S3 Encryption – SSE-C

- ▶ Server-Side Encryption using customer outside of AWS
- ▶ Amazon S3 does NOT store it
- ▶ HTTPS must be used
- ▶ Encryption key must be provided in HTTP request made

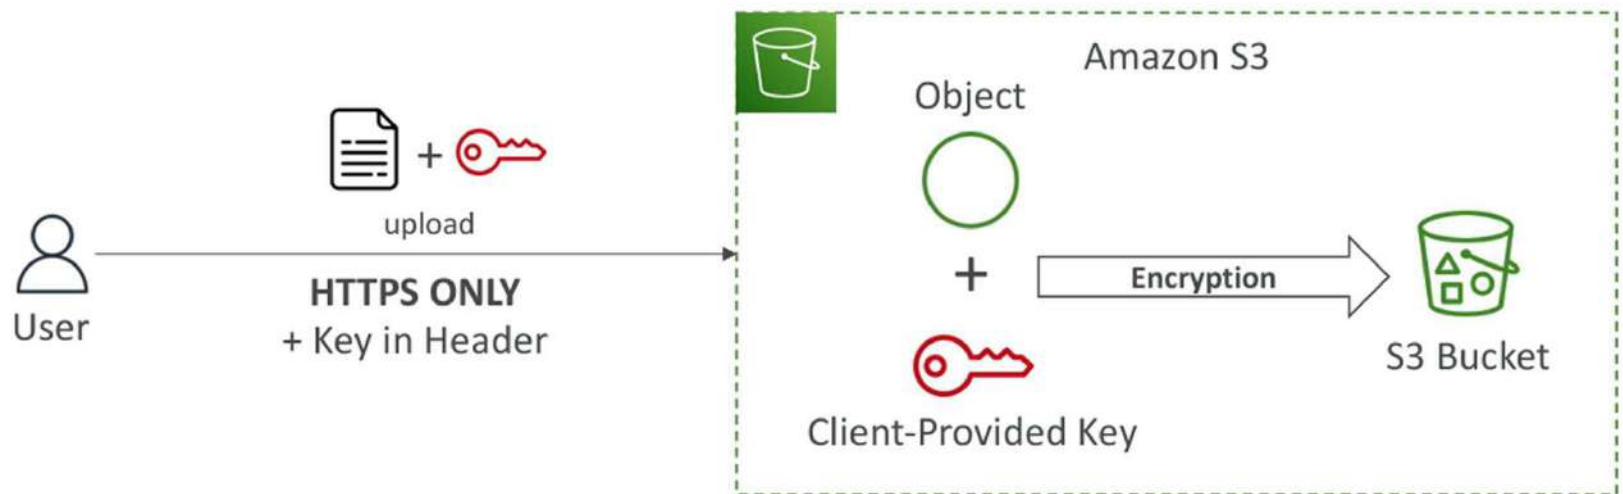

# Amazon S3 Encryption – Client-Side Encryption

- ▶ Use client libraries such as Library
- ▶ Clients must encrypt data before uploading to S3
- ▶ Clients must decrypt data before downloading from Amazon S3
- ▶ Customer fully manages the keys

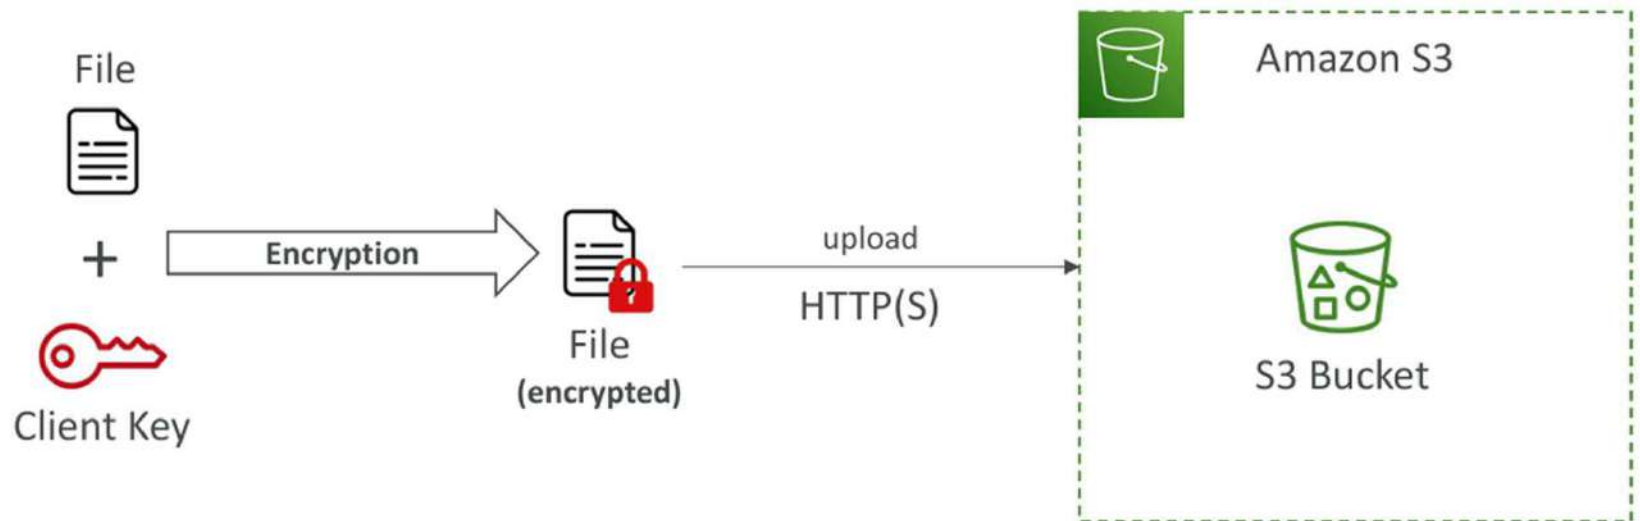

<https://www.youtube.com>

# Amazon S3 – Encryption in transit (SSL/TLS)


- ▶ Encryption in flight is
- ▶ Amazon S3 exposes
- ▶ HTTP Endpoint – no
- ▶ HTTPS Endpoint – e
- ▶ **HTTPS is recommended**
- ▶ **HTTPS is mandatory for S**
- ▶ Most clients would use t



<https://www.youtube.com/>


# Amazon S3 – Force Encryption in Transit

## aws:SecureTransport

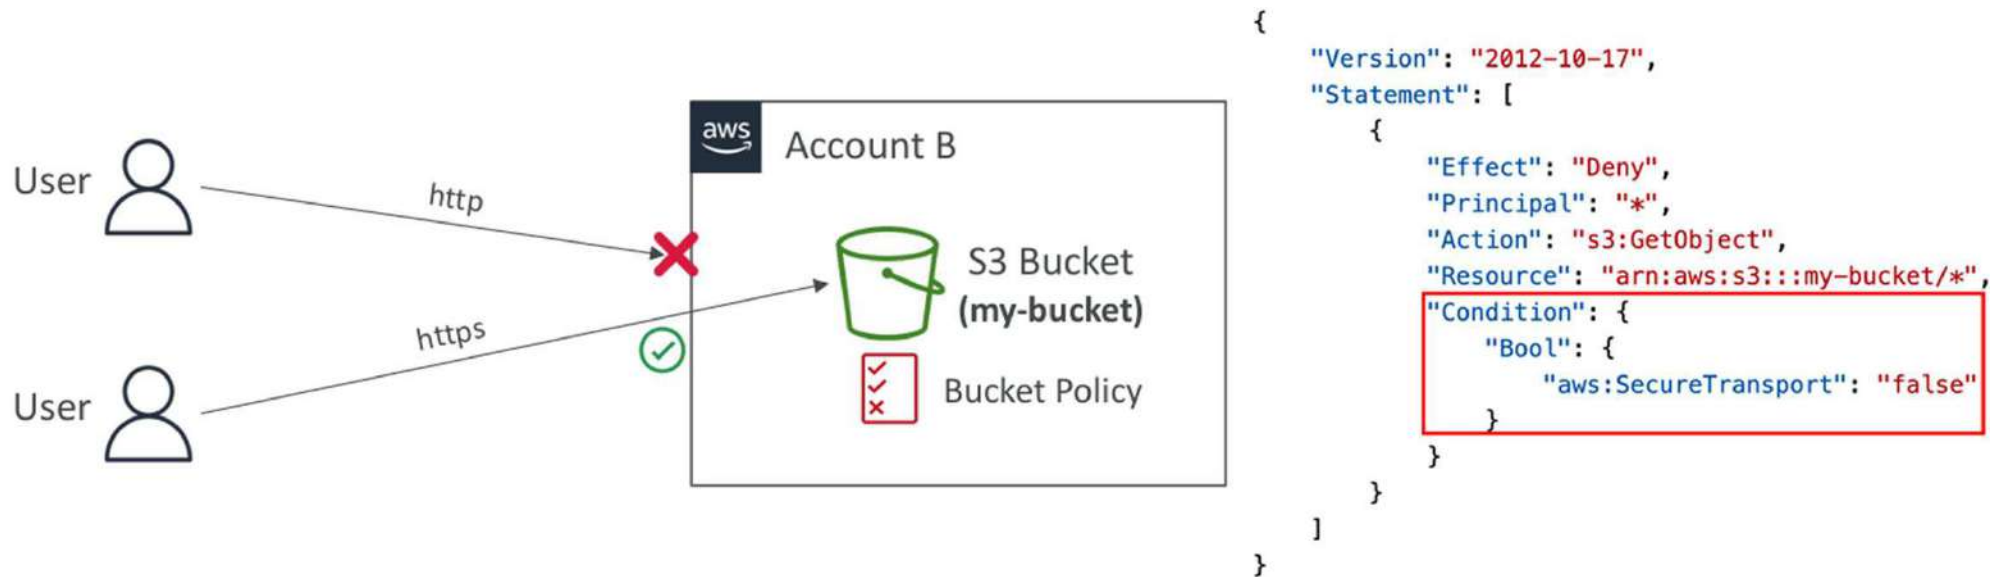

<https://www.youtube.com>

# Amazon S3 Encryption Hands On

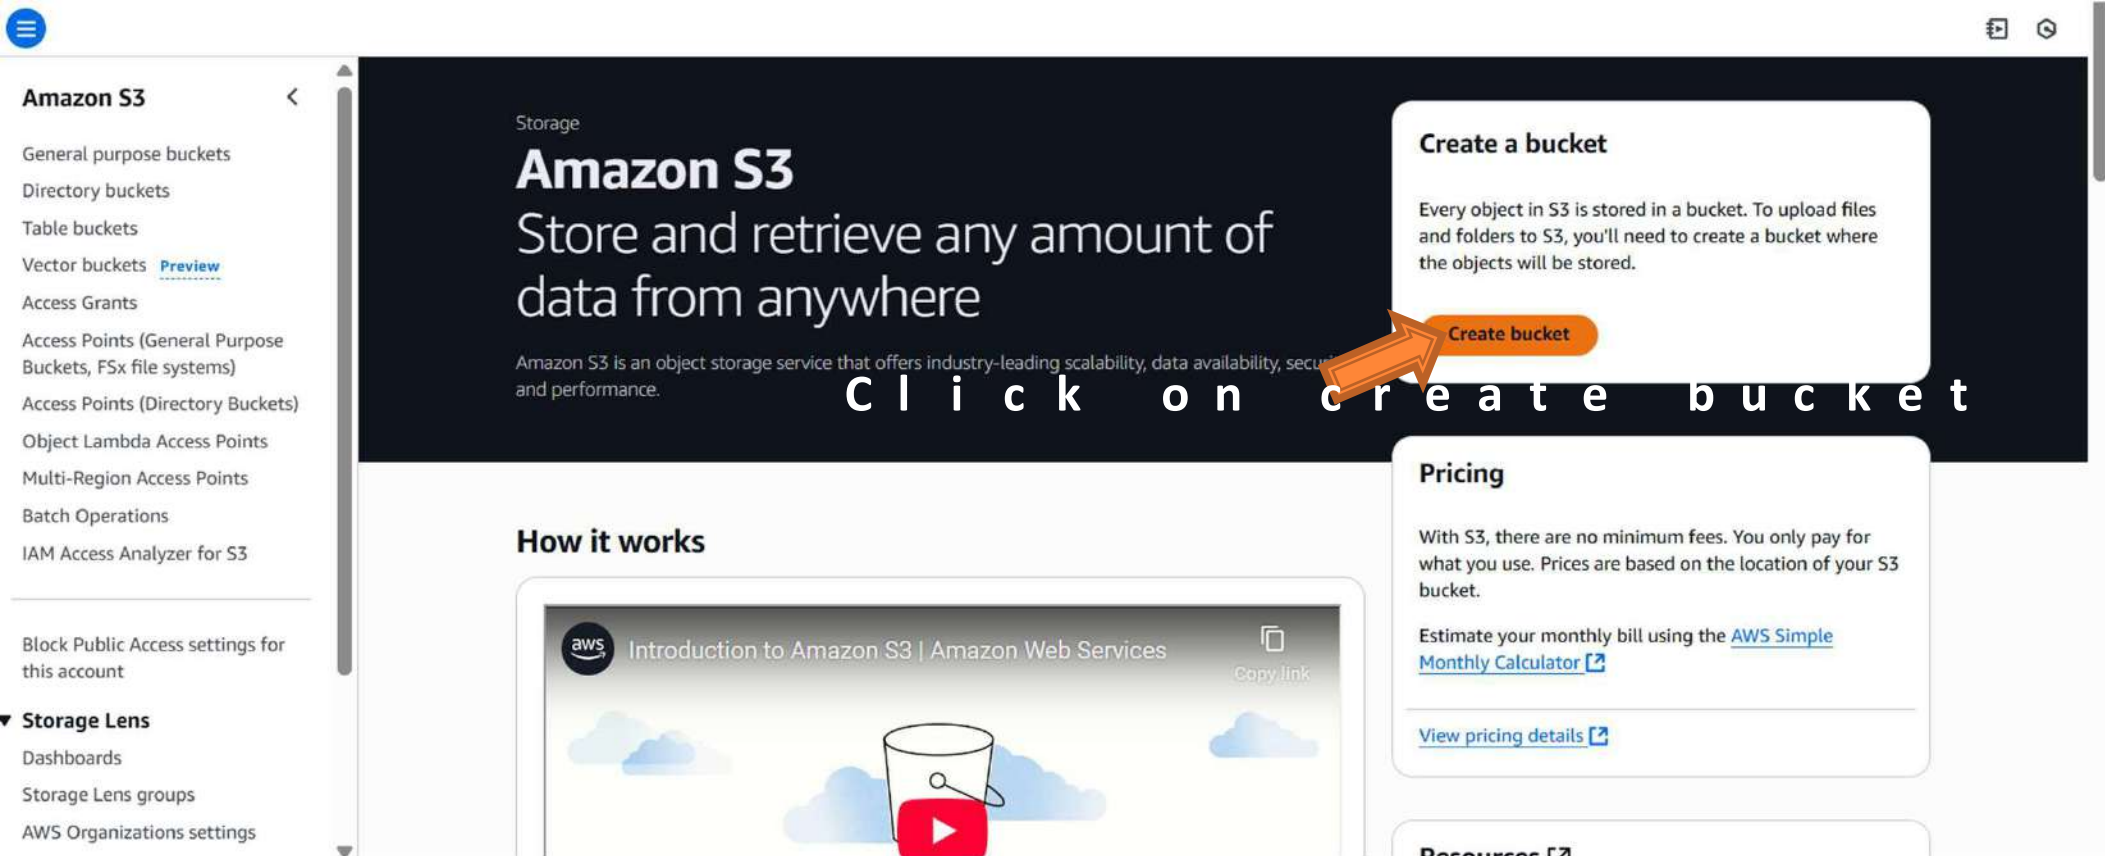

The screenshot shows the Amazon S3 console interface. On the left is a navigation sidebar with the following items: Amazon S3, General purpose buckets, Directory buckets, Table buckets, Vector buckets (with a 'Preview' link), Access Grants, Access Points (General Purpose Buckets, FSx file systems), Access Points (Directory Buckets), Object Lambda Access Points, Multi-Region Access Points, Batch Operations, IAM Access Analyzer for S3, Block Public Access settings for this account, Storage Lens (expanded), Dashboards, Storage Lens groups, and AWS Organizations settings. The main content area has a dark header with 'Storage' and 'Amazon S3' text, followed by the tagline 'Store and retrieve any amount of data from anywhere'. Below this is a description of Amazon S3 as an object storage service. A large orange arrow points from the text 'Click on create bucket' to the 'Create bucket' button. To the right of the main content are two panels: 'Create a bucket' with a description and the 'Create bucket' button, and 'Pricing' with information about fees and a link to the 'AWS Simple Monthly Calculator'. At the bottom of the main content area is a 'How it works' section with a video player showing an 'Introduction to Amazon S3' video.

Storage

## Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

**Create a bucket**

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

[Create bucket](#)

**Pricing**

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS Simple Monthly Calculator](#)

[View pricing details](#)

**How it works**

Introduction to Amazon S3 | Amazon Web Services

[Copy link](#)

<https://www.youtube.com>

## Create bucket [Info](#)

Buckets are containers for data stored in S3.

### General configuration

#### AWS Region

Asia Pacific (Mumbai) ap-south-1

#### Bucket type [Info](#)

☒ **General purpose**  
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**  
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

#### Bucket name [Info](#)

demo-encryption-twinkle

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Allowed characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

#### Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix



E n t e r   b u d g e t   n a m e

### Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

### Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

#### Bucket Versioning

☐ Disable

☒ **Enable**



E n a b l e   b u c k e t   v e r s i o n i n g

### Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

[Add new tag](#)

You can add up to 50 tags.

<https://www.youtube.com>

### Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

#### Encryption type [Info](#)

☒ **Server-side encryption with Amazon S3 managed keys (SSE-S3)**

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

Amazon S3 > Buckets > Create bucket

Add new tag

You can add up to 50 tags.

Default encryption

Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Info

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page.

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS.

☐ Disable

☒ Enable

https://www.youtube.com/@t

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create Bucket

Amazon S3 > Buckets

Successfully created bucket "demo-encryption-twinkle"

To upload files and folders, or to configure additional bucket settings, choose View details.

View details

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (7)

Info

Buckets are containers for data stored in S3.

Find buckets by name

| Name                            | AWS Region                       | Creation date                         |
|---------------------------------|----------------------------------|---------------------------------------|
| demo-encryption-twinkle         | Asia Pacific (Mumbai) ap-south-1 | August 10, 2025, 13:35:11 (UTC+05:30) |
| demo-twinkle-event              | Asia Pacific (Mumbai) ap-south-1 | August 10, 2025, 12:37:08 (UTC+05:30) |
| elasticbeanstalk-ap-south-1-25  | Asia Pacific (Mumbai) ap-south-1 | August 8, 2025, 14:47:26 (UTC+05:30)  |
| s3-storage-classes-demo-twinkle | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 18:10:54 (UTC+05:30)  |
| s3-twinkle-aws-v1               | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 17:15:58 (UTC+05:30)  |
| s3-twinkle-bucket-replica-v1    | Asia Pacific (Mumbai) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30)  |
| twinkle-aws-bucket              | Asia Pacific (Mumbai) ap-south-1 | August 9, 2025, 12:59:03 (UTC+05:30)  |

Account snapshot

Info

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

View dashboard

External access summary - new

Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.



Encryption bucket is cr

# Amazon S3 – Default Encryption vs. Bucket Policies

- ▶ S S E - S 3 encryption is autom stored in S 3 bucket
- ▶ Optionall y, you can “force and refuse any A P I call to encryption headers ( S S E - K M

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Deny",
      "Action": "s3:PutObject",
      "Principal": "*",
      "Resource": "arn:aws:s3::my-bucket/*",
      "Condition": {
        "StringNotEquals": {
          "s3:x-amz-server-side-encryption": "aws:kms"
        }
      }
    }
  ]
}
```

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Deny",
      "Action": "s3:PutObject",
      "Principal": "*",
      "Resource": "arn:aws:s3::my-bucket/*",
      "Condition": {
        "Null": {
          "s3:x-amz-server-side-encryption-customer-algorithm": "true"
        }
      }
    }
  ]
}
```

Note: Bucket Policies are eval


<https://www.youtube.com>

# What is CORS?

- ▶ **C r o s s - O r i g i n R e s o u r c e S h a r**
- ▶ **O r i g i n = s c h e m e ( p r o t o c o l )**
- ▶ **e x a m p l e : h t t p s : / / w w w . e x a m p**  
**f o r H T T P S , 8 0 f o r H T T P )**
- ▶ **W e b B r o w s e d m e c h a n i s m t o a l**  
**o r i g i n s w h i l e v i s i t i n g t h e**
- ▶ **S a m e o r i g i n : h t t p : / / e x a m p l e . c o m / a**  
**h t t p : / / e x a m p l e . c o m**
- ▶ **D i f f e r e n t o r i g i n : h t t p : / / o t h e r . e x a m p l e . c o m**  
**h t t p : / / o t h e r . e x a m p l e . c o m**
- ▶ **T h e r e q u e s t s w o n ' t b e f u l f**  
**a l l o w s f o r t h e C O R S h e a d e r s**  
**A c c e s s - C o n t r o l - A l l o w - O r i g i**

<https://www.youtube.com>


# What is CORS?

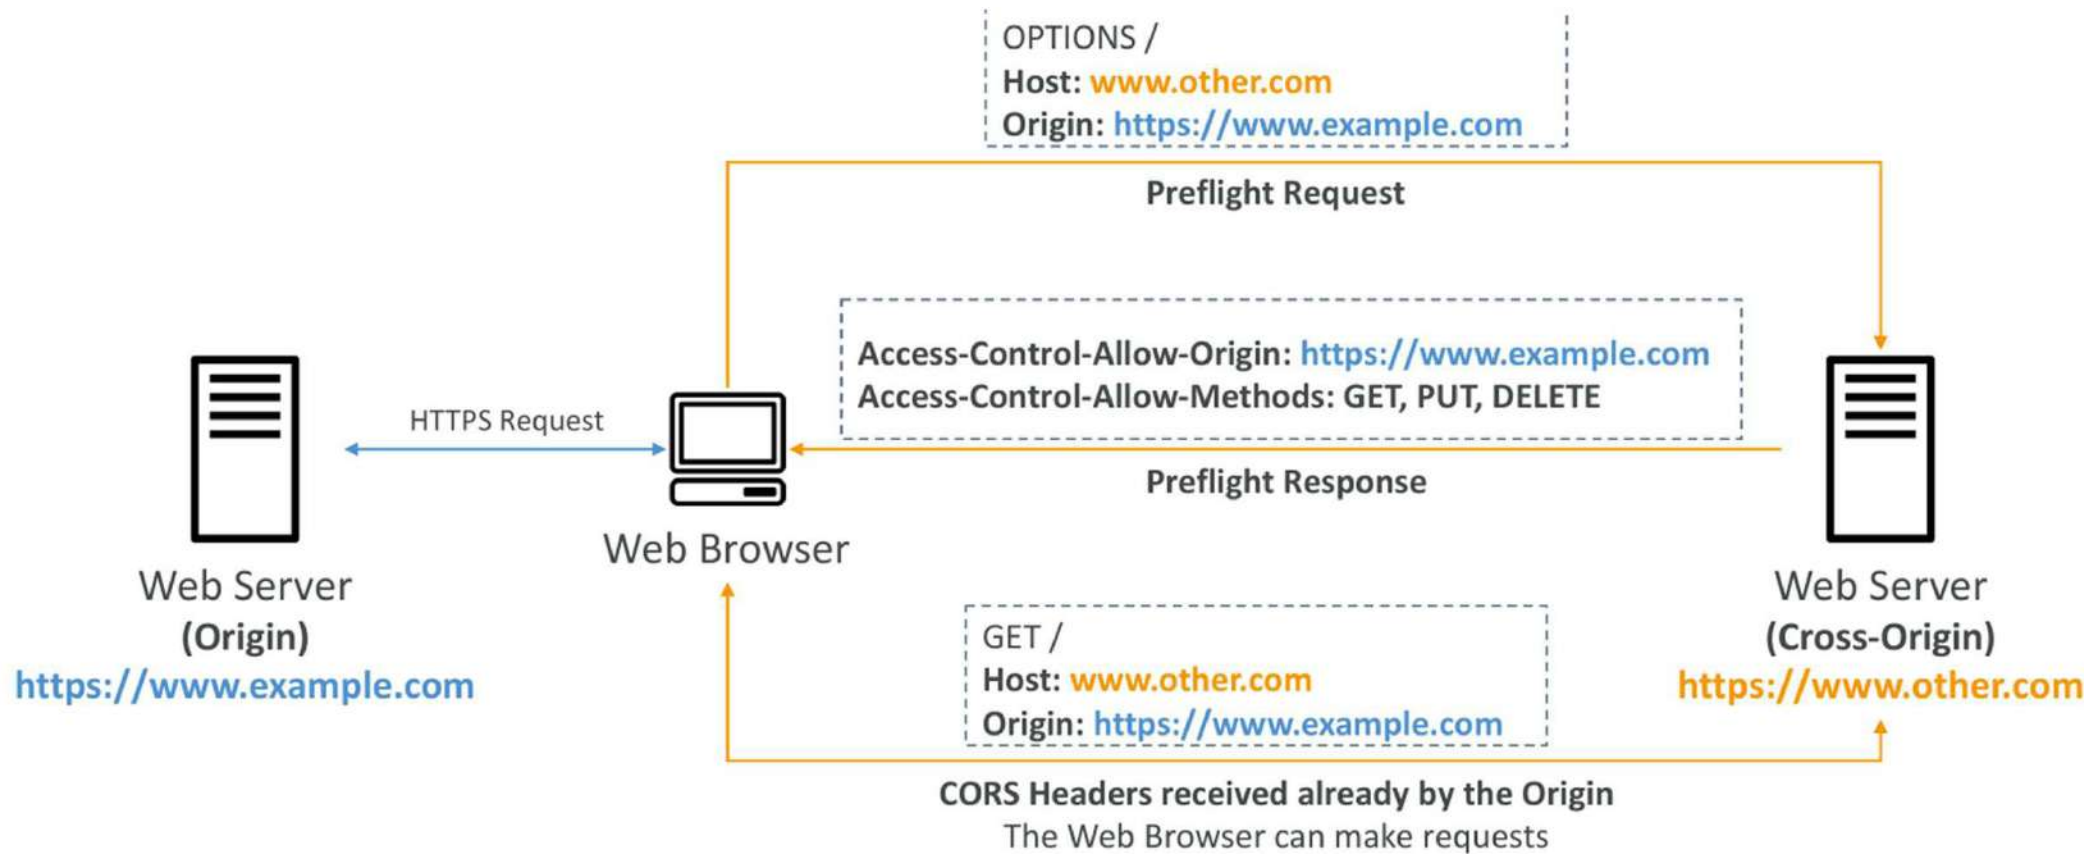

<https://www.youtube.com>

# Amazon S3 – CORS

- ▶ If a client makes a cross bucket, we need to enable
- ▶ It's a popular exam question
- ▶ You can allow for a spec

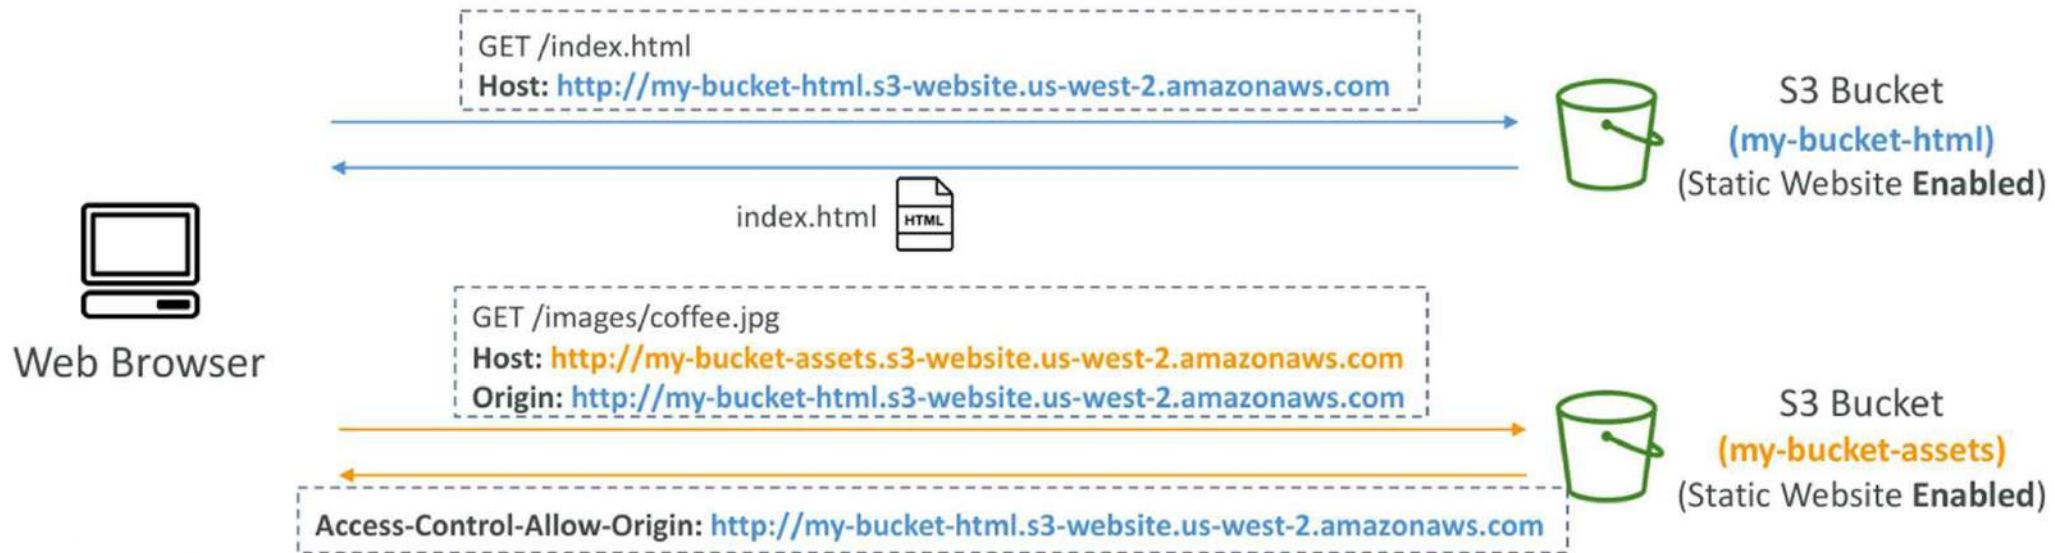

# Amazon S3 CORS Hands On

aws Search [Alt+S] Asia Pacific (Mumbai) aws-twinkle-v4 (2355-6299-1793) twinkle

Amazon S3 > Buckets > twinkle-aws-bucket

twinkle-aws-bucket Info

Go to AWS Bucket

Click on

Objects Properties Permissions Metrics Management Access Points

Objects (3)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

| <input type="checkbox"/> | Name                       | Type | Last modified                        | Size     | Storage class |
|--------------------------|----------------------------|------|--------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30) | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30) | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a> | html | August 9, 2025, 14:29:43 (UTC+05:30) | 597.0 B  | Standard      |

<https://www.youtube.com>

## Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

### Files and folders (0)

All files and folders in this table will be uploaded.

☐ Name ☐ Folder

☐ Type

☐ Size

< 1 >

No files or folders  
You have not chosen any files or folders to upload.

Remove

Add files

Add folder

Click on Add files

### Destination [Info](#)

Destination

[s3://twinkle-aws-bucket](#)

#### Destination details

Bucket settings that impact new objects stored in the specified destination.

<https://www.youtube.com/@techw>

### Files and folders (2 total, 594.0 B)

All files and folders in this table will be uploaded.

☐ Name ☐ Folder

☐ Type

☐ Size

< 1 >

☐ extra-page.html

-

text/html

69.0 B

☐ index.html

-

text/html

525.0 B

Remove

Add files

Add folder

### Destination [Info](#)

Destination

[s3://twinkle-aws-bucket](#)

#### Destination details

Bucket settings that impact new objects stored in the specified destination.

#### Permissions

Grant public access and access to other AWS accounts.

#### Properties

Specify storage class, encryption settings, tags, and more.

Click on upload

# twinkle-aws-bucket Info Click on properties

[Objects](#)[Properties](#)[Permissions](#)[Metrics](#)[Management](#)[Access Points](#)

## Objects (4)

[Copy S3 URI](#)[Copy URL](#)[Download](#)[Open](#)[Delete](#)[Actions](#)[Create folder](#)[Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions

&lt; 1 &gt; [ ]

| <input type="checkbox"/> | Name                            | Type | Last modified                         | Size     | Storage class |
|--------------------------|---------------------------------|------|---------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>       | jpg  | August 9, 2025, 14:17:56 (UTC+05:30)  | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a>      | jpg  | August 9, 2025, 13:10:00 (UTC+05:30)  | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">extra-page.html</a> | html | August 10, 2025, 14:14:28 (UTC+05:30) | 69.0 B   | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a>      | html | August 10, 2025, 14:14:28 (UTC+05:30) | 525.0 B  | Standard      |

Requester pays  
Disabled

<https://www.youtube.com/@tech>

## Static website hosting

[Edit](#)

Use this bucket to host a website or redirect requests. [Learn more](#)

**We recommend using AWS Amplify Hosting for static website hosting**

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about [Amplify Hosting](#) or [View your existing Amplify apps](#)

[Create Amplify app](#)

### S3 static website hosting

Enabled

### Hosting type

Bucket hosting

### Bucket website endpoint

When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#)

<http://twinkle-aws-bucket.s3-website-ap-south-1.amazonaws.com>

Click here on endpoint

# I love coffee

Hello world!



This extra page has been successfully loaded!

Index page is showing with  
<https://www.youtube.com/@te>

Amazon S3 > Buckets

General purpose buckets

All AWS Regions

Directory buckets

## General purpose buckets (7) Info

Buckets are containers for data stored in S3.

Find buckets by name

|                       | Name                                                     | AWS Region                          | Creation date                         |
|-----------------------|----------------------------------------------------------|-------------------------------------|---------------------------------------|
| <input type="radio"/> | <a href="#">demo-encryption-twinkle</a>                  | Asia Pacific (Mumbai) ap-south-1    | August 10, 2025, 13:35:11 (UTC+05:30) |
| <input type="radio"/> | <a href="#">demo-twinkle-event-notifications</a>         | Asia Pacific (Mumbai) ap-south-1    | August 10, 2025, 12:37:08 (UTC+05:30) |
| <input type="radio"/> | <a href="#">elasticbeanstalk-ap-south-1-235562991793</a> | Asia Pacific (Mumbai) ap-south-1    | August 8, 2025, 14:47:26 (UTC+05:30)  |
| <input type="radio"/> | <a href="#">s3-storage-classes-demo-twinkle</a>          | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 18:10:54 (UTC+05:30)  |
| <input type="radio"/> | <a href="#">s3-twinkle-aws-v1</a>                        | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30)  |
| <input type="radio"/> | <a href="#">s3-twinkle-bucket-replica-v1</a>             | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30)  |

Create bucket

Click on create b

## Account snapshot Info

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

View dashboard

## External access summary - new Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

# Create bucket [Info](#)

Buckets are containers for data stored in S3.

F i r s t   c h a n g e   y o u r   l o c a t i o n

## General configuration

**AWS Region**  
Asia Pacific (Hyderabad) ap-south-2



**Bucket name** [Info](#)

demo-other-origin-twinkle



E n t e r   n a m e   o f   b u c k e t

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

### Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

<https://www.youtube.com/@teco>

☐ **Block all public access**  U n c h e c k   t h i s

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**  
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**  
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**  
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**  
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

**Warning** Turning off block all public access might result in this bucket and the objects within becoming public  
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.



C h e c k   t h i s

## Bucket Versioning

## Encryption type [Info](#)

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)  
Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the **Storage** tab of the [Amazon S3 pricing page](#).

## Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

- ☐ Disable
- ☒ Enable

## Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Click on create bucket

Successfully created bucket "demo-other-origin-twinkle"  
To upload files and folders, or to configure additional bucket settings, choose **View details**.

View details

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

## General purpose buckets (8) [Info](#)

[Refresh](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

Find buckets by name

< 1 > [Settings](#)

| Name                                         | AWS Region                          | Creation date                        |
|----------------------------------------------|-------------------------------------|--------------------------------------|
| <a href="#">s3-twinkle-aws-v1</a>            | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 17:15:58 (UTC+05:30) |
| <a href="#">s3-twinkle-bucket-replica-v1</a> | Asia Pacific (Hyderabad) ap-south-2 | August 9, 2025, 17:23:04 (UTC+05:30) |
| <a href="#">twinkle-aws-bucket</a>           | Asia Pacific (Mumbai) ap-south-1    | August 9, 2025, 12:59:03 (UTC+05:30) |

Click on v

https://www.youtube.com

# demo-other-origin-twinkle Click on properties

Objects Properties Permissions Metrics Management Access Points

Objects (0)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > Settings

| Name | Type | Last modified | Size | Storage class |
|------|------|---------------|------|---------------|
|------|------|---------------|------|---------------|

No objects  
You don't have any objects in this bucket.

Upload



Search

[Alt+S]



Asia Pacific (Hyderabad)

aws-twinkle-v4 (2355-6299-1793) twinkl

Amazon S3 > Buckets > demo-other-origin-twinkle

Info Help Refresh

Object Lock  
Disabled

Requester pays

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays  
Disabled

Edit

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

S3 static website hosting  
Disabled

Edit

<https://www.youtube.com/@techwithtwinkle> Click on Edit

## Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

### Static website hosting

☐ Disable

☒ Enable  Click on Enable

### Hosting type

☒ Host a static website

Use the bucket endpoint as the web address. [Learn more](#)


☐ Redirect requests for an object

Redirect requests to another bucket or domain. [Learn more](#)

 For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#)

### Index document

Specify the home or default page of the website.

index.html  Enter index.html

Error document - optional

After that click on

✓ Successfully edited static website hosting.

demo-other-origin-twinkle  Click on permissions

Objects

Properties

Permissions 

Metrics

Management

Access Points

### Bucket overview

AWS Region

Asia Pacific (Hyderabad) ap-south-2

Amazon Resource Name (ARN)

 arn:aws:s3:::demo-other-origin-twinkle

Creation date

August 10, 2025, 14:32:38 (UTC+05:30)

### Bucket Versioning

Edit

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

Disabled

<https://www.youtube.co>

## Block public access (bucket settings)

Edit

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

### Block all public access

Off

#### Individual Block Public Access settings for this bucket

Click on edit

## Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Edit

Delete

No policy to display.

Copy

<https://www.youtube.com/@techwitht>

## Amazon S3

### General purpose buckets

Directory buckets

Table buckets

Vector buckets [Preview](#)

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

### Storage Lens

Off

#### Individual Block Public Access settings for this bucket

## Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Edit

Delete

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "Statement1",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::twinkle-aws-bucket/*"
    }
  ]
}
```

Copy

To make it simple  
this policy & pass  
new one bucket

## Edit bucket policy [Info](#)

### Bucket policy

[Policy examples](#)[Policy generator](#)

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

### Bucket ARN

 arn:aws:s3:::demo-other-origin-twinkle

### Policy

```
1 {  
2   "Version": "2012-10-17",  
3   "Statement": [  
4     {  
5       "Sid": "Statement1",  
6       "Effect": "Allow",  
7       "Principal": "*",  
8       "Action": "s3:GetObject",  
9       "Resource": "arn:aws:s3:::twinkle-aws-bucket/*"  
10    }  
11  ]  
12 }
```

### Edit statement

### Select a statement

Select an existing statement in the policy or add a new statement.

[+ Add new statement](#)

12

[+ Add new statement](#)[+ Add new statement](#)

JSON Ln 12, Col 1

Security: 0 Errors: 0 Warnings: 0 Suggestions: 0

[Preview external access](#)

Click on save

[Save changes](#)

<https://www.youtube.com/@techwithh>

Successfully edited bucket policy.

## demo-other-origin-twinkle Info

Objects Properties Permissions Metrics Management Access Points

### Permissions overview

#### Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)

[View analyzer for ap-south-2](#)

### Block public access (bucket settings)

Edit

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

## demo-other-origin-twinkle Info

Objects Properties Permissions Metrics Management Access Points

Objects (0)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > Settings

Name Type Last modified Size Storage class

No objects

You don't have any objects in this bucket.

Upload

<https://www.youtube.com>

# Upload

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Click on Add files



## Files and folders (0)

All files and folders in this table will be uploaded.

Remove Add files Add folder

| <input type="checkbox"/> | Name | Folder | Type | Size |
|--------------------------|------|--------|------|------|
|--------------------------|------|--------|------|------|

No files or folders  
You have not chosen any files or folders to upload.

https://www.youtube.com/@t

## Files and folders (1 total, 69.0 B)

All files and folders in this table will be uploaded.

Remove Add files Add folder

| <input type="checkbox"/> | Name            | Folder | Type      | Size   |
|--------------------------|-----------------|--------|-----------|--------|
| <input type="checkbox"/> | extra-page.html | -      | text/html | 69.0 B |

## Destination

Destination  
[s3://demo-other-origin-twinkle](#)

Destination details  
Bucket settings that impact new objects stored in the specified destination.

- Permissions  
Grant public access and access to other AWS accounts.
- Properties  
Specify storage class, encryption settings, tags, and more.

Click on upload

## demo-other-origin-twinkle Info

[Objects](#) | [Properties](#) | [Permissions](#) | [Metrics](#) | [Management](#) | [Access Points](#)

Objects (1)

Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

| <input type="checkbox"/> | Name                                                                                              | Type | Last modified                         | Size   | Storage class |
|--------------------------|---------------------------------------------------------------------------------------------------|------|---------------------------------------|--------|---------------|
| <input type="checkbox"/> |  extra-page.html | html | August 10, 2025, 14:50:30 (UTC+05:30) | 69.0 B | Standard      |

 Click here

## extra-page.html Info

Copy S3 URI Download Open Object actions

[Properties](#) | [Permissions](#) | [Versions](#)

### Object overview

**Owner**  
6acd0fafa077a484308a7e05f1d9d18e430f282d1238398ad4a09b1adaae9cf8

**AWS Region**  
Asia Pacific (Hyderabad) ap-south-2

**Last modified**  
August 10, 2025, 14:50:30 (UTC+05:30)

**Size**  
69.0 B

**Type**  
html

**Key**  
 extra-page.html

**S3 URI**  
 s3://demo-other-origin-twinkle/extra-page.html

**Amazon Resource Name (ARN)**  
 arn:aws:s3:::demo-other-origin-twinkle/extra-page.html

**Entity tag (Etag)**  
 c1914eec0805fbf08a08d3ebf4d4943d

**Object URL**  
 <https://demo-other-origin-twinkle.s3.ap-south-2.amazonaws.com/extra-page.html>

 Click here  
<https://www.youtube.com>

This extra page has been successfully loaded!



This page will open now

<https://www.youtube.com/@t>

Amazon S3 > Buckets > twinkle-aws-bucket

twinkle-aws-bucket



Go to this bucket

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (4)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 > ⚙

| <input type="checkbox"/> | Name                            | Type | Last modified                         | Size     | Storage class |
|--------------------------|---------------------------------|------|---------------------------------------|----------|---------------|
| <input type="checkbox"/> | <a href="#">beach.jpg</a>       | jpg  | August 9, 2025, 14:17:56 (UTC+05:30)  | 85.8 KB  | Standard      |
| <input type="checkbox"/> | <a href="#">coffee.jpg</a>      | jpg  | August 9, 2025, 13:10:00 (UTC+05:30)  | 108.4 KB | Standard      |
| <input type="checkbox"/> | <a href="#">extra-page.html</a> | html | August 10, 2025, 14:14:28 (UTC+05:30) | 69.0 B   | Standard      |
| <input type="checkbox"/> | <a href="#">index.html</a>      | html | August 10, 2025, 14:14:28 (UTC+05:30) | 525.0 B  | Standard      |

Select this

Storage Lens

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

twinkle-aws-bucket

Objects

Properties

Permissions

Metrics

Management

Access Points

Objects (1/4)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

|                                     | Name                            | Type | Last modified                         | Size     | Storage class |
|-------------------------------------|---------------------------------|------|---------------------------------------|----------|---------------|
| <input type="checkbox"/>            | <a href="#">beach.jpg</a>       | jpg  | August 9, 2025, 14:17:56 (UTC+05:30)  | 85.8 KB  | Standard      |
| <input type="checkbox"/>            | <a href="#">coffee.jpg</a>      | jpg  | August 9, 2025, 13:10:00 (UTC+05:30)  | 108.4 KB | Standard      |
| <input checked="" type="checkbox"/> | <a href="#">extra-page.html</a> | html | August 10, 2025, 14:14:28 (UTC+05:30) | 69.0 B   | Standard      |
| <input type="checkbox"/>            | <a href="#">index.html</a>      | html | August 10, 2025, 14:14:28 (UTC+05:30) | 525.0 B  | Standard      |

Click on delete

Amazon S3 > Buckets > twinkle-aws-bucket > Delete objects

Deleting the specified objects adds delete markers to them

If you need to undo the delete action, you can delete the delete markers. [Learn more](#)

Specified objects

Find objects by name

| Name                            | Type | Last modified                         | Size   |
|---------------------------------|------|---------------------------------------|--------|
| <a href="#">extra-page.html</a> | html | August 10, 2025, 14:14:28 (UTC+05:30) | 69.0 B |

Delete objects?

To confirm deletion, type *delete* in the text input field.

delete

https://www.youtube.com/

Click on delete



I t s h o w i n g t h u s a f t e r

## 404 Not Found

- Code: NoSuchKey
- Message: The specified key does not exist.
- Key: extra-page.html
- RequestId: 4DAMDB2G3HT331Y1
- HostId: ZSMU67MKiPovKZkvvFneFrHvKHuoVzwGJkwcU6TUZmhSy49qWbEJMsQZkL7KHkLXT45EJrsLqE=



← → ↻ 🌐 demo-other-origin-twinkle.s3.ap-south-2.amazonaws.com/extra-page.html

This **extra page** has been successfully loaded!



C o p y t h i s o t h e r  
b u c k e t u r l & p a s t  
y o u r i n d e x f i l e

<https://www.youtube.com/>

```
File Edit View
ec2-user-dat index.l
</body>



<!-- CORS demo -->
<div id="tofetch"/>
<script>
  var tofetch = document.getElementById("tofetch");

  fetch('https://demo-other-origin-twinkle.s3.amazonaws.com/extra-page.html')
    .then((response) => {
      return response.text();
    })
    .then((html) => {
      tofetch.innerHTML = html
    });
</script>
</html>
```

Here in index file

<https://www.youtube.com/>

After saving re-upload

Amazon S3 > Buckets > twinkle-aws-bucket

### twinkle-aws-bucket

Objects Properties Permissions Metrics Management Access Points

Objects (3)   Copy S3 URI  Copy URL  Download  Open  Delete  Actions  Create folder  Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions < 1 > 

| <input type="checkbox"/> | Name                                                                                                           | Type | Last modified                         | Size     | Storage class |
|--------------------------|----------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------|---------------|
| <input type="checkbox"/> |  <a href="#">beach.jpg</a>  | jpg  | August 9, 2025, 14:17:56 (UTC+05:30)  | 85.8 KB  | Standard      |
| <input type="checkbox"/> |  <a href="#">coffee.jpg</a> | jpg  | August 9, 2025, 13:10:00 (UTC+05:30)  | 108.4 KB | Standard      |
| <input type="checkbox"/> |  <a href="#">index.html</a> | html | August 10, 2025, 15:00:46 (UTC+05:30) | 587.0 B  | Standard      |

Uploaded new

twinkle-aws-bucket.s3-website.ap-south-1.amazonaws.com

# I love coffee

Hello world!



It is showing the error

```
Access to fetch at 'https://demo-other-origin-twinkle.s3.ap-south-2.amazonaws.com/extra-page.html' from origin 'http://twinkle-aws-bucket.s3-website.ap-south-1.amazonaws.com' has been blocked by CORS policy: No 'Access-Control-Allow-Origin' header is present on the requested resource.
Failed to load resource: net::ERR_FAILED
Uncaught (in promise) TypeError: Failed to fetch
    at (index):17:9
```

Amazon S3 > Buckets > demo-other-origin-twinkle

## demo-other-origin-twinkle

Go to this bucket

Click on permissions

<https://www.youtube.com>

Objects (1)

Find objects by prefix

| Name                            | Type | Last modified                         | Size   | Storage class |
|---------------------------------|------|---------------------------------------|--------|---------------|
| <a href="#">extra-page.html</a> | html | August 10, 2025, 14:50:30 (UTC+05:30) | 69.0 B | Standard      |