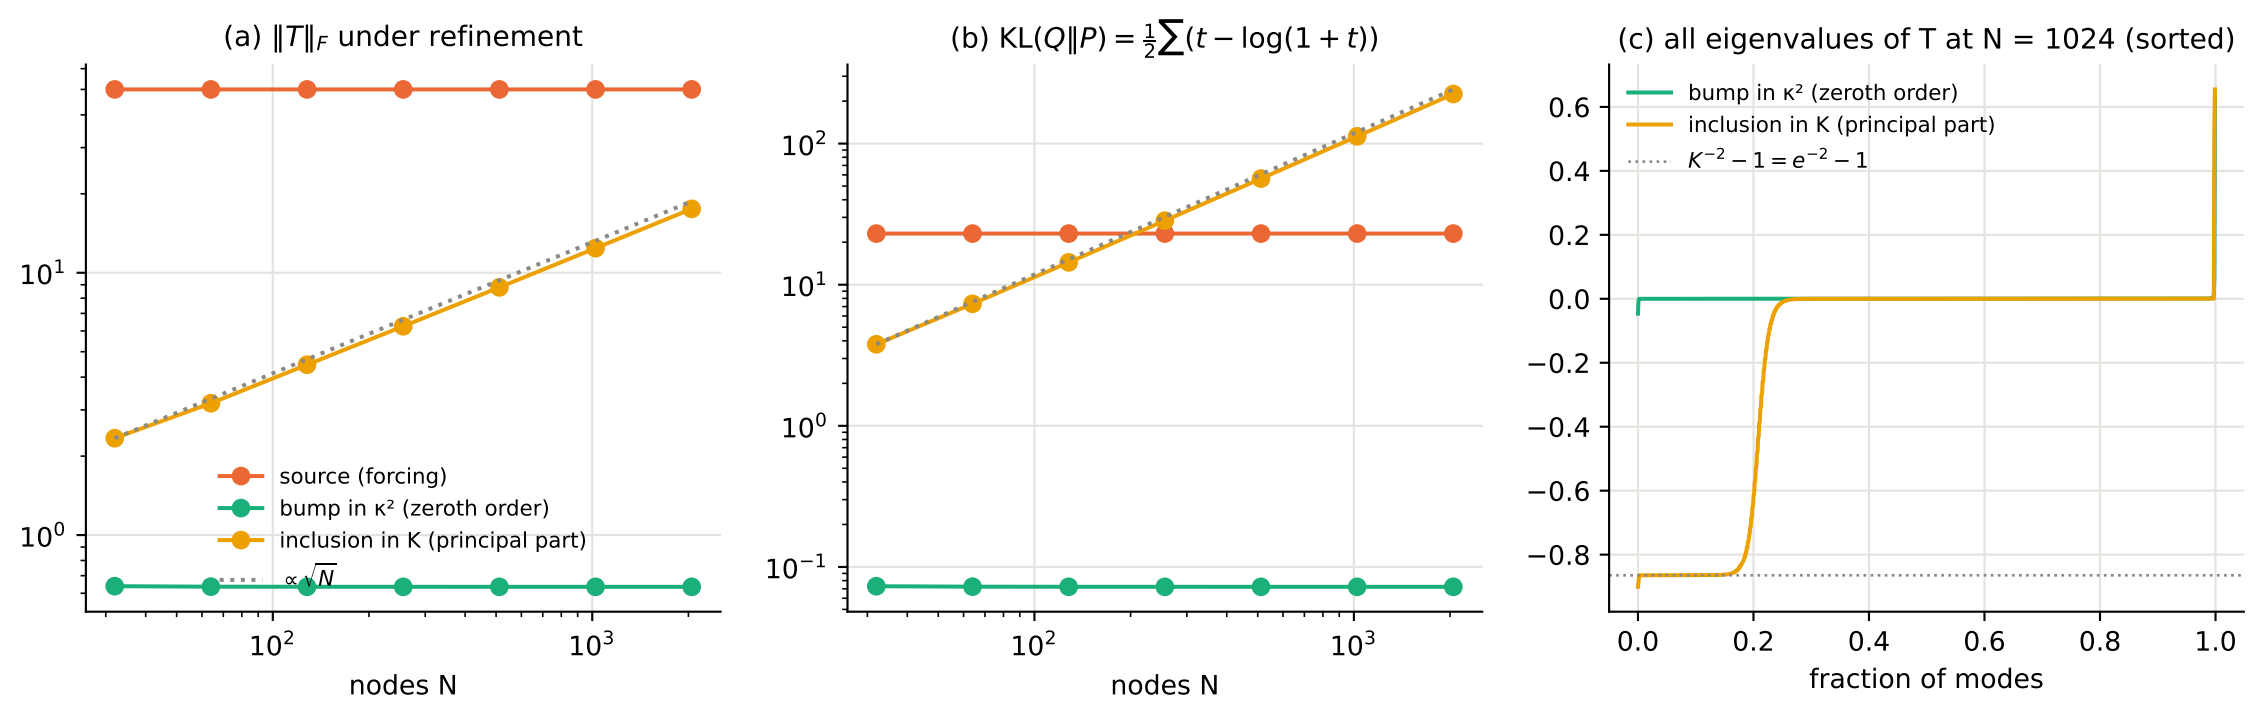
(a) $\|T\|_F$ under refinement
source (forcing)
bump in κ² (zeroth order)
inclusion in K (principal part)
$\propto \sqrt{N}$
nodes N
(b) $\mathrm{KL}(Q\|P) = \frac{1}{2}\sum(t - \log(1+t))$
nodes N
(c) all eigenvalues of T at N = 1024 (sorted)
bump in κ² (zeroth order)
inclusion in K (principal part)
$K^{-2} - 1 = e^{-2} - 1$
fraction of modes