

AUTOMATED EXCHANGE RATES API

Discover why more companies trust OANDA.

START A FREE TRIAL

OANDA
Solutions for Business

Java concurrency (multi-threading) - Tutorial

Lars Vogel (c) 2009, 2016 vogella GmbH – Version 2.6, 06.07.2016

Table of Contents

1. Concurrency
 - 1.1. What is concurrency?
 - 1.2. Process vs. threads
2. Improvements and issues with concurrency
 - 2.1. Limits of concurrency gains
 - 2.2. Concurrency issues
3. Concurrency in Java
 - 3.1. Processes and Threads
 - 3.2. Locks and thread synchronization
 - 3.3. Volatile
4. The Java memory model
 - 4.1. Overview
 - 4.2. Atomic operation
 - 4.3. Memory updates in synchronized code
5. Immutability and Defensive Copies
 - 5.1. Immutability
 - 5.2. Defensive Copies
6. Threads in Java
7. Threads pools with the Executor Framework
8. Futures and Callables
 - 8.1. Futures and Callables
 - 8.2. Drawbacks with Futures and Callbacks
9. CompletableFuture
10. Nonblocking algorithms
11. Fork-Join in Java 7
12. Deadlock
13. About this website
14. Links and Literature
 - 14.1. Concurrency Resources
 - 14.2. vogella GmbH training and consulting support
- Appendix A: Copyright and License

Java concurrency (multi-threading). This article describes how to do concurrent programming with Java. It covers the concepts of parallel programming, immutability, threads, the executor framework (thread pools), futures, callables CompletableFuture and the fork-join framework.



SpreadsheetGear
Performance Spreadsheet Components

Easy and Scalable Excel Reporting

WIN Easy and Powerful WinForms, WPF & Silverlight Controls

Easy and Extensive Excel Compatible Charting

Fast and Complete Excel-Compatible Calculations

SpreadsheetGear
Download Free Trial



Beautiful Everlasting Sarees

Now Starting at 399 Only!

VOOI

Shop

1. Concurrency

1.1. What is concurrency?

Concurrency is the ability to run several programs or several parts of a program in parallel. If a time consuming task can be performed asynchronously or in parallel, this improves the throughput and the interactivity of the program.

A modern computer has several CPU's or several cores within one CPU. The ability to leverage these multi-cores can be the key for a successful high-volume application.

1.2. Process vs. threads

A *process* runs independently and isolated of other processes. It cannot directly access shared data in other processes. The resources of the process, e.g. memory and CPU time, are allocated to it via the operating system.

A *thread* is a so called lightweight process. It has its own call stack, but can access shared data of other threads in the same process. Every thread has its own memory cache. If a thread reads shared data it stores this data in its own memory cache. A

A Java application runs by default in one process. Within a Java application you work with several threads to achieve parallel processing or asynchronous behavior.

2. Improvements and issues with concurrency

2.1. Limits of concurrency gains

Within a Java application you work with several threads to achieve parallel processing or asynchronous behavior. Concurrency promises to perform certain task faster as these tasks can be divided into subtasks and these subtasks can be executed in parallel. Of course the runtime is limited by parts of the task which can be performed in parallel.

The theoretical possible performance gain can be calculated by the following rule which is referred to as *Amdahl's Law*.

If F is the percentage of the program which can not run in parallel and N is the number of processes, then the maximum performance gain is $1 / (F + ((1-F)/n))$.

2.2. Concurrency issues

Threads have their own call stack, but can also access shared data. Therefore you have two basic problems, visibility and access problems.

A visibility problem occurs if thread A reads shared data which is later changed by thread B and thread A is unaware of this change.

An access problem can occur if several thread access and change the same shared data at the same time.

Visibility and access problem can lead to

- Liveness failure: The program does not react anymore due to problems in the concurrent access of data, e.g. deadlocks.
- Safety failure: The program creates incorrect data.

3. Concurrency in Java

3.1. Processes and Threads

A Java program runs in its own process and by default in one thread. Java supports threads as part of the Java language via the `Thread` code. The Java application can create new threads via this class.



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/) [Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/) [Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/) [Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/) [Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/) [Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/) [Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/) [Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

Search



QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(http://www.vogella.o
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(http://www.vogella.o
- [vogella Training](http://www.vogella.com/vogella-Training)
(http://www.vogella.o
- [vogella Books](http://www.vogella.com/vogella-Books)
(http://www.vogella.o

SHARE



Java 1.5 also provides improved support for concurrency with the in the `java.util.concurrent` package.

3.2. Locks and thread synchronization

Java provides *locks* to protect certain parts of the code to be executed by several threads at the same time. The simplest way of locking a certain method or Java class is to define the method or class with the `synchronized` keyword.

The *synchronized* keyword in Java ensures:

- that only a single thread can execute a block of code at the same time
- that each thread entering a synchronized block of code sees the effects of all previous modifications that were guarded by the same lock



[Tutorials](http://www.vogella.com/tutorials/) (<http://www.vogella.com/tutorials/>) [Training](http://www.vogella.com/training/) (<http://www.vogella.com/training/>) [Consulting](http://www.vogella.com/consulting/) (<http://www.vogella.com/consulting/>) [Products](http://www.vogella.com/products/) (<http://www.vogella.com/products/>) [Books](http://www.vogella.com/books/) (<http://www.vogella.com/books/>) [Company](http://www.vogella.com/company/) (<http://www.vogella.com/company/>) [Donate](http://www.vogella.com/donate/) (<http://www.vogella.com/donate/>) [Contact us](http://www.vogella.com/contact.html) (<http://www.vogella.com/contact.html>)

Search



You can use the *synchronized* keyword for the definition of a method. This would ensure that only one thread can enter this method at the same time. Another threads which is calling this method would wait until the first threads leaves this method.

```
public synchronized void critical() {
    // some thread critical stuff
    // here
}
```

JAVA

You can also use the *synchronized* keyword to protect blocks of code within a method. This block is guarded by a key, which can be either a string or an object. This key is called the *lock*.

All code which is protected by the same lock can only be executed by one thread at the same time

For example the following datastructure will ensure that only one thread can access the inner block of the `add()` and `next()` methods.

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06FEB-RCP-Training) (<http://www.vogella.com/06FEB-RCP-Training>)
- [20 FEB - Android Development](http://www.vogella.com/20FEB-Android-Development) (<http://www.vogella.com/20FEB-Android-Development>)
- [vogella Training](http://www.vogella.com/vogella-Training) (<http://www.vogella.com/vogella-Training>)
- [vogella Books](http://www.vogella.com/vogella-Books) (<http://www.vogella.com/vogella-Books>)

SHARE



```

package de.vogella.pagerank.crawler;

import java.util.ArrayList;
import java.util.List;

/**
 * Data structure for a web crawler. Keeps track of the visited sites and
 * keeps
 * a list of sites which needs still to be crawled.
 *
 * @author Lars Vogel
 */
public class CrawledSites {
    private List<String> crawledSites = new ArrayList<String>();
    private List<String> linkedSites = new ArrayList<String>();

    public void add(String site) {
        synchronized (this) {
            // ...
        }
    }

    /**
     * Get next site to crawl. Can return null (if nothing to crawl)
     */
    public String next() {
        if (linkedSites.size() == 0) {
            return null;
        }
        synchronized (this) {
            // Need to check again if size has changed
            if (linkedSites.size() > 0) {
                String s = linkedSites.get(0);
                linkedSites.remove(0);
                crawledSites.add(s);
                return s;
            }
            return null;
        }
    }
}

```



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/) [Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/) [Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search



[\(http://www.vogella.com\)](http://www.vogella.com/)

[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/) [Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/) [Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/) [Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/) [Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(http://www.vogella.o)
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(http://www.vogella.o)
- [vogella Training](http://www.vogella.com/vogella-Training)
(http://www.vogella.o)
- [vogella Books](http://www.vogella.com/vogella-Books)
(http://www.vogella.o)

SHARE



3.3. Volatile

If a variable is declared with the *volatile* keyword then it is guaranteed that any thread that reads the field will see the most recently written value. The *volatile* keyword will not perform any mutual exclusive lock on the variable.

As of Java 5 write access to a *volatile* variable will also update non-volatile variables which were modified by the same thread. This can also be used to update values within a reference variable, e.g. for a *volatile* variable person. In this case you must use a temporary variable person and use the setter to initialize the variable and then assign the temporary variable to the final variable. This will then make the address changes of this variable and the values visible to other threads.



4. The Java memory model

4.1. Overview

The *Java memory model* describes the communication between the memory of the threads and the main memory of the application.

It defines the rules how changes in the memory done by threads are propagated to other threads.

The *Java memory model* also defines the situations in which a thread re-fresh its own memory from the main memory.

It also describes which operations are atomic and the ordering of the operations.

An **atomic operation** is an operation, which is performed as a single unit of work without the possibility of interference from other operations.

The Java language specification guarantees that reading or writing a variable is an atomic operation (unless the variable is of type `long` or `double`). Operations variables of type `long` or `double` are only atomic if they declared with the `volatile` keyword.

Assume `i` is defined as `int`. The `i++` (increment) operation is not an atomic operation in Java. This also applies for the other numeric types, e.g. `long`, etc).

The `i++` operation first reads the value which is currently stored in `i` (atomic operation) and then it adds one to it (atomic operation). But between the read and the write the value of `i` might have changed.

Since Java 1.5 the Java language provides atomic variables, e.g. `AtomicInteger` or `AtomicLong` which provide methods like `getAndDecrement()`, `getAndIncrement()` and `getAndSet()` which are atomic.

4.3. Memory updates in synchronized code

The Java memory model guarantees that each thread entering a synchronized block of code sees the effects of all previous modifications that were guarded by the same lock.

5. Immutability and Defensive Copies

5.1. Immutability

The simplest way to avoid problems with concurrency is to share only immutable data between threads. Immutable data is data which cannot be changed.

To make a class immutable make

- all its fields `final`
- the class declared as `final`
- the `this` reference is not allowed to escape during construction
- Any fields which refer to mutable data objects are
- `private`
- have no setter method



[Tutorials](http://www.vogella.com/tutorials/) (<http://www.vogella.com/tutorials/>) [Training](http://www.vogella.com/training/) (<http://www.vogella.com/training/>) [Consulting](http://www.vogella.com/consulting/) (<http://www.vogella.com/consulting/>) [Products](http://www.vogella.com/products/) (<http://www.vogella.com/products/>) [Books](http://www.vogella.com/books/) (<http://www.vogella.com/books/>) [Donate](http://www.vogella.com/donate/) (<http://www.vogella.com/donate/>) [Contact us](http://www.vogella.com/contact.html) (<http://www.vogella.com/contact.html>)

Search



QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06FEB-RCP-Training/) (<http://www.vogella.com/06FEB-RCP-Training/>)
- [20 FEB - Android Development](http://www.vogella.com/20FEB-Android-Development/) (<http://www.vogella.com/20FEB-Android-Development/>)
- [vogella Training](http://www.vogella.com/vogella-Training/) (<http://www.vogella.com/vogella-Training/>)
- [vogella Books](http://www.vogella.com/vogella-Books/) (<http://www.vogella.com/vogella-Books/>)

SHARE



- they are never directly returned or otherwise exposed to a caller
- if they are changed internally in the class this change is not visible and has no effect outside of the class

An immutable class may have some mutable data which is used to manage its state but from the outside this class nor any attribute of this class can get changed.

For all mutable fields, e.g. Arrays, that are passed from the outside to the class during the construction phase, the class needs to make a defensive-copy of the elements to make sure that no other object from the outside still can change the data

5.2. Defensive Copies

You must protect your classes from calling code. Assume that calling code will do its best to change your data in a way you didn't expect it. While this is especially true in



[Tutorials](http://www.vogella.com/tutorials/) (<http://www.vogella.com/tutorials/>) [Training](http://www.vogella.com/training/) (<http://www.vogella.com/training/>) [Consulting](http://www.vogella.com/consulting/) (<http://www.vogella.com/consulting/>)
[\(http://www.vogella.com\)](http://www.vogella.com/)
[Products](http://www.vogella.com/products/) (<http://www.vogella.com/products/>) [Books](http://www.vogella.com/books/) (<http://www.vogella.com/books/>) [Company](http://www.vogella.com/company/) (<http://www.vogella.com/company/>) [Donate](http://www.vogella.com/donate/) (<http://www.vogella.com/donate/>) [Contact us](http://www.vogella.com/contact.html) (<http://www.vogella.com/contact.html>)

Search



copies of data to calling code.

The following example creates a copy of a list (ArrayList) and returns only the copy of the list. This way the client of this class cannot remove elements from the list.

```
package de.vogella.performance.defensivecopy;                                     JAVA

import java.util.ArrayList;
import java.util.Collections;
import java.util.List;

public class MyDataStructure {
    List<String> list = new ArrayList<String>();

    public void add(String s) {
        list.add(s);
    }

    /**
     * Makes a defensive copy of the List and return it
     * This way cannot modify the list itself
     *
     * @return List<String>
     */
    public List<String> getList() {
        return Collections.unmodifiableList(list);
    }
}
```

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(<http://www.vogella.com/06-FEB-RCP-Training>)
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(<http://www.vogella.com/20-FEB-Android-Development>)
- [vogella Training](http://www.vogella.com/vogella-Training)
(<http://www.vogella.com/vogella-Training>)
- [vogella Books](http://www.vogella.com/vogella-Books)
(<http://www.vogella.com/vogella-Books>)

SHARE



6. Threads in Java

The base means for concurrency are the `java.lang.Thread` class. A `Thread` executes an object of type `java.lang.Runnable`.

`Runnable` is an interface which defines the `run()` method. This method is called by the `Thread` object and contains the work which should be done. Therefore the "Runnable" is the task to perform. The `Thread` is the worker who is doing this task.

The following demonstrates a task (`Runnable`) which counts the sum of a given range of numbers. Create a new Java project called `de.vogella.concurrency.threads` for the example code of this section.

JAVA

```

package de.vogella.concurrency.threads;

/**
 * MyRunnable will count the sum of the number from 1 to the parameter
 * countUntil and then write the result to the console.
 * <p>
 * MyRunnable is the task which will be performed
 *
 * @author Lars Vogel
 */
public class MyRunnable implements Runnable {
    private final long countUntil;

    MyRunnable(long countUntil) {
        this.countUntil = countUntil;
    }

    @Override
    public void run() {
        sum += i;
        System.out.println(sum);
    }
}

```



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)
[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)
[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)
[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)
[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)
[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)
[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)
[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

Search



The following example demonstrate the usage of the Thread and the Runnable class.

JAVA

```

package de.vogella.concurrency.threads;

import java.util.ArrayList;
import java.util.List;

public class Main {

    public static void main(String[] args) {
        // We will store the threads so that we can check if they are
        // done

        List<Thread> threads = new ArrayList<Thread>();
        // We will create 500 threads
        for (int i = 0; i < 500; i++) {
            Runnable task = new MyRunnable(10000000L + i);
            Thread worker = new Thread(task);
            // We can set the name of the thread
            worker.setName(String.valueOf(i));
            // Start the thread, never call method run() direct
            worker.start();
            // Remember the thread for later usage
            threads.add(worker);
        }
        int running = 0;
        do {
            running = 0;
            for (Thread thread : threads) {
                if (thread.isAlive()) {
                    running++;
                }
            }
            System.out.println("We have " + running + " running
threads. ");
        } while (running > 0);
    }
}

```

Using the Thread class directly has the following disadvantages.

- Creating a new thread causes some performance overhead.

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06FEB-RCP-Training/)
(http://www.vogella.o
- [20 FEB - Android Development](http://www.vogella.com/20FEB-Android-Development/)
(http://www.vogella.o
- [vogella Training](http://www.vogella.com/vogella-Training/)
(http://www.vogella.o
- [vogella Books](http://www.vogella.com/vogella-Books/)
(http://www.vogella.o

SHARE



- Too many threads can lead to reduced performance, as the CPU needs to switch between these threads.
- You cannot easily control the number of threads, therefore you may run into out of memory errors due to too many threads.

The `java.util.concurrent` package offers improved support for concurrency compared to the direct usage of `Threads`. This package is described in the next section.



Millions of developers:

[Tutorials](http://www.vogella.com/tutorials/) (<http://www.vogella.com/tutorials/>)
 [Training](http://www.vogella.com/training/) (<http://www.vogella.com/training/>)
 [Consulting](http://www.vogella.com/consulting/) (<http://www.vogella.com/consulting/>)
 [Products](http://www.vogella.com/products/) (<http://www.vogella.com/products/>)
 [Books](http://www.vogella.com/books/) (<http://www.vogella.com/books/>)
 [Company](http://www.vogella.com/company/) (<http://www.vogella.com/company/>)
 [Donate](http://www.vogella.com/donate/) (<http://www.vogella.com/donate/>)
 [Contact us](http://www.vogella.com/contact.html) (<http://www.vogella.com/contact.html>)

Search

<http://www.vogella.com/>

7. Threads pools with the Executor Framework



You find this examples in the source section in Java project called `de.vogella.concurrency.threadpools`.

Thread pools manage a pool of worker threads. The thread pools contains a work queue which holds tasks waiting to get executed.

A thread pool can be described as a collection of `Runnable` objects

(work queue) and a connections of running threads. These threads are constantly running and are checking the work query for new work. If there is new work to be done they execute this `Runnable`. The `Thread` class itself provides a method, e.g. `execute(Runnable r)` to add a new `Runnable` object to the work queue.

The `Executor` framework provides example implementation of the `java.util.concurrent.Executor` interface, e.g. `Executors.newFixedThreadPool(int n)` which will create `n` worker threads. The `ExecutorService` adds life cycle methods to the `Executor`, which allows to shutdown the `Executor` and to wait for termination.



If you want to use one thread pool with one thread which executes several runnables you can use the `Executors.newSingleThreadExecutor()` method.

Create again the `Runnable`.

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(<http://www.vogella.com/06-FEB-RCP-Training>)
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(<http://www.vogella.com/20-FEB-Android-Development>)
- [vogella Training](http://www.vogella.com/vogella-Training)
(<http://www.vogella.com/vogella-Training>)
- [vogella Books](http://www.vogella.com/vogella-Books)
(<http://www.vogella.com/vogella-Books>)

SHARE



JAVA

```

package de.vogella.concurrency.threadpools;

/**
 * MyRunnable will count the sum of the number from 1 to the parameter
 * countUntil and then write the result to the console.
 * <p>
 * MyRunnable is the task which will be performed
 *
 * @author Lars Vogel
 */
public class MyRunnable implements Runnable {
    private final long countUntil;

    MyRunnable(long countUntil) {
        this.countUntil = countUntil;
    }

    @Override
    public void run() {
        sum += i;
        System.out.println(sum);
    }
}

```



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)
[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)
[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)
[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)
[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)
[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)
[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)
[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

Search



Now you run your runnables with the executor framework.

JAVA

```

package de.vogella.concurrency.threadpools;

import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;

public class Main {
    private static final int NTHREDS = 10;

    public static void main(String[] args) {
        ExecutorService executor =
            Executors.newFixedThreadPool(NTHREDS);
        for (int i = 0; i < 500; i++) {
            Runnable worker = new MyRunnable(10000000L + i);
            executor.execute(worker);
        }
        // This will make the executor accept no new threads
        // and finish all existing threads in the queue
        executor.shutdown();
        // Wait until all threads are finish
        executor.awaitTermination();
        System.out.println("Finished all threads");
    }
}

```

In case the threads should return some value (result-bearing threads) then you can use the `java.util.concurrent.Callable` class.

8. Futures and Callables

8.1. Futures and Callables

The executor framework presented in the last chapter works with `Runnable` objects. Unfortunately a `Runnable` cannot return a result to the caller.

In case you expect your threads to return a computed result you can use `java.util.concurrent.Callable`. The `Callable` object allows to return values after completion.

The `Callable` object uses generics to define the type of object which is returned.

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/2016/02/06-feb-rcp-training/)
(http://www.vogella.o
- [20 FEB - Android Development](http://www.vogella.com/2016/02/20-feb-android-development/)
(http://www.vogella.o
- [vogella Training](http://www.vogella.com/2016/02/20-feb-android-development/)
(http://www.vogella.o
- [vogella Books](http://www.vogella.com/2016/02/20-feb-android-development/)
(http://www.vogella.o

SHARE



If you submit a `Callable` object to an `Executor` the framework returns an object of type `java.util.concurrent.Future`. `Future` exposes methods allowing a client to monitor the progress of a task being executed by a different thread. Therefore a `Future` object can be used to check the status of a `Callable` and to retrieve the result from the `Callable`.

On the `Executor` you can use the method `submit` to submit a `Callable` and to get a future. To retrieve the result of the future use the `get()` method.

```
package de.vogella.concurrency.callables;

import java.util.concurrent.Callable;

public class MyCallable implements Callable<Long> {
    @Override
    public Long call() throws Exception {
        // ...
    }
}
```

JAVA



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)

[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)

[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search



[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)

[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)

[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)

[Donate \(http://www.vogella.com/donate.html\)](http://www.vogella.com/donate.html)

[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

```
package de.vogella.concurrency.callables;

import java.util.ArrayList;
import java.util.List;
import java.util.concurrent.Callable;
import java.util.concurrent.ExecutionException;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;
import java.util.concurrent.Future;

public class CallableFutures {
    private static final int NTHREDS = 10;

    public static void main(String[] args) {
        ExecutorService executor =
            Executors.newFixedThreadPool(NTHREDS);
        List<Future<Long>> list = new ArrayList<Future<Long>>();
        for (int i = 0; i < 20000; i++) {
            Callable<Long> worker = new MyCallable();
            Future<Long> submit = executor.submit(worker);
            list.add(submit);
        }
        long sum = 0;
        System.out.println(list.size());
        // now retrieve the result
        for (Future<Long> future : list) {
            try {
                sum += future.get();
            } catch (InterruptedException e) {
                e.printStackTrace();
            } catch (ExecutionException e) {
                e.printStackTrace();
            }
        }
        System.out.println(sum);
        executor.shutdown();
    }
}
```

JAVA

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(http://www.vogella.o
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(http://www.vogella.o
- [vogella Training](http://www.vogella.com/vogella-Training)
(http://www.vogella.o
- [vogella Books](http://www.vogella.com/vogella-Books)
(http://www.vogella.o

SHARE



The code examples for this section are created in a Java project called `de.vogella.concurrency.callables`.

8.2. Drawbacks with Futures and Callbacks

The `Future` interface is limited as a model of asynchronously executed tasks. While `Future` allows a client to query a `Callable` task for its result, it does not provide the option to register a callback method, which would allow to notified once a task is done. In Java 5 you could use `ExecutorCompletionService` for this purpose but as of Java 8 you can use the `CompletableFuture` interface which allows to provide a callback interface which is called once a task is completed.

9. CompletableFuture

Asynchronous task handling is important for any application which performs time consuming activities, as IO operations. Two basic approaches to asynchronous task handling are available to a Java application:

- application logic blocks until a task completes
- application logic is called once the task completes, this is called a nonblocking

`CompletableFuture` extends the functionality of the `Future` interface for asynchronous calls. It also implements the `CompletionStage` interface.

`CompletionStage` offers methods, that let you attach callbacks that will be executed on completion.

It adds standard techniques for executing application code when a task completes, including various ways to combine tasks. `CompletableFuture` support both blocking and nonblocking approaches, including regular callbacks.

This callback can be executed in another thread as the thread in which the `CompletableFuture` is executed.

The following example demonstrates how to create a basic `CompletableFuture`.

```
CompletableFuture.supplyAsync(this::doSomething);
```

JAVA

`CompletableFuture.supplyAsync` runs the task asynchronously on the default thread pool of Java. It has the option to supply your custom executor to define the `ThreadPool`.



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/) [Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/) [Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/) [Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/) [Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/) [Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/) [Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/) [Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

Search



QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06FEB-RCP-Training/)
(http://www.vogella.o)
- [20 FEB - Android Development](http://www.vogella.com/20FEB-Android-Development/)
(http://www.vogella.o)
- [vogella Training](http://www.vogella.com/vogella-Training/)
(http://www.vogella.o)
- [vogella Books](http://www.vogella.com/vogella-Books/)
(http://www.vogella.o)

SHARE



JAVA

```

package snippet;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class CompletableFutureSimpleSnippet {
    public static void main(String[] args) {
        long started = System.currentTimeMillis();

        // configure CompletableFuture
        CompletableFuture<Integer> futureCount =
            createCompletableFuture();

        // continue to do other work
        System.out.println("Took " + (started -
            System.currentTimeMillis()) + " milliseconds ");

        // now its time to get the result
        try {
            // ...

        } catch (InterruptedException | ExecutionException
            ex) {
            here
        }

        // Exceptions from the future should be handled

        private static CompletableFuture<Integer> createCompletableFuture() {
            CompletableFuture<Integer> futureCount =
                CompletableFuture.supplyAsync(
                    () -> {
                        try {
                            // simulate long running task
                            Thread.sleep(5000);
                        } catch (InterruptedException e) { }
                        return 20;
                    }
                );
            return futureCount;
        }
    }
}

```

The usage of the `thenApply` method is demonstrated by the following code snippet.



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/) [Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/) [Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search



[\(http://www.vogella.com\)](http://www.vogella.com/)

[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/) [Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/) [Systems Company \(http://www.vogella.com/systems-company/\)](http://www.vogella.com/systems-company/) [Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/) [News \(http://www.vogella.com/news.html\)](http://www.vogella.com/news.html)

[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

QUICK LINKS

- [06 FEB - RCP Training](#)
(http://www.vogella.o)
- [20 FEB - Android Development](#)
(http://www.vogella.o)
- [vogella Training](#)
(http://www.vogella.o)
- [vogella Books](#)
(http://www.vogella.o)

SHARE



```

package snippet;

import java.util.concurrent.CompletableFuture;
import java.util.concurrent.ExecutionException;

public class CompletableFutureCallback {
    public static void main(String[] args) {
        long started = System.currentTimeMillis();

        CompletableFuture<String> data = createCompletableFuture()
            .thenApply((Integer count) -> {
                int transformedValue = count * 10;
                return transformedValue;
            }).thenApply(transformed -> "Finally creates a
string: " + transformed);

        try {
            System.out.println(data.get());
        } catch (InterruptedException | ExecutionException e) {

        }
    }

    public static CompletableFuture<Integer> createCompletableFuture() {
        CompletableFuture<Integer> result =
            CompletableFuture.supplyAsync(() -> {
                try {
                    // simulate long running task
                    Thread.sleep(5000);
                } catch (InterruptedException e) { }
                return 20;
            });
        return result;
    }
}

```



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)
[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)
[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)
[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)
[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)
[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)
[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)
[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

Search



QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(http://www.vogella.o)
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(http://www.vogella.o)
- [vogella Training](http://www.vogella.com/vogella-Training)
(http://www.vogella.o)
- [vogella Books](http://www.vogella.com/vogella-Books)
(http://www.vogella.o)

SHARE



**Millions of developers:
one call.**

The world's leading developer
advertising group

10. Nonblocking algorithms

Java 5.0 provides supports for additional atomic operations. This allows to develop algorithm which are non-blocking algorithm, e.g. which do not require synchronization, but are based on low-level atomic hardware primitives such as compare-and-swap (CAS). A compare-and-swap operation check if the variable has a certain value and if it has this value it will perform this operation.

Non-blocking algorithms are typically faster than blocking algorithms, as the synchronization of threads appears on a much finer level (hardware).

For example this created a non-blocking counter which always increases. This example is contained in the project called *de.vogella.concurrency.nonblocking.counter*.

JAVA

```

package de.vogella.concurrency.nonblocking.counter;

import java.util.concurrent.atomic.AtomicInteger;

public class Counter {
    private AtomicInteger value = new AtomicInteger();
    public int getValue(){
        return value.get();
    }
    public int increment(){
        return value.incrementAndGet();
    }

    // Alternative implementation as increment but just make the
    // implementation explicit
    public int incrementLongVersion(){
        int oldValue = value.get();
        while (!value.compareAndSet(oldValue, oldValue+1)){
            oldValue = value.get();
        }
    }
}

```


[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)
[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)
[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search


[\(http://www.vogella.com\)](http://www.vogella.com/)
[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)
[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)
[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)
[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)
<http://www.vogella.com/contact.html>
[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

And a test.

QUICK LINKS

- [06 FEB - RCP Training](#)
(http://www.vogella.o)
- [20 FEB - Android Development](#)
(http://www.vogella.o)
- [vogella Training](#)
(http://www.vogella.o)
- [vogella Books](#)
(http://www.vogella.o)

SHARE



```

package de.vogella.concurrency.nonblocking.counter;

import java.util.ArrayList;
import java.util.HashSet;
import java.util.List;
import java.util.Set;
import java.util.concurrent.Callable;
import java.util.concurrent.ExecutionException;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;
import java.util.concurrent.Future;

public class Test {
    private static final int NTHREDS = 10;

    public static void main(String[] args) {
        final Counter counter = new Counter();
        List<Future<Integer>> list = new
        ArrayList<Future<Integer>>();

        for (int i = 0; i < 500; i++) {
            Callable<Integer>() {
                @Override
                public Integer call() throws Exception {
                    int number =
                    System.out.println(number );
                    return number ;
                }
            };
            Future<Integer> submit=
            list.add(submit);
        }

        // This will make the executor accept no new threads
        // and finish all existing threads in the queue
        executor.shutdown();
        // Wait until all threads are finish
        while (!executor.isTerminated()) {
        }
        Set<Integer> set = new HashSet<Integer>();
        for (Future<Integer> future : list) {
            try {
                set.add(future.get());
            } catch (InterruptedException e) {
                e.printStackTrace();
            } catch (ExecutionException e) {
                e.printStackTrace();
            }
        }
        if (list.size()!=set.size()){
            throw new RuntimeException("Double-
            entries!!!");
        }
    }
}

```

The interesting part is how the `incrementAndGet()` method is implemented. It uses a CAS operation.



[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/) [Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/) [Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search



[\(http://www.vogella.com\)](http://www.vogella.com/)

[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)

[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)

[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)

[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)

[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

QUICK LINKS

- [06 FEB - RCP Training](#)
(http://www.vogella.o)
- [20 FEB - Android Development](#)
(http://www.vogella.o)
- [vogella Training](#)
(http://www.vogella.o)
- [vogella Books](#)
(http://www.vogella.o)

SHARE



JAVA

```

public final int incrementAndGet() {
    for (;;) {
        int current = get();
        int next = current + 1;
        if (compareAndSet(current, next))
            return next;
    }
}

```

The JDK itself makes more and more use of non-blocking algorithms to increase performance for every developer. Developing correct non-blocking algorithm is not a trivial task.

For more information on non-blocking algorithm, e.g. examples for a non-blocking Stack and non-block LinkedList, please see <http://www.ibm.com/developerworks/java/library/j-jtp04186/index.html>



[Tutorials](http://www.vogella.com/tutorials/) (<http://www.vogella.com/tutorials/>) [Training](http://www.vogella.com/training/) (<http://www.vogella.com/training/>) [Consulting](http://www.vogella.com/consulting/) (<http://www.vogella.com/consulting/>) [Products](http://www.vogella.com/products/) (<http://www.vogella.com/products/>) [Books](http://www.vogella.com/books/) (<http://www.vogella.com/books/>) [Company](http://www.vogella.com/company/) (<http://www.vogella.com/company/>) [Donate](http://www.vogella.com/donate/) (<http://www.vogella.com/donate/>) [Contact us](http://www.vogella.com/contact-us/) (<http://www.vogella.com/contact-us/>)

Search



framework. The fork-join framework allows you to distribute a certain task on several workers and then wait for the result.

For Java 6.0 you can download the package (jsr166y) from the [Download site](http://gee.cs.oswego.edu/dl/concurrency-interest/index.html) (<http://gee.cs.oswego.edu/dl/concurrency-interest/index.html>).

For testing create the Java project "de.vogella.performance.forkjoin". If you are not using Java 7 you also need to *jsr166y.jar* to the classpath.

Create first a `algorithm` package and then the following class.

JAVA

```

package algorithm;

import java.util.Random;

/**
 * This class defines a long list of integers which defines the problem we
 * will later try to solve
 */
public class Problem {
    private final int[] list = new int[2000000];

    public Problem() {
        Random generator = new Random(19580427);
        for (int i = 0; i < list.length; i++) {
            list[i] = generator.nextInt(500000);
        }
    }

    public int[] getList() {
        return list;
    }
}

```

Define now the `Solver` class as shown in the following example coding.



The API defines other top classes, e.g. `RecursiveAction`, `AsyncAction`. Check the Javadoc for details.

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06FEB-RCP-Training/) (<http://www.vogella.com/06FEB-RCP-Training/>)
- [20 FEB - Android Development](http://www.vogella.com/20FEB-Android-Development/) (<http://www.vogella.com/20FEB-Android-Development/>)
- [vogella Training](http://www.vogella.com/vogella-Training/) (<http://www.vogella.com/vogella-Training/>)
- [vogella Books](http://www.vogella.com/vogella-Books/) (<http://www.vogella.com/vogella-Books/>)

SHARE



JAVA

```

package algorithm;

import java.util.Arrays;

import jsr166y.forkjoin.RecursiveAction;

public class Solver extends RecursiveAction {
    private int[] list;
    public long result;

    public Solver(int[] array) {
        this.list = array;
    }

    @Override
    protected void compute() {
        if (list.length == 1) {
            result = list[0];
        } else {
            // ...
        }
    }
}

```


[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)
[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)
[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search


[\(http://www.vogella.com\)](http://www.vogella.com/)

list.length);

[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)
[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)
[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)
[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)
[New HTML](http://www.vogella.com/new.html)
[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

```

Solver s1 = new Solver(1);
Solver s2 = new Solver(12);
forkJoin(s1, s2);
result = s1.result + s2.result;

```

```

    }
}

```

Now define a small test class for testing its efficiency.

JAVA

```

package testing;

import jsr166y.forkjoin.ForkJoinExecutor;
import jsr166y.forkjoin.ForkJoinPool;
import algorithm.Problem;
import algorithm.Solver;

public class Test {

    public static void main(String[] args) {
        Problem test = new Problem();
        // check the number of available processors
        int nThreads = Runtime.getRuntime().availableProcessors();
        System.out.println(nThreads);
        Solver mfj = new Solver(test.getList());
        ForkJoinExecutor pool = new ForkJoinPool(nThreads);
        pool.invoke(mfj);
        long result = mfj.getResult();
        System.out.println("Done. Result: " + result);
        long sum = 0;
        // check if the result was ok
        for (int i = 0; i < test.getList().length; i++) {
            sum += test.getList()[i];
        }
        System.out.println("Done. Result: " + sum);
    }
}

```

QUICK LINKS

- [06 FEB - RCP Training](#)
(http://www.vogella.o)
- [20 FEB - Android Development](#)
(http://www.vogella.o)
- [vogella Training](#)
(http://www.vogella.o)
- [vogella Books](#)
(http://www.vogella.o)

SHARE




12. Deadlock

A concurrent application has the risk of a *deadlock*. A set of processes are deadlocked if all processes are waiting for an event which another process in the same set has to cause.

For example if thread A waits for a lock on object Z which thread B holds and thread B wait for a look on object Y which is hold be process A then these two processes are locked and cannot continue in their processing.

This can be compared to a traffic jam, where cars(threads) require the access to a certain street(resource), which is currently blocked by another car(lock).

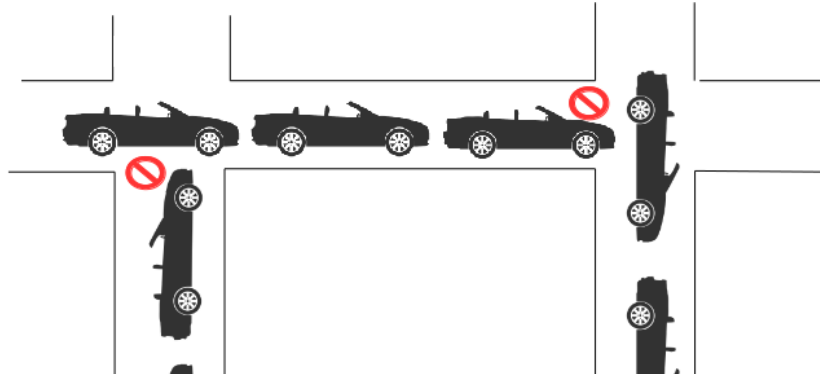

[Tutorials \(http://www.vogella.com/tutorials/\)](http://www.vogella.com/tutorials/)

[Training \(http://www.vogella.com/training/\)](http://www.vogella.com/training/)

[Consulting \(http://www.vogella.com/consulting/\)](http://www.vogella.com/consulting/)

Search



[\(http://www.vogella.com\)](http://www.vogella.com/)


[Products \(http://www.vogella.com/products/\)](http://www.vogella.com/products/)

[Books \(http://www.vogella.com/books/\)](http://www.vogella.com/books/)

[Company \(http://www.vogella.com/company/\)](http://www.vogella.com/company/)

[Donate \(http://www.vogella.com/donate/\)](http://www.vogella.com/donate/)

[Contact us \(http://www.vogella.com/contact.html\)](http://www.vogella.com/contact.html)

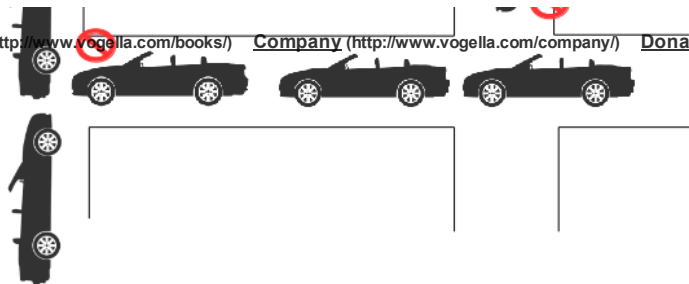

Download This to PDF

Convert doc to pdf and pdf
to doc

downloadconverternow.com



QUICK LINKS

- [06 FEB - RCP
Training](http://www.vogella.com/06-FEB-RCP-Training/)
(http://www.vogella.o)
- [20 FEB - Android
Development](http://www.vogella.com/20-FEB-Android-Development/)
(http://www.vogella.o)
- [vogella Training](http://www.vogella.com/vogella-Training/)
(http://www.vogella.o)
- [vogella Books](http://www.vogella.com/vogella-Books/)
(http://www.vogella.o)


SHARE




13. About this website




[\(http://www.vogella.com/support-free-content/\)](http://www.vogella.com/support-free-content/)



[\(http://www.vogella.com/questions-and-discussion/\)](http://www.vogella.com/questions-and-discussion/)



[\(http://www.vogella.com/tutorial-code-license/\)](http://www.vogella.com/tutorial-code-license/)



<http://www.vogella.com/code/index.html>

14. Links and Literature

14.1. Concurrency Resources

[IBM concurrency: Java 8 concurrency basics](http://www.ibm.com/developerworks/java/library/j-jvmc2/index.html)

(http://www.ibm.com/developerworks/java/library/j-jvmc2/index.html)

[Functional-Style Callbacks Using Java 8's CompletableFuture](http://www.infoq.com/articles/Functional-Style-Callbacks-Using-CompletableFuture)

(http://www.infoq.com/articles/Functional-Style-Callbacks-Using-CompletableFuture)

[Introduction to concurrency](http://java.sun.com/docs/books/tutorial/essential/concurrency/index.html)

(http://java.sun.com/docs/books/tutorial/essential/concurrency/index.html)

[Article series from Brian Goetz including lots about concurrency](http://www.briangoetz.com/pubs.html)
(<http://www.briangoetz.com/pubs.html>)

[Thread pools and work queues by Brian Goetz](http://www.ibm.com/developerworks/library/j-jtp0730.html)
(<http://www.ibm.com/developerworks/library/j-jtp0730.html>)

[Introduction to nonblocking algorithms by Brian Goetz](http://www.ibm.com/developerworks/java/library/j-jtp04186/index.html)
(<http://www.ibm.com/developerworks/java/library/j-jtp04186/index.html>)

[Java theory and practice: Stick a fork in it, Part 1 by Brian Goetz](http://www.ibm.com/developerworks/java/library/j-jtp11137.html)
(<http://www.ibm.com/developerworks/java/library/j-jtp11137.html>)

[Java theory and practice: Stick a fork in it, Part 2 by Brian Goetz](http://www.ibm.com/developerworks/java/library/j-jtp03048.html)
(<http://www.ibm.com/developerworks/java/library/j-jtp03048.html>)

1.4.2. vogella GmbH training and consulting contact



[Tutorials](http://www.vogella.com/tutorials/) (<http://www.vogella.com/tutorials/>) [Training](http://www.vogella.com/training/) (<http://www.vogella.com/training/>) [Consulting](http://www.vogella.com/consulting/) (<http://www.vogella.com/consulting/>)

Search



(<http://www.vogella.com>)

[Products](http://www.vogella.com/products/) (<http://www.vogella.com/products/>) [Books](http://www.vogella.com/books/) (<http://www.vogella.com/books/>) [Company](http://www.vogella.com/company/) (<http://www.vogella.com/company/>) [Donate](http://www.vogella.com/donate/) (<http://www.vogella.com/donate/>) [New HTML](http://www.vogella.com/new.html) (<http://www.vogella.com/new.html>)

[Contact us](http://www.vogella.com/contact.html) (<http://www.vogella.com/contact.html>)

The vogella company provides comprehensive training and education services (<http://www.vogella.com/training/>) from experts in the areas of Eclipse RCP, Android, Git, Java, Gradle and Spring. We offer both public and inhouse training. Whichever course you decide to take, you are guaranteed to experience what many before you refer to as "The best IT class I have ever attended" (<http://www.vogella.com/training/>).

The vogella company offers expert consulting (<http://www.vogella.com/consulting/>) services, development support and coaching. Our customers range from Fortune 100 corporations to individual developers.

QUICK LINKS

- [06 FEB - RCP Training](http://www.vogella.com/06-FEB-RCP-Training)
(<http://www.vogella.com/06-FEB-RCP-Training>)
- [20 FEB - Android Development](http://www.vogella.com/20-FEB-Android-Development)
(<http://www.vogella.com/20-FEB-Android-Development>)
- [vogella Training](http://www.vogella.com/vogella-Training)
(<http://www.vogella.com/vogella-Training>)
- [vogella Books](http://www.vogella.com/vogella-Books)
(<http://www.vogella.com/vogella-Books>)

SHARE



**Millions of developers:
one call.**

The world's leading developer
advertising group

Appendix A: Copyright and License

Copyright © 2012-2016 vogella GmbH. Free use of the software examples is granted under the terms of the EPL License. This tutorial is published under the [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Germany](http://creativecommons.org/licenses/by-nc-sa/3.0/de/deed.en) (<http://creativecommons.org/licenses/by-nc-sa/3.0/de/deed.en>) license.

See [Licence](http://www.vogella.com/license.html) (<http://www.vogella.com/license.html>).