


Documentation Screenshots

1. Docker Compose & Build

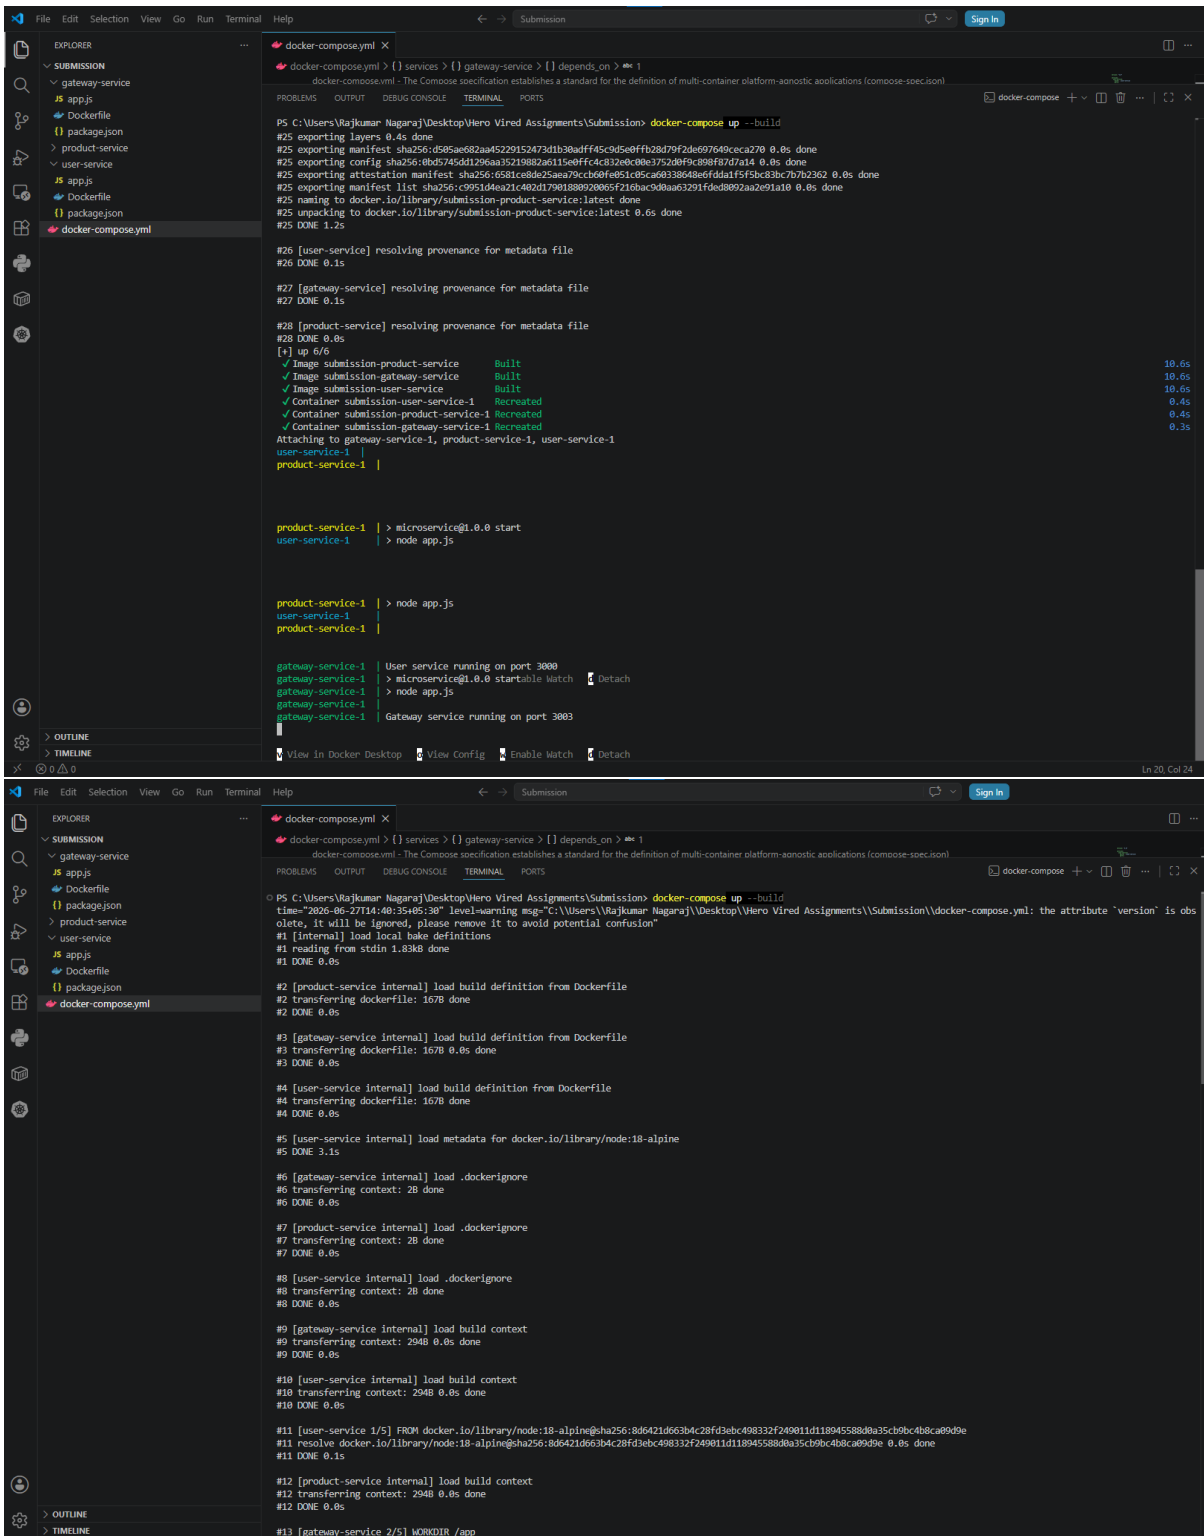

The first screenshot shows the output of the `docker-compose up --build` command. It displays the process of pulling Docker images for `submission-product-service`, `submission-gateway-service`, and `submission-user-service`, and then starting the containers. The output includes timestamps and progress bars for each step.

```
P5 C:\Users\Rajkumar Nagaraj\Desktop\Hiro Vired Assignments\Submission> docker-compose up --build
docker-compose.yml - The Compose specification establishes a standard for the definition of multi-container platform-agnostic applications (compose-spec:1.0)

#25 exporting layers 0.4s done
#25 exporting manifest sha256:d505ae682aa45229152473d1b30adff45c9d5e8ff82879f2de697649ceca270 0.0s done
#25 exporting config sha256:8bd5745dd1296aa35219882a6115eeff4c832e0c00e3752d0f9c898f87d7a14 0.0s done
#25 exporting attestation manifest sha256:6581ce8d625aaa79cbb0f0e51c05ca68338648e6fdd1f5f5bc83bc767b2362 0.0s done
#25 exporting manifest list sha256:c95164e21c40d179d188920869216bac9d8aa63291fdec8092aa2e91a10 0.0s done
#25 naming to docker.io/library/submission-product-service:latest done
#25 unpacking to docker.io/library/submission-product-service:latest 0.6s done
#25 DONE 1.2s

#26 [user-service] resolving provenance for metadata file
#26 DONE 0.1s

#27 [gateway-service] resolving provenance for metadata file
#27 DONE 0.1s

#28 [product-service] resolving provenance for metadata file
#28 DONE 0.0s

[+] up 6/6
✓ Image submission-product-service Built 18.6s
✓ Image submission-gateway-service Built 18.6s
✓ Image submission-user-service Built 18.6s
✓ Container submission-user-service-1 Recreated 0.4s
✓ Container submission-product-service-1 Recreated 0.4s
✓ Container submission-gateway-service-1 Recreated 0.3s
Attaching to gateway-service-1, product-service-1, user-service-1
user-service-1 |
product-service-1 |
product-service-1 | > microservice@1.0.0 start
user-service-1 | > node app.js
product-service-1 | > node app.js
user-service-1 | > node app.js
product-service-1 |
gateway-service-1 | User service running on port 3000
gateway-service-1 | > microservice@1.0.0 startable Watch [Detach]
gateway-service-1 | > node app.js
gateway-service-1 |
gateway-service-1 | Gateway service running on port 3803
```

The second screenshot shows the output of the `docker-compose up --build` command, displaying the process of pulling Docker images for `submission-product-service`, `submission-gateway-service`, and `submission-user-service`, and then starting the containers. The output includes timestamps and progress bars for each step.

```
P5 C:\Users\Rajkumar Nagaraj\Desktop\Hiro Vired Assignments\Submission> docker-compose up --build
time="2026-06-27T14:48:35+05:30" level=warning msg="C:\Users\Rajkumar Nagaraj\Desktop\Hiro Vired Assignments\Submission\docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion"
#1 [internal] load local bake definitions
#1 reading from stdin 1.83kB done
#1 DONE 0.0s

#2 [product-service internal] load build definition from Dockerfile
#2 transferring dockerfile: 167B done
#2 DONE 0.0s

#3 [gateway-service internal] load build definition from Dockerfile
#3 transferring dockerfile: 167B 0.0s done
#3 DONE 0.0s

#4 [user-service internal] load build definition from Dockerfile
#4 transferring dockerfile: 167B done
#4 DONE 0.0s

#5 [user-service internal] load metadata for docker.io/library/node:18-alpine
#5 DONE 3.1s

#6 [gateway-service internal] load .dockerignore
#6 transferring context: 2B done
#6 DONE 0.0s

#7 [product-service internal] load .dockerignore
#7 transferring context: 2B done
#7 DONE 0.0s

#8 [user-service internal] load .dockerignore
#8 transferring context: 2B done
#8 DONE 0.0s

#9 [gateway-service internal] load build context
#9 transferring context: 294B 0.0s done
#9 DONE 0.0s

#10 [user-service internal] load build context
#10 transferring context: 294B 0.0s done
#10 DONE 0.0s

#11 [user-service 1/5] FROM docker.io/library/node:18-alpine@sha256:8d6421d663b4c28fd3ebc498332f249011d118945588da35c9bcb48ca09d9e
#11 resolve docker.io/library/node:18-alpine@sha256:8d6421d663b4c28fd3ebc498332f249011d118945588da35c9bcb48ca09d9e 0.0s done
#11 DONE 0.1s


#12 [product-service internal] load build context
#12 transferring context: 294B 0.0s done
#12 DONE 0.0s


#13 [gateway-service 2/5] WORKDIR /app
```

2. YAML file configuration

```
docker-compose.yml
docker-compose.yml > {} services > {} gateway-service > {} depends_on > abc 1
1  version: "3.8"
2
3  >Run All Services
4  services:
5    >Run Service
6    user-service:
7      build: ./user-service
8      ports:
9        - "3000:3000"
10
11    >Run Service
12    product-service:
13      build: ./product-service
14      ports:
15        - "3001:3001"
16
17    >Run Service
18    gateway-service:
19      build: ./gateway-service
20      ports:
21        - "3003:3003"
22      depends_on:
23        - user-service
24        - product-service
```

3. Verification of Containers Running on the Docker Application

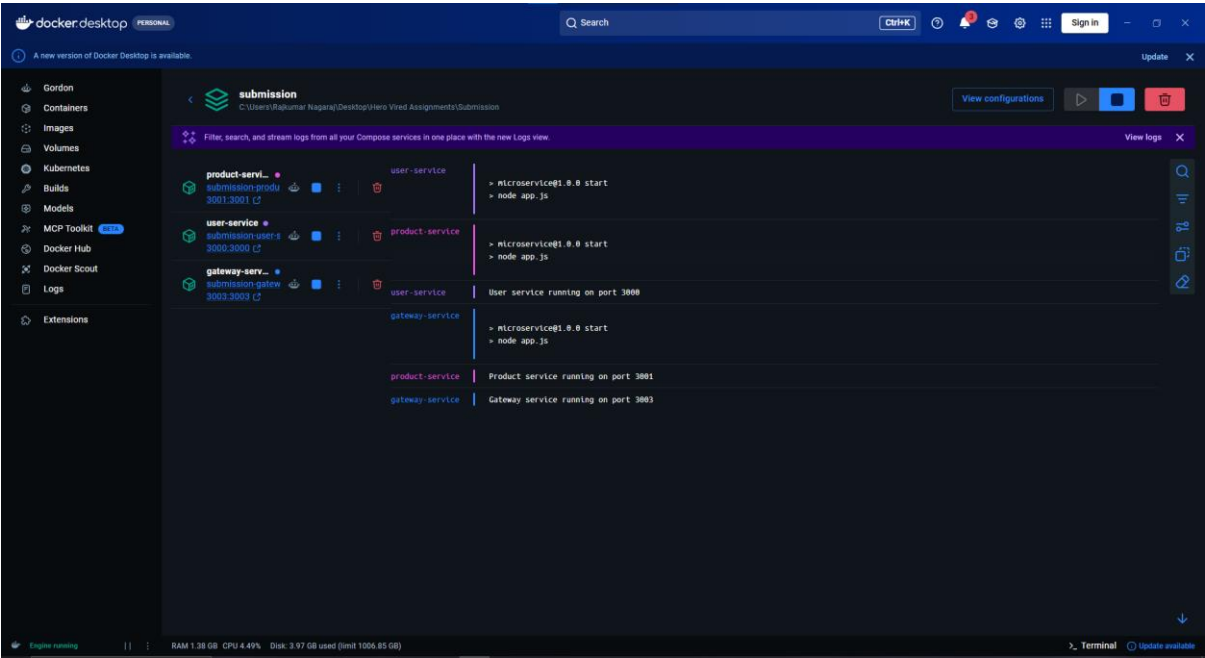

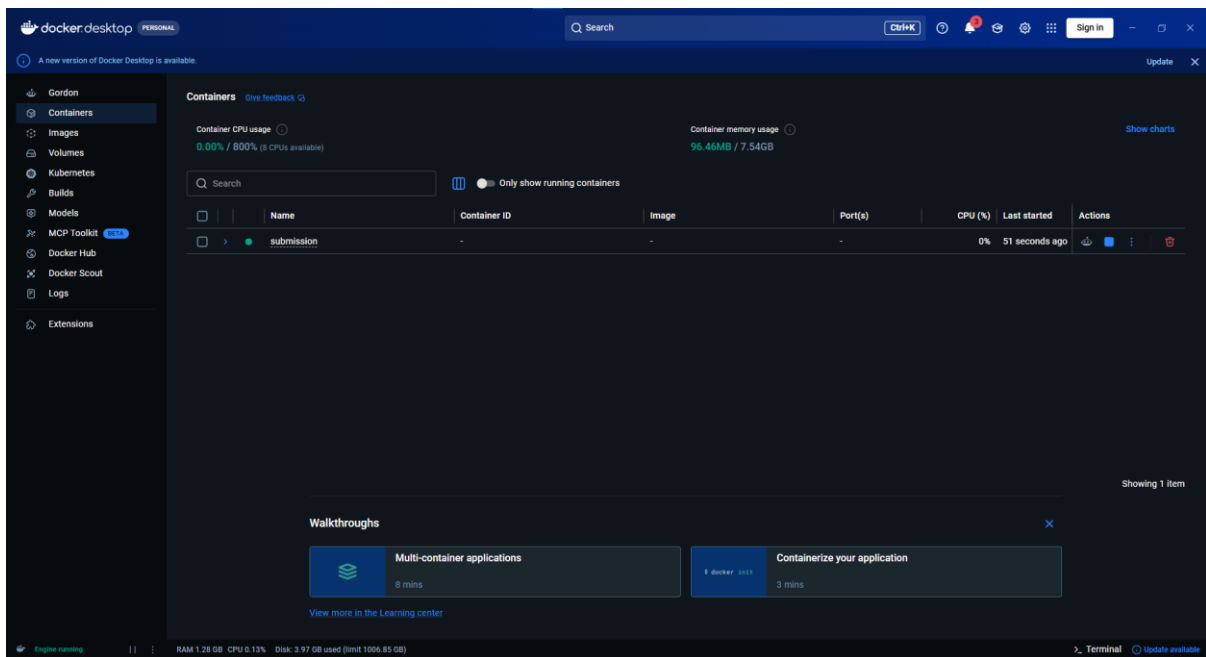

4. Testing the Application using the localhost Port Numbers

