

SELECT \* FROM hacker

UPDATE hacker  
SET Country='United Kingdom'  
WHERE Country='UK';

SELECT \* FROM hacker  
WHERE Country='United Kingdom';

The screenshot shows the Microsoft SQL Server Enterprise Manager interface. The left pane displays the Object Explorer with the 'hacker' database selected. The right pane shows a SQL query window with the following code:

```
SELECT * FROM hacker  
  
UPDATE hacker  
SET Country='United Kingdom'  
WHERE Country='UK';  
  
SELECT * FROM hacker  
WHERE Country='United Kingdom';  
  
UPDATE hacker  
SET Score=100  
WHERE name='Kareemshah6';  
  
SELECT * FROM hacker  
WHERE Score=100;
```


The bottom pane shows the results of the last query, displaying a table with 2 rows:

ID	rank	name	Score	Time	Country
1	6	kareemshah6	100	1723.35.33	India
2	42	roohullah18	100	1261.26.02	India

The status bar at the bottom indicates 'Query executed successfully.' and '2 rows'.

```
UPDATE hacker
SET Score=100
WHERE name='Kareemshah6';
```

```
SELECT * FROM hacker
WHERE Score=100;
```

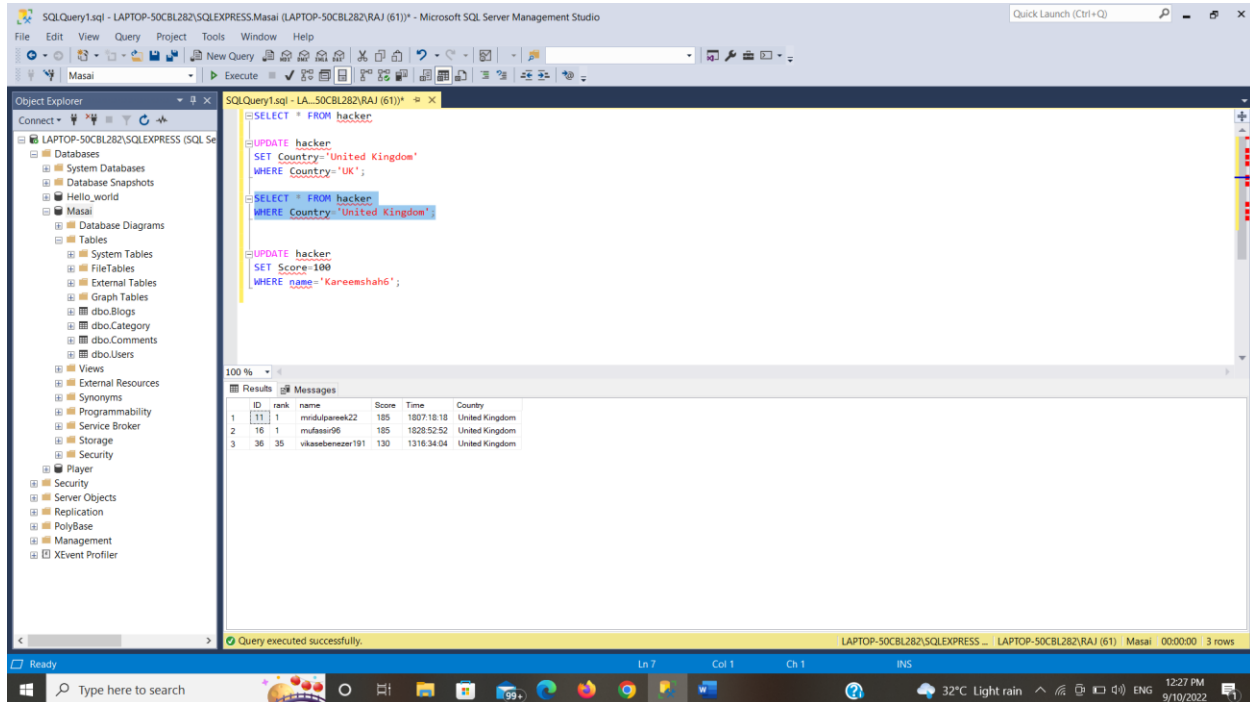

SQLQuery1.sql - LAPTOP-50CBL282\SQLEXPRESS\Masai (LAPTOP-50CBL282\RAJ (61)) - Microsoft SQL Server Management Studio

Object Explorer: LAPTOP-50CBL282\SQLEXPRESS (SQL Se)

SQLQuery1.sql - LA\_50CBL282\RAJ (61):

```
SELECT * FROM hacker;
UPDATE hacker
SET Country='United Kingdom'
WHERE Country='UK';
SELECT * FROM hacker
WHERE Country='United Kingdom';
UPDATE hacker
SET Score=100
WHERE name='Kareemshah6';
```

Results


ID	rank	name	Score	Time	Country
1	11	mukulpareek22	185	1807.18.18	United Kingdom
2	16	mufassir96	185	1828.52.52	United Kingdom
3	36	vikasbenazer191	130	1316.34.04	United Kingdom

Query executed successfully.

Ready | Type here to search | 32°C Light rain | 12:27 PM 9/10/2022

```
UPDATE hacker
SET name='Shubham Ghatе'
WHERE name='Shubham_Ghatе';
```

```
SELECT * FROM hacker
WHERE name='Shubham Ghatе';
```

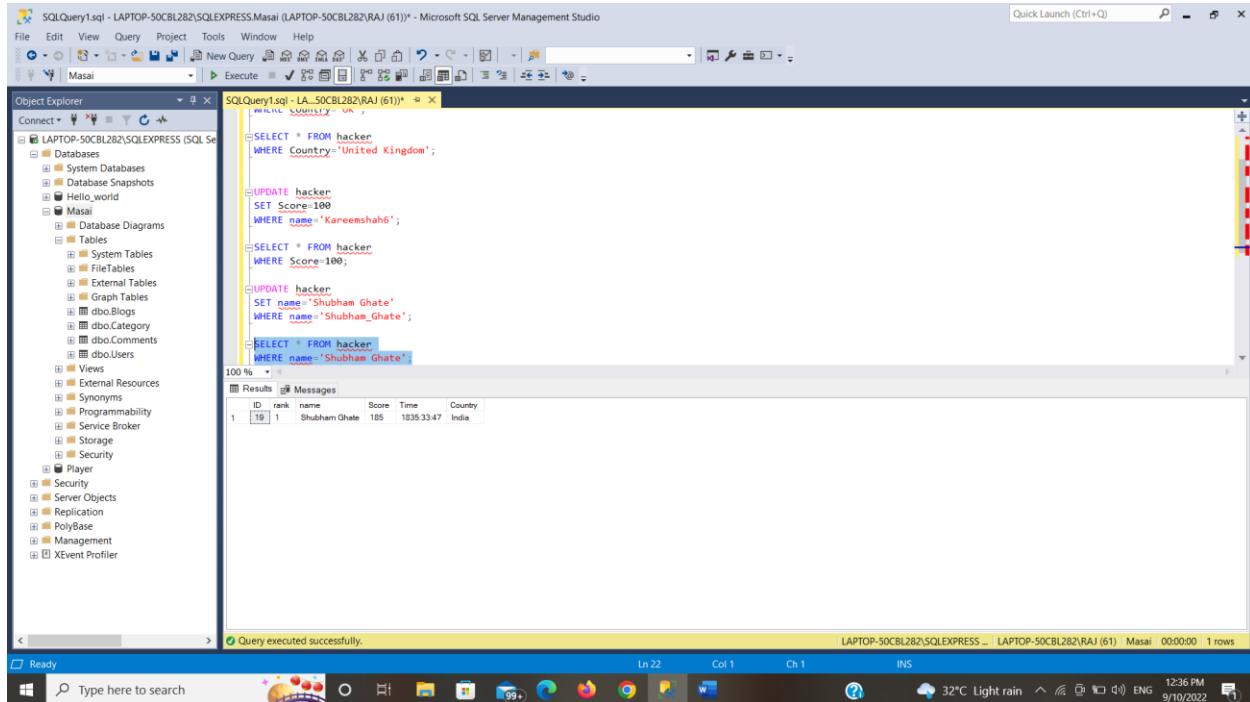

The screenshot displays the Microsoft SQL Server Enterprise Manager interface. The Object Explorer on the left shows the database structure, including the 'hacker' table. The central query window contains the following SQL script:

```
SELECT * FROM hacker
WHERE Country='United Kingdom';

UPDATE hacker
SET Score=100
WHERE name='Kareemshah6';

SELECT * FROM hacker
WHERE Score=100;

UPDATE hacker
SET name='Shubham Ghatе'
WHERE name='Shubham_Ghatе';

SELECT * FROM hacker
WHERE name='Shubham Ghatе';
```

The Results pane at the bottom shows the output of the final query, displaying one row with the following data:

ID	rank	name	Score	Time	Country
1	1	Shubham Ghatе	105	1035.3347	India

The status bar at the bottom indicates that the query was executed successfully, returning 1 row.

```
UPDATE hacker
SET Country='Australia'
WHERE name='nikitanawarkhed1';
```

```
SELECT * FROM hacker
WHERE name='nikitanawarkhed1';
```

