



Python Programming - 2301CS404

Lab - 1

Raj Vekariya | 23010101298 | 332

01) WAP to print “Hello World”

```
In [1]: print("Hello World!!!")
```

```
Hello World!!!
```

02) WAP to print addition of two numbers with and without using input().

```
In [2]: a = int(input('Enter number 1: '))
b = int(input('Enter number 2: '))
print(a+b)

c = 10
d = 20
print(c+d)
```

```
Enter number 1: 2
Enter number 2: 6
```

```
8
30
```

03) WAP to check the type of the variable.

```
In [4]: a = 10
b = 10.5
c = 'Hello'
d = True
print(type(a))
print(type(b))
print(type(c))
print(type(d))
```



```
<class 'int'>
<class 'float'>
<class 'str'>
<class 'bool'>
```

04) WAP to calculate simple interest.

```
In [6]: principle = float(input('Enter the principle amount: '))
time = float(input('Enter the time period: '))
rate = float(input('Enter the rate of interest: '))
simpleInterest = (principle*time*rate)/100

print('Simple interest is:', simpleInterest)
```



```
Enter the principle amount: 1000
Enter the time period: 2
Enter the rate of interest: 5

Simple interest is: 100.0
```

05) WAP to calculate area and perimeter of a circle.

```
In [8]: import math
r = float(input('Enter the radius of the circle: '))

perimeter = 2*math.pi*r
area = math.pi*r**2

print('Perimeter of the circle is:', perimeter)
print('Area of the circle is:', area)
```



```
Enter the radius of the circle: 7

Perimeter of the circle is: 43.982297150257104
Area of the circle is: 153.93804002589985
```

06) WAP to calculate area of a triangle.

```
In [10]: base = float(input('Enter the base of the triangle: '))
height = float(input('Enter the height of the triangle: '))
area = 1/2 * (base* height)

print('Area of the triangle is:', area)
```

Enter the base of the triangle: 6
 Enter the height of the triangle: 8

Area of the triangle is: 24.0

07) WAP to compute quotient and remainder.

```
In [12]: a = int(input('Enter number 1: '))
b = int(input('Enter number 2: '))

print(f'Quotient is {a/b}')
print(f'Remainder is {a%b}')
```

Enter number 1: 5
 Enter number 2: 3

Quotient is 1.6666666666666667
 Remainder is 2

08) WAP to convert degree into Fahrenheit and vice versa.

```
In [14]: temp = input('Enter "c" for celcius or "f" for fahrenheit: ')
if temp == c:
    c = float(input('Enter the temperature in celcius: '))
    f = c * (9/5) + 32
    print(f'{c} degrees celcius is equal to {f} degrees fahrenheit')
else:
    f = float(input('Enter the temperature in fahrenheit: '))
    c = (5/9) * (f-32)
    print(f'{f} degrees fahrenheit is equal to {c} degrees celcius')
```

Enter "c" for celcius or "f" for fahrenheit: c
 Enter the temperature in fahrenheit: 32
 32.0 degrees fahrenheit is equal to 0.0 degrees celcius

09) WAP to find the distance between two points in 2-D space.

```
In [16]: x1, x2 = 1, 4
y1, y2 = 2, 6

distance = math.sqrt((x2 - x1)**2 + (y2 - y1)**2)
print(f'Distance between 2 points in 2-D space is {distance}')
```

Distance between 2 points in 2-D space is 5.0

10) WAP to print sum of n natural numbers.

```
In [18]: n = int(input('Enter any natural number: '))
sum = 0
for i in range(n+1):
    sum += i

print(f'Sum of first {n} natural numbers is {sum}')
```

Enter any natural number: 5

Sum of first 5 natural numbers is 15

11) WAP to print sum of square of n natural numbers.

```
In [20]: n = int(input('Enter any natural number: '))
sum = 0
for i in range(n+1):
    sum += (i*i)

print(f'Sum of square of first {n} natural numbers is {sum}')
```

Enter any natural number: 8

Sum of square of first 8 natural numbers is 204

12) WAP to concate the first and last name of the student.

```
In [1]: first = input('Enter your first name: ')
last = input('Enter your last name: ')
name = first + ' ' + last
print(f'Your full name is {name}')
```

Enter your first name: Raj

Enter your last name: Vekariya

Your full name is Raj Vekariya

13) WAP to swap two numbers.

```
In [24]: a, b = 5, 10
print(f'a is {a} and b is {b}')
a, b = b, a
print(f'a is {a} and b is {b}')
```

a is 5 and b is 10

a is 10 and b is 5

14) WAP to get the distance from user into kilometer, and convert it into meter, feet, inches and centimeter.

```
In [26]: distance = float(input('Enter distance in kilometer: '))
print(f'The distance in meter is {distance * 1000} meters')
print(f'The distance in feet is {distance * 3280.84} feet')
print(f'The distance in inches is {distance * 39370.08} inches')
print(f'The distance in centimeters is {distance * 100000} centimeters')
```

```
Enter distance in kilometer: 8
The distance in meter is 8000.0 meters
The distance in feet is 26246.72 feet
The distance in inches is 314960.64 inches
The distance in centimeters is 800000.0 centimeters
```

15) WAP to get day, month and year from the user and print the date in the given format: 23-11-2024.

```
In [28]: day = int(input('Enter the day: '))
month = int(input('Enter the month: '))
year = int(input('Enter the year: '))

print(f'The date is {day}-{month}-{year}')
```

```
Enter the day: 5
Enter the month: 6
Enter the year: 2025

The date is 5-6-2025
```

```
In [ ]:
```



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Lab - 2

Raj Vekariya | 23010101298 | 332

if..else..

01) WAP to check whether the given number is positive or negative.

```
In [1]: n=int(input("Enter a number:"));
if(n>=0):
    print("Number is positive!!");
else:
    print("Number is negative!!");
```

Enter a number: -8

Number is negative!!

02) WAP to check whether the given number is odd or even.

```
In [3]: n=int(input("Enter a number:"));
if(n%2==0):
    print("Number is even!!");
else:
    print("Number is odd!!");
```

Enter a number: 8

Number is even!!

03) WAP to find out largest number from given two numbers using simple if and ternary operator.

```
In [7]: #if..else..
n=int(input("Enter a number(n):"));
m=int(input("Enter a number(m):"));
if(n>m):
    print("Number n is larger!");
else:
    print("Number m is larger!");

#Ternary operator
n=int(input("Enter a number(n):"));
m=int(input("Enter a number(m):"));
a="n is larger!!" if n>m else "m is larger!!";
print(a);
```

Enter a number(n): 8
Enter a number(m): 9

Number m is larger!

Enter a number(n): 8
Enter a number(m): 9

m is larger!!

04) WAP to find out largest number from given three numbers.

```
In [9]: n1=int(input("Enter a number(n1):"));
n2=int(input("Enter a number(n2):"));
n3=int(input("Enter a number(n3):"));
if(n1>=n2):
    if(n1>=n3):
        print(f"{n1} is largest!!");
    else:
        print(f"{n3} is largest!!");
else:
    if(n2>=n3):
        print(f"{n2} is largest!!");
    else:
        print(f"{n3} is largest!!");
```

Enter a number(n1): 7
Enter a number(n2): 8
Enter a number(n3): 9

9 is largest!!

05) WAP to check whether the given year is leap year or not.

[If a year can be divisible by 4 but not divisible by 100 then it is leap year but if it is divisible by 400 then it is leap year]

```
In [11]: year = int(input('Enter the year: '));

if ((year%4 == 0 and year%100 != 0) or year%400 == 0):
    print(f'{year} is Leap year')
else:
    print(f'{year} is not Leap year');
```

Enter the year: 2024

2024 is Leap year

06) WAP in python to display the name of the day according to the number given by the user.

```
In [13]: day = int(input('Enter the number of day: '))

match day:
    case 1:
        print('Today is monday')
    case 2:
        print('Today is tuesday')
    case 3:
        print('Today is wednesday')
    case 4:
        print('Today is thusday')
    case 5:
        print('Today is friday')
    case 6:
        print('Today is saturday')
    case 7:
        print('Today is sunday')
    case _:
        print('Invalid number')
```

Enter the number of day: 7

Today is sunday

07) WAP to implement simple calculator which performs (add,sub,mul,div) of two no. based on user input.

```
In [15]: n=int(input("Enter a number(n):"));
m=int(input("Enter a number(m):"));
p=str(input("Enter a operator:"));
if(p=="+"):
    print("Addition:",n+m);
elif(p=="-"):
    print("Subtraction:",n-m);
elif(p=="*"):
    print("Multiplication:",n*m);
elif(p=="/"):
    print("Division:",n/m);
```

Enter a number(n): 7

Enter a number(m): 5

Enter a operator: /

Division: 1.4

08) WAP to read marks of five subjects. Calculate percentage and print class accordingly.

Fail below 35

Pass Class between 35 to 45

Second Class

between 45 to 60

First Class between 60 to 70

Distinction if more than 70

```
In [19]: s1 = int(input('Enter marks of subject1: '));
s2 = int(input('Enter marks of subject2: '))
s3 = int(input('Enter marks of subject3: '))
s4 = int(input('Enter marks of subject4: '))
s5 = int(input('Enter marks of subject5: '))

result=(s1+s2+s3+s4+s5)/5;
print(result);

if(result<35):
    print("Class:Fail");
elif(result>=35 and result<45):
    print("Class Pass")
elif(result>=45 and result<60):
    print("Class:Second");
elif(result>=60 and result<70):
    print("Class:First");
elif(result>=70):
    print("Class:Distinction")
```

```
Enter marks of subject1: 55
Enter marks of subject2: 66
Enter marks of subject3: 88
Enter marks of subject4: 77
Enter marks of subject5: 99

77.0
Class:Distinction
```

09) Three sides of a triangle are entered through the keyboard, WAP to check whether the triangle is isosceles, equilateral, scalene or right-angled triangle.

```
In [4]: a = float(input("Enter the first side: "))
b = float(input("Enter the second side: "))
c = float(input("Enter the third side: "))

if a + b > c and a + c > b and b + c > a:
    if a**2 + b**2 == c**2 or a**2 + c**2 == b**2 or b**2 + c**2 == a**2:
        print("The triangle is Right-angled.")
    if a == b == c:
        print("The triangle is Equilateral.")
    elif a == b or b == c or a == c:
        print("The triangle is Isosceles.")
    else:
        print("The triangle is Scalene.")
else:
    print("The given sides do not form a valid triangle.")
```

```
Enter the first side: 7
Enter the second side: 24
Enter the third side: 25

The triangle is Right-angled.
The triangle is Scalene.
```

10) WAP to find the second largest number among three user input numbers.

```
In [23]: a = int(input('Enter the first number: '))
b = int(input('Enter the second number: '))
c = int(input('Enter the third number: '))

if (a > b and a < c):
    print('First number is second largest');
elif (b > a and b < c):
    print('Second number is second largest');
else:
    print('Third number is second largest');
```

Enter the first number: 7
 Enter the second number: 8
 Enter the third number: 9
 Second number is second largest

11) WAP to calculate electricity bill based on following criteria. Which takes the unit from the user.

- a. First 1 to 50 units – Rs. 2.60/unit
- b. Next 50 to 100 units – Rs. 3.25/unit
- c. Next 100 to 200 units – Rs. 5.26/unit
- d. above 200 units – Rs. 8.45/unit

```
In [25]: units = int(input('Enter the number of units: '))
case = 0
if units > 0 and units < 50:
    case = 1
elif units >= 50 and units < 100:
    case = 2
elif units >= 100 and units < 200:
    case = 3
elif units > 200:
    case = 4
rate = 0
match case:
    case 1:
        rate = units * 2.6
        print(f'Your electricity bill is {rate}')
    case 2:
        rate = (50 * 2.6) + ((units - 50) * 3.25)
        print(f'Your electricity bill is {rate}')
    case 3:
        rate = (50 * 2.6) + (50 * 3.25) + ((units - 100) * 5.26)
        print(f'Your electricity bill is {rate}')
    case 4:
        rate = (50 * 2.6) + (50 * 3.25) + (100 * 5.26) + ((units - 200) * 8.
        print(f'Your electricity bill is {rate}')
```

Enter the number of units: 50
 Your electricity bill is 130.0

In []:



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Lab - 3

Raj Vekariya | 23010101298 | 332

for and while loop

01) WAP to print 1 to 10.

```
In [6]: for i in range(1,11):
          print(i)
```

```
1
2
3
4
5
6
7
8
9
10
```

02) WAP to print 1 to n.

```
In [12]: n=int(input("enter a number:"))
for i in range (1,n+1):
    print(i)
```

enter a number: 10

1
2
3
4
5
6
7
8
9
10

03) WAP to print odd numbers between 1 to n.

```
In [18]: n=int(input("enter a number:"))
for i in range (1,n+1,2):
    print(i)
```

enter a number: 10

1
3
5
7
9

04) WAP to print numbers between two given numbers which is divisible by 2 but not divisible by 3.

```
In [22]: a=int(input("enter a number:"))
b=int(input("enter a number:"))
for i in range(a,b):
    if(i%2==0 and i%3!=0):
        print(i)
```

```
enter a number: 8
enter a number: 80
```

```
8
10
14
16
20
22
26
28
32
34
38
40
44
46
50
52
56
58
62
64
68
70
74
76
```

05) WAP to print sum of 1 to n numbers.

```
In [24]: n=int(input("Enter a number:"))
sum=0;
for i in range(1,n+1):
    sum+=i;
print(sum)
```

Enter a number: 15

```
1
3
6
10
15
21
28
36
45
55
66
78
91
105
120
```

06) WAP to print sum of series $1 + 4 + 9 + 16 + 25 + 36 + \dots n$.

```
In [50]: n=int(input("Enter a number:"))
sum=0;
for i in range(1,n+1):
    sum+=(i*i);
print(sum)
```

Enter a number: 5

```
55
```

07) WAP to print sum of series $1 - 2 + 3 - 4 + 5 - 6 + 7 \dots n$.

```
In [52]: n=int(input("Enter a number:"));
sum=0;
for i in range (1,n+1):
    if i%2==0:
        sum-=i
    else:
        sum+=i
print(sum)
```

Enter a number: 4

```
-2
```

08) WAP to print multiplication table of given number.

```
In [54]: n=int(input("Enter a number:"));
for i in range(1,11):
    print(n*i);
```

Enter a number: 5

5
10
15
20
25
30
35
40
45
50

09) WAP to find factorial of the given number.

```
In [64]: n=int(input("Enter a number:"));
fac=1;
for i in range(1,n+1):
    fac*=i;
print(fac)
```

Enter a number: 5

120

10) WAP to find factors of the given number.

```
In [60]: n=int(input("Enter a number:"));
fac=0;
for i in range(1,n+1):
    if(n%i==0):
        print(i)
```

Enter a number: 20

1
2
4
5
10
20

11) WAP to find whether the given number is prime or not.

```
In [82]: n=int(input("Enter a number:"));
for i in range(2,n):
    if(n%i==0):
        print("Not prime!!")
        break;
else:
    print("Prime!!")
```

Enter a number: 9

Not prime!!

12) WAP to print sum of digits of given number.

```
In [98]: #Method-1
n = int(input('Enter the number: '))
sum = 0
while n > 0:
    sum += n % 10
    n = n // 10
print(f"The sum of the digits is {sum}")

#Method-2
n = input('Enter the number: ')
sum=0;
for i in n:
    sum+=int(i)
print(f"The sum of the digits is {sum}")
```

Enter the number: 596

The sum of the digits is 20

Enter the number: 596

The sum of the digits is 20

13) WAP to check whether the given number is palindrome or not

```
In [86]: n = input('Enter the number: ')

if n == n[::-1]:
    print('The number is a palindrome')
else:
    print('The number is not a palindrome')
```

Enter the number: 16461

The number is a palindrome

14) WAP to print GCD of given two numbers.

```
In [92]: a = int(input("Enter the first number: "))
b = int(input("Enter the second number: "))

while b != 0:
    a, b = b, a % b

print(f"The GCD is: {a}")
```

```
Enter the first number: 20
Enter the second number: 15
```

```
The GCD is: 5
```



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Lab - 4

Raj Vekariya | 23010101298 | 332

String

01) WAP to check whether the given string is palindrome or not.

```
In [2]: string=input("Enter a String:");
reverse=string[::-1];

if(string==reverse):
    print(f"{string} is palindrome!!");
else:
    print(f"{string} is not palindrome!!");
```

```
Enter a String:abccba
abccba is palindrome!!
```

02) WAP to reverse the words in the given string.

```
In [4]: string=input("Enter a String:");
reverse=string[::-1];

print(f"Reversed string:{reverse}");
```

```
Enter a String:lknkljn
Reversed string:njlknkl
```

03) WAP to remove ith character from given string.

```
In [5]: string = input('Enter a string: ')
i = int(input('Enter the position to remove a character: '))

if i < 0 or i >= len(string):
    print('Index out of range');
else:
    string = string[:i] + string[i+1:]
    print('Modified string:', string);
```

Enter a string: jksfgkjldsn
 Enter the position to remove a character: 2
 Modified string: jkfgkjldsn

04) WAP to find length of string without using len function.

```
In [1]: string = input('Enter the string: ')
length = 0

for i in string:
    length += 1

print(f'The length of the string is {length}')
```

Enter the string: Raj
 The length of the string is 3

05) WAP to print even length word in string.

```
In [19]: string = input('Enter the string: ')
words = string.split()

for word in words:
    if len(word) % 2 == 0:
        print(word);
```

Enter the string: guyihu
 guyihu

06) WAP to count numbers of vowels in given string.

```
In [24]: string=input("Enter a string:");
string=string.lower();
count=0;

for i in string:
    if(i=='a'or i=='e' or i=='i' or i=='o' or i=='u'):
        count+=1;
print(f"The number of vowel is {count}");
```

Enter a string:AJPOOR
 The number of vowel is 3

07) WAP to capitalize the first and last character of each word in a string.

```
In [33]: string = input("Enter a string: ")
words = string.split()
result = []

for word in words:
    if len(word) > 1:
        word = word[0].upper() + word[1:-1] + word[-1].upper()
    else:
        word = word.upper()
    result.append(word)

output = ' '.join(result)
print("Modified string:", output);
```

Enter a string: try
Modified string: TrY

08) WAP to convert given array to string.

```
In [30]: array = ['Hello', 'World', 'From', 'Python']
result = ' '.join(array)

print(f"Converted string:{result}");
```

Converted string:Hello World From Python

09) Check if the password and confirm password is same or not.

In case of only case's mistake, show the error message.

```
In [37]: password=input("Enter password:");
confirm_password=input("Enter confirm_password:");
if password==confirm_password:
    print("Password matched");
elif password.lower()==confirm_password.lower():
    print("Case's mistake")
else:
    print("Password unmatched");
```

Enter password:mnbvcxz
Enter confirm_password:mnbVcxz
Case's mistake

10) : Display credit card number.

card no. : 1234 5678 9012 3456

```
In [38]: card_number = input("Enter the credit card number (with spaces): ")

if ''.join(card_number.split()).isnumeric() and len(card_number) == 19:
    parts = card_number.split()
    masked_parts = ['****'] * (len(parts) - 1) + [parts[-1]]
    masked_card = ' '.join(masked_parts)
    print("Masked card number:", masked_card);
else:
    print("Invalid card number");
```

Enter the credit card number (with spaces): 1234 5678 9012 3456
 Masked card number: **** **** **** 3456

11) : Checking if the two strings are Anagram or not.

s1 = decimal and s2 = medical are Anagram

```
In [42]: s1 = input("Enter the first string: ")
s2 = input("Enter the second string: ")

s1 = s1.replace(" ", "").lower()
s2 = s2.replace(" ", "").lower()

if sorted(s1) == sorted(s2):
    print(f'{s1} and {s2} are Anagrams.')
else:
    print(f'{s1} and {s2} are not Anagrams.')
```

Enter the first string: mug
 Enter the second string: gum
 "mug" and "gum" are Anagrams.

12) : Rearrange the given string. First lowercase then uppercase alphabets.

input : EHlsarwiwhtwMV

output : lsarwiwhtwEHMV

```
In [43]: string = input("Enter the string: ")

lowercase = ''.join([char for char in string if char.islower()])
uppercase = ''.join([char for char in string if char.isupper()])
result = lowercase + uppercase

print("Rearranged string:", result);
```

Enter the string: EHlsarwiwhtwMV
 Rearranged string: lsarwiwhtwEHMV



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 5

List

01) WAP to find sum of all the elements in a List.

```
In [2]: l1=[1,2,3,4,5]
print(sum(l1))
```

15

02) WAP to find largest element in a List.

```
In [4]: l1=[1,2,3,4,5]
print(max(l1))
```

5

03) WAP to find the length of a List.

```
In [8]: l1=[1,2,3,4,5,6,7,8,9,10]
print(len(l1))
```

10

04) WAP to interchange first and last elements in a list.

```
In [10]: l1=[1,2,3,4,5,6]
l1[0],l1[-1]=l1[-1],l1[0]
print(l1)
```

```
[6, 2, 3, 4, 5, 1]
```

05) WAP to split the List into two parts and append the first part to the end.

```
In [24]: l1=[1,2,3,4,5,6]
mid=len(l1)//2
x=l1[:mid]
y=l1[mid:]
print(y+x)
```

```
[4, 5, 6, 1, 2, 3]
```

06) WAP to interchange the elements on two positions entered by a user.

```
In [47]: n=int(input('Enter length of list:'))
l1=[]
for i in range(n):
    a=int(input(f'Element {i+1}:'))
    l1.append(a)
x=int(input('Enter a position:'))
y=int(input('Enter a position:'))
l1[x], l1[y] = l1[y], l1[x]
print(f'List after interchange is: {l1}')
```

```
Enter length of list: 5
Element 1: 0
Element 2: 1
Element 3: 2
Element 4: 3
Element 5: 4
Enter a position: 1
Enter a position: 3

List after interchange is: [0, 3, 2, 1, 4]
```

07) WAP to reverse the list entered by user.

```
In [49]: n=int(input('Enter length of list:'))
l1=[]
for i in range(n):
    a=int(input(f'Element {i+1}:'))
    l1.append(a)
l2=l1[::-1]
print(l2)
```

Enter length of list: 4
Element 1: 1
Element 2: 2
Element 3: 3
Element 4: 4

[4, 3, 2, 1]

08) WAP to print even numbers in a list.

```
In [53]: n=int(input('Enter length of list:'))
l1=[]
for i in range(n):
    a=int(input(f'Element {i+1}:'))
    l1.append(a)
l2=[i for i in l1 if(i%2==0)]
print(l2)
```

Enter length of list: 4
Element 1: 0
Element 2: 1
Element 3: 2
Element 4: 3

[0, 2]

09) WAP to count unique items in a list.

```
In [79]: l1=[1,1,1,1,2,2,3,3,4,5,6,8,8,9]
l2=[]
count=0
for i in l1:
    if i not in l2:
        count+=1
        l2.append(i)
print(count)
```

10) WAP to copy a list.

```
In [81]: l1=[1,2,3,4,5,6,7,8,9]
l2=l1.copy()
print(l2)
```

```
[1, 2, 3, 4, 5, 6, 7, 8, 9]
```

11) WAP to print all odd numbers in a given range.

```
In [91]: x=int(input('Enter a number:'))
y=int(input('Enter a number:'))
l1=[]
for i in range(x,y):
    if(i%2!=0):
        l1.append(i)
print(l1)
```

```
Enter a number: 1
Enter a number: 12
```

```
[1, 3, 5, 7, 9, 11]
```

12) WAP to count occurrences of an element in a list.

```
In [9]: n=int(input('Enter length of list:'))
l1=[]
for i in range(n):
    a=int(input(f'Element {i+1}:'))
    l1.append(a)
k=int(input('Enter number to be counted:'))
l2=l1.count(k)
print(l2)
```

```
Enter length of list: 6
Element 1: 1
Element 2: 11
Element 3: 1
Element 4: 2
Element 5: 3
Element 6: 4
Enter number to be counted: 1
```

```
2
```

13) WAP to find second largest number in a list.

```
In [11]: n=int(input('Enter length of list:'))
l1=[]
for i in range(n):
    a=int(input(f'Element {i+1}:'))
    l1.append(a)
l1.sort()
l2=l1[len(l1)-2]
print(l2)
```

```
Enter length of list: 8
Element 1: 1
Element 2: 2
Element 3: 3
Element 4: 4
Element 5: 5
Element 6: 6
Element 7: 7
Element 8: 8
```

7

14) WAP to extract elements with frequency greater than K.

```
In [7]: list = []
flag = True
while flag == True:
    element = input('Enter a element for list (Enter "f" to terminate): ')
    if element == 'f':
        break
    else:
        element = int(element)
    list.append(element)

k = int(input('Enter the frequency: '))

frequencyDict = {}
for i in list:
    if i in frequencyDict:
        frequencyDict[i] += 1
    else:
        frequencyDict[i] = 1

result = [key for key, value in frequencyDict.items() if value > k]
print(f'The element that occurred more than {k} times are: {result}')
```

```
Enter a element for list (Enter "f" to terminate): 1
Enter a element for list (Enter "f" to terminate): 1
Enter a element for list (Enter "f" to terminate): 11
Enter a element for list (Enter "f" to terminate): 1
Enter a element for list (Enter "f" to terminate): 2
Enter a element for list (Enter "f" to terminate): 2
Enter a element for list (Enter "f" to terminate): 23
Enter a element for list (Enter "f" to terminate): 3
Enter a element for list (Enter "f" to terminate): 2
Enter a element for list (Enter "f" to terminate): f
Enter the frequency: 2
```

The element that occurred more than 2 times are: [1, 2]

15) WAP to create a list of squared numbers from 0 to 9 with and without using List Comprehension.

```
In [109]: #With List Comprehension
list = [i**2 for i in range(10)]
print(list)

#Without List Comprehension
list = []
for i in range(10):
    list.append(i**2)

print(f'The list with square from 0 to 9 is: {list}')
```

```
[0, 1, 4, 9, 16, 25, 36, 49, 64, 81]
The list with square from 0 to 9 is: [0, 1, 4, 9, 16, 25, 36, 49, 64, 81]
```

16) WAP to create a new list (fruit whose name starts with 'b') from the list of fruits given by user.

```
In [113]: fruit_list = []
flag = True
while flag == True:
    element = input('Enter a fruit for list (Enter "f" to terminate): ')
    if element == 'f':
        break
    fruit_list.append(element)

b_fruits = [i for i in fruit_list if i.lower().startswith('b')]
print(f"Fruits whose names start with 'b': {b_fruits}")
```

```
Enter a fruit for list (Enter "f" to terminate): apple
Enter a fruit for list (Enter "f" to terminate): banana
Enter a fruit for list (Enter "f" to terminate): orange
Enter a fruit for list (Enter "f" to terminate): f

Fruits whose names start with 'b': ['banana']
```

17) WAP to create a list of common elements from given two lists.

```
In [1]: list1 = []
flag = True
while flag == True:
    element = input('Enter a element for list1 (Enter "f" to terminate): ')
    if element == 'f':
        break
    else:
        element = int(element)
    list1.append(element)

list2 = []
flag = True
while flag == True:
    element = input('Enter a element for list2 (Enter "f" to terminate): ')
    if element == 'f':
        break
    else:
        element = int(element)
    list2.append(element)

common = [element for element in list1 if element in list2]
print(f'Enter common elements in both list are: {common}')
```

```
Enter a element for list1 (Enter "f" to terminate): 1
Enter a element for list1 (Enter "f" to terminate): 2
Enter a element for list1 (Enter "f" to terminate): 3
Enter a element for list1 (Enter "f" to terminate): 4
Enter a element for list1 (Enter "f" to terminate): 5
Enter a element for list1 (Enter "f" to terminate): f
Enter a element for list2 (Enter "f" to terminate): 4
Enter a element for list2 (Enter "f" to terminate): 5
Enter a element for list2 (Enter "f" to terminate): 6
Enter a element for list2 (Enter "f" to terminate): 7
Enter a element for list2 (Enter "f" to terminate): 8
Enter a element for list2 (Enter "f" to terminate): f

Enter common elements in both list are: [4, 5]
```



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 6

Tuple

01) WAP to find sum of tuple elements.

```
In [2]: t1=(1,2,3,4,5,6,7,8,9)
t2=sum(t1)
print(t2)
```

45

02) WAP to find Maximum and Minimum K elements in a given tuple.

```
In [4]: t1=(1,2,3,4,5,6,7,8,9)
k = int(input("Enter the value of K: "))
sorted_t1 = sorted(t1)
minElements = sorted_t1[:k]
maxElements = sorted_t1[-k:]
print(f'Minimum elements:{minElements}');
print(f'Maximum elements:{maxElements}');
```

Enter the value of K: 3

Minimum elements:[1, 2, 3]
Maximum elements:[7, 8, 9]

03) WAP to find tuples which have all elements divisible by K from a list of tuples.

```
In [6]: tuple_list = [(12, 24, 36), (5, 10, 15), (3, 6, 9), (4, 8, 12), (10, 20, 30)]
k = int(input("Enter the value of K: "))
result = []
for tup in tuple_list:
    if all(i % k == 0 for i in tup):
        result.append(tup)

print(f"Tuples with all elements divisible by {k} are: {result}")
```

Enter the value of K: 5

Tuples with all elements divisible by 5 are: [(5, 10, 15), (10, 20, 30)]

04) WAP to create a list of tuples from given list having number and its cube in each tuple.

```
In [18]: l1 = []
while True:
    element = input('Enter a element for list (Enter "f" to terminate): ')
    if element == 'f':
        break
    else:
        element = int(element)
    l1.append(element)

result = [(num, num**3) for num in l1]

print(f"List of tuples with number and its cube: {result}")
```

Enter a element for list (Enter "f" to terminate): 1
 Enter a element for list (Enter "f" to terminate): 2
 Enter a element for list (Enter "f" to terminate): 3
 Enter a element for list (Enter "f" to terminate): 4
 Enter a element for list (Enter "f" to terminate): 5
 Enter a element for list (Enter "f" to terminate): 6
 Enter a element for list (Enter "f" to terminate): f

List of tuples with number and its cube: [(1, 1), (2, 8), (3, 27), (4, 64), (5, 125), (6, 216)]

05) WAP to find tuples with all positive elements from the given list of tuples.

```
In [22]: t1 = [(12, 24, 36), (-5, 10, 15), (3, 6, 9), (4, -8, 12), (10, 20, 30)]  
  
result = []  
for tup in t1:  
    if all(i > 0 for i in tup):  
        result.append(tup)  
  
print(f"Tuples with all positive elements: {result}")
```

Tuples with all positive elements: [(12, 24, 36), (3, 6, 9), (10, 20, 30)]

06) WAP to add tuple to list and vice – versa.

```
In [24]: l1 = [1, 2, 3, 4]  
t1 = (5, 6, 7)  
  
l1.append(t1)  
print("List after adding tuple:", l1)  
  
t2 = tuple(l1)  
t3 = t1 + tuple(l1)  
print("Tuple after adding list:", t3)
```

List after adding tuple: [1, 2, 3, 4, (5, 6, 7)]
Tuple after adding list: (5, 6, 7, 1, 2, 3, 4, (5, 6, 7))

07) WAP to remove tuples of length K.

```
In [32]: tuple_list = [(1, 2, 3), (4, 5), (6, 7, 8, 9), (10, 11), (12, 13, 14)]  
k = int(input("Enter the value of K: "))  
  
filtered_list = [tup for tup in tuple_list if len(tup) != k]  
print(f"List after removing tuples of length {k}: {filtered_list}")
```

Enter the value of K: 3

List after removing tuples of length 3: [(4, 5), (6, 7, 8, 9), (10, 11)]

08) WAP to remove duplicates from tuple.

```
In [36]: t1=(1,1,1,2,3,3,3,4,4,5,6,6,6,7)  
t2=set(t1)  
print(tuple(t2))
```

(1, 2, 3, 4, 5, 6, 7)

09) WAP to multiply adjacent elements of a tuple and print that resultant tuple.

```
In [38]: t1=(1,2,3,4,5,6,7,8,9,10,11,22,33,44,55,66,77,88,99,100)
result = []
for i in range(len(t1) - 1):
    product = t1[i] * t1[i + 1]
    result.append(product)
result_tuple = tuple(result)

print(f"Resultant tuple after multiplying adjacent elements: {result_tuple}")
```

Resultant tuple after multiplying adjacent elements: (2, 6, 12, 20, 30, 4
2, 56, 72, 90, 110, 242, 726, 1452, 2420, 3630, 5082, 6776, 8712, 9900)

10) WAP to test if the given tuple is distinct or not.

```
In [40]: t1=(1,1,1,1,2,2,2,3,3,3,3,3,4,5,6,7,8,9,9,9,9,9,10)
t2=set(t1)
if len(t1)==len(t2):
    print("Tuple is distinct!!!")
else:
    print("Tuple is not distinct!!!")
```

Tuple is not distinct!!!



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 7

Set & Dictionary

01) WAP to iterate over a set.

```
In [2]: S1={1,2,3,4,5,6,7,8,9}  
for i in S1:  
    print(i)
```

```
1  
2  
3  
4  
5  
6  
7  
8  
9
```

02) WAP to convert set into list, string and tuple.

```
In [6]: s1={1,2,3,4,5,6,7,8,9}  
print(list(s1))  
print(tuple(s1))  
print(str(s1))
```

```
[1, 2, 3, 4, 5, 6, 7, 8, 9]  
(1, 2, 3, 4, 5, 6, 7, 8, 9)  
{1, 2, 3, 4, 5, 6, 7, 8, 9}
```

03) WAP to find Maximum and Minimum from a set.

```
In [20]: s1={1,2,3,4,5,6,7,8,9}
print(f'Maximum number:{max(s1)}')
print(f'Minimum number:{min(s1)}')
```

Maximum number:9
Minimum number:1

04) WAP to perform union of two sets.

```
In [22]: s1={1,2,3,4,5,6,7,8,9}
s2={1,2,3,44,55,66,77,88,99}
print(f'Union is:{s1|s2}')
```

Union is:{1, 2, 3, 4, 5, 6, 7, 8, 9, 99, 66, 44, 77, 55, 88}

05) WAP to check if two lists have at-least one element common.

```
In [40]: l1=[1,2,3,4,5,6,7,8,9]
l2=[1,2,3,11,22,33,44,55,66]
common=[x for x in l1 if x in l2]
print(set(common))
```

{1, 2, 3}

06) WAP to remove duplicates from list.

```
In [24]: li=[1,1,2,2,2,3,3,4,4,5,6,7]
print(f'Removed duplicates:{set(li)}')
```

Removed duplicates:{1, 2, 3, 4, 5, 6, 7}

07) WAP to find unique words in the given string.

```
In [44]: li=('mango','apple','banana','cherry','apple')
print(f'Unique words:{set(li)}')
```

Unique words:{'cherry', 'banana', 'mango', 'apple'}

08) WAP to remove common elements of set A & B from set A.

```
In [50]: A={1,2,3,3,4,5,6,7}
B={1,2,3,4,5}
print(f'Removed duplicates:{set(A^B)}')
```

Removed duplicates:{6, 7}

09) WAP to check whether two given strings are anagram or not using set.

```
In [96]: l1='state'
l2='taste'
l=set(l1.lower())
m=set(l2.lower())
if l == m:
    print("Given string is anagram")
else:
    print("Not anagram")
```

Given string is anagram

10) WAP to find common elements in three lists using set.

```
In [104]: l1=[1,2,3,4,5,6,7,8,9]
l2=[2,3,4,5,6]
l3=[2,5,6,7,8,9]
print(f'Common elements are:{set(l1)&set(l2)&set(l3)}')
```

Common elements are:{2, 5, 6}

11) WAP to count number of vowels in given string using set.

```
In [116]: s1 = 'Hello World'
count = 0
for i in s1:
    if i.lower() in {'a', 'e', 'i', 'o', 'u'}:
        count += 1
if count > 0:
    print(f"Number of vowels: {count}")
else:
    print("No vowels")
```

Number of vowels: 3

12) WAP to check if a given string is binary string or not.

```
In [5]: # Input string
string = input("Enter a string: ")
is_binary = all(char in '01' for char in string)
if is_binary:
    print(f'{string}' " is a binary string.")
else:
    print(f'{string}' " is not a binary string.")
```

Enter a string: 101010101010

"101010101010" is a binary string.

13) WAP to sort dictionary by key or value.

```
In [1]: my_dict = {'banana': 3, 'apple': 5, 'cherry': 2, 'date': 4}

# Sorting by keys
sorted_by_keys = {k: my_dict[k] for k in sorted(my_dict)}
print("Dictionary sorted by keys:")
print(sorted_by_keys)

# Sorting by values
sorted_by_values = {k: v for k, v in sorted(my_dict.items(), key=lambda item:
print("\nDictionary sorted by values:")
print(sorted_by_values))}
```

Dictionary sorted by keys:
{'apple': 5, 'banana': 3, 'cherry': 2, 'date': 4}

Dictionary sorted by values:
{'cherry': 2, 'banana': 3, 'date': 4, 'apple': 5}

14) WAP to find the sum of all items (values) in a dictionary given by user. (Assume: values are numeric)

```
In [9]: user_input = input("Enter a dictionary (e.g., {'a': 10, 'b': 20}): ")
user_dict = eval(user_input)
if all(isinstance(value, (int, float)) for value in user_dict.values()):
    total_sum = sum(user_dict.values())
    print(f"The sum of all values in the dictionary is: {total_sum}")
else:
    print("All values in the dictionary must be numeric.")
```

Enter a dictionary (e.g., {'a': 10, 'b': 20}): {'a':123, 'b':234}

The sum of all values in the dictionary is: 357

15) WAP to handle missing keys in dictionaries.

Example : Given, dict1 = {'a': 5, 'c': 8, 'e': 2}

if you look for key = 'd', the message given should be 'Key Not Found', otherwise print the value of 'd' in dict1.

```
In [11]: dict1 = {'a': 5, 'c': 8, 'e': 2}
key = input("Enter the key to search in the dictionary: ")
if key in dict1:
    print(f"The value of '{key}' is: {dict1[key]}")
else:
    print("Key Not Found")
```

Enter the key to search in the dictionary: c

The value of 'c' is: 8



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 8

User Defined Function

01) Write a function to calculate BMI given mass and height. (BMI = mass/h2)**

```
In [31]: def BMI(weight,height):
    bmi=weight/(height**2);
    return bmi

BMI(56,1.80)
```

Out[31]: 17.28395061728395

02) Write a function that add first n numbers.

```
In [41]: def add(n):
    sum=0
    for i in range(1,n+1):
        sum=sum+i
    return sum

add(5)
```

Out[41]: 15

03) Write a function that returns 1 if the given number is Prime or 0 otherwise.

```
In [61]: def prime(a):
    if(a==0 or a==1):
        return 0;
    elif(a>1):
        for i in range(2,a):
            if(a%i==0):
                return 0
            else:
                return 1

prime(43)
```

Out[61]: 1

04) Write a function that returns the list of Prime numbers between given two numbers.

```
In [68]: li=[]
def Primeno(a,b):
    for i in range(a,b):
        if(prime(i)):
            li.append(i)
Primeno(1,10)
print(li)
```

[2, 3, 5, 7]

05) Write a function that returns True if the given string is Palindrome or False otherwise.

```
In [91]: st=input("Enter a string:")
def palindrome(st):
    if(st[::-1]==st):
        return True
    else:
        return False
palindrome(st)
```

Enter a string: lol

Out[91]: True

06) Write a function that returns the sum of all the elements of the list.

```
In [93]: li=[1,2,3,4,5,6,7,8,9]
def ans():
    Sum=sum(li)
    return Sum
ans()
```

Out[93]: 45

07) Write a function to calculate the sum of the first element of each tuples inside the list.

```
In [107]: li=[(0,1,2),(4,5,6),(7,8,9)]
def listsum():
    sum=0
    for i,j,k in li:
        sum=sum+i
    print(sum)
listsum()
```

11

08) Write a recursive function to find nth term of Fibonacci Series.

```
In [157]: def fibonacci(a,b,n):
    if n==1:
        return a
    return fibonacci(b,a+b,n-1)

print(fibonacci(0,1,12))
```

89

09) Write a function to get the name of the student based on the given rollno.

Example: Given dict1 = {101:'Ajay', 102:'Rahul', 103:'Jay', 104:'Pooja'} find name of student whose rollno = 103

```
In [31]: dict1 = {101:'Ajay', 102:'Rahul', 103:'Jay', 104:'Pooja'}
def nameofstudent(n):
    a=dict1.get(n)
    return a

result=nameofstudent(103)
print(result)
```

Jay

10) Write a function to get the sum of the scores ending with zero.

Example : scores = [200, 456, 300, 100, 234, 678]

Ans = 200 + 300 + 100 = 600

```
In [17]: scores = [200, 456, 300, 100, 234, 678]
def sumofScores(scores):
    total=0
    for i in scores:
        if i%10==0:
            total+=i
    return total

result=sumofScores(scores)
print(result)
```

600

11) Write a function to invert a given Dictionary.

hint: keys to values & values to keys

Before : {'a': 10, 'b':20, 'c':30, 'd':40}

After : {10:'a', 20:'b', 30:'c', 40:'d'}

```
In [39]: ini_dict={'a': 10, 'b':20, 'c':30, 'd':40}
def invertDictionary(ini_dict):
    inv_dict = dict(zip(ini_dict.values(), ini_dict.keys()))
    return inv_dict

invertDictionary(ini_dict)
```

Out[39]: {10: 'a', 20: 'b', 30: 'c', 40: 'd'}

12) Write a function to check whether the given string is Pangram or not.

hint: Pangram is a string containing all the characters a-z atleast once.

"the quick brown fox jumps over the lazy dog" is a Pangram string.

In [53]: `string="the quick brown fox jumps over the lazy dog"`

```
def pangram(string):
    string=string.replace(" ","")
    string=string.lower()
    x=list(set(string))
    x.sort()
    x="".join(x)
    alphabets="abcdefghijklmnopqrstuvwxyz"
    if(x==alphabets):
        print("The string is a pangram")
    else:
        print("The string is not a pangram")

pangram(string)
```

The string is a pangram

13) Write a function that returns the number of uppercase and lowercase letters in the given string.

example : Input : s1 = AbcDEfgh ,Ouptput : no_upper = 3, no_lower = 5

In [65]: `s1 = "AbcDEfgh"`

```
def countUPLW(s1):
    lower=0
    upper=0
    for i in s1:
        if i.islower():
            lower+=1
        else:
            upper+=1
    print(f"Lower case are:{lower}")
    print(f"Upper case are:{upper}")

countUPLW(s1)
```

Lower case are:5

Upper case are:3

14) Write a lambda function to get smallest number from the given two numbers.

In [67]: `min_number = lambda a, b : min(a,b)`

```
print(min_number(5, 8))
```

5

15) For the given list of names of students, extract the names having more than 7 characters. Use filter().

```
In [3]: students=['Alexander', 'Benjamin', 'Jonathan', 'Malay', 'Meet', 'Dhairya']
def myFunc(x):
    if len(x) > 7:
        return True
    else:
        return False

names = filter(myFunc, students)

for x in names:
    print(x)
```

Alexander
Benjamin
Jonathan

16) For the given list of names of students, convert the first letter of all the names into uppercase. use map().

```
In [62]: students = ['alexander', 'benjamin', 'jonathan', 'malay', 'meet', 'dhairyा']

def uppercaseusingMap(names):
    return list(map(str.capitalize, names))

result = uppercaseusingMap(students)
print(result)
```

['Alexander', 'Benjamin', 'Jonathan', 'Malay', 'Meet', 'Dhairya']

17) Write udfs to call the functions with following types of arguments:

1. Positional Arguments
2. Keyword Arguments
3. Default Arguments
4. Variable Length Positional(*args) & variable length Keyword Arguments (**kwargs)
5. Keyword-Only & Positional Only Arguments

```
In [92]: # Positional Arguments
print("Positional Arguments:::")
def nameAge(name, age):
    print("Hi, I am", name)
    print("My age is ", age)

nameAge(name="Prince", age=20)
print()

# Keyword Arguments
print("Keyword Arguments:::")
def my_function(child3, child2, child1):
    print("The youngest child is " + child3)

my_function(child1 = "alexander", child2 = "benjamin", child3 = "Jonathan")
print()

# Default Arguments
print("Default Arguments:::")
def my_function(country = "India"):
    print("I am from " + country)

my_function()
my_function("Australia")
print()

# Variable Length Positional(*args) & variable length Keyword Arguments (**kwargs)
print("Variable Length Positional(*args) & variable length Keyword Argument")
# *args
def my_function(*kids):
    print("*args:The youngest child is " + kids[2])

my_function("alexander", "benjamin", "Jonathan")
#**kwargs
def my_function(**kid):
    print("**kwargs:His last name is " + kid["lname"])

my_function(fname = "alexander", lname = "benjamin")
print()

# Keyword-Only & Positional Only Arguments
print("Keyword-Only & Positional Only Arguments:::")
```

Positional Arguments::

Hi, I am Prince

My age is 20

Keyword Arguments::

The youngest child is Jonathan

Default Arguments::

I am from India

I am from Australia

Variable Length Positional(*args) & variable length Keyword Arguments (**kwargs)::

*args:The youngest child is Jonathan

**kwargs:His last name is benjamin

Keyword-Only & Positional Only Arguments::



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 9

File I/O

01) WAP to read and display the contents of a text file. (also try to open the file in some other directory)

- in the form of a string

- line by line

- in the form of a list

```
In [11]: f = open("newFile.txt", "r")
print(f.read())
f.close()

f = open("newFile.txt", "r")
print(f.readline())
f.close()

f = open("newFile.txt", "r")
print(f.readlines())
f.close()
```

Hello World!!!!!!

Good Mornings.....

Hello World!!!!!!

```
['Hello World!!!!!!\n', 'Good Mornings.....']
```

02) WAP to create file named "new.txt" only if it doesn't exist.

```
In [49]: f = open("new.txt", "w")
f.write("Hi Hello from python")
f.close()
```

03) WAP to read first 5 lines from the text file.

```
In [31]: f = open("newFile.txt", "r")
for i in range(5):
    print(f.readline())
f.close()
```

Hello World!!!!!!

Good Mornings.....

1

2

3

04) WAP to find the longest word(s) in a file

```
In [55]: f = open("newFile.txt", "r")
words = f.read().split()
print(max(words, key=len))
f.close()
```

Mornings.....

05) WAP to count the no. of lines, words and characters in a given text file.

```
In [51]: #No.of Lines  
f = open("newFile.txt","r")  
lines=len(f.readlines())  
print(lines)  
f.close()  
  
#No. of words  
f = open("newFile.txt","r")  
lines=len(f.readline())  
print(lines)  
f.close()  
  
#No. of characters  
f = open("newFile.txt","r")  
lines=len(f.read())  
print(lines)  
f.close()
```

9
22
57

06) WAP to copy the content of a file to the another file.

```
In [59]: f1 = open("newFile.txt","r")  
f2 = open("newFile2.txt","w")  
for i in f1:  
    f2.write(i)  
f1.close()  
f2.close()
```

07) WAP to find the size of the text file.

```
In [67]: import os  
sz = os.path.getsize("newFile.txt")  
print(sz)
```

57

08) WAP to create an UDF named frequency to count occurrences of the specific word in a given text file.

```
In [71]: def frequency(file_content,specific_word):
    # Method-1
    count = file_content.count(specific_word)
    # Method-2
    # count = 0
    # for i in file_content:
    #     if i == specific_word:
    #         count += 1
    return count

fp = open("newFile.txt","r")
data = fp.read()
print(frequency(data.split(),'Hello'))
fp.close()
```

1

09) WAP to get the score of five subjects from the user, store them in a file. Fetch those marks and find the highest score.

```
In [5]: fp = open("newFile.txt", "w+")
for i in range(1, 6):
    mark = input(f"Enter marks of subject {i}: ")
    fp.write(mark + "\n")
fp.seek(0)
l1 = [int(mark.strip()) for mark in fp.readlines()]
print(f"The highest score is: {max(l1)}")
fp.close()
```

```
Enter marks of subject 1: 5
Enter marks of subject 2: 10
Enter marks of subject 3: 15
Enter marks of subject 4: 20
Enter marks of subject 5: 25
```

```
The highest score is: 25
```

10) WAP to write first 100 prime numbers to a file named primenumbers.txt

(Note: each number should be in new line)

```
In [3]: def is_prime(num):
    if num < 2:
        return False
    for i in range(2, int(num**0.5) + 1):
        if num % i == 0:
            return False
    return True

def prime_numbers(n, filename):
    count = 0
    num = 2
    with open(filename, 'w') as fp:
        while count < n:
            if is_prime(num):
                fp.write(f"{num}\n")
                count += 1
            num += 1

prime_numbers(100, "primenumbers.txt")
```

11) WAP to merge two files and write it in a new file.

```
In [13]: f1 = open("newFile.txt", "r")
f2 = open("new.txt", "r")
fp = open("mergedFile.txt", "w")
fp.write(f1.read())
fp.write(f2.read())
f1.close()
f2.close()
fp.close()

print("Files 'newFile.txt' and 'newFile2.txt' have been merged into 'mergedF
```

Files 'newFile.txt' and 'newFile2.txt' have been merged into 'mergedFile.txt'

12) WAP to replace word1 by word2 of a text file. Write the updated data to new file.

```
In [15]: f1 = open("mergedFile.txt", "r")
content = f1.read()
updated_content = content.replace('Hi', 'bye')
new_file = open("updated_content.txt", "w")
new_file.write(updated_content)
f1.close()
new_file.close()

print("The word replacement has been done and saved to 'updated_content.txt'
```

The word replacement has been done and saved to 'updated_content.txt'

13) Demonstrate tell() and seek() for all the cases(seek from beginning-end-current position) taking a suitable example of your choice.

```
In [3]: with open('newFile.txt', 'w') as fp:  
    fp.write("Hello, this is a sample file for demonstrating tell() and seek  
  
with open('newFile.txt', 'r') as fp:  
    # Case 1: Tell the current position from the beginning  
    print("Case 1: Current position from beginning (before reading):", fp.tell())  
    print("Reading first 5 characters:")  
    print(fp.read(5)) # Read first 5 characters  
    print("Position after reading 5 characters:", fp.tell())  
  
    # Case 2: Seek from the beginning (SEEK_SET)  
    fp.seek(0, 0) # Move the pointer to the beginning  
    print("\nCase 2: Seek from the beginning to position 0:", fp.tell())
```

Case 1: Current position from beginning (before reading): 0

Reading first 5 characters:

Hello

Position after reading 5 characters: 5

Case 2: Seek from the beginning to position 0: 0

```
In [ ]:
```



Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 10

Exception Handling

01) WAP to handle following exceptions:

1. ZeroDivisionError
2. ValueError
3. TypeError

Note: handle them using separate except blocks and also using single except block too.

```
In [14]: try:
    # ZeroDivisionError
    result = 10 / 0

    # ValueError
    value = int("not_a_number")

    # TypeError
    result = "string" + 10

#handling using separate except block
except ZeroDivisionError:
    print("Error: Cannot divide by zero.")
except ValueError:
    print("Error: Invalid value provided.")
except TypeError:
    print("Error: Type mismatch encountered.")

try:
    # ZeroDivisionError
    result = 10 / 0

    # ValueError
    value = int("not_a_number")

    # TypeError
    result = "string" + 10

#handling using single except block
except (ZeroDivisionError, ValueError, TypeError) as e:
    print(f"Error: {str(e)}")
```

Error: Cannot divide by zero.
Error: division by zero

02) WAP to handle following exceptions:

1. IndexError
2. KeyError

```
In [42]: #Index Error
try:
    l1=[1,2,3,4,5,6]
    print(l1[6])
except IndexError as e:
    print(f'Index Error:{str(e)}')

#KeyError
try:
    d1={'a':1,'b':2,'c':3}
    print(d1['d'])
except KeyError as e:
    print(f'KeyError: {str(e)}')
```

Index Error:list index out of range
KeyError: 'd'

03) WAP to handle following exceptions:

1. FileNotFoundError
2. ModuleNotFoundError

```
In [50]: #FileNotFoundException
try:
    fp=open("a.txt", "r")
    fp.read()
except FileNotFoundError as e:
    print(f'FileNotFoundException:{str(e)}')

#ModuleNotFoundError
try:
    import a

except ModuleNotFoundError as e:
    print(f'ModuleNotFoundError:{str(e)}')
```

FileNotFoundException:[Errno 2] No such file or directory: 'a.txt'
 ModuleNotFoundError:No module named 'a'

04) WAP that catches all type of exceptions in a single except block.

```
In [63]: try:
    # ZeroDivisionError
    result = 10 / 0

    # IndexError
    # my_list = [1, 2, 3]
    # print(my_list[5])

    # ValueError
    # value = int("not_a_number")

    # KeyError
    # my_dict = {'a': 1}
    # print(my_dict['b'])

    # FileNotFoundError
    # with open("non_existent_file.txt", "r") as file:
    #     content = file.read()

    # ModuleNotFoundError
    # import non_existent_module

except Exception as e:
    print(f"An error occurred: {str(e)}")
```

An error occurred: division by zero

05) WAP to demonstrate else and finally block.

```
In [57]: try:
    result = 10 / 2
    print(result)

except ZeroDivisionError as e:
    print(f"An error occurred: {str(e)}")

else:
    print("The try block executed successfully.")

finally:
    print("This block is always executed")
```

```
5.0
The try block executed successfully.
This block is always executed
```

06) Create a short program that prompts the user for a list of grades separated by commas.

Split the string into individual grades and use a list comprehension to convert each string to an integer.

You should use a try statement to inform the user when the values they entered cannot be converted.

```
In [75]: grades_input = input("Enter a list of grades separated by commas: ")

try:
    grades = [int(grade.strip()) for grade in grades_input.split(',')]
    print("Grades:", grades)

except ValueError:
    print("Error: Some of the values you entered cannot be converted to integers.")
```

```
Enter a list of grades separated by commas: 10,20.3.50,60
```

```
Error: Some of the values you entered cannot be converted to integers. Please enter valid numbers.
```

07) WAP to create an udf divide(a,b) that handles ZeroDivisionError.

```
In [65]: def divide(a, b):
    try:
        result = a / b

    except ZeroDivisionError:
        return "Error: Cannot divide by zero."

    else:
        return result

a = float(input("Enter the a: "))
b = float(input("Enter the b: "))

result = divide(a, b)
print(f"Result: {result}")
```

Enter the a: 5
 Enter the b: 0
 Result: Error: Cannot divide by zero.

08) WAP that gets an age of a person form the user and raises ValueError with error message: "Enter Valid Age" :

If the age is less than 18.

otherwise print the age.

```
In [71]: def ageInvalid():
    try:
        age = int(input("Enter your age: "))
        if age < 18:
            raise ValueError("Enter Valid Age")
        else:
            print(f"Your age is {age}")
    except ValueError as e:
        print(f"Error: {str(e)}")

ageInvalid()
```

Enter your age: 5
 Error: Enter Valid Age

09) WAP to raise your custom Exception named InvalidUsernameError with the error message : "Username must be between 5 and 15 characters long":

if the given name is having characters less than 5 or greater than 15.

otherwise print the given username.

```
In [81]: class InvalidUsername(Exception):
    pass
def custom_exception():
    try:
        name=input("Enter your name::")
        if(len(name)<5 or len(name)>15):
            raise InvalidUsername("Username must be between 5 and 15 characters")
    except InvalidUsername as e:
        print(f"Error:{str(e)}")
custom_exception()
```

Enter your name:: raj

Error:Username must be between 5 and 15 characters long

10) WAP to raise your custom Exception named NegativeNumberError with the error message : "Cannot calculate the square root of a negative number" :

if the given number is negative.

otherwise print the square root of the given number.

```
In [79]: import math
class NegativeNumberError(Exception):
    pass
def calculate_square_root():
    try:
        number = float(input("Enter a number to calculate its square root: "))
        if number < 0:
            raise NegativeNumberError("Cannot calculate the square root of a negative number")
        sqrt_result = math.sqrt(number)
        print(f"The square root of {number} is: {sqrt_result}")
    except NegativeNumberError as e:
        print(f"Error: {str(e)}")
    except ValueError:
        print("Error: Please enter a valid number.")
calculate_square_root()
```

Enter a number to calculate its square root: 25

The square root of 25.0 is: 5.0



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332 ગ

Lab - 11

Modules

01) WAP to create Calculator module which defines functions like add, sub,mul and div.

Create another .py file that uses the functions available in Calculator module.

```
In [1]: from another import add,multiply,divide,subtract
print(add(5,6))
print(subtract(10,5))
print(multiply(5,6))
print(divide(4,2))
```

```
11
5
30
2.0
```

02) WAP to pick a random character from a given String.

```
In [164]: import random
a='Hello World'
print(random.choice(a))
```

```
o
```

03) WAP to pick a random element from a given list.

```
In [32]: li=[1,2,3,4,5,6,7,8,9]
print(random.choice(li))
```

5

04) WAP to roll a dice in such a way that every time you get the same number.

```
In [90]: random.seed(2)

def roll_dice():
    return random.randint(1,6)

print(roll_dice())
```

1

05) WAP to generate 3 random integers between 100 and 999 which is divisible by 5.

```
In [100]: def get_random_integer():
    count = 0
    l1 = []
    while count != 3:
        random_number = random.randint(100, 999)
        if random_number % 5 == 0:
            l1.append(random_number)
            count += 1
    return l1

print(get_random_integer())
```

[470, 265, 770]

06) WAP to generate 100 random lottery tickets and pick two lucky tickets from it and announce them as Winner and Runner up respectively.

```
In [114]: import random

tickets = [''.join(random.choices('0123456789', k = 6)) for _ in range(100)]

winner = random.choice(tickets)
tickets.remove(winner)
runner_up = random.choice(tickets)

print(f"Winner: Ticket {winner}")
print(f"Runner-up: Ticket {runner_up}")
```

Winner: Ticket 751582
 Runner-up: Ticket 968558

07) WAP to print current date and time in Python.

```
In [118]: import datetime  
current_time = datetime.datetime.now()  
print(current_time)
```

2025-02-12 12:58:30.892162

08) Subtract a week (7 days) from a given date in Python.

```
In [129]: new_date = datetime.datetime.now() - datetime.timedelta(weeks = 1)  
print(f"Date after subtracting a week: {new_date}")
```

Date after subtracting a week: 2025-02-05 13:01:37.878858

09) WAP to Calculate number of days between two given dates.

```
In [133]: start_date = datetime.date(2025, 2, 4)  
end_date = datetime.date(2025, 2, 12)  
no_of_days = abs(start_date - end_date)  
print(no_of_days)
```

8 days, 0:00:00

10) WAP to Find the day of the week of a given date.(i.e. whether it is sunday/monday/tuesday/etc.)

```
In [143]: date1=datetime.date(2025,2,12)  
dayname=date1.strftime("%A")  
print(dayname)
```

Wednesday

11) WAP to demonstrate the use of date time module.

```
In [147]: print(datetime.datetime.now())
```

2025-02-12 13:06:45.029571

12) WAP to demonstrate the use of the math module.

In [155]:

```
import math

print(math.factorial(5))
print(math.gcd(10,5))
print(math.ceil(5.25))
print(math.lcm(23,5))
print(math.pow(23,5))
print(math.sqrt(81))
```

```
120
5
6
115
6436343.0
9.0
```



(<https://www.darshan.ac.in/>)


Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332


Lab - 12

In []: `#import matplotlib below`

In [4]: `import matplotlib.pyplot as plt
x = range(1,11)
y = [1,5,9,7,5,6,3,2,4,9]
plt.plot(x,y)
plt.show()
write a code to display the line chart of above x & y`

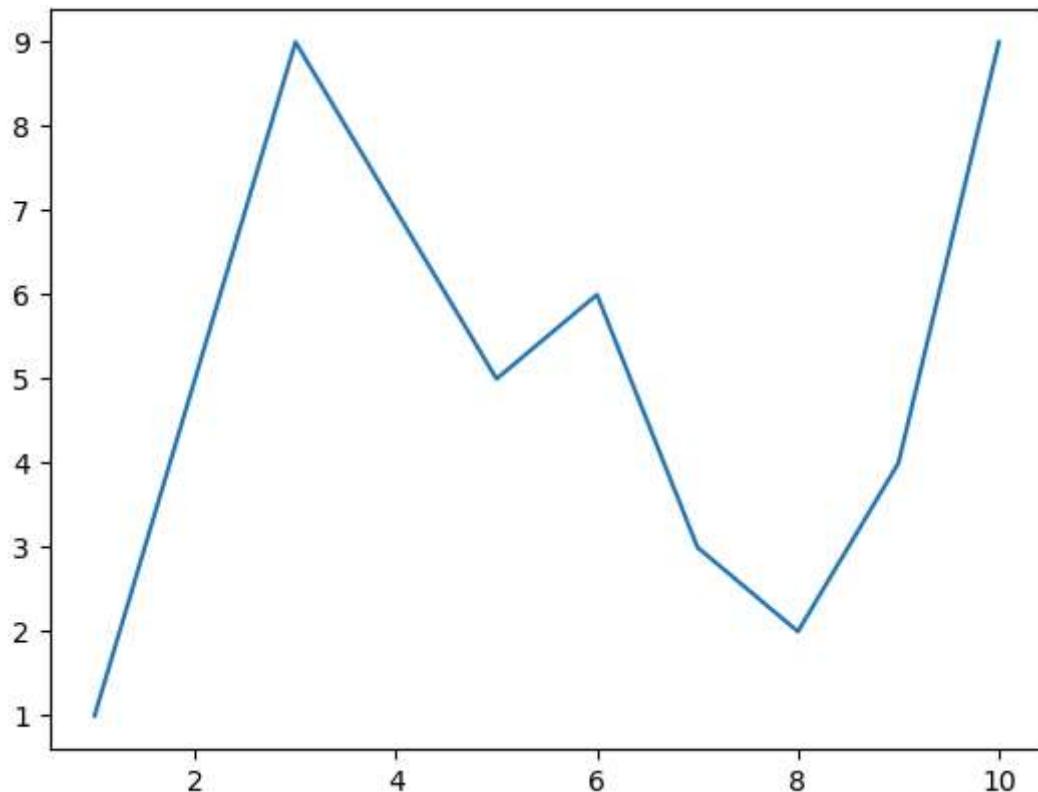


```
In [19]: x = range(1,11,1)
cxMarks= [8,9,6,3,5,7,4,1,2,6]
cyMarks= [5,8,9,6,3,2,4,8,8,9]
plt.plot(x,cxMarks,label="CX",color="r",marker="o",linestyle="--")
plt.plot(x,cyMarks,label="CY",color="b",marker=">",linestyle="dotted")
plt.xlabel("Roll No")
plt.ylabel("CPI")
plt.legend()
plt.annotate('Lowest CPI',xy=[8,1])
plt.show()
```

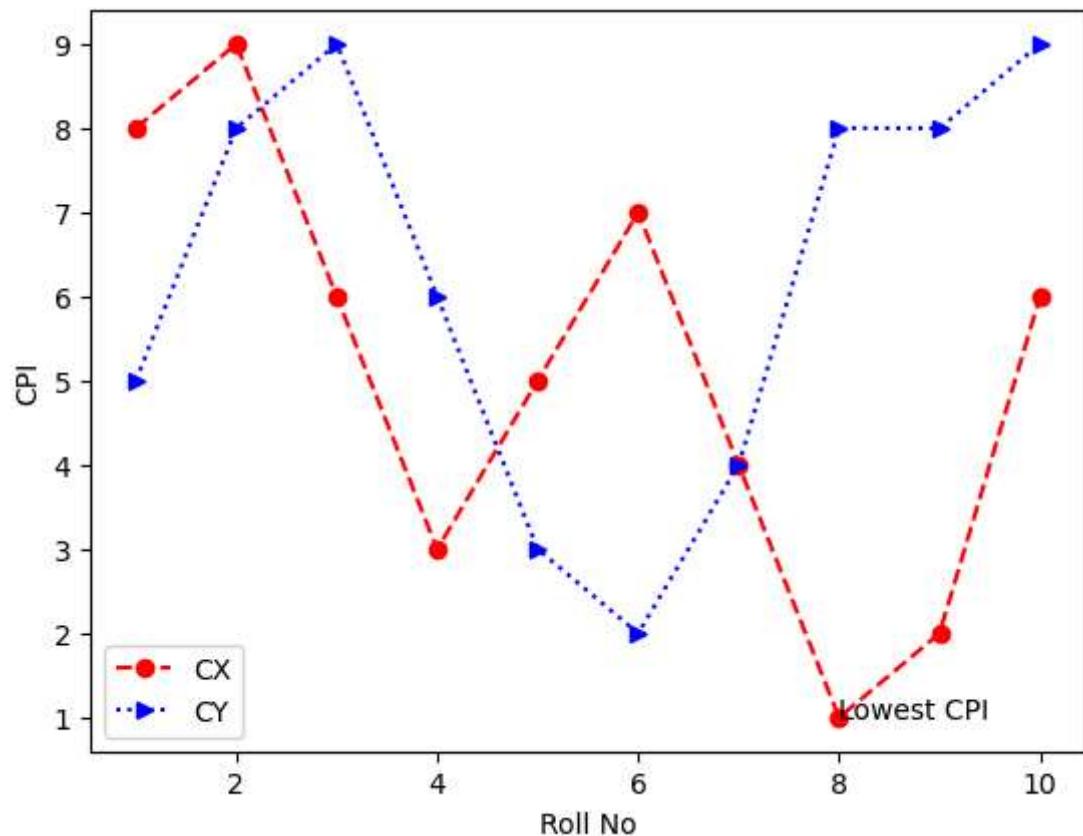

04) WAP to demonstrate the use of Pie chart.

```
In [114]: labels = ['Apple', 'Banana', 'Cherry', 'Grapes', 'Orange']
sizes = [25, 30, 20, 15, 10]
colors = ['#ff9999', '#66b3ff', '#99ff99', '#ffcc99', '#ffb3e6']


plt.pie(sizes, labels=labels, colors=colors, shadow=True)
plt.axis('equal')
plt.title('Fruit Distribution')
plt.show()
```

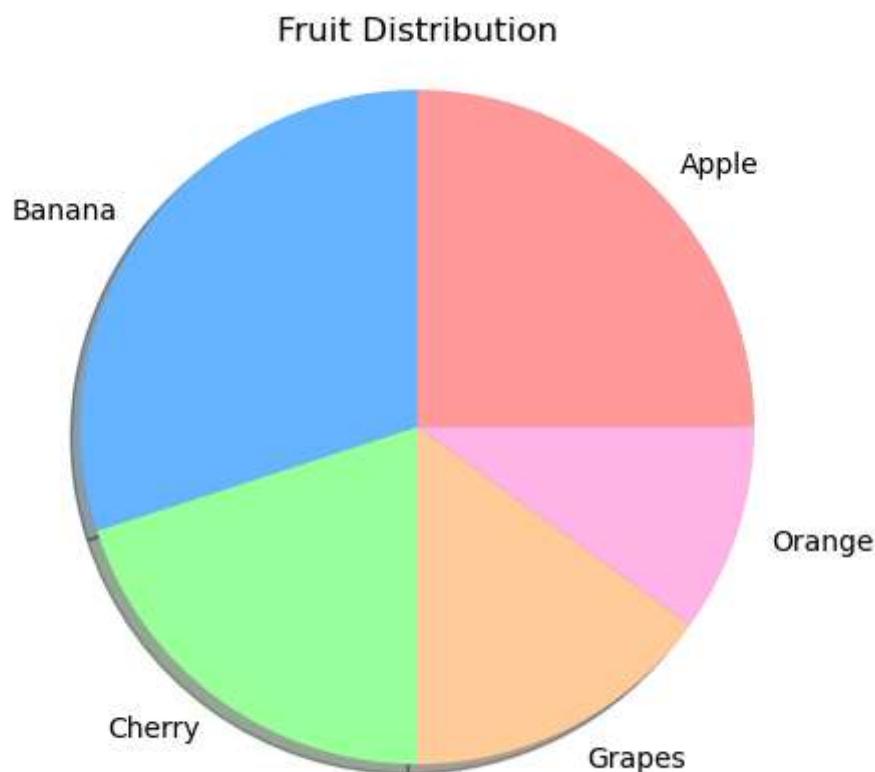

5) WAP to demonstrate the use of Bar chart.


In [58]:

```
x = range(1,11,1)
cxMarks= [8,9,6,3,5,7,4,1,2,6]
plt.bar(x,cxMarks,label="Rollno vs CPI",color="b")
plt.xlabel("Roll No")
plt.ylabel("CPI")
plt.legend()
plt.show()
```

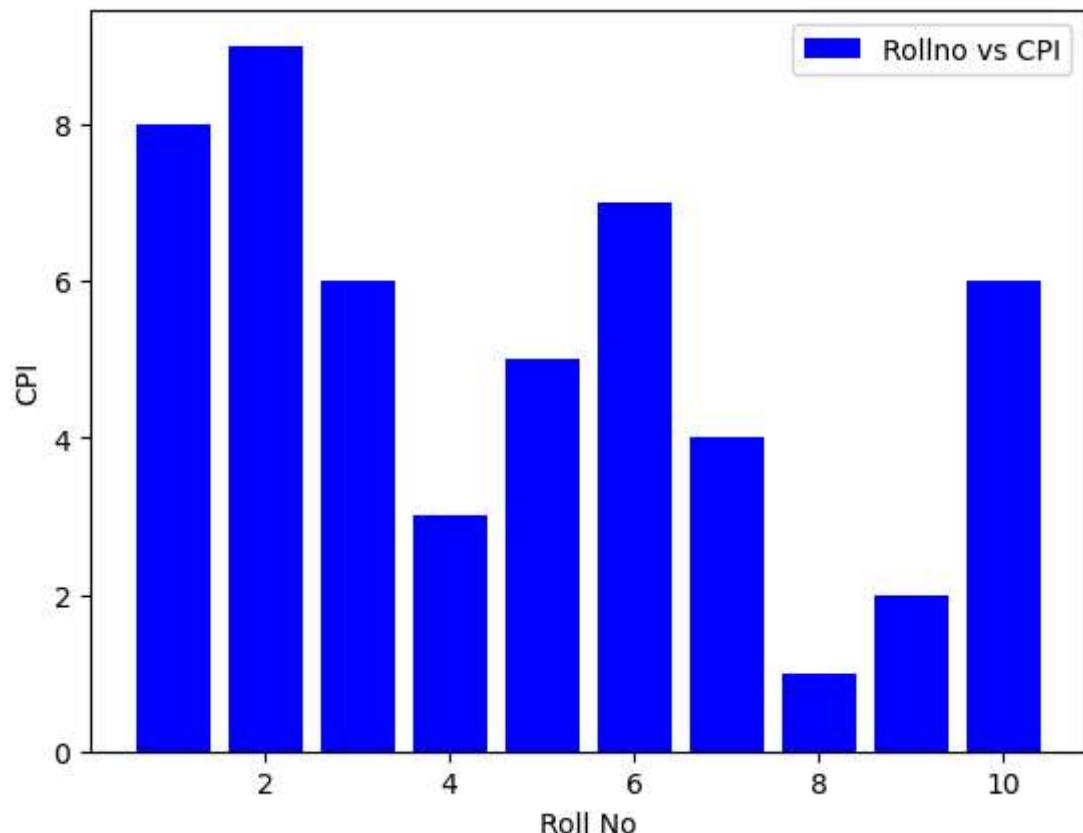


06) WAP to demonstrate the use of Scatter Plot.

```
In [82]: import random as r
r.seed(1)
x = [r.randint(1,20) for i in range(20)]
y = [r.randint(1,20) for i in range(20)]
plt.scatter(x,y,color="b")
plt.title("Scatter plot for x vs y")
plt.show()
```

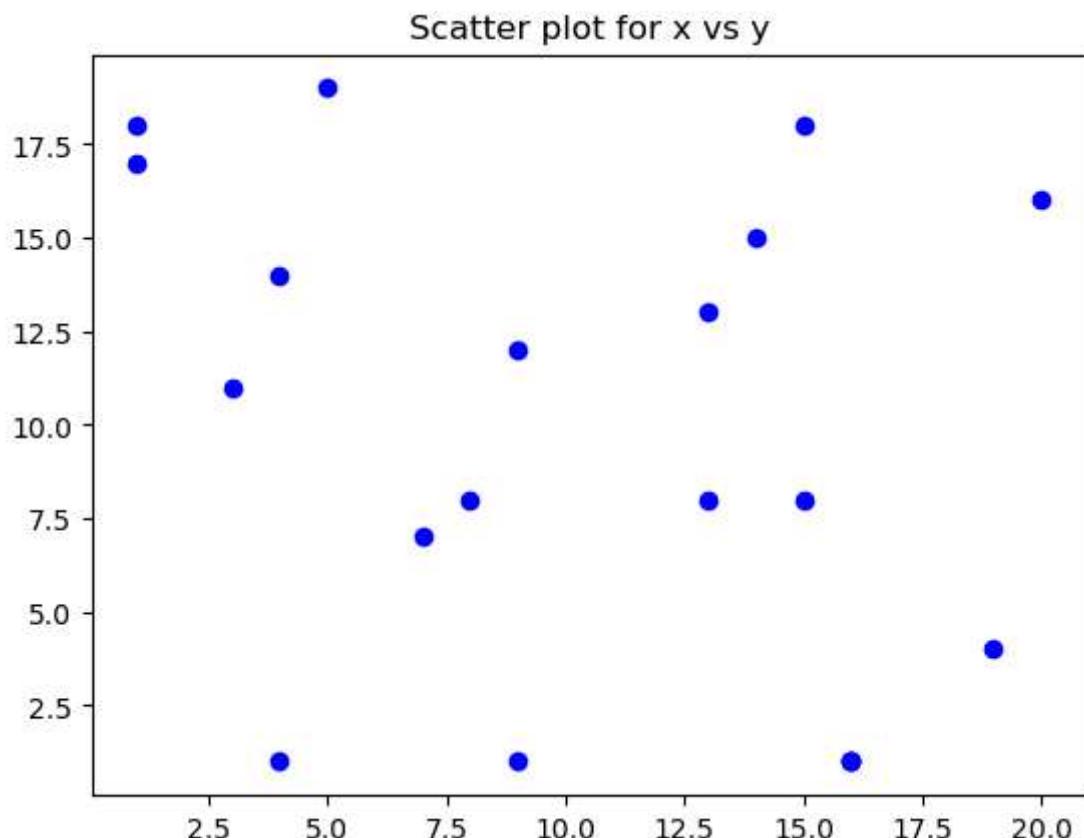


07) WAP to demonstrate the use of Histogram.

```
In [108]: r.seed(5)
data = [r.randint(1,20) for i in range(20)]
plt.hist(data,edgecolor="b",color="r")
plt.title("Histogram x vs y")
plt.show()
```

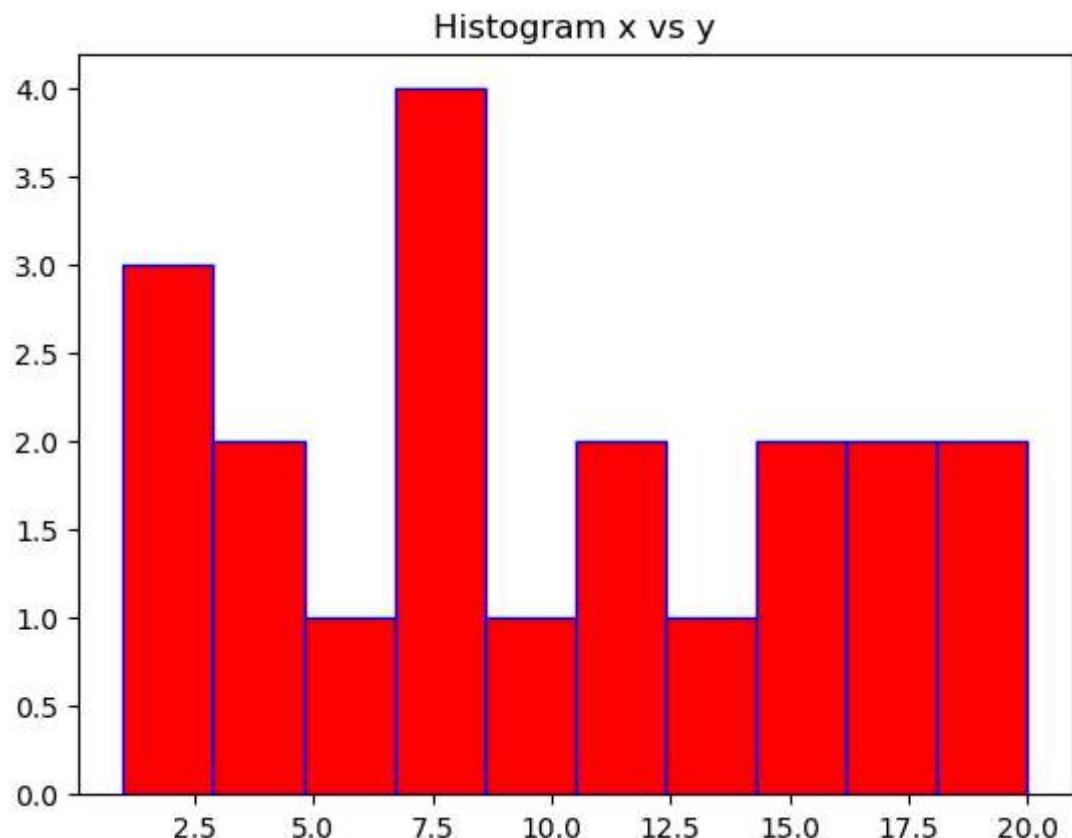

08) WAP to display the value of each bar in a bar chart using Matplotlib.

```
In [128]: products = ['Product A', 'Product B', 'Product C', 'Product D', 'Product E']
sales = [100, 150, 120, 90, 200]
plt.bar(products, sales, color='b')
for i in range(len(products)):
    plt.text(i, sales[i]+1,str(sales[i]))
plt.title('Sales of Products')
plt.xlabel('Products')
plt.ylabel('Sales')
plt.show()
```

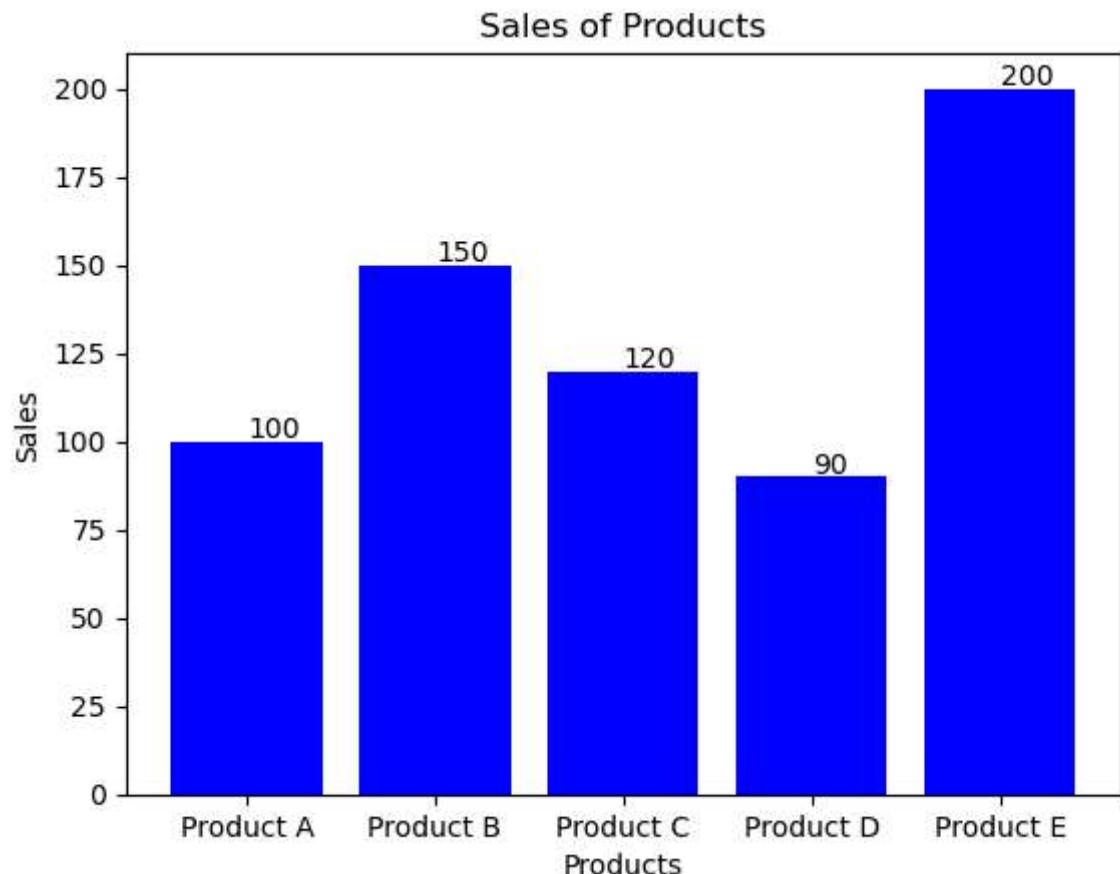


09) WAP create a Scatter Plot with several colors in Matplotlib?

In [134]:


```
r.seed(1)
x = [r.randint(1,20) for i in range(10)]
y = [r.randint(1,20) for i in range(10)]
colors = ['r','b','g','k','m','y','r','b','g','y']

plt.scatter(x, y, color=colors, s=100)
plt.title('Scatter Plot with Several Colors')
plt.xlabel('x values')
plt.ylabel('y values')
plt.show()
```

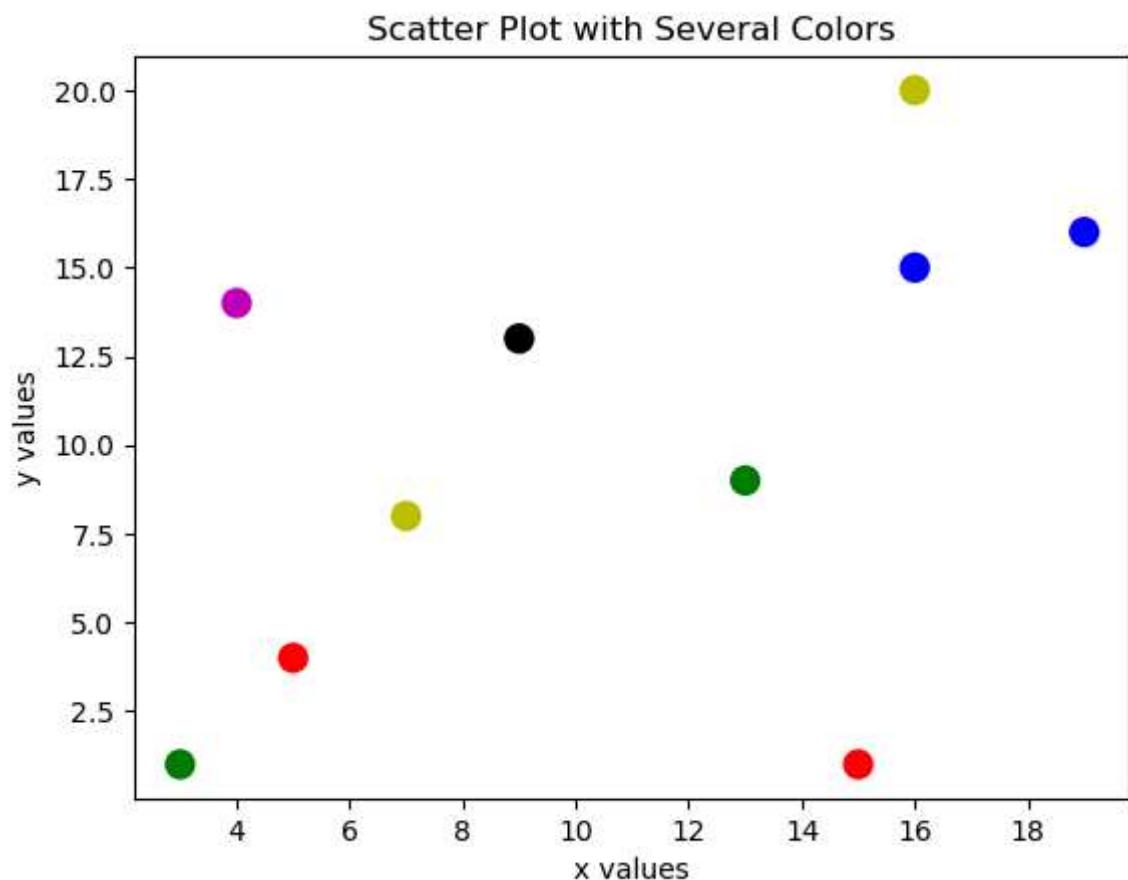

10) WAP to create a Box Plot.

```
In [158]: data=[r.randint(1,20) for i in range(10)]
plt.boxplot(data)
plt.show()
```

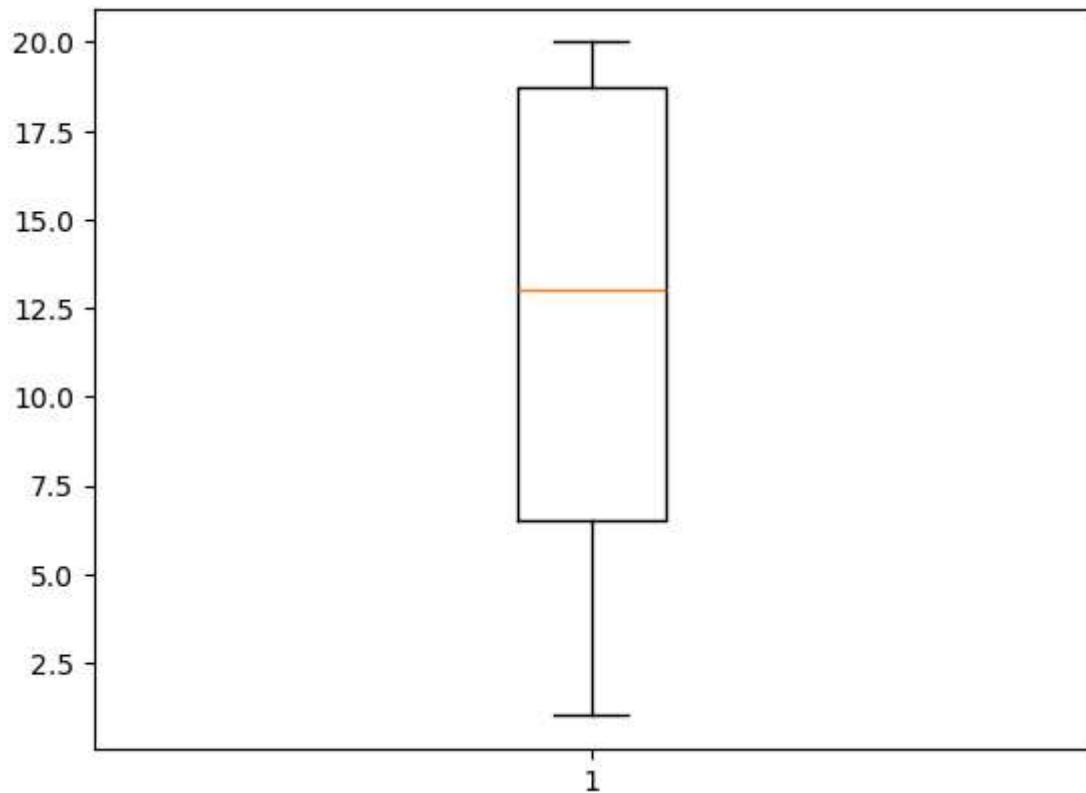



(<https://www.darshan.ac.in/>)

Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 13

OOP

01) Write a Program to create a class by name Students, and initialize attributes like name, age, and grade while creating an object.

```
In [1]: class Student:  
    def __init__(self, name, age, grade):  
        self.name=name  
        self.age=age  
        self.grade=grade  
  
    obj=Student("Raj", 32, "B")  
  
    print(obj.name)  
    print(obj.age)  
    print(obj.grade)
```

Raj
32
B

02) Create a class named Bank_Account with Account_No, User_Name, Email, Account_Type and Account_Balance data members. Also create a method GetAccountDetails() and DisplayAccountDetails(). Create main method to demonstrate the Bank_Account class.

```
In [2]: class Bank_Account:  
    def __init__(self):  
        pass  
  
    def GetAccountDetails(self):  
        self.Account_no=int(input("Enter Account_no:"))  
        self.User_Name=input("Enter User_Name:")  
        self.Email=input("Enter Email:")  
        self.Account_Type=input("Enter Account_Type:")  
        self.Account_Balance=int(input("Enter Account_Balance:"))  
  
    def DisplayAccountDetails(self):  
        print(self.Account_no)  
        print(self.User_Name)  
        print(self.Email)  
        print(self.Account_Type)  
        print(self.Account_Balance)  
  
obj=Bank_Account()  
obj.GetAccountDetails()  
obj.DisplayAccountDetails()
```

```
Enter Account_no:332  
Enter User_Name:Raj  
Enter Email:raj@gmail.com  
Enter Account_Type:abc  
Enter Account_Balance:100000000000  
332  
Raj  
raj@gmail.com  
abc  
100000000000
```

03) WAP to create Circle class with area and perimeter function to find area and perimeter of circle.

```
In [36]: import math
class Circle:
    def area(self,r):
        print(f"Area:{math.pi*r*r}")

    def perimeter(self,r):
        print(f"Perimeter:{2*math.pi*r}")

obj=Circle()
obj.area(7)
obj.perimeter(7)
```

```
Area:153.93804002589985
Perimeter:43.982297150257104
```

04) Create a class for employees that includes attributes such as name, age, salary, and methods to update and display employee information.

```
In [15]: class Employee:  
    def __init__(self, name, age, salary):  
        self.name=name  
        self.age=age  
        self.salary=salary  
  
    def updatedetails(self, name, age, salary):  
        if name:  
            self.name=name  
        if age:  
            self.age=age  
        if salary:  
            self.salary=salary  
  
    def displaydetails(self):  
        print("Employee Information:")  
        print(f"Name: {self.name}")  
        print(f"Age: {self.age}")  
        print(f"Salary: {self.salary}")  
  
obj=Employee("Raj", 20, 555500000)  
obj.displaydetails()  
obj.updatedetails("Raj", 19, 1000000)  
obj.displaydetails()
```

```
Employee Information:  
Name: Malay  
Age: 20  
Salary: 555500000  
Employee Information:  
Name: Malay  
Age: 19  
Salary: 1000000
```

05) Create a bank account class with methods to deposit, withdraw, and check balance.

```
In [28]: class Bank_Account:  
    def __init__(self,acc_no,balance):  
        self.acc_no=acc_no  
        self.balance=balance  
  
    def deposit(self,amount):  
        if amount > 0:  
            self.balance += amount  
            print(f"Deposited Rs.{amount}. Current balance: Rs.{self.balance}")  
        else:  
            print("Deposit amount must be positive.")  
  
    def withdraw(self,amount):  
        if amount > 0:  
            if amount <= self.balance:  
                self.balance -= amount  
                print(f"Withdrew Rs.{amount}. Current balance: Rs.{self.balance}")  
            else:  
                print("Insufficient funds.")  
        else:  
            print("Withdrawal amount must be positive.")  
  
    def check_balance(self):  
        print(f"Balance:Rs.{self.balance}")  
  
obj=Bank_Account(151322,10000000)  
obj.deposit(1000)  
obj.withdraw(123)  
obj.check_balance()
```

```
Deposited Rs.1000. Current balance: Rs.10001000  
Withdrew Rs.123. Current balance: Rs.10000877  
Balance:Rs.10000877
```

06) Create a class for managing inventory that includes attributes such as item name, price, quantity, and methods to add, remove, and update items.

```
In [38]: class Inventory:
    def __init__(self):
        self.items = {}

    def add_item(self, item_name, price, quantity):
        if item_name in self.items:
            self.items[item_name]['quantity'] += quantity
        else:
            self.items[item_name] = {'price': price, 'quantity': quantity}
        print(f"Added {quantity} {item_name}(s) to inventory.")

    def remove_item(self, item_name, quantity):
        if item_name in self.items:
            if self.items[item_name]['quantity'] >= quantity:
                self.items[item_name]['quantity'] -= quantity
                print(f"Removed {quantity} {item_name}(s) from inventory.")
            else:
                print(f"Not enough {item_name} in inventory to remove.")
        else:
            print(f"{item_name} not found in inventory.")

    def update_price(self, item_name, new_price):
        if item_name in self.items:
            self.items[item_name]['price'] = new_price
            print(f"Updated price of {item_name} to ${new_price}.")
        else:
            print(f"{item_name} not found in inventory.")

    def display_inventory(self):
        if not self.items:
            print("Inventory is empty.")
        else:
            print("Inventory Details:")
            for item_name, details in self.items.items():
                print(f"{item_name}: Price - ${details['price']}, Quantity - {details['quantity']}")

inventory = Inventory()
inventory.add_item("Laptop", 1200, 10)
inventory.add_item("Phone", 800, 15)
inventory.display_inventory()
inventory.remove_item("Laptop", 5)
inventory.update_price("Phone", 850)
inventory.display_inventory()
inventory.remove_item("Laptop", 6)
inventory.update_price("Tablet", 300)
```

```

Added 10 Laptop(s) to inventory.
Added 15 Phone(s) to inventory.
Inventory Details:
Laptop: Price - $1200, Quantity - 10
Phone: Price - $800, Quantity - 15
Removed 5 Laptop(s) from inventory.
Updated price of Phone to $850.
Inventory Details:
Laptop: Price - $1200, Quantity - 5
Phone: Price - $850, Quantity - 15
Not enough Laptop in inventory to remove.
Tablet not found in inventory.

```

07) Create a Class with instance attributes of your choice.

```
In [36]: class Car:
    def __init__(self, make, model, year, color):
        self.make = make
        self.model = model
        self.year = year
        self.color = color

    def display_car_info(self):
        print(f"Car Information:")
        print(f"Make: {self.make}")
        print(f"Model: {self.model}")
        print(f"Year: {self.year}")
        print(f"Color: {self.color}")

car1 = Car("Toyota", "Century", 2021, "Blue")
car1.display_car_info()
car2 = Car("Honda", "Civic", 2020, "Red")
car2.display_car_info()
```

```

Car Information:
Make: Toyota
Model: Century
Year: 2021
Color: Blue
Car Information:
Make: Honda
Model: Civic
Year: 2020
Color: Red

```

08) Create one class student_kit

Within the `student_kit` class create one class attribute `principal name (Mr ABC)`

Create one attendance method and take input as number of days.

While creating student take input their name .

Create one certificate for each student by taking input of number of days present in class.

```
In [3]: class StudentKit:
    principal = "Mr ABC"

    def __init__(self, student_name):
        self.student_name = student_name
        self.attendance = 0

    def record_attendance(self, days_present):
        self.attendance = days_present
        print(f"Attendance recorded: {self.attendance} days")

    def generate_certificate(self):
        if self.attendance >= 75:
            print(f"Certificate of Attendance\n")
            print(f"Principal: {StudentKit.principal}")
            print(f"Student: {self.student_name}")
            print(f"Days Present: {self.attendance}")
            print(f"Status: Passed (Attendance is sufficient)")
        else:
            print(f"Certificate of Attendance\n")
            print(f"Principal: {StudentKit.principal}")
            print(f"Student: {self.student_name}")
            print(f"Days Present: {self.attendance}")
            print(f"Status: Failed (Attendance is insufficient)")

    student_name = input("Enter the student's name: ")
    student = StudentKit(student_name)
    days_present = int(input("Enter the number of days present in class: "))
    student.record_attendance(days_present)
    student.generate_certificate()
```

```
Enter the student's name: Raj
Enter the number of days present in class: 32
Attendance recorded: 32 days
Certificate of Attendance

Principal: Mr ABC
Student: Raj
Days Present: 32
Status: Failed (Attendance is insufficient)
```

09) Define Time class with hour and minute as data member. Also define addition method to add two time objects.

```
In [42]: class Time:
    def __init__(self, hour=0, minute=0):
        self.hour = hour
        self.minute = minute

    def add_time(self, other):
        total_minutes = (self.hour * 60 + self.minute) + (other.hour * 60 + other.minute)
        total_hour = total_minutes // 60
        total_minute = total_minutes % 60
        return Time(total_hour, total_minute)

    def display_time(self):
        print(f"{self.hour} hour(s) and {self.minute} minute(s)")

time1 = Time(2, 45)
time2 = Time(3, 30)
total_time = time1.add_time(time2)
print("Time 1:")
time1.display_time()
print("Time 2:")
time2.display_time()
print("Total Time after adding:")
total_time.display_time()
```

```
Time 1:
2 hour(s) and 45 minute(s)
Time 2:
3 hour(s) and 30 minute(s)
Total Time after adding:
6 hour(s) and 15 minute(s)
```

```
In [ ]:
```



Python Programming - 2301CS404

Raj Vekariya | 23010101298 | 332

Lab - 13

Continued..

10) Calculate area of a rectangle using object as an argument to a method.

```
In [7]: class Rectangle:
    def __init__(self, length, width):
        self.length = length
        self.width = width

    def area(self, rectangle): return rectangle.length * rectangle.width

a=int(input("enter length"))
b=int(input("enter width"))
rect = Rectangle(a,b)
rect.length = 10
print(f"Area of rectangle: {rect.area(rect)}")
```

```
enter length5
enter width10
Area of rectangle: 100
```

11) Calculate the area of a square.

Include a Constructor, a method to calculate area named area() and a method named output() that prints the output and is invoked by

```
In [4]: class Rectangle:  
    def __init__(self, a):  
        self.a=a  
  
    def area(self):  
        ans=self.a*self.a  
        self.output(ans)  
  
    def output(self,b):  
        print(b)  
  
d=int(input("enter value:"))  
f=Rectangle(d)  
f.area()
```

```
enter value:10  
100
```

12) Calculate the area of a rectangle.

Include a Constructor, a method to calculate area named area() and a method named output() that prints the output and is invoked by area().

Also define a class method that compares the two sides of reactangle. An object is instantiated only if the two sides are different; otherwise a message should be displayed : THIS IS SQUARE.

```
In [6]: class Rectangle:
    def __init__(self, a ,b):
        self.a=a
        self.b=b
        if(self.a==self.b):
            print("this is square")

    def area(self):
        ans=self.a*self.b
        self.output(ans)

    def output(self,c):
        print(c)

a=int(input("enter length"))
b=int(input("enter width"))
f= Rectangle(a,b)
f.area()
```

```
enter length10
enter width10
this is square
100
```

13) Define a class Square having a private attribute "side".

Implement get_side and set_side methods to access the private attribute from outside of the class.

```
In [10]: class Square:
    def __init__(self, side):
        self.__side = side

    def get_side(self):
        return self.__side

    def set_side(self, side):
        if side > 0:
            self.__side = side
        else:
            print("Side must be positive.")

sq = Square(4)
print(f"Side of the square: {sq.get_side()}")
sq.set_side(-6)
print(f"Updated side of the square: {sq.get_side()}")
```

```
Side of the square: 4
Side must be positive.
Updated side of the square: 4
```

14) Create a class Profit that has a method named getProfit that accepts profit from the user.

Create a class Loss that has a method named getLoss that accepts loss from the user.

Create a class BalanceSheet that inherits from both classes Profit and Loss and calculates the balance. It has two methods getBalance() and printBalance().

```
In [12]: class Profit:
    def __init__(self, profit):
        self.profit = profit

    def getProfit(self):
        return self.profit

class Loss:
    def __init__(self, loss):
        self.loss = loss

    def getLoss(self):
        return self.loss

class BalanceSheet(Profit, Loss):
    def __init__(self, profit, loss):
        Profit.__init__(self, profit)
        Loss.__init__(self, loss)

    def getBalance(self):
        return self.getProfit() - self.getLoss()

    def printBalance(self):
        print(f"Balance: {self.getBalance()}")

balance = BalanceSheet(2000, 500)
balance.printBalance()
```

Balance: 1500

15) WAP to demonstrate all types of inheritance.

In [13]:

```
class Animal:
    def sound(self):
        print("Animal makes sound.")

class Dog(Animal):
    def sound(self):
        print("Dog barks.")

class Worker:
    def work(self):
        print("Working...")

class Student:
    def study(self):
        print("Studying...")

class Person(Worker, Student):
    def sleep(self):
        print("Sleeping...")

class Parent:
    def speak(self):
        print("Speaking...")

class Child(Parent):
    def laugh(self):
        print("Laughing...")

class Vehicle:
    def move(self):
        print("Vehicle moves.")

class Car(Vehicle):
    def drive(self):
        print("Car drives.")

class Bike(Vehicle):
    def ride(self):
        print("Bike rides.")

d = Dog()
d.sound()

p = Person()
p.work()
p.study()
p.sleep()

c = Car()
c.move()
c.drive()

b = Bike()
b.move()
b.ride()
```

```
Dog barks.  
Working...  
Studying...  
Sleeping...  
Vehicle moves.  
Car drives.  
Vehicle moves.  
Bike rides.
```

16) Create a Person class with a constructor that takes two arguments name and age.

Create a child class Employee that inherits from Person and adds a new attribute salary.

Override the init method in Employee to call the parent class's init method using the super() and then initialize the salary attribute.

In [14]:

```
class Person:  
    def __init__(self, name, age):  
        self.name = name  
        self.age = age  
  
class Employee(Person):  
    def __init__(self, name, age, salary):  
        super().__init__(name, age)  
        self.salary = salary  
emp = Employee("John", 30, 50000)  
print(f"Name: {emp.name}, Age: {emp.age}, Salary: {emp.salary}")
```

Name: John, Age: 30, Salary: 50000

17) Create a Shape class with a draw method that is not implemented.

Create three child classes Rectangle, Circle, and Triangle that implement the draw method with their respective drawing behaviors.

Create a list of Shape objects that includes one instance of each child class, and then iterate through the list and call the draw method on each object.

In [15]:

```
from abc import ABC, abstractmethod

class Shape(ABC):
    @abstractmethod
    def draw(self):
        pass

class Rectangle(Shape):
    def draw(self):
        print("Drawing a rectangle.")

class Circle(Shape):
    def draw(self):
        print("Drawing a circle.")

class Triangle(Shape):
    def draw(self):
        print("Drawing a triangle.")

# Example usage
shapes = [Rectangle(), Circle(), Triangle()]
for shape in shapes:
    shape.draw()
```

Drawing a rectangle.
Drawing a circle.
Drawing a triangle.

In []: