

Programming in Java
Prof. Debasis Samanta
Department of Computer Science and Engineering
Indian Institute of Technology, Kharagpur

Lecture - 52
JDBC - III

Now, this is the 3rd session of our JDBC learning and then in this session we are going to learn about the five-step, that we should follow from the program execution point of view in order to access the database remotely from the hope your host machine.

(Refer Slide Time: 00:38)

Some frequently occurred tasks

1. Connecting a Java application to the MySQL database server.
2. Creating a table.
3. Inserting a record into a table.
4. Processing a table.
5. Updating a record in a table.
6. Deleting a record from a table.

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

Now, so we will see exactly how all those things can be done, but using some examples one by one different example that we are going to cover in these slides are like how we can connect JAVA application to the database server. In this case; obviously, MySQL only and then how a table can be created and then how the records into such a table can be inserted. And, then how the results obtained from a table can be processed and then the record can be updated and then record can be deleted. All these things we have done in our first session of learning of JDBC when we are just connecting directly from our console missing to the SQL server. But, here we will do the same thing, but using our from program, not from the console.

(Refer Slide Time: 01:00)



Connecting to MySQL server

The following class **Connect.java** is to connect from a Java application to MySQL database server.

```
import java.sql.*;

public class Connect {
    public static void main (String[] args) {
        Connection conn = null;
        try
        {
            String userName = "quest";
            String password = "quest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance ();
            conn = DriverManager.getConnection (url, userName, password);
            System.out.println ("Database connection established");
        }
    }
}
```


Continued to the next slide...

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

Now, let us first see exactly how the connection to the remote a SQL server can be done, as you have already mentioned about this idea about that connection as we see here. So, basically this is the guest login and password that is a piece of information that is required and these basically shows the JDBC MySQL database location driver actually we have to connect it and the test is the name of the database and then that connection class that can be created by using this method only.

So, this basically return you the connection objects and then connection object basically can be obtained using URL, username, password which we have set in the last three statement. And then finally, we can have this statement console from your System.out.println usual database connection established successfully if it is there. And all these things should be put under the try-catch block as I have already told you in order to handle the exception if any occurs during any problem which may occur during either this time or this time it is there.

(Refer Slide Time: 02:25)

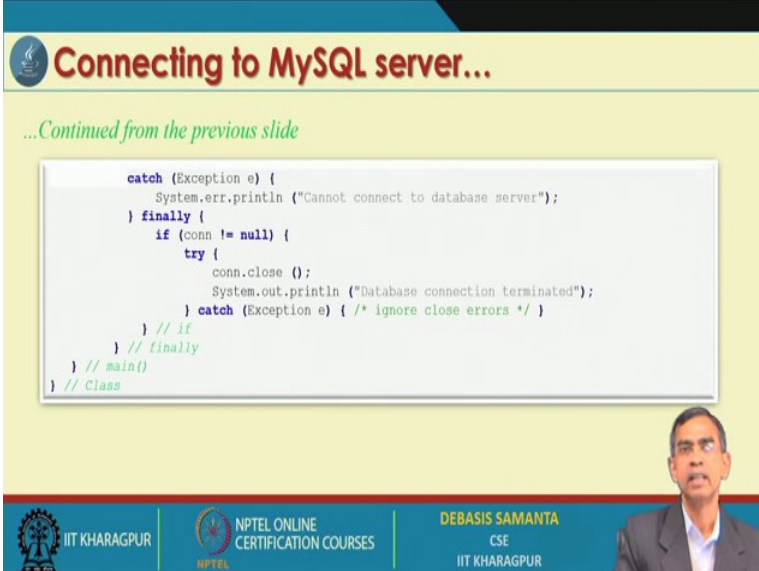

Connecting to MySQL server...


...Continued from the previous slide

```
catch (Exception e) {
    System.err.println ("Cannot connect to database server");
} finally {
    if (conn != null) {
        try {
            conn.close ();
            System.out.println ("Database connection terminated");
        } catch (Exception e) { /* ignore close errors */ }
    } // if
} // finally
} // main()
} // Class
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

So, this way the connections can be established and then so, this is a method by which a connection can be done right. And, this is a simple statement that you have to follow usually in every Java application you have to include this kind of code, in your program always.

(Refer Slide Time: 02:42)

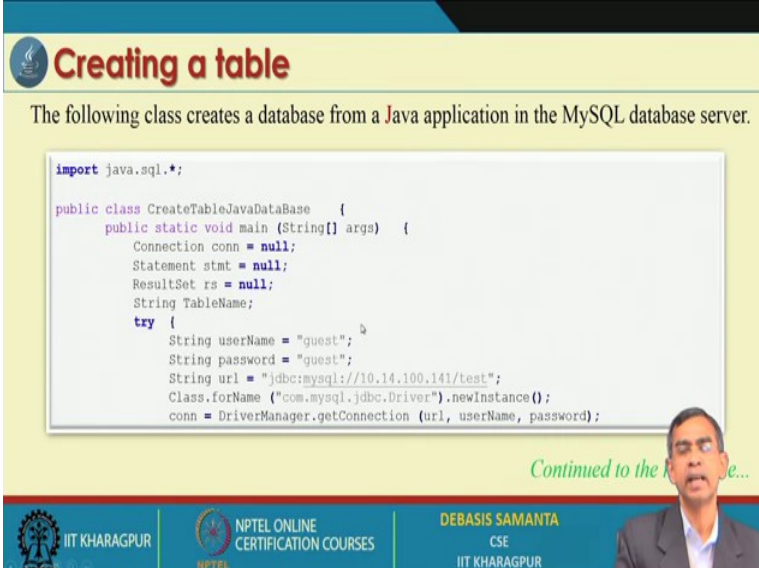

Creating a table

The following class creates a database from a Java application in the MySQL database server.

```
import java.sql.*;


public class CreateTableJavaDataBase {
    public static void main (String[] args) {
        Connection conn = null;
        Statement stmt = null;
        ResultSet rs = null;
        String TableName;
        try {
            String userName = "guest";
            String password = "guest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance();
            conn = DriverManager.getConnection (url, userName, password);
        }
    }
}
```

Continued to the next slide...

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

Now, let us see how a table can be created. First of all, the same procedure that the connection can be done. So, this is the statement that you have to include.

(Refer Slide Time: 02:49)

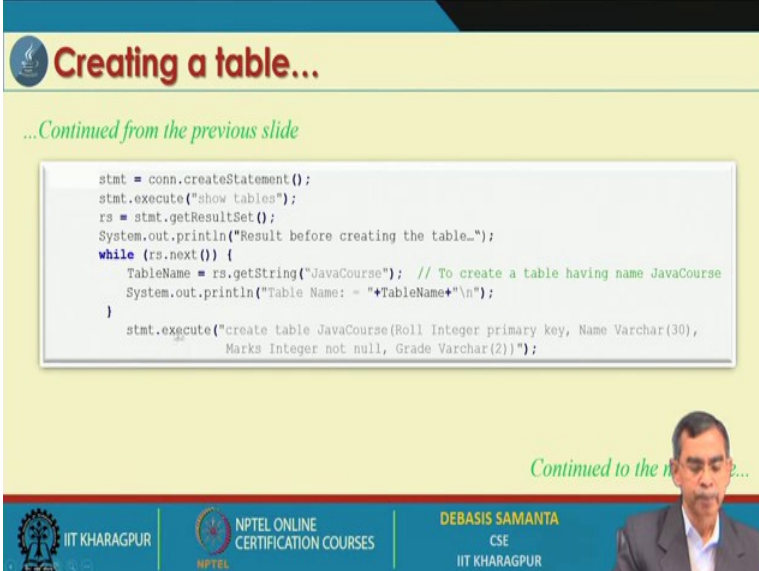

The slide is titled "Creating a table..." in a red font. Below the title, it says "...Continued from the previous slide" in green. The main content is a code block with the following Java code:

```
stmt = conn.createStatement();
stmt.execute("show tables");
rs = stmt.getResultSet();
System.out.println("Result before creating the table..");
while (rs.next()) {
    TableName = rs.getString("JavaCourse"); // To create a table having name JavaCourse
    System.out.println("Table Name: " + TableName + "\n");
}
stmt.execute("create table JavaCourse(Roll Integer primary key, Name Varchar(30),
    Marks Integer not null, Grade Varchar(2))");
```

At the bottom right of the slide, there is a small video inset of a man speaking. The slide footer contains the IIT Kharagpur logo, the text "NPTEL ONLINE CERTIFICATION COURSES", and the name "DEBASIS SAMANTA CSE IIT KHARAGPUR".

And this statement follows the different statement like how the; we can execute a statement here. As we see here in this example so, the statement object is created using this statement, these two statements are to create a statement object. So, statement conn.createStatement this is basically instantiation and finally, execute the method of the statement can be used using passing the SQL commands. So, this is basically SQL command show tables. Now, the result will be written and this result will be caught in the rs result statement object; rs is basically statemented that we have created here.

And, then we just scan all the results that obtain that that is there in these rs we can say array of results we can say rs and then rs.next means we scan each element in this rs array one by one and then we can display on the console. So, if you can pass a while statement until all the elements are traverse; we will be able to do that. And, then statement .execute another statement that we are going to execute after knowing that this table is there, create table JavaCourse Roll Integer primary key, Name Varchar Marks Integer not null, Grade Varchar. So, these basically tell you that a new character table can be created and that name of the new table may be saying JavaCourse.

So, this way the new table can be created and then we can get it. So, all the statement that we can we have executed ones using SQL server directly from the console it can be existed from the Java program using this statement actually.

(Refer Slide Time: 04:24)

Creating a table...

...Continued from the previous slide

```
stmt.execute("show tables");
rs = stmt.getResultSet();
System.out.println("Result after creating the table_\n");
while (rs.next()) {
    TableName = rs.getString("MyTables");
    System.out.println("Table Name: = "+TableName+"\n");
}
} catch (SQLException ex){
    System.out.println("SQLException: " + ex.getMessage());
    System.out.println("SQLState: " + ex.getSQLState());
    System.out.println("VendorError: " + ex.getErrorCode());
}
} catch (Exception e) {
    System.err.println ("Cannot connect to database server");
}
```

Continued to the next slide...

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

And then the statement can be executed again after the in creation is there, if you want to see exactly where the table is created again the same statement can be executed show tables. And, then rs statement getResultSet it will again the return the results is showing all the table and in this case you will be able to see that new tables which have been recently added can be shown in there.

(Refer Slide Time: 04:52)

Creating a table...

```
finally {
    if (rs != null) {
        try {
            rs.close();
        } catch (SQLException sqlEx) { //Ignore any code here.. }
        rs = null;
    }
    if (stmt != null) {
        try {
            stmt.close();
        } catch (SQLException sqlEx) { // ignore code for this }
        stmt = null;
    }
    if (conn != null) {
        try {
            conn.close ();
        } catch (Exception e) { /* Ignore code for closing errors */ }
    }
}
} //main()
} // class
```


IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

And then these are the parenthesis things under the catch and try and catch blocks should be there so, that the exception can be handled properly. So, these courses are available

readily will be able I will give you the source of all these courses in our next session when you will discuss then you can run all those courses and you can understand thoroughly one by one so, that if you can. So, that will give you a lot of practice to understand how things are going on.

Now, we will discuss about how a record can be inserted into a table again from the Java application; you know how the same thing can be done from the console directly to the MySQL server.

(Refer Slide Time: 05:22)

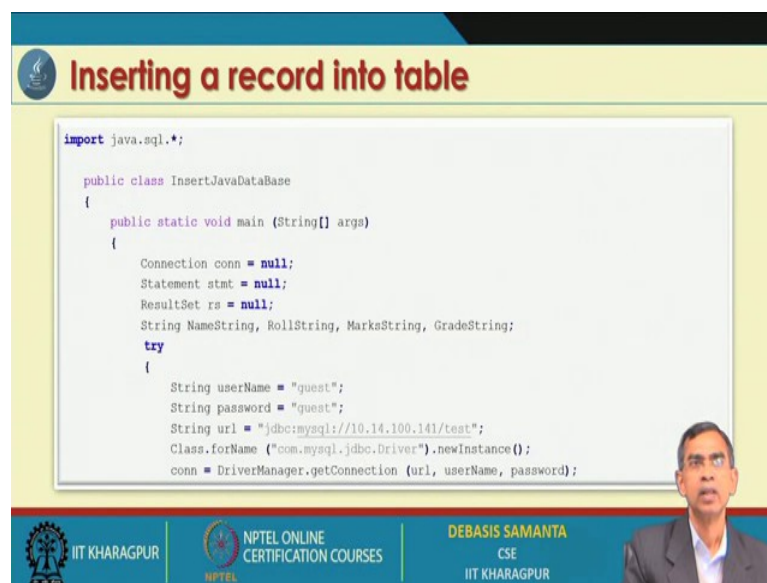

The slide is titled "Inserting a record into table" in a red, bold font. It features a code editor window with the following Java code:

```
import java.sql.*;

public class InsertJavaDataBase
{
    public static void main (String[] args)
    {
        Connection conn = null;
        Statement stmt = null;
        ResultSet rs = null;
        String NameString, RollString, MarksString, GradeString;
        try
        {
            String userName = "guest";
            String password = "guest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance();
            conn = DriverManager.getConnection (url, userName, password);
```

Below the code editor, there is a small video inset of a man speaking. At the bottom of the slide, there is a footer with the IIT Kharagpur logo, the text "IIT KHARAGPUR", "NPTEL ONLINE CERTIFICATION COURSES", and "DEBASIS SAMANTA CSE IIT KHARAGPUR".

So, again here you see the Connection type of object conn Statement and rs these are the three different type of objects of type connection statement and the result sets that are the things we have defined it. And finally, we create a connection here using the same method that we have discussed.

(Refer Slide Time: 05:42)

Inserting a record into table...

```
stmt = conn.createStatement();
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
System.out.println("\n\n ----- Result Before Insert-----\n");
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks: =
        "+MarksString+" \t\t"+Grade: = "+GradeString+"\n");
} //end while
stmt.execute("INSERT INTO JavaCourse values (01,'Debasish Kundu', 75, 'A')");
stmt.execute("INSERT INTO JavaCourse values(02,'Saikat Das', 85, 'EX')");
stmt.execute("INSERT INTO JavaCourse values(03,'Sandeep Banerjee', 65, 'B')");
stmt.execute("INSERT INTO JavaCourse values(04,'Raju Chatterjee', 78, 'A')");
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
```

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

So, the connection is established and then finally, we execute the statement and this a statement object is created and this a select star from JavaCourse. This is the SQL statement we fire from this program and then it will result return the results rs. And, then we can browse the results through this while statement; each record can be printed on our screen. I mean displaced screen like using this simple System.out.println. Once the record will be obtained and this is the process by which we can get the values and then processing these values into the string, actually, it will display all the results.

And, then once the result is the after the execution of the select star from JavaCourse we have to execute some other statement like statement execute INSERT INTO JavaCourse with value this one. So; that means, here the five different statements SQL statements we have fire these are related to the inserting the records into the table. This is the initial table, it may we usually if it is the initial table it does not have any record after inserting this one it will give the records are to be inserted into there. And finally, we can get results sets using this rs statement and then the result can be obtained after the result of this in secretion is there.

(Refer Slide Time: 07:02)

Inserting a record into table...

```
System.out.println("\n\n ----- Result After Insert-----\n");
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    System.out.println("Name: " + NameString + "\t\t" + Roll: = " + RollString + "\t\t" + Marks: =
        + MarksString + "\t\t" + Grade: = " + GradeString + "\n");
} //end while
}
catch (SQLException ex){
    // handle any errors
    System.out.println("SQLException: " + ex.getMessage());
    System.out.println("SQLState: " + ex.getSQLState());
    System.out.println("VendorError: " + ex.getErrorCode());
}
catch (Exception e)
{
    System.err.println ("Cannot connect to database server");
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

And then that the result again be processed using the again passing because, it will process all the results that can be obtained from this one and then the result can be shown on the display screen. So, this way you can connect you can establish a connection and then once the connection is established we can fire a lot many skill statements to be executed. And, then on the successful execution of each statement we can get the result and then all those result can be processed using these are the few courses that we have mentioned here.

(Refer Slide Time: 07:31)


Inserting a record into table...

```
finally {
    if (rs != null) {
        try {
            rs.close();
        } catch (SQLException sqlEx) { } // ignore
        rs = null;
    }
    if (stmt != null) {
        try {
            stmt.close();
        } catch (SQLException sqlEx) { } // ignore
        stmt = null;
    }
    if (conn != null) {
        try {
            conn.close(); // System.out.println ("Database connection terminated");
        } catch (Exception e) { /* ignore close errors */ }
    }
}
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

And then finally, all those programs should be put into the exception handling trike and broths mechanism.

(Refer Slide Time: 07:41)

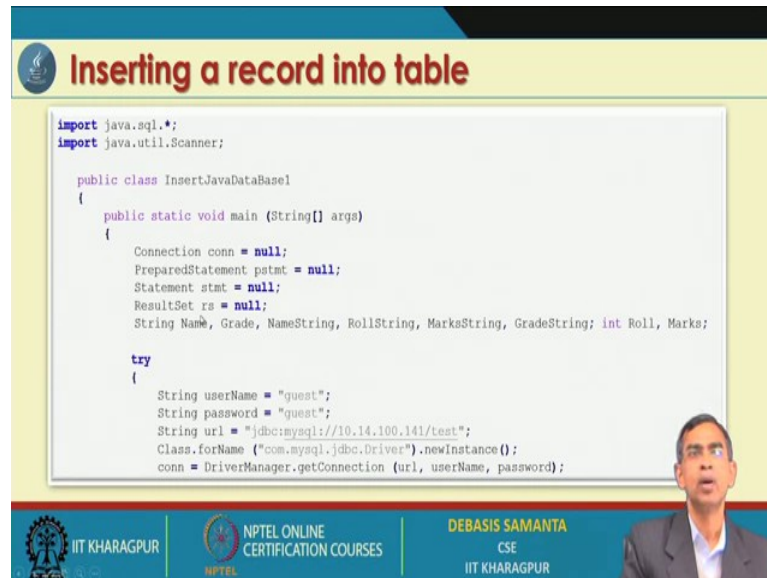

Inserting a record into table

```
import java.sql.*;
import java.util.Scanner;

public class InsertJavaDataBase1
{
    public static void main (String[] args)
    {
        Connection conn = null;
        PreparedStatement pstmt = null;
        Statement stmt = null;
        ResultSet rs = null;
        String Name, Grade, NameString, RollString, MarksString, GradeString; int Roll, Marks;

        try
        {
            String userName = "quest";
            String password = "quest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance();
            conn = DriverManager.getConnection (url, userName, password);
```

The slide features a video inset of a man in a suit speaking in the bottom right corner. The footer contains logos for IIT Kharagpur, NPTEL Online Certification Courses, and the speaker's name, Debasis Samanta, CSE, IIT Kharagpur.

Now, inserting a record with another example; let us see how things can be done. Again it is the same as the previous one we create the conn and then p statement here basically we have to prepared statement we have to follow; that means, we can read some values from the keyboard and then statement can be prepared and then finally, this statement can be executed. So, these are p statement object is created finally, this is a statement and then rs the result where it will be stored. So, they are the four objects that we have defined here and this is the connection mechanism few lines of course, that is obvious it is there and we can just simply make a connection.

(Refer Slide Time: 08:3)

Inserting a record into table...

```
System.out.println("\n\n ----- Results before Insert ----- \n");
stmt = conn.createStatement();
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks: =
        "+MarksString+"\t\t"+Grade: = "+GradeString+"\n");
} //end while
System.out.println("\n\n --- Input for the entries of table (JavaCourse) --- \n");
Scanner in = new Scanner(System.in);
System.out.println("\n Enter Name: \t");
Name = in.nextLine();
System.out.println("\n Enter Grade: \t");
Grade = in.nextLine();
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

And then once this connection is there we can execute some statement. So, the statement is created and then this is the SQL statement is fired from this. So, SELECT star FROM JavaCourse and these basically first we want to see the result before insertion what is the data it is there; so, it is the basically it will get all the records those are there at the moment before executing any insertion. And, now we are going to take the input from the entries of the table JavaCourse; first we give a prompt Enter Name read the name from the buffer keyboard. So, keyboard from the keyboard the array name will be entered and then it will read it and then this will store into this name right.

(Refer Slide Time: 08:55)

Inserting a record into table...


```
System.out.println("\n Enter Roll: \t");
Roll = in.nextInt();
System.out.println("\n Enter Marks: \t");
Marks = in.nextInt();
String QryString = "INSERT INTO JavaCourse (Roll,Name,Marks,Grade) VALUES(?, ?, ?, ?)";
pstmt = conn.prepareStatement(QryString);
pstmt.setInt(1, Roll);
pstmt.setString(2, Name);
pstmt.setInt(3, Marks);
pstmt.setString(4, Grade);
pstmt.executeUpdate();
System.out.println("\n\n ----- Results after Insert ----- \n");
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

So, it is basically name and then grades and then roll number and the marks everything can be read from the keyboard and then their value can be temporarily held there. And, then the p statement using this command all these values that we have read from recently from the keyboard can go to these values. So, this basically this thing we prepared using INSERT INTO JavaCourse Roll, Marks, number, Grade VALUES is this one; all those values is question mark. Those value will obtain from the p statement all these get int get string setIntString.

And then finally, p statement executeUpdate means all the value that we have already stored and will go to this one and finally, the entire statement will be executed. So, this is basically the problem the statement that you can do it and then finally, after this insertion is done we can display the result. So, results after the insertion again we can execute SELECT star FROM JavaCourse, the result set can be obtained again and then these results can be scanned one by one for each field Name, Roll, Marks, and Grade one by one. So, it will basically display all the records including the new record that we have added into the system and finally, it will try cache block it is as it is there.

(Refer Slide Time: 10:06)

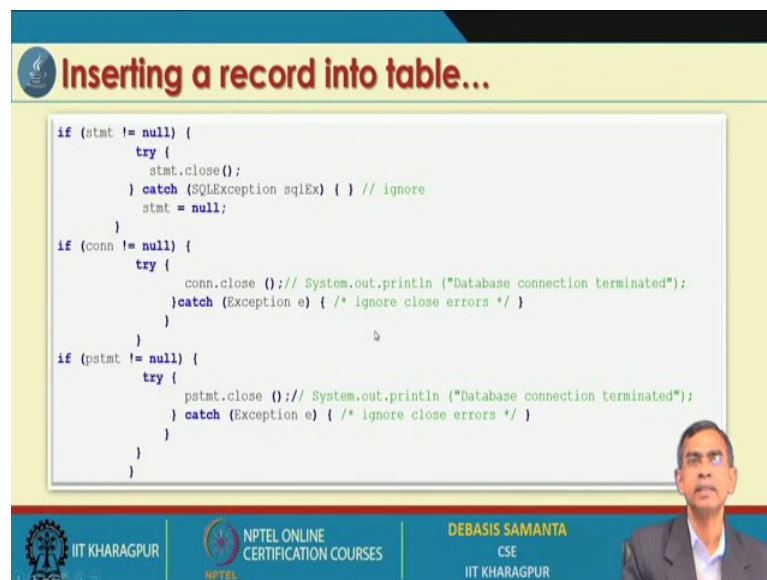


Inserting a record into table...

```
if (stmt != null) {
    try {
        stmt.close();
    } catch (SQLException sqlEx) { } // ignore
    stmt = null;
}
if (conn != null) {
    try {
        conn.close (); // System.out.println ("Database connection terminated");
    } catch (Exception e) { /* ignore close errors */ }
}
if (pstmt != null) {
    try {
        pstmt.close (); // System.out.println ("Database connection terminated");
    } catch (Exception e) { /* ignore close errors */ }
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

Now, inserting a record into a table that we have discussed how it can be there and now processing a table either we can do a lot of processing.

(Refer Slide Time: 10:18)

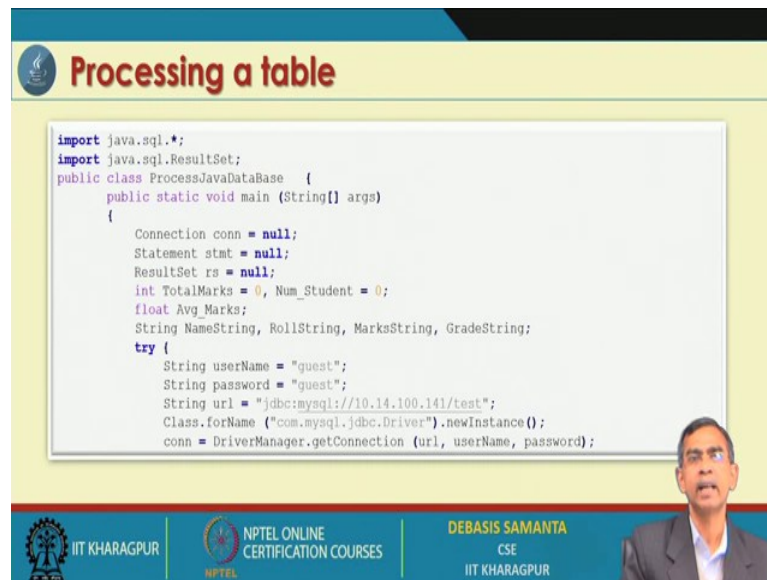

The slide is titled "Processing a table" and features a Java code snippet for connecting to a MySQL database and processing a table. The code is as follows:


```
import java.sql.*;
import java.sql.ResultSet;
public class ProcessJavaDataBase {
    public static void main (String[] args)
    {
        Connection conn = null;
        Statement stmt = null;
        ResultSet rs = null;
        int TotalMarks = 0, Num_Student = 0;
        float Avg_Marks;
        String NameString, RollString, MarksString, GradeString;
        try {
            String userName = "guest";
            String password = "guest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance();
            conn = DriverManager.getConnection (url, userName, password);
```

The slide also includes a small video inset of a man in the bottom right corner. At the bottom, there are logos for IIT KHARAGPUR, NPTEL ONLINE CERTIFICATION COURSES, and the presenter's name, DEBASIS SAMANTA, CSE, IIT KHARAGPUR.

So, basically, the result data set that can be processed here. Now, here again same thing we first import java.sql.star; all these things would be inputted there and this class basically is a Java application in this case by which we can process any execution like and these are the few statements here as we see here. In this example what you want to do is that say, suppose already a table is there and for each table, all the marks are already there for say 100 records or whatever it is there.

Now, we want to get the results and then we can get the results from the server and then being all the results in our application end and then make their average. So, basically this program will tell how the results can be obtained from the remote server from a table and then the average of all the marks can be calculated and it can be finally displayed. So, it is the idea and so, this is the process that we are going to give a simple example here. So, these are the few statements as usual earlier. So, it basically establishes a connection from where application to the server.

(Refer Slide Time: 11:30)

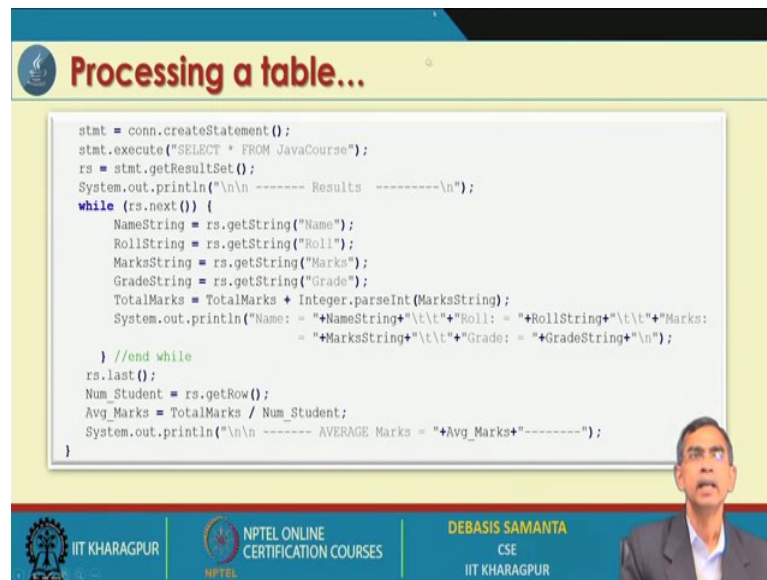

Processing a table...

```
stmt = conn.createStatement();
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
System.out.println("\n\n ----- Results ----- \n");
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    TotalMarks = TotalMarks + Integer.parseInt(MarksString);
    System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks:
                      = "+MarksString+"\t\t"+Grade: = "+GradeString+"\n");
} //end while
rs.last();
Num_Student = rs.getRow();
Avg_Marks = TotalMarks / Num_Student;
System.out.println("\n\n ----- AVERAGE Marks = "+Avg_Marks+"-----");
}
```

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR


And then this is the statement object is created and then we got all the results because we need to fetch all the results. So, SELECT star FROM JavaCourse it will basically fetch all the results, those the result will be store in rs results sets and then results that can be obtained can be processed it is like this as you see here. So, we just give the Name, Roll, Marks and Grade they are all string and then finally, we can convert all these things into the numbers form.

So, total marks are integer parseInt MarkString so, it basically read the results are there. So, total marks will be obtained for each record getting one record at a time and then getting the results are there and then finally, the total number of records can also be ca co obtained. So, this is the formula getRow from the result sets is basically says that how many rows that we have fetched it. So, this basically includes the total number of records are there. So, it is basically a total number of students and we in this statement after parsing all the records we can got the total marks and then this is the total number of records. And finally, the average marks can be obtained by this one and the assign can be printed on the screen.

So, as you have learned about how the entire results from a database can be fetched into your Java application and then some processing. It is a just an example that how this processing can be done. There are a lot many processing also can be done from the SQL end also; this average calculation is also possible at the SQL site also using some SQL

command. But, this result also can be obtained and you can get it there. Now, here is a question some processing can be done at the server end, it is possible you can fire those processing exhibiting the statement from here and then get the result. Or, you can get the entire result in your n program end application and then compute it and then process it. So, both way it is there, some things which are not possible from the server end you can get it and then you can solve it that is also quite possible.

(Refer Slide Time: 13:29)

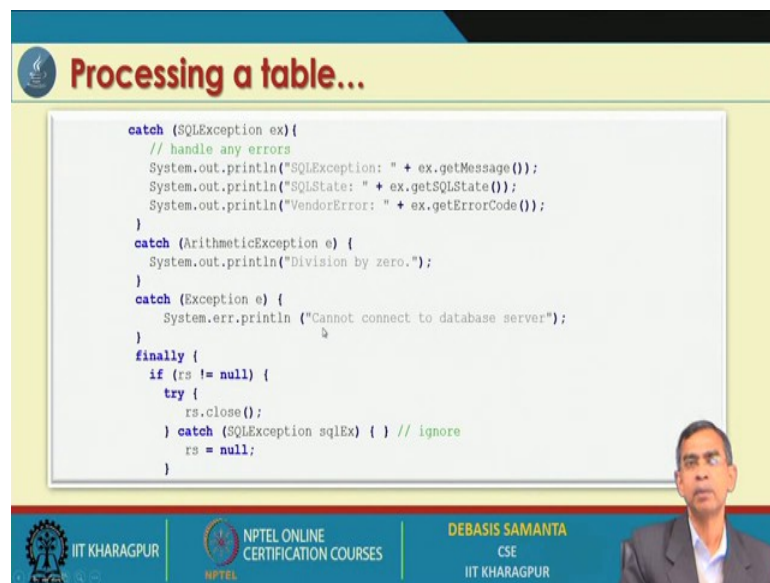

The slide is titled "Processing a table..." and displays a Java code snippet for handling exceptions during database processing. The code is as follows:

```
catch (SQLException ex) {  
    // handle any errors  
    System.out.println("SQLException: " + ex.getMessage());  
    System.out.println("SQLState: " + ex.getSQLState());  
    System.out.println("VendorError: " + ex.getErrorCode());  
}  
catch (ArithmeticException e) {  
    System.out.println("Division by zero.");  
}  
catch (Exception e) {  
    System.err.println ("Cannot connect to database server");  
}  
finally {  
    if (rs != null) {  
        try {  
            rs.close();  
        } catch (SQLException sqlEx) { } // ignore  
        rs = null;  
    }  
}
```


The slide also features a small video inset of a man in the bottom right corner. At the bottom, there are logos for IIT Kharagpur and NPTEL Online Certification Courses, along with the text "DEBASIS SAMANTA CSE IIT KHARAGPUR".

So, whatever the way the processing it is there and the rest of the trailing part of the program is basically related to the exception handling. Then updating a table it is basically how we can update command.

(Refer Slide Time: 13:43)

Updating a table

```
import java.sql.*;
import java.sql.ResultSet;
public class UpdateJavaDataBase
{
    public static void main (String[] args)
    {
        Connection conn = null;
        Statement stmt = null;
        ResultSet rs = null;
        String NameString, RollString, MarksString, GradeString;
        try
        {
            String userName = "quest";
            String password = "quest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance();
            conn = DriverManager.getConnection (url, userName, password);
```



IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR


Update command already you have learned about while we are studying the SQL statement there. So, first of all, we have to create an establishment and then create few important objects like conn statement and rs for related to the connection statement and other result states storing. And, then these are the basic string that we have declared to be used intermediate way and this is basically the; for five steps which are required for establishing a connection from your program to the JDBC server.

(Refer Slide Time: 14:07)

Updating a table...

```
stmt = conn.createStatement();
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
System.out.println("\n\n ----- Result Before Update ----- \n");
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks: =
        "+MarksString+"\t\t"+Grade: = "+GradeString+"\n");
} //end while
// Update a row
stmt.execute("update JavaCourse set Marks=85, Grade='Ex' where Name='Debasish Kundu'");
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();

System.out.println("\n\n ----- Result After Update ----- \n");
```




IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

And then we can use the statement like this one this basically creates a; I mean is a define a statement and then this is the execution of the statement like SELECT star FROM JavaCourse. So, this basically shows that what are the entries are there as usual earlier we have discussed it. So, this a statement will be executed, the data result will be stored in the rs object and then this rs object can be passed one by one, scan then finally, it will display.

And, then here we just give we just execute one more statement is called the update. As you see statement.execute we are going to execute one more statement update, then JavaCourse set Marks. Here exactly you see update these are table name and set, the Marks equals to 85, code equals to Ex where Name equals to this one. So, that means, it will find a record whose name is this one, if it find this is the condition upon the condition; satisfying the condition it will basically change this record with these values. And, then after this update command is successfully executed we can face all the records and see whether the results are updated or not.

(Refer Slide Time: 15:25)

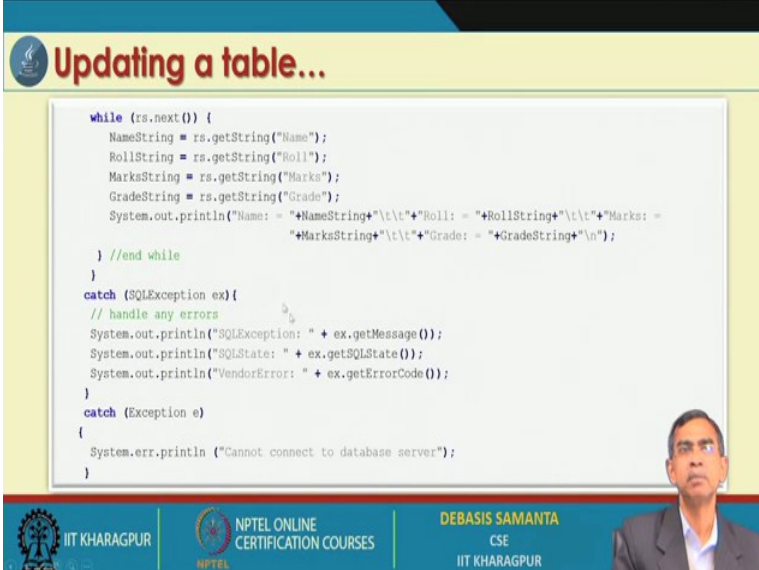

Updating a table...


```
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks: =
        "+MarksString+"\t\t"+Grade: = "+GradeString+"\n");
} //end while
}
catch (SQLException ex){
    // handle any errors
    System.out.println("SQLException: " + ex.getMessage());
    System.out.println("SQLState: " + ex.getSQLState());
    System.out.println("VendorError: " + ex.getErrorCode());
}
catch (Exception e)
{
    System.err.println ("Cannot connect to database server");
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

So, the last few statements is basically executed the select start from and then rs.next we can again reply we can see that whether the update common has been executed or not. If that data is satisfied this condition definitely you can do it and then finally, it will have updation is successful there and again the try-catch block is basically to ensure that the program is executed in a reliable and more robust way.

And then deleting a record, it is basically how the record can be deleted, the same procedure will follow. First of all we have to create the statement object and then connection objects and then result set object and then we have to establish a connection. And, then using the statement object we have to fire the; a co statement SQL statement, in this case, deletes a record.

(Refer Slide Time: 16:13)

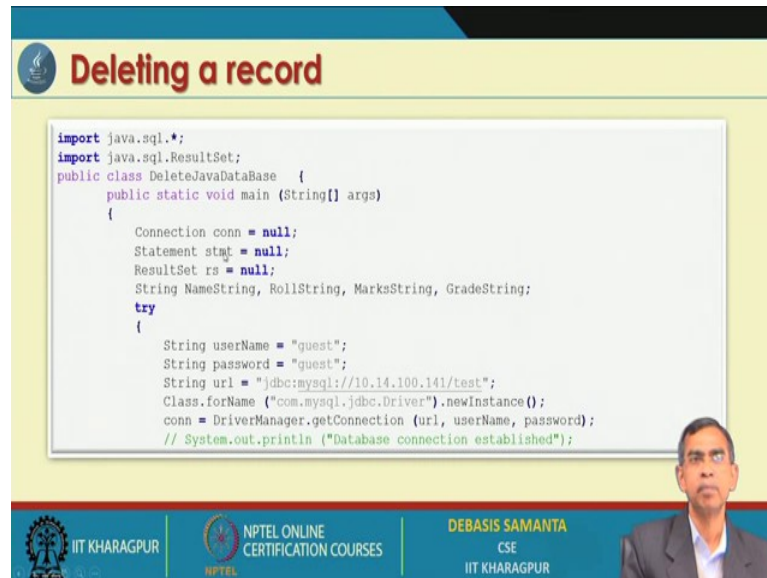


Deleting a record

```
import java.sql.*;
import java.sql.ResultSet;
public class DeleteJavaDataBase {
    public static void main (String[] args)
    {
        Connection conn = null;
        Statement stmt = null;
        ResultSet rs = null;
        String NameString, RollString, MarksString, GradeString;
        try
        {
            String userName = "quest";
            String password = "quest";
            String url = "jdbc:mysql://10.14.100.141/test";
            Class.forName ("com.mysql.jdbc.Driver").newInstance();
            conn = DriverManager.getConnection (url, userName, password);
            // System.out.println ("Database connection established");
```

NPTEL ONLINE CERTIFICATION COURSES
DEBASIS SAMANTA
CSE
IIT KHARAGPUR

Now, here is the statement here we create the connection object, statement object, result set object and then these are the temporary variable that is required.

(Refer Slide Time: 16:27)

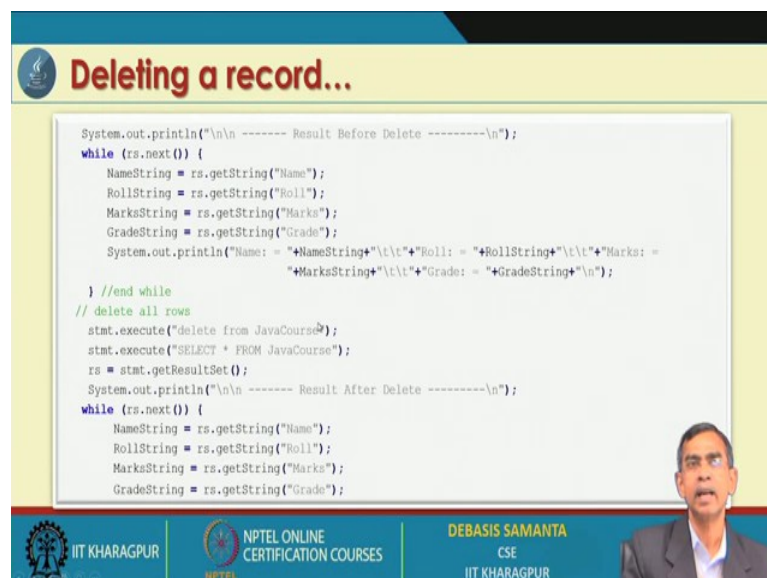

Deleting a record...

```
System.out.println("\n\n ----- Result Before Delete ----- \n");
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
    System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks: =
        "+MarksString+"\t\t"+Grade: = "+GradeString+"\n");
} //end while
// delete all rows
stmt.execute("delete from JavaCourse");
stmt.execute("SELECT * FROM JavaCourse");
rs = stmt.getResultSet();
System.out.println("\n\n ----- Result After Delete ----- \n");
while (rs.next()) {
    NameString = rs.getString("Name");
    RollString = rs.getString("Roll");
    MarksString = rs.getString("Marks");
    GradeString = rs.getString("Grade");
```

NPTEL ONLINE CERTIFICATION COURSES
DEBASIS SAMANTA
CSE
IIT KHARAGPUR

And then this is the five steps that are necessary to create a connection and all those things should be placed in the try catch block. And, here now Result Before Delete; we just see exactly what is the result it is there and then here basically we are creating we are executing one statement called the delete from JavaCourse. Now, if we delete from JavaCourse this means that it will delete the entire, I mean a number of records those are there in the table. If they delete some records from this one certification condition only that kind of records will be deleted whose condition is satisfied.

But, this is a very dangerous one delete common like it will delete all the records, but not the entire table. Table will remain there now, hereafter this deletion is there if we just simply execute this statement to get the other records if it is there, if you see then get result. And, then again processing the result as is the same way one by one you will see as this is not there so, rs.next will return null.

(Refer Slide Time: 17:25)

Deleting a record...

```
System.out.println("Name: = "+NameString+"\t\t"+Roll: = "+RollString+"\t\t"+Marks: =  
    "+MarksString+"\t\t"+Grade: = "+GradeString+"\n");  
} //end while  
}  
catch (SQLException ex){ // handle any errors  
    System.out.println("SQLException: " + ex.getMessage());  
    System.out.println("SQLState: " + ex.getSQLState());  
    System.out.println("VendorError: " + ex.getErrorCode());  
}  
catch (Exception e){  
    System.err.println ("Cannot connect to database server");  
}  
finally {  
    if (rs != null) {  
        try {  
            rs.close();  
        } catch (SQLException sqlEx) { } // ignore  
        rs = null;  
    }  
}
```

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

So, null means it will not execute further this statement and then it will do not give any print on the screen.

(Refer Slide Time: 17:30)

Deleting a record...

```
if (stmt != null) {  
    try {  
        stmt.close();  
    } catch (SQLException sqlEx) { } // ignore  
    stmt = null;  
}  
if (conn != null) {  
    try {  
        conn.close (); // System.out.println ("Database connection terminated");  
    }  
    catch (Exception e) { /* ignore close errors */ }  
}  
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

And so, this is the delete statement as we have seen.

(Refer Slide Time: 17:32)


Deleting a table

```
import java.sql.*;  
import java.sql.ResultSet;  
public class DeleteTableJavaDataBase {  
    public static void main (String[] args)  
    {  
        Connection conn = null;  
        Statement stmt = null;  
        ResultSet rs = null;  
        String TableName;  
  
        try  
        {  
            String userName = "guest";  
            String password = "guest";  
            String url = "jdbc:mysql://10.14.100.141/test";  
            Class.forName ("com.mysql.jdbc.Driver").newInstance();  
            conn = DriverManager.getConnection (url, userName, password);  
        }  
    }  
}
```

DEBASIS SAMANTA
CSE
IIT KHARAGPUR

And then deleting a table and this is another command it is there drop command and again the Statement, Connection and the ResultSet are created and this is a connection is established.

(Refer Slide Time: 17:44)

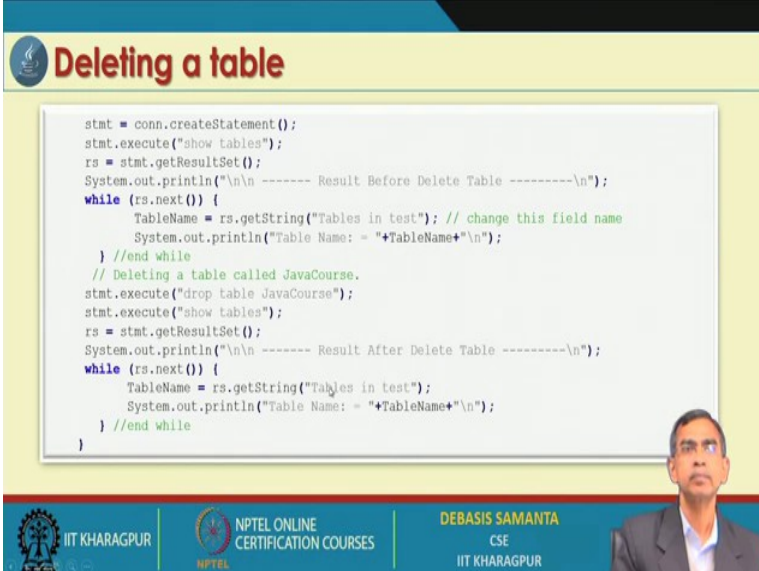

Deleting a table

```
stmt = conn.createStatement();
stmt.execute("show tables");
rs = stmt.getResultSet();
System.out.println("\n\n ----- Result Before Delete Table ----- \n");
while (rs.next()) {
    TableName = rs.getString("Tables in test"); // change this field name
    System.out.println("Table Name: = "+TableName+"\n");
} //end while
// Deleting a table called JavaCourse.
stmt.execute("drop table JavaCourse");
stmt.execute("show tables");
rs = stmt.getResultSet();
System.out.println("\n\n ----- Result After Delete Table ----- \n");
while (rs.next()) {
    TableName = rs.getString("Tables in test");
    System.out.println("Table Name: = "+TableName+"\n");
} //end while
}
```

IIT KHARAGPUR | NPTEL ONLINE CERTIFICATION COURSES | DEBASIS SAMANTA CSE IIT KHARAGPUR

And we execute the show tables; that means, what are the tables are there. So, show table says you know show table, show databases everything is there you can execute it, under your own login password, your authorization. If their many databases it is there showing database will show you all the databases. Now it is there so, results as getResultSet basically it will return you the result set and System.out.println it will show all the tables which are there including their table name. So, the Table in the test will be there and then the table will be displayed; that means, whatever the tables are there.

Now, after these things we execute the drop table JavaCourse; that means, we want to delete the table permanently whether it contains a record or not. It will remove the table permanently physically from the server and then show tables after this thing again the same thing if we repeat and then you will see that all tables are there except the JavaCourse table is there because JavaCourse table has been deleted. So, this is the way the different statement that can be executed and then after exiting the different statement we can process the results.

We have state three sessions, we will discuss about demonstration giving all those things in details starting from the installation of SQL server, installation of JDBC driver and the execution of some SQL statement from your application.

So, thank you very much.