


**Programming in Java**  
**Prof. Debasis Samanta**  
**Department of Computer Science and Engineering**  
**Indian Institute of Technology, Kharagpur**

**Lecture - 53**  
**Demonstration – XX**

So, here is the session about JDBC, there are there is a series of demonstration will be followed after the learning, so, for the theoretical concepts.

(Refer Slide Time: 00:31)

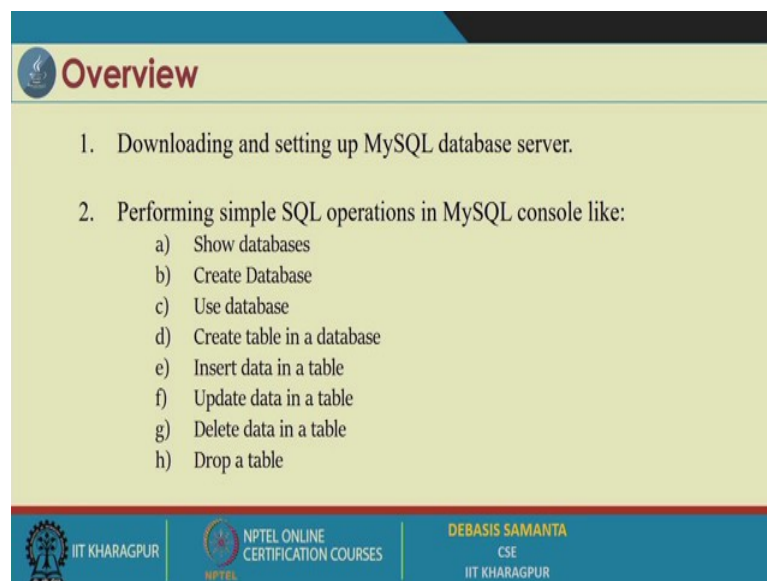


The slide is titled "Overview" and contains a numbered list of topics. The first topic is "1. Downloading and setting up MySQL database server." The second topic is "2. Performing simple SQL operations in MySQL console like:", followed by a sub-list of eight operations: a) Show databases, b) Create Database, c) Use database, d) Create table in a database, e) Insert data in a table, f) Update data in a table, g) Delete data in a table, and h) Drop a table. The slide footer includes the IIT Kharagpur logo, NPTEL Online Certification Courses logo, and the name "DEBASIS SAMANTA CSE IIT KHARAGPUR".

- 1. Downloading and setting up MySQL database server.
- 2. Performing simple SQL operations in MySQL console like:
  - a) Show databases
  - b) Create Database
  - c) Use database
  - d) Create table in a database
  - e) Insert data in a table
  - f) Update data in a table
  - g) Delete data in a table
  - h) Drop a table

So, first we will discussed about regarding the MySQL server installation and after the steps of installation we will decide exactly how to access the MySQL server. Initially we will consider about the console based accessing and then later on another session where we will demonstrate how the same can be done through the JDBC driver. So now, let us have the demonstration about the MySQL database server installation in your own machine right.


It may be laptop, it may be PC we will we are going to consider the installation in Windows system. However, the procedure and the steps basically in variance for any other systems to be followed. So, as an installation the first step is basically to download the software as you have told the download the link that we have already given.

(Refer Slide Time: 01:22)

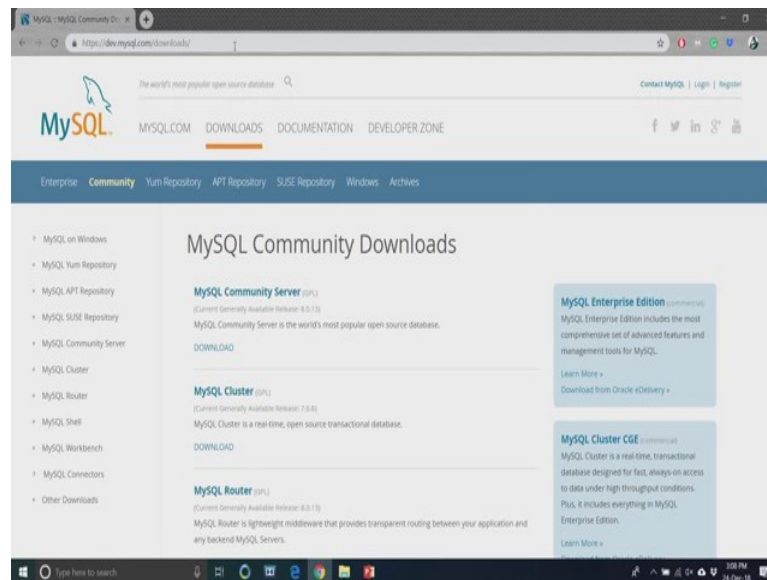


So, this is the link the dev dot mysql dot com oblique downloads oblique. So, this actually is the link; so, if you just able to access this link then it will open a browser window where you can find MySQL community downloads.

(Refer Slide Time: 01:58)

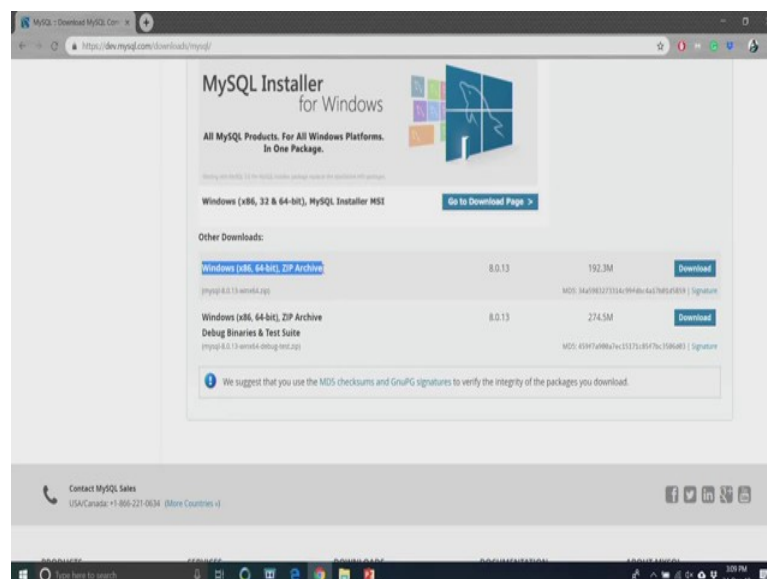


So, we have just clicked the link and then we see that MySQL community server is there. So, we have to open the link and then we will find the installer basically as you have told Windows installer you have to consider here. So, this is basically archive a ZIP Archive.

(Refer Slide Time: 02:12)

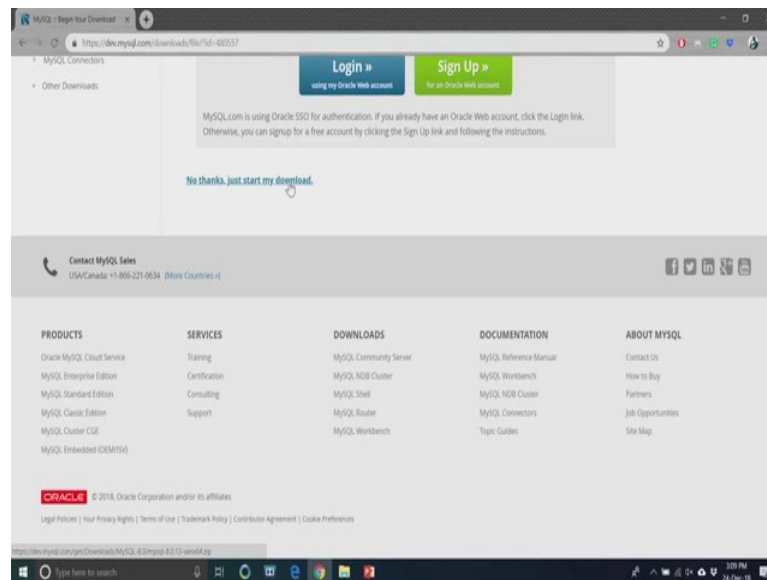


And depending on your machine configuration whether it is a 32 bit or is 64 bits; you have to decide the correct what is called downloading software for your download. So, that you have to ensure that otherwise your installation may not be successful operation. So, assuming that our machine is Windows 64 and we are just going to download the latest version of the MySQL server which is the MySQL 8.0 and then release 13.0. So, we are going to install it; so, here actually we have already pre-installed, it is in our desktop terminal.

(Refer Slide Time: 02:49)

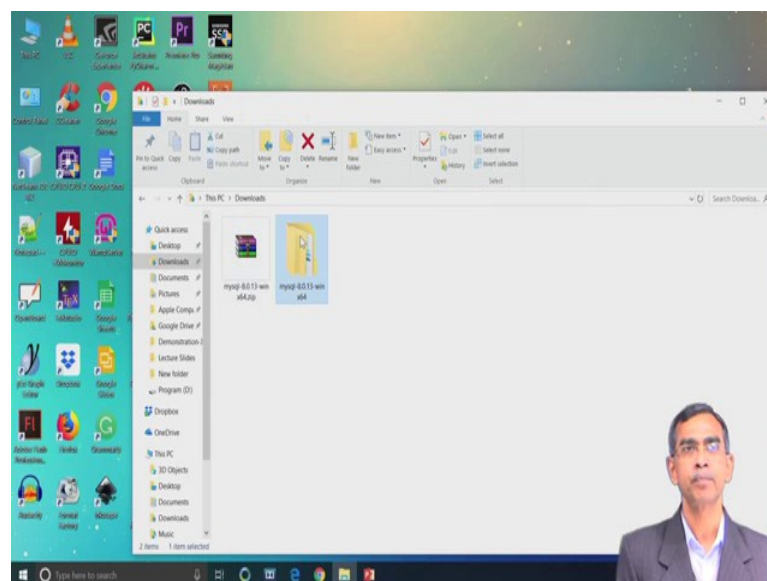



(Refer Slide Time: 04:10)

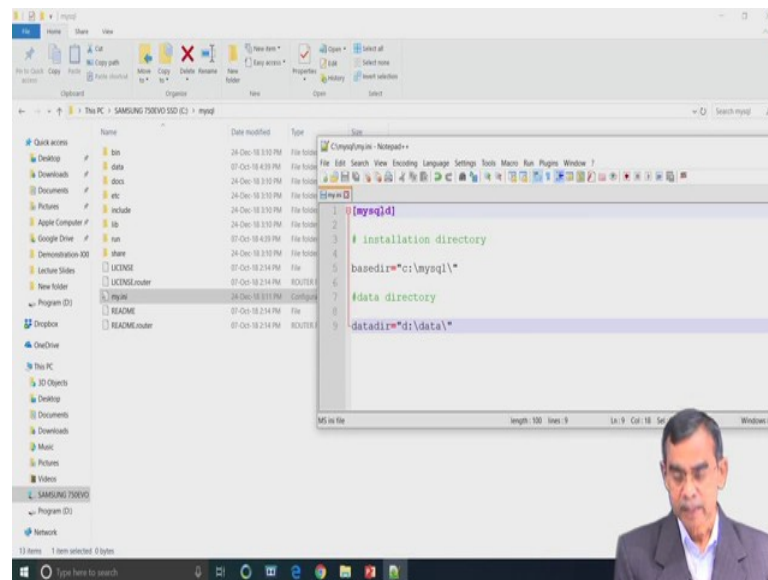


And then we have to so, this basically completes the downloading about it and then go to the command prompt. So, you have to copy the my any file as we have already mentioned and that my any files should be placed into the MySQL directory. So, my any file the configuration which is there that configuration and we have already mention in theory class; we are typing the configuration that is required for the my any file right.

So, this is the syntax that you have to follow verbatim without knowing what exactly the things are there, only the system can understand about the any file. This is required for the initialization so far the MySQL server is concerned. So, MySQL id then hash installation directory then base directory. So, it will be base dir equals these is a base directory where our zip file is located that is c colon then slash mysql slash within double quote. And then data directory hash data directory; data directory is equals to within d colon dash data.


So, this is basically back up file will be stored in this drive we have planned that all the backup file or data file will be stored in a D drive of this machine. You can make our some other stores location also no issue.

(Refer Slide Time: 05:37)

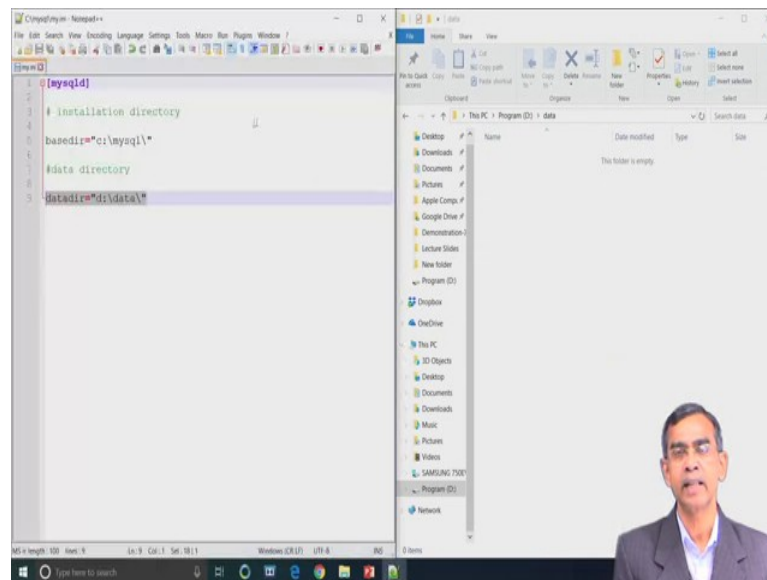


Anyway so, the data file is created here in D drive, we have created a folder there.

(Refer Slide Time: 05:41)

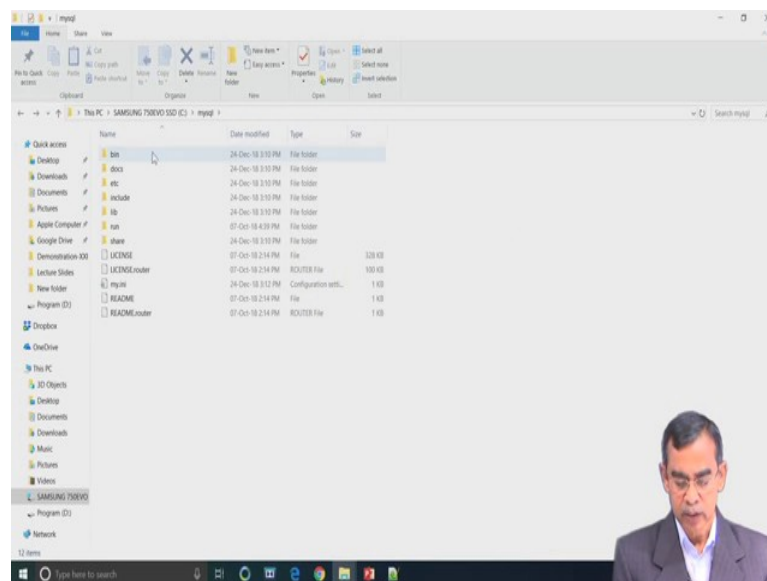


And there is in a C driver so, you see in the mysql directory the data file is there, this folder should be removed. So, we are removing this folder from here.

(Refer Slide Time: 05:50)

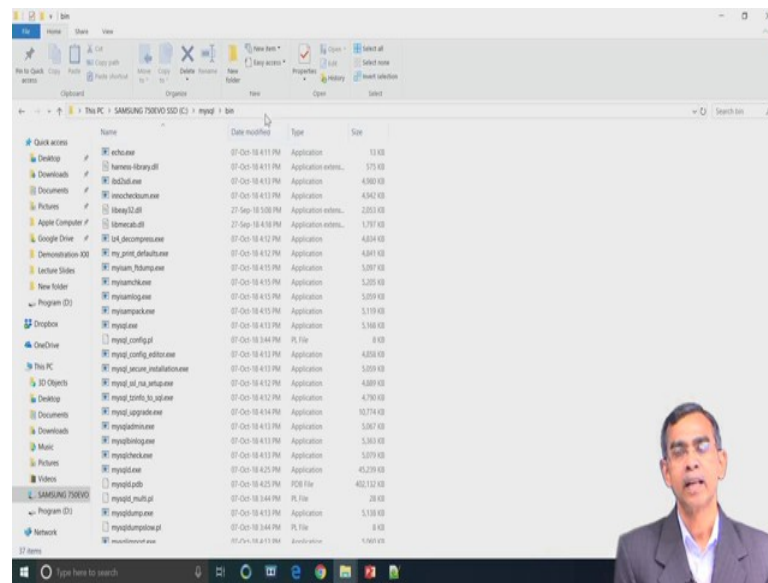

Now so, this completes exactly the storing the files there.

(Refer Slide Time: 05:57)

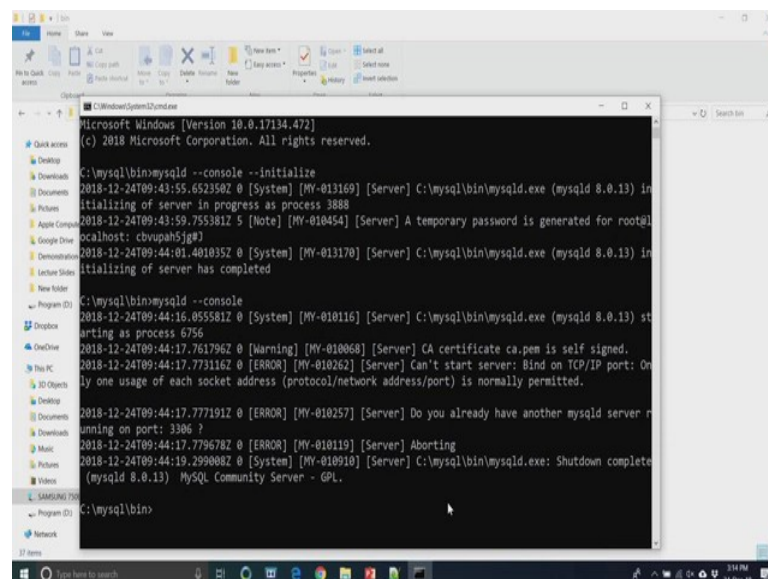


Now, you have to run the program and to run this program you have to go to command prompt. And in command prompt mysql go to the bin directory and there you type `mysqlid --console console`. These are command already you have mentioned there console data initial is right initialize right ok. So, once we face it so, your system will take care about this installation of these program.



So, installation is going on and then as you return to the command prompt and you have return it to this and localhost that basically the this machine is the host machine in this mysql server is there. So, we have completed the installation here ok. So, it is now installed, now our next task is basically to change the password.

(Refer Slide Time: 06:57)

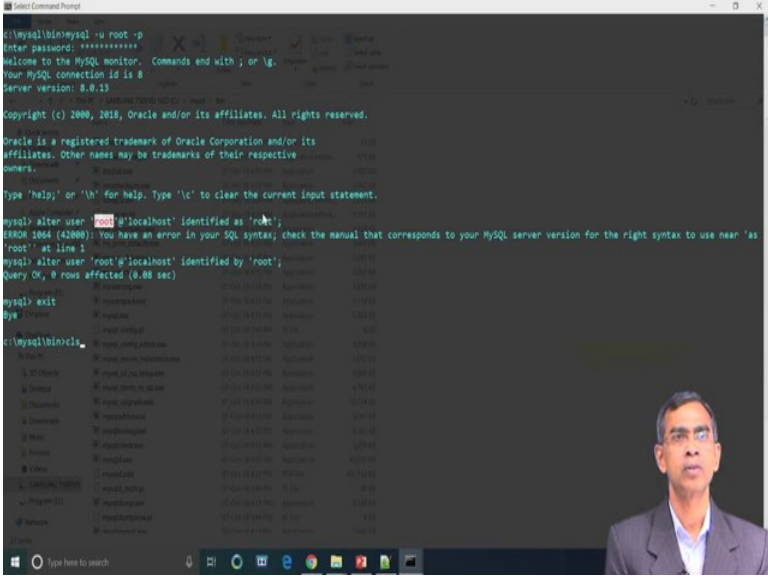

```
C:\MySQL\bin>mysql -u root -p
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 8.0.13

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> alter user 'root'@'localhost' identified as 'root';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'as
'root'' at line 1
mysql> alter user 'root'@'localhost' identified by 'root';
Query OK, 0 rows affected (0.08 sec)

mysql> exit
bye

C:\MySQL\bin>
```

So, we can do this thing again from command mode. So, `mysql -u root -p`. So, basically user is root and then password it is basically asking the password. So, in this local machine and then you have to enter the password you can type any password. So, in this case you are setting the password as the root password right ok. So, this is the localhost password is basically as it is mentioned. So, this you have to give the password at the beginning; so, we are copying it and then pasting.


So, you are giving the password; however, we can change the password also for these things, we can write the command alter. So, we are just changing the user id login for this as alter user give this root, we are giving the user name as root at the local host. So, this is the step that you should follow user root and percent localhost. So, this is a command identified as root. So, this is basically root is the user id in this case enter. So, there is some syntax error ok.

So, now so this is the correct syntax that you should follow in order to give the proper name of the user here, you should note it this is very important and then once the user is there we have to set the password also. So, you should set the password here ok. So, here



you see alter user command. So, this is the user at the rate of localhost identified as this is basically the password. So, we set for this mysql server at the moment user id as root and password is also root. So, this is the login and password for this one.

(Refer Slide Time: 09:15)

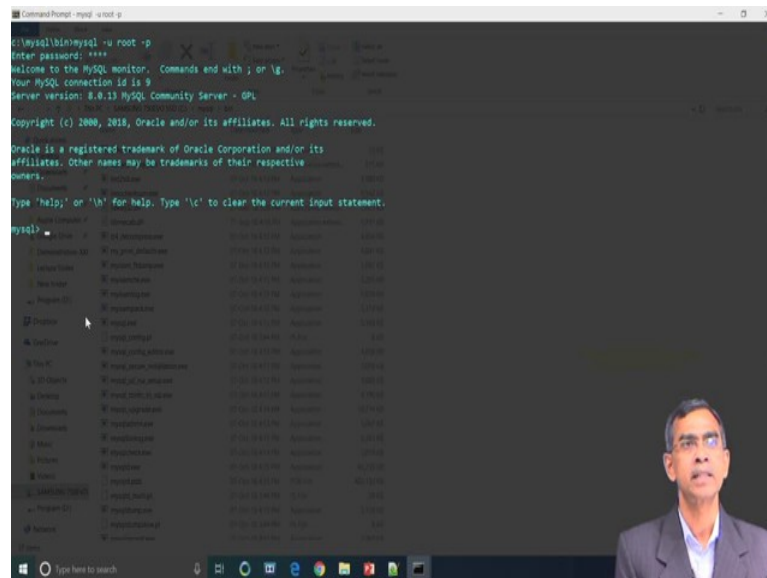

```
Command Prompt - mysql -u root -p
d:\mysql\bin>mysql -u root -p
Enter password: ****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 8.0.13 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.


Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

And now our mysql server is ready, we can type exit command and to exit from this setting.

(Refer Slide Time: 09:27)

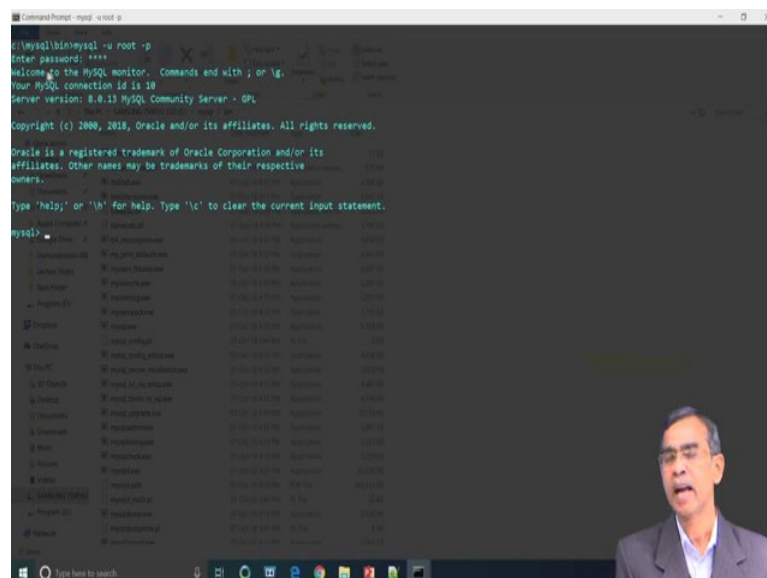

```
Command Prompt - mysql -u root -p
d:\mysql\bin>mysql -u root -p
Enter password: ****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 10
Server version: 8.0.13 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.


mysql> exit
d:\mysql\bin>
```

Then we will go for the class per checking or not now. So, we have done it and then we can change the password, this is the changing the password of.

(Refer Time: 09:35).

So now, we are now our server is ready and now we are going to log into the server. So, for this login we have type the command in the mysql prompt you have to go `mysql -u root -p` is basically ask for the password to be entered. So, the root is the password and it is case sensitivity. So, in the small letter you type root. So, it is there and then system has accepted this authorization check is passes. Now, one thing authorization check is passed; that means, MySQL server is now allow you to execute any statement whichever you want to run it right ok.

(Refer Slide Time: 10:22)

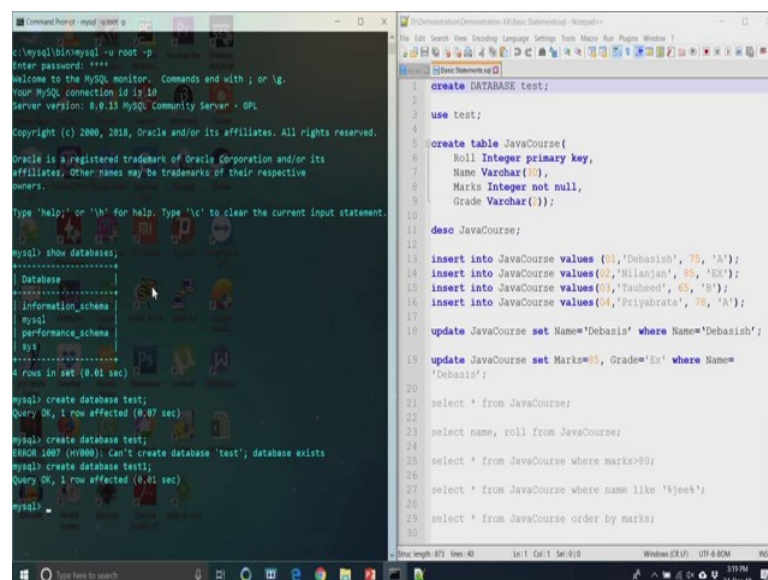

The image shows two windows side-by-side. The left window is a Command Prompt titled 'mysql -u root -p' showing the MySQL command-line interface. The right window is a Notepad++ editor titled 'C:\Users\user\Documents\MySQL Statements\MySQL Statements.sql' containing a series of SQL commands.

```
mysql> mysql -u root -p
Enter password: ***
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 10
Server version: 8.0.18 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.01 sec)

mysql> create database test;
Query OK, 1 row affected (0.07 sec)

mysql> create database test;
ERROR 1007 (HY000): Can't create database 'test'; database exists

mysql> create database test1;
Query OK, 1 row affected (0.01 sec)


mysql>
```

```
1 create DATABASE test;
2
3 use test;
4
5 create table JavaCourse{
6     Roll Integer primary key,
7     Name Varchar(50),
8     Marks Integer not null,
9     Grade Varchar(10);
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debasish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (03,'Tausheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 78, 'A');
17
18 update JavaCourse set Name='Debasish' where Name='Debasish';
19 update JavaCourse set Marks=85, Grade='Ex' where Name=
'Debasish';
20
21 select * from JavaCourse;
22
23 select name, roll from JavaCourse;
24
25 select * from JavaCourse where marks>80;
26
27 select * from JavaCourse where name like 'hjeek';
28
29 select * from JavaCourse order by marks;
30
```

Now, we are going to first our step is that initially the server is prepared; however, there is no database there is no table under this database. So, we should see exactly if there is any database at the moment in the server or not under your categories. So, absolutely is not there; so, you first create this is the default database is there, but we have to create our own.

So, now we are going to create one database of our own. So, clear let it be test database test now so, database test is created. Now, again if we try to create database test it will give an error because, it will not allow to duplicate the test 1. So, it is there now, if you can again create database test 1 this is quite possible test 1. So, it is you can delete also if you want to remove these.

(Refer Slide Time: 11:16)

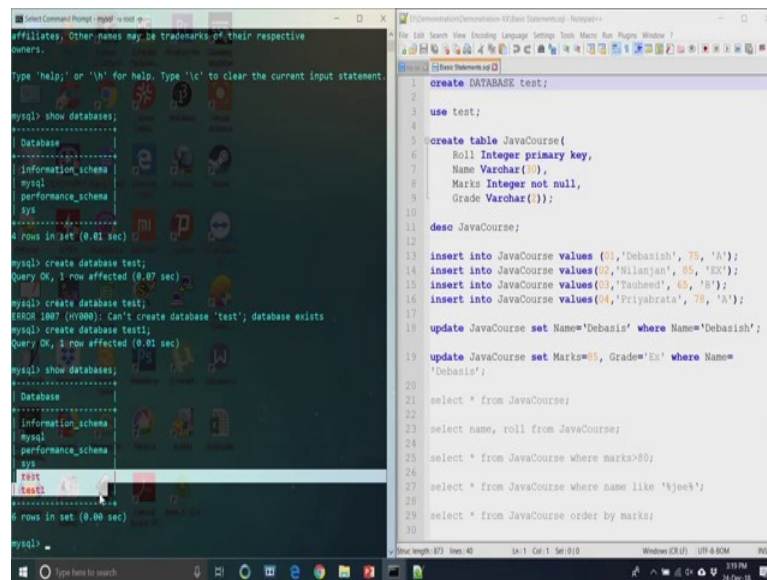

The screenshot shows two windows. The left window is a MySQL command prompt with the following commands and output:

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
6 rows in set (0.01 sec)

mysql> create database test;
Query OK, 1 row affected (0.07 sec)

mysql> create database test1;
ERROR 1007 (HY000): Can't create database 'test1'; database exists

mysql> create database test1;
Query OK, 1 row affected (0.01 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| test |
| test1 |
+-----+
6 rows in set (0.00 sec)


mysql>
```

The right window is Notepad++ containing SQL code for creating a table and inserting data:

```
1 create DATABASE test;
2
3 use test;
4
5 create table JavaCourse(
6     Roll Integer primary key,
7     Name Varchar(30),
8     Marks Integer not null,
9     Grade Varchar(1));
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debanish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'B');
15 insert into JavaCourse values (03,'Tausheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 78, 'A');
17
18 update JavaCourse set Name='Debasish' where Name='Debanish';
19
20 update JavaCourse set Marks=85, Grade='B' where Name='Debasish';
21
22 select * from JavaCourse;
23 select name, roll from JavaCourse;
24
25 select * from JavaCourse where marks>80;
26
27 select * from JavaCourse where name like '%jee%';
28
29 select * from JavaCourse order by marks;
```

So, databases if you see it will give you all the databases that is here. So, right now test and test 1 these 2 databases have been created.

(Refer Slide Time: 11:27)

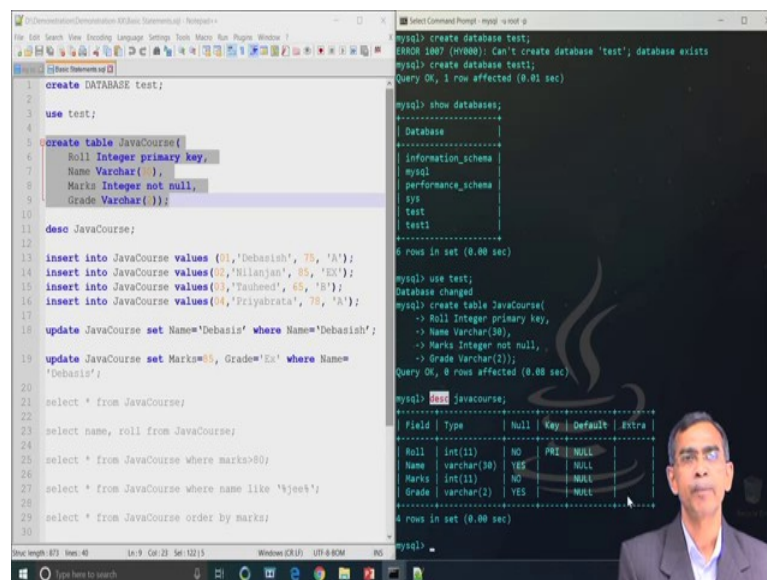

The screenshot shows two windows. The left window is Notepad++ with the same SQL code as the previous slide. The right window is a MySQL command prompt with the following commands and output:

```
mysql> create database test;
ERROR 1007 (HY000): Can't create database 'test'; database exists

mysql> create database test1;
Query OK, 1 row affected (0.01 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| test |
| test1 |
+-----+
6 rows in set (0.00 sec)

mysql> use test;
Database changed

mysql> create table JavaCourse(
-> Roll Integer primary key,
-> Name Varchar(30),
-> Marks Integer not null,
-> Grade Varchar(1));
Query OK, 0 rows affected (0.08 sec)

mysql> desc JavaCourse;
+-----+
| Field | Type | Null | Key | Default | Extra |
+-----+
| Roll | int(11) | NO | PRI | NULL | |
| Name | varchar(30) | YES | | NULL | |
| Marks | int(11) | NO | | NULL | |
| Grade | varchar(1) | YES | | NULL | |
+-----+
6 rows in set (0.00 sec)

mysql>
```

Now, these 2 data bases under your own jurisdiction and inside these databases you can put as many table as you wish. Now, we are going to enter some table under the data base test 1. So, you have to make it active.

So, let us use the command use test. So, this basically make the data base currently active. So, this is now current active database test. Now, whatever the command that will


be you will be able to enter it now it will go to this test data base actually. Now, let us first create a table, we want to create one table the name of the table that we want to give a JavaCourse.

And then this table has four fields as we see Roll, Name, Marks and Grade, they are 4 columns actually. The first fill field Roll has the type Integer we have to give this syntax, the Name Varchar and then you can type in integer in capital letter or small letter absolutely no issue. You can do whatever it is there and then the second field is Name it is basically string of 30 characters, for this the syntax is Varchar. And then within brackets is 30 indicates the maximum 30 characters can be allowed to enter or; that means, this is the weight of the column. And then Marks is also the type Integer and then Grade is also a character, but is of 2 characters only.

And one more thing that you ensure that for the first field Roll we have declared the primary key. For every database table there should be one field as a primary key, there may be more than one field also primary key any way no issue. But, if it is a primary key then it should have all the entries are all null and entries in any rows should be unique. So, you cannot allow it based system not allowed to duplicate entries in 2 rows for this value primary key which is defined. And then other is also you see marks integer not null this indicates that these entry has to be there whenever you insert some record into it no null values is allowed.

And great is a second and at the moment there is no entry. So, it is basically default is no value is it is there. So, we have entered it now you can show the table that we have entered; so, table you see ok. So, this is the case right now we have created one table called the JavaCourse and this is the describe command short form DESC if we type it, it will basically display all the structures there which is there.

(Refer Slide Time: 14:04)

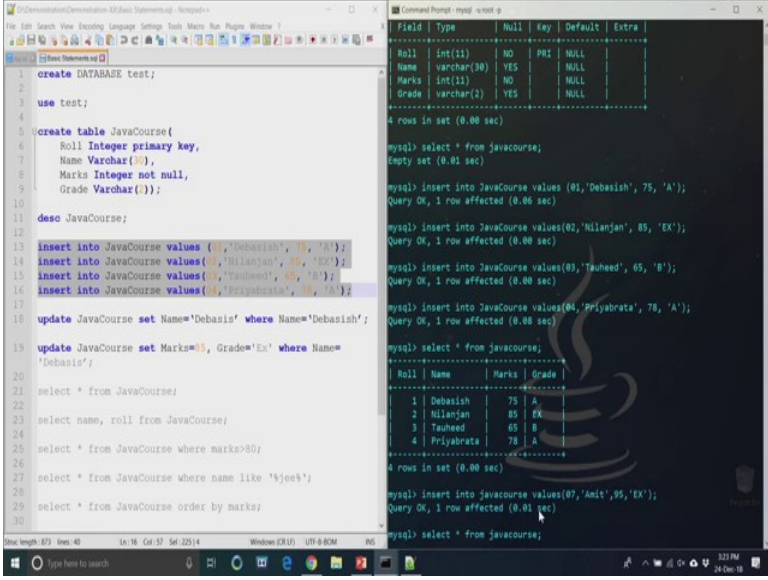

```
1 create DATABASE test;
2
3 use test;
4
5 create table JavaCourse(
6     Roll Integer primary key,
7     Name Varchar(30),
8     Marks Integer not null,
9     Grade Varchar(2));
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debasish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (03,'Tauheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 78, 'A');
17
18 update JavaCourse set Name='Debasish' where Name='Debasish';
19
20 update JavaCourse set Marks=85, Grade='EX' where Name='Debasish';
21
22 select * from JavaCourse;
23
24 select name, roll from JavaCourse;
25
26 select * from JavaCourse where marks>80;
27
28 select * from JavaCourse where name like '%jeeb';
29
30 select * from JavaCourse order by marks;
```

Field	Type	Null	Key	Default	Extra
Roll	int(11)	NO	PR	NULL	
Name	varchar(30)	YES		NULL	
Marks	int(11)	NO		NULL	
Grade	varchar(2)	YES		NULL	

```
mysql> select * from javacourse;
Empty set (0.01 sec)

mysql> insert into javacourse values (01,'Debasish', 75, 'A');
Query OK, 1 row affected (0.00 sec)

mysql> insert into javacourse values (02,'Nilanjan', 85, 'EX');
Query OK, 1 row affected (0.00 sec)

mysql> insert into javacourse values (03,'Tauheed', 65, 'B');
Query OK, 1 row affected (0.00 sec)

mysql> insert into javacourse values (04,'Priyabrata', 78, 'A');
Query OK, 1 row affected (0.00 sec)

mysql> select * from javacourse;
+----+-----+-----+-----+
| Roll | Name      | Marks | Grade |
+----+-----+-----+-----+
| 1 | Debasish  | 75    | A     |
| 2 | Nilanjan  | 85    | EX    |
| 3 | Tauheed   | 65    | B     |
| 4 | Priyabrata | 78    | A     |
+----+-----+-----+-----+
4 rows in set (0.00 sec)

mysql> insert into javacourse values (07,'Amit',95,'EX');
Query OK, 1 row affected (0.01 sec)

mysql> select * from javacourse;
```

So, as we see the 4 fields there type and then null key is primary default is null also and there is no exactly my field and there is a total structure composition so far the SQL server is concerned maintained this metadata in its own repository. Now so, the data is created now at the moment is javacourse table does not have any data.


So, if we add use the command select start this basically the command is to retrieve all the record that is stored there in this database in this table JavaCourse. At the moment as it gives that empty set there is no elements there. So, now let us see how the record can be inserted into the table the JavaCourse again which is under database test. So, there are commands like insert, insert command can be one at a time or four insert commands can be also placed in the same command also, now we are typing only one command first ok.

So, at the same time we have typed all commands on by one anyway so, it will execute. So, first insert into JavaCourse value 0 1 Debasish 75 A. So, 4 records has been inserted and you know all these record insertion will go into the appending mode. So, one by one it will be inserted; now if again if you see the show table or select star command and as you see the four records has been inserted.

Now, I am again issuing one more insert command here insert into data into javacourse value say 0 7 and then within quote name is Amit and then marks is 95. And then grade is EX within double quote all the string or varchar should be in the EX. Now, semi colon

should be there termination of the command enter, now it is successful; now, enter the data right.

(Refer Slide Time: 16:03)

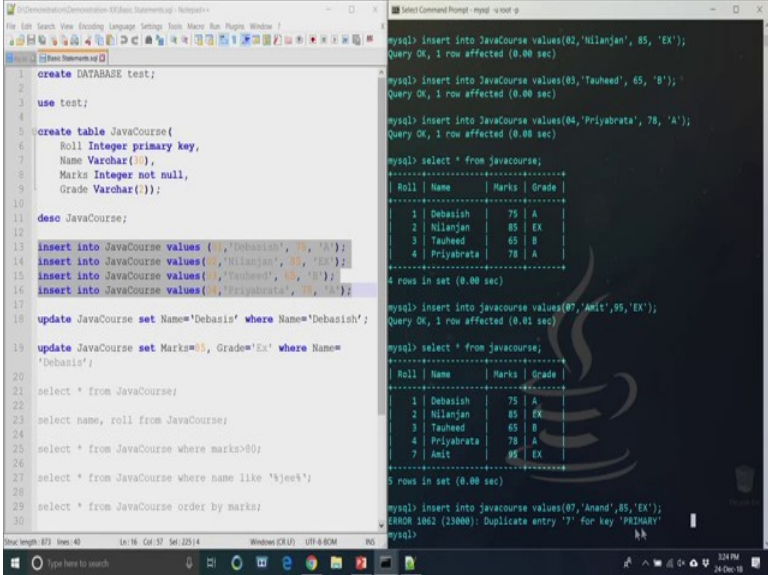

```
1 create DATABASE test;
2
3 use test;
4
5 create table JavaCourse(
6     Roll Integer primary key,
7     Name Varchar(10),
8     Marks Integer not null,
9     Grade Varchar(1));
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (1, 'Debasish', 75, 'A');
14 insert into JavaCourse values (2, 'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (3, 'Tauheed', 65, 'B');
16 insert into JavaCourse values (4, 'Priyabrata', 78, 'A');
17
18 update JavaCourse set Name='Debasish' where Name='Debasish';
19 update JavaCourse set Marks=85, Grade='EX' where Name='Debasish';
20
21 select * from JavaCourse;
22 select name, roll from JavaCourse;
23 select * from JavaCourse where marks>80;
24 select * from JavaCourse where name like '%jee%';
25 select * from JavaCourse order by marks;
```

```
mysql> insert into JavaCourse values(02,'Nilanjan', 85, 'EX');
Query OK, 1 row affected (0.00 sec)

mysql> insert into JavaCourse values(03,'Tauheed', 65, 'B');
Query OK, 1 row affected (0.00 sec)

mysql> insert into JavaCourse values(04,'Priyabrata', 78, 'A');
Query OK, 1 row affected (0.00 sec)

mysql> select * from JavaCourse;
+----+-----+-----+-----+
| Roll | Name      | Marks | Grade |
+----+-----+-----+-----+
| 1    | Debasish  | 75    | A     |
| 2    | Nilanjan  | 85    | EX    |
| 3    | Tauheed   | 65    | B     |
| 4    | Priyabrata | 78    | A     |
+----+-----+-----+-----+
4 rows in set (0.00 sec)

mysql> insert into JavaCourse values(07,'Anand',85,'EX');
Query OK, 1 row affected (0.01 sec)

mysql> select * from JavaCourse;
+----+-----+-----+-----+
| Roll | Name      | Marks | Grade |
+----+-----+-----+-----+
| 1    | Debasish  | 75    | A     |
| 2    | Nilanjan  | 85    | EX    |
| 3    | Tauheed   | 65    | B     |
| 4    | Priyabrata | 78    | A     |
| 7    | Anand     | 85    | EX    |
+----+-----+-----+-----+
5 rows in set (0.00 sec)


mysql> insert into JavaCourse values(07,'Anand',85,'EX');
ERROR 1062 (23000): Duplicate entry '7' for key 'PRIMARY'

mysql>
```

As we see we can enter it here roll number is the unique key, now let us see again insert command at the primary key should be unique. Now what we are going to be, we have to starting the insert and then 0 7 again insert value 0 7 Anand a n a n d Anand then 85 fine no problem. So, whatever it is there; now if we want to do because primary key should be a unique one, but here as we have given this so, it basically gives that error. So, it should be different ok.



(Refer Slide Time: 16:40)

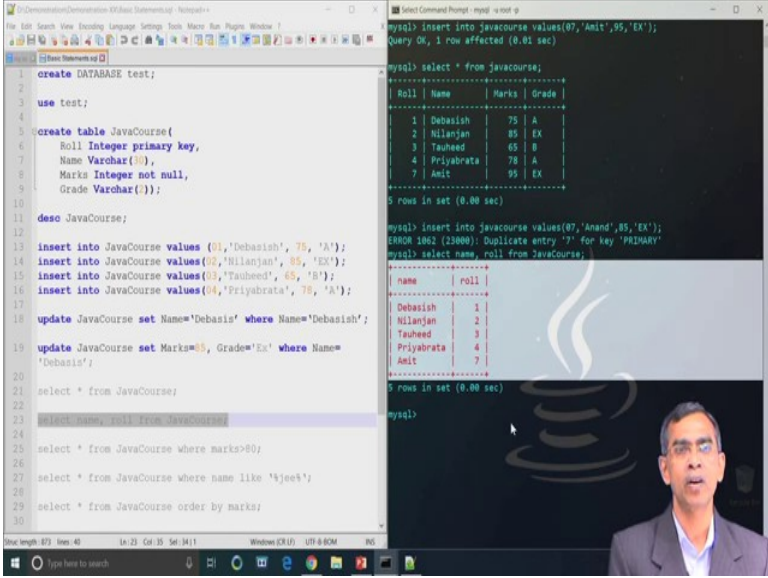

The screenshot shows a MySQL command prompt window on the right and a code editor on the left. The code editor contains SQL commands for creating a database, a table, inserting data, and performing various select queries. The command prompt shows the execution of these commands and the resulting output, including a table of data and an error message for a duplicate entry.

```
1 create DATABASE test;
2 use test;
3
4
5 create table JavaCourse(
6     Roll Integer primary key,
7     Name Varchar(50),
8     Marks Integer not null,
9     Grade Varchar(10));
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debasish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (03,'Tauheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 78, 'A');
17
18 update JavaCourse set Name='Debasia' where Name='Debasish';
19
20 update JavaCourse set Marks=85, Grade='EX' where Name='Debasia';
21
22 select * from JavaCourse;
23 select name, roll from JavaCourse;
24
25 select * from JavaCourse where marks>80;
26
27 select * from JavaCourse where name like '%jee%';
28
29 select * from JavaCourse order by marks;
30
```

mysql> insert into javacourse values(07,'Amit',95,'EX');  
Query OK, 1 row affected (0.01 sec)

mysql> select \* from javacourse;

Roll	Name	Marks	Grade
1	Debasish	75	A
2	Nilanjan	85	EX
3	Tauheed	65	B
4	Priyabrata	78	A
7	Amit	95	EX

0 rows in set (0.00 sec)

mysql> insert into javacourse values(07,'Anand',85,'EX');  
ERROR 1062 (23000): Duplicate entry '7' for key 'PRIMARY'

mysql> select name, roll from javacourse;

name	roll
Debasish	1
Nilanjan	2
Tauheed	3
Priyabrata	4
Amit	7

0 rows in set (0.00 sec)


mysql>

Now so, this you have added it and as we see at the moment there are 7 records entered into the table. The name of the table data database table is javacourse. So, this is the insertion command is there and also we have learnt about the select command select star. Now, select star has the different other nesting and then conditional base also. Now, here we want to execute the select command select name roll from JavaCourse.

So, basically not the entire table, but only 2 columns mainly name and roll number it will be there; as you see name is there roll is there. So, in order you will specify the field in that order it will basically get the data as we see the 5 records have been retrieved and there are 2 fields name and roll number has been there.



(Refer Slide Time: 17:37)

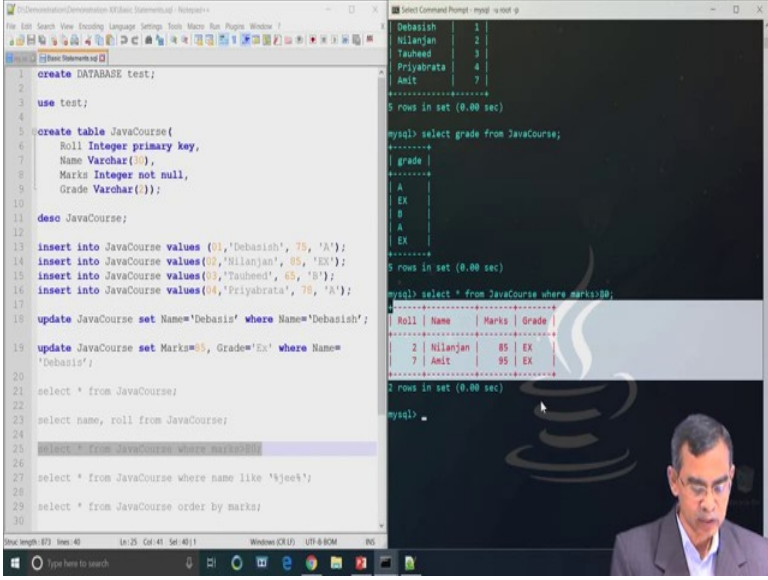

```
1 create DATABASE test;
2
3 use test;
4
5 create table JavaCourse(
6     Roll Integer primary key,
7     Name Varchar(50),
8     Marks Integer not null,
9     Grade Varchar(10));
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debasish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (03,'Tauheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 75, 'A');
17
18 update JavaCourse set Name='Debasish' where Name='Debasish';
19 update JavaCourse set Marks=85, Grade='EX' where Name='Debasish';
20
21 select * from JavaCourse;
22 select name, roll from JavaCourse;
23
24 select * from JavaCourse where marks>80;
25
26 select * from JavaCourse where name like '%jee%';
27
28 select * from JavaCourse order by marks;
29
30
```

mysql> select grade from JavaCourse;

grade
A
EX
B
A
EX

mysql> select \* from JavaCourse where marks>80;

Roll	Name	Marks	Grade
2	Nilanjan	85	EX
7	Amit	85	EX

So, again so, select star indicate all fields, but if you specify the name of fields so, explicitly only those fields will be selected and then so, again from select only the grades. So, if you see it will not display the name yes, select grade from JavaCourse as you see here right. So, it will only the particular field will be particular field; that means, column grade will be selected as you see. So, this one and this is basically the results that SQL server returns against command that you have given to it.

Now, our next command that we are going to exercise is basically conditional. So, select star from the JavaCourse with certain condition, here suppose the condition that we are going to give that marks is greater than 80. So, that mean it will basically retrieve those records whose marks is greater than 80. So, this is the command that you followed and note that command should be terminated by a semicolon. As we see out all the records these are the 2 records only satisfy this condition and therefore, has been retrieved. So, this is the select with condition, there are many other complex condition also can be fired.

(Refer Slide Time: 19:03)


```

1  --Administration\Microsoft Statements - MySQL>
2
3  File Edit Search View Encoding Language Settings Tools Macro Run Plugins Window Help
4
5  [Icons] [Basic Statements] [D]
6
7  Marks Integer not null,
8  Grade Varchar(3));
9
10
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debasish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (03,'Tauheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 75, 'A');
17
18 update JavaCourse set Name='Debasish' where Name='Debasish';
19
20 update JavaCourse set Marks=85, Grade='Ex' where Name=
21 'Debasish';
22
23 select * from JavaCourse;
24
25 select name, roll from JavaCourse;
26
27 select * from JavaCourse where marks>80;
28
29 select * from JavaCourse order by marks;
30
31 delete from JavaCourse where marks <66;
32
33 delete from JavaCourse;
34
35 drop table JavaCourse;
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
9
```

Now, let us see another conditions that we are going if this condition does not implies to any record so, then in that case it will return null. So, here is another select star from JavaCourse where name here this is the command name like something; that means, we want to have if any name is there for which any substream JEE is there. So, this is the command that we are going to write yeah.

So, you see here within single quote there is a “ JEE “ this means there should be any one name whose substring is jee; as it does not have any such name in this current record entry. So, it should return a null actually. So, its empty set as it says that there is no record which matches with this condition therefore, it returns empty sets.

(Refer Slide Time: 20:02)

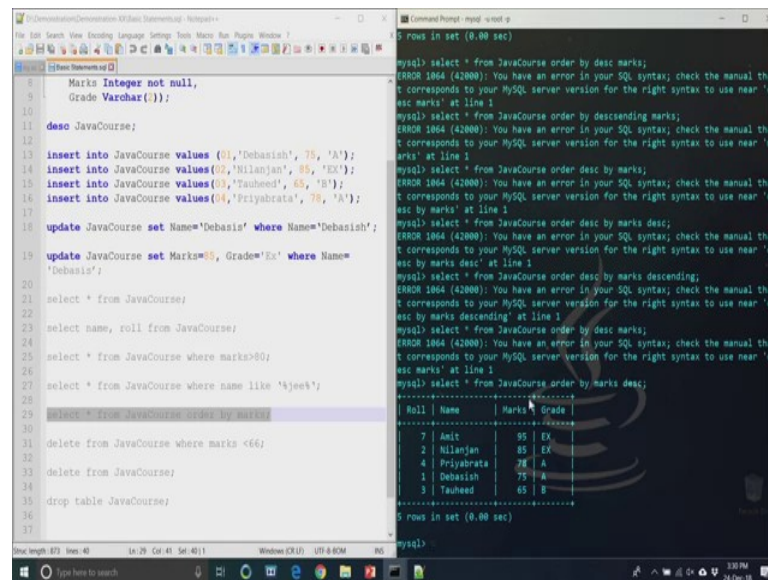

The screenshot shows a MySQL command prompt window on the right and a code editor on the left. The code editor contains the following SQL commands:

```
8 Marks Integer not null,  
9 Grade Varchar(1));  
10  
11 desc JavaCourse;  
12  
13 insert into JavaCourse values (01,'Debasish', 75, 'A');  
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');  
15 insert into JavaCourse values (03,'Tauheed', 65, 'B');  
16 insert into JavaCourse values (04,'Priyabrata', 78, 'A');  
17  
18 update JavaCourse set Name='Debasia' where Name='Debasish';  
19  
20 update JavaCourse set Marks=85, Grade='Ex' where Name=  
'Debasia';  
21  
22 select * from JavaCourse;  
23 select name, roll from JavaCourse;  
24  
25 select * from JavaCourse where marks>80;  
26  
27 select * from JavaCourse where name like '%jee%';  
28  
29 select * from JavaCourse order by marks;  
30  
31 delete from JavaCourse where marks <66;  
32  
33 delete from JavaCourse;  
34  
35 drop table JavaCourse;  
36  
37
```


The command prompt shows the output of the commands, including several syntax errors (ERROR 1064 (42000)) and a table view of the JavaCourse table:

```
mysql> select * from JavaCourse order by desc marks;  
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that  
corresponds to your MySQL server version for the right syntax to use near 'd  
esc marks' at line 1  
mysql> select * from JavaCourse order by descending marks;  
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that  
corresponds to your MySQL server version for the right syntax to use near 'd  
esc marks' at line 1  
mysql> select * from JavaCourse order desc by marks;  
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that  
corresponds to your MySQL server version for the right syntax to use near 'd  
esc by marks desc' at line 1  
mysql> select * from JavaCourse order desc by marks descending;  
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that  
corresponds to your MySQL server version for the right syntax to use near 'd  
esc marks' at line 1  
mysql> select * from JavaCourse order by marks desc;  
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that  
corresponds to your MySQL server version for the right syntax to use near 'd  
esc by marks desc' at line 1  
mysql> select * from JavaCourse order desc by marks descending;  
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that  
corresponds to your MySQL server version for the right syntax to use near 'd  
esc marks' at line 1  
mysql> select * from JavaCourse order by marks desc;  
+-----+  
| Roll | Name | Marks | Grade |  
+-----+  
| 7 | Jee | 85 | EX |  
| 2 | Nilanjan | 85 | EX |  
| 4 | Priyabrata | 78 | A |  
| 1 | Debasish | 75 | A |  
| 3 | Tauheed | 65 | B |  
+-----+  
5 rows in set (0.00 sec)
```

Now, next our commands is basically we can also retrieve the order according to some ordering may ascending order or descending order based on the numeric field. As we see we have the two numeric field one is roll number and another is grade marks. So, let us see to retrieve the value of the field based on the ascending order of the number like. So, select star from JavaCourse order by marks. So; that means, the marks field will be order in an ascending order.

Now, the same thing also we can do in descending order; in this case the command little bit you have to change in order by descending order right; ordered by desc write desc after the by the desc right desc desc then marks. So, this is right so, we are facing some syntax error anyway. So, select start from JavaCourse order by marks descending. So, this is way you can see this display the record in the descending order of the results.

(Refer Slide Time: 21:54)

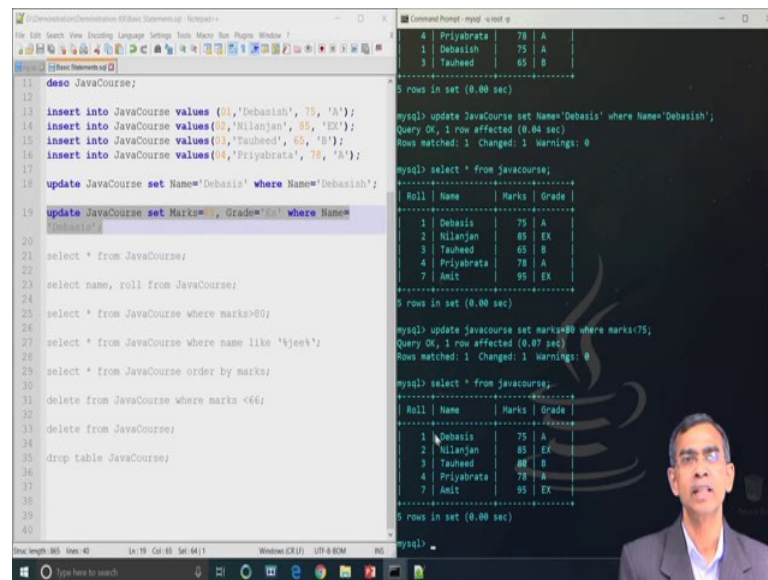

The screenshot shows a MySQL command prompt window on the right and a code editor on the left. The code editor contains the following SQL commands:

```
DESC JavaCourse;
insert into JavaCourse values (01,'Debanish', 75, 'A');
insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
insert into JavaCourse values (03,'Tauheed', 65, 'B');
insert into JavaCourse values (04,'Priyabrata', 78, 'A');
update JavaCourse set Name='Debasish' where Name='Debanish';
update JavaCourse set Marks=80, Grade='A' where Name='Debasish';
select * from JavaCourse;
select name, roll from JavaCourse;
select * from JavaCourse where marks>80;
select * from JavaCourse where name like '%jee%';
select * from JavaCourse order by marks;
delete from JavaCourse where marks <66;
delete from JavaCourse;
drop table JavaCourse;
```

The MySQL command prompt shows the following output:

```
mysql> update JavaCourse set Name='Debasish' where Name='Debanish';
Query OK, 1 row affected (0.04 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from JavaCourse;
+----+-----+-----+-----+
| Roll | Name   | Marks | Grade |
+----+-----+-----+-----+
| 1 | Debasish | 75 | A |
| 2 | Nilanjan | 85 | EX |
| 3 | Tauheed | 65 | B |
| 4 | Priyabrata | 78 | A |
| 7 | Amit | 95 | EX |
+----+-----+-----+-----+
5 rows in set (0.00 sec)

mysql> update JavaCourse set marks=80 where marks=75;
Query OK, 1 row affected (0.07 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from JavaCourse;
+----+-----+-----+-----+
| Roll | Name   | Marks | Grade |
+----+-----+-----+-----+
| 1 | Debasish | 80 | A |
| 2 | Nilanjan | 85 | EX |
| 3 | Tauheed | 65 | B |
| 4 | Priyabrata | 78 | A |
| 7 | Amit | 95 | EX |
+----+-----+-----+-----+
5 rows in set (0.00 sec)
```


So, we have learn about the different compositions, there are many more select command is very complex also because, nested select is also possible here. Anyway that we do not want to discuss at the moment, let us proceed further. Now, we will exactly how a particular record we have learnt about how to insert a record, opposite to insertion operation is basically deletion we will see how a record can be deleted ok. So, have we have to first discuss update, let us see exactly how a record can be updated here. So, we will discuss about the update command.

So, update is basically JavaCourse, we have to update the table and then to update it you have to give some condition that what is the basis of updation in which value needs to be updated. So, here is the command update JavaCourse set, we have to just change the value the field name and we have to change the value of this field by Debasish where Name is equals to Debasish. So, it will find if any entry for the field name is equal to Debasish it will change Debasish as a different spelling. So, this one enter now it is done.

Now, if you show if we show that it will select star. So, you will see in earlier case select star from write javacourse as you see the these things been changed. So, like this anythings for example, you want to change the marks who got 75 or more we want to make it as a 80 or (Refer Time: 23:38) like. So, here again we are going to change it update javacourse set marks equals to 80, where marks equals to 70 marks is greater than 75 that is all, marks is less than 75 rather.

So, you can understand what is the meaning so, all the marks will be right. So, it is changed one change has been done as you see those are the 75 above had been changed and this update is basically permanent; that means, once you do it so, it is basically permanent forever. So, this is the one another updation is set marks equals to 85 grade EX where, name equals to Debasish we want to change this yeah. So, we are just going to change it that.

(Refer Slide Time: 24:42)

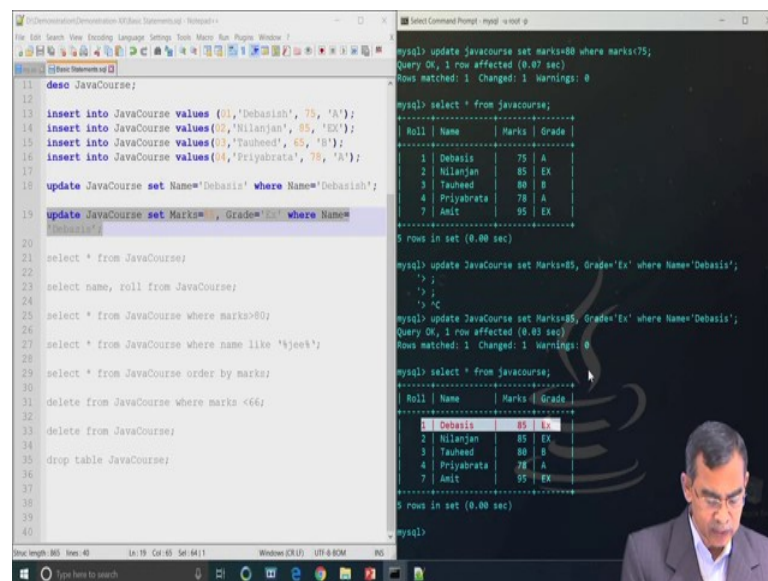

The screenshot shows a MySQL command prompt window on the right and a code editor on the left. The code editor contains the following SQL commands:

```
11 desc JavaCourse;
12
13 insert into JavaCourse values (01,'Debasish', 75, 'A');
14 insert into JavaCourse values (02,'Nilanjan', 85, 'EX');
15 insert into JavaCourse values (03,'Tauheed', 65, 'B');
16 insert into JavaCourse values (04,'Priyabrata', 78, 'A');
17
18 update JavaCourse set Name='Debasia' where Name='Debasish';
19
20 update JavaCourse set Marks=85, Grade='Ex' where Name='Debasia';
21
22 select * from JavaCourse;
23 select name, roll from JavaCourse;
24
25 select * from JavaCourse where marks>80;
26
27 select * from JavaCourse where name like 'kjee%';
28
29 select * from JavaCourse order by marks;
30
31 delete from JavaCourse where marks <66;
32
33 delete from JavaCourse;
34
35 drop table JavaCourse;
36
37
38
39
40
```

The MySQL command prompt shows the following commands and their output:

```
mysql> update JavaCourse set marks=85 where marks=75;
Query OK, 1 row affected (0.07 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from JavaCourse;
+----+-----+-----+-----+
| Roll | Name   | Marks | Grade |
+----+-----+-----+-----+
| 1    | Debasia | 75    | A     |
| 2    | Nilanjan | 85    | EX    |
| 3    | Tauheed | 65    | B     |
| 4    | Priyabrata | 78    | A     |
| 7    | Amit    | 95    | EX    |
+----+-----+-----+-----+
5 rows in set (0.00 sec)


mysql> update JavaCourse set Marks=85, Grade='Ex' where Name='Debasia';
Query OK, 1 row affected (0.03 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from JavaCourse;
+----+-----+-----+-----+
| Roll | Name   | Marks | Grade |
+----+-----+-----+-----+
| 1    | Debasia | 85    | EX    |
| 2    | Nilanjan | 85    | EX    |
| 3    | Tauheed | 65    | B     |
| 4    | Priyabrata | 78    | A     |
| 7    | Amit    | 95    | EX    |
+----+-----+-----+-----+
5 rows in set (0.00 sec)

mysql>
```

Another update command as you see we are using another update command update second update right yes. So, as you see here update JavaCourse set Marks equals to 85 Grade is equals to Ex; we are changing the 2 fields where Name is Debasia. Earlier, Debasia marks is 75 A, now after this updation you will see marks will be 85 grade is here grade right. As you see this has been updated. Now, fine so now so update is there, next our statement that we are going to discuss about delete operation.

(Refer Slide Time: 25:27)

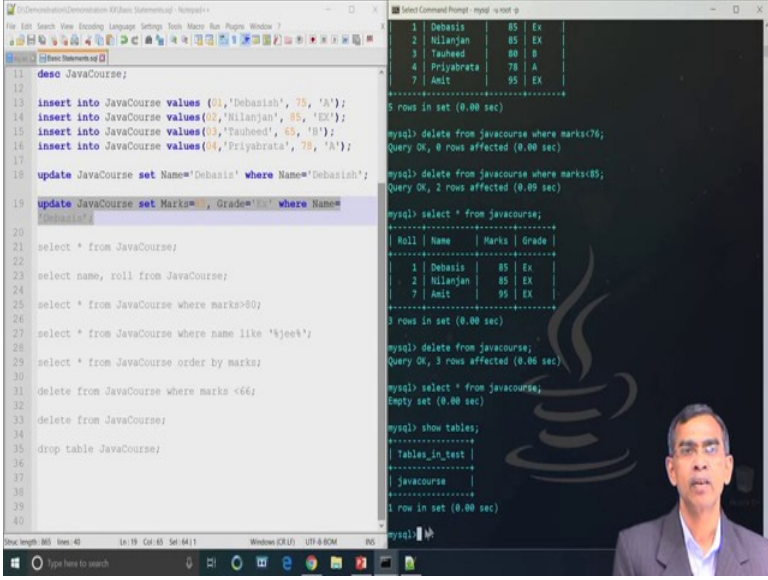

```
mysql> desc javacourse;
+-----+
| Id | Name | Marks | Grade |
+-----+
| 1 | Debanish | 85 | Ex |
| 2 | Nilanjan | 85 | Ex |
| 3 | Tauheed | 80 | B |
| 4 | Priyabrata | 78 | A |
| 7 | Amit | 95 | EX |
+-----+
5 rows in set (0.00 sec)

mysql> delete from javacourse where marks=78;
Query OK, 0 rows affected (0.00 sec)

mysql> delete from javacourse where marks=85;
Query OK, 2 rows affected (0.00 sec)

mysql> select * from javacourse;
+----+-----+-----+-----+
| Roll | Name | Marks | Grade |
+----+-----+-----+-----+
| 1 | Debanish | 85 | Ex |
| 2 | Nilanjan | 85 | Ex |
| 7 | Amit | 95 | EX |
+----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> delete from javacourse;
Query OK, 3 rows affected (0.06 sec)

mysql> select * from javacourse;
Empty set (0.00 sec)


mysql> show tables;
+-----+
| Tables_in_test |
+-----+
| javacourse |
+-----+
1 row in set (0.00 sec)
```

So, delete means basically if you want to delete a record, it is again physically deletion; that means, it will remove forever. Here we are issuing one command delete from javacourse where marks equals to marks is less than 75 fine. So, you are deleting the marks there is no entry which satisfy so, no deletion is there. Now, we are giving the command marks is less than 85 ok. So, here we can see 2 rows has been deleted; after deletion if we see the table entry we will be able to see that this is the table actually there which basically is there deletion.

And so, delete if we issue the delete from table the entire table will be deleted delete from javacourse. So, this means it is permanent 3 rows where the present it is there. So, it is deleted the set is empty, now we can permanently remove yeah show table; as you see only on table javacourse is there. Now, the entire table also can be deleted whether it contains data or not it absolutely does not matter; for these are command is drop table.



(Refer Slide Time: 26:53)

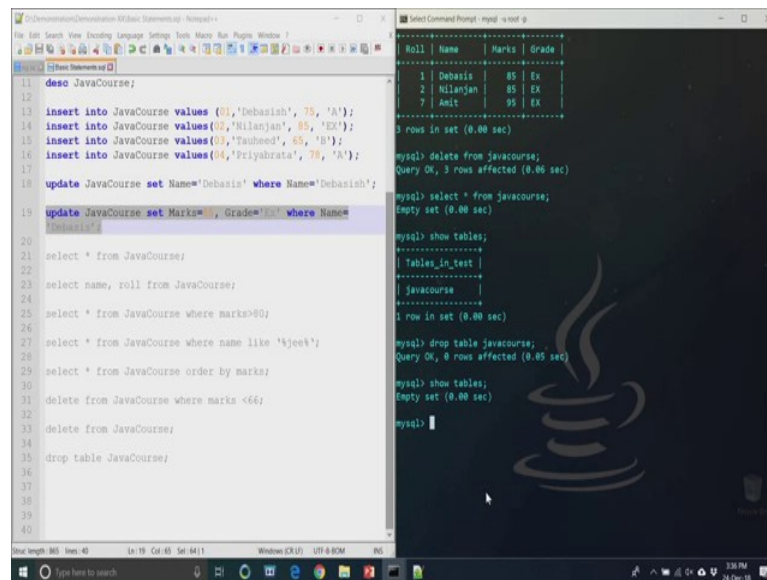

```
mysql> desc JavaCourse;
+-----+
| Roll | Name | Marks | Grade |
+-----+
| 1 | Debasish | 85 | EX |
| 2 | Nilanjana | 85 | EX |
| 7 | Amit | 95 | EX |
+-----+
3 rows in set (0.00 sec)

mysql> delete from javacourse;
Query OK, 3 rows affected (0.06 sec)

mysql> select * from javacourse;
Empty set (0.00 sec)

mysql> show tables;
+-----+
| Tables_in_test |
+-----+
| javacourse |
+-----+
1 row in set (0.00 sec)

mysql> drop table javacourse;
Query OK, 0 rows affected (0.05 sec)

mysql> show tables;
Empty set (0.00 sec)

mysql>
```


The screenshot shows a MySQL command prompt window with a dark background and a Java logo. The left pane displays a list of SQL commands for a table named 'JavaCourse'. The right pane shows the execution results of these commands, including table structure, data insertion, deletion, and table dropping. The commands are numbered 11 through 40.

So, here you have the command drop table the name of the table. So, this one basically completes this one. Now, if we show data then show tables as you see there is no tables in these database. Now, that database also can be deleted as you have current database test right it can be deleted no ok. Anyway so, as we see there are few some step SQL statement.

How they can be executed after the successful instalment of SQL server. Now, we have done about the SQL our SQL installation is ready. It may be here in the currently local machine, but the same can be installed in a remote machine also.



(Refer Slide Time: 27:35)

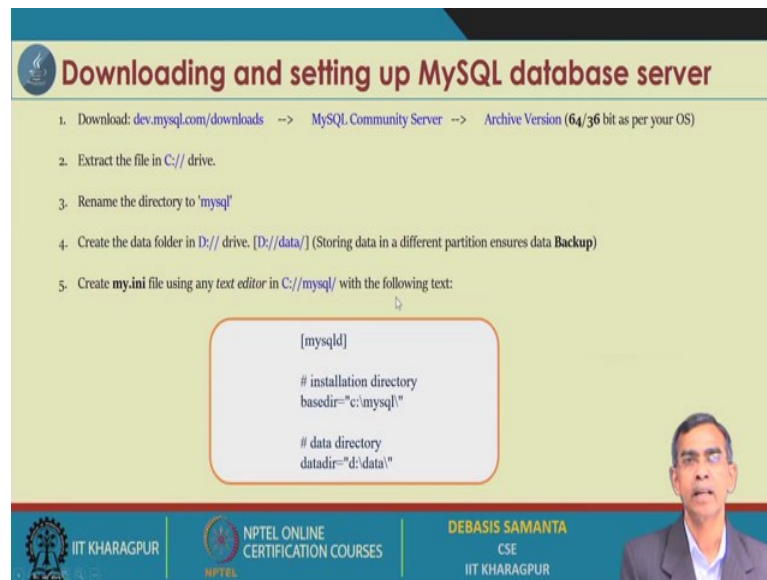

### Downloading and setting up MySQL database server

1. Download: [dev.mysql.com/downloads](http://dev.mysql.com/downloads) --> MySQL Community Server --> Archive Version (64/36 bit as per your OS)
2. Extract the file in C:// drive.
3. Rename the directory to 'mysql'
4. Create the data folder in D:// drive. [D://data/] (Storing data in a different partition ensures data **Backup**)
5. Create **my.ini** file using any *text editor* in C://mysql/ with the following text:

```
[mysqld]

# installation directory
basedir="c:\\mysql\\"

# data directory
datadir="d:\\data\\"
```

**DEBASIS SAMANTA**  
CSE  
IIT KHARAGPUR

If it is installed in a remote machine so, you have to note the IP address of the same machine and then using this concept you will be able to connect to this. But, this connection is through the JDBC driver. So, that will be discussed in our next session.

Thank you.