

# Python Tutorial



## PYTHON TUTORIAL

---

*Simply Easy Learning by tutorialspoint.com*

tutorialspoint.com

## **ABOUT THE TUTORIAL**

---

### **Python Tutorial**

Python is a general purpose interpreted, interactive, object-oriented and high-level programming language. Python was created by Guido van Rossum in the late eighties and early nineties. Like Perl, Python source code is also now available under the GNU General Public License (GPL).

### **Audience**

This tutorial has been designed for software programmers with a need to understand the Python programming language starting from scratch. This tutorial will give you enough understanding on Python programming language from where you can take yourself at higher level of expertise.

### **Prerequisites**

Before proceeding with this tutorial you should have a basic understanding of Computer Programming terminologies. A basic understanding of any of the programming languages will help you in understanding the Python programming concepts and move fast on the learning track.

### **Copyright & Disclaimer Notice**

©All the content and graphics on this tutorial are the property of tutorialspoint.com. Any content from tutorialspoint.com or this tutorial may not be redistributed or reproduced in any way, shape, or form without the written permission of tutorialspoint.com. Failure to do so is a violation of copyright laws.

This tutorial may contain inaccuracies or errors and tutorialspoint provides no guarantee regarding the accuracy of the site or its contents including this tutorial. If you discover that the tutorialspoint.com site or this tutorial content contains some errors, please contact us at [webmaster@tutorialspoint.com](mailto:webmaster@tutorialspoint.com)

# Table of Content

Python Tutorial.....	2
Audience.....	2
Prerequisites.....	2
Copyright & Disclaimer Notice.....	2
Python Overview.....	40
History of Python:.....	40
Python Features:.....	40
Python Environment.....	42
Getting Python: .....	43
Install Python:.....	43
Unix & Linux Installation:.....	43
Windows Installation:.....	43
Macintosh Installation:.....	44
Setting up PATH: .....	44
Setting path at Unix/Linux: .....	44
Setting path at Windows:.....	44
Python Environment Variables: .....	44
Running Python:.....	45
(1) Interactive Interpreter:.....	45
(2) Script from the Command-line: .....	46
(3) Integrated Development Environment.....	46
Python Basic Syntax .....	47
First Python Program: .....	47
INTERACTIVE MODE PROGRAMMING: .....	47
SCRIPT MODE PROGRAMMING : .....	47
Python Identifiers: .....	48
Reserved Words: .....	48
Lines and Indentation:.....	49
Multi-Line Statements:.....	50
Quotation in Python:.....	50
Comments in Python:.....	50
Using Blank Lines: .....	51
Waiting for the User:.....	51
Multiple Statements on a Single Line: .....	51
Multiple Statement Groups as Suites:.....	51
Command Line Arguments:.....	51
Accessing Command Line Arguments: .....	52

Example: .....	52
Parsing Command Line Arguments: .....	52
getopt.getopt method: .....	52
exception getopt.GetoptError: .....	53
Example .....	53
Python Variable Types .....	55
Assigning Values to Variables:.....	55
Multiple Assignment:.....	55
Standard Data Types: .....	56
Python Numbers: .....	56
Examples: .....	57
Python Strings:.....	57
Python Lists:.....	58
Python Tuples: .....	58
Python Dictionary: .....	59
Data Type Conversion:.....	59
Python Basic Operators .....	62
Python Arithmetic Operators: .....	62
Example: .....	63
Python Comparison Operators:.....	64
Example: .....	64
Python Assignment Operators: .....	66
Example: .....	66
Python Bitwise Operators:.....	67
Example: .....	68
Python Logical Operators:.....	69
Example: .....	69
Python Membership Operators: .....	70
Example: .....	71
Python Identity Operators:.....	71
Example: .....	71
Python Operators Precedence .....	72
Example: .....	73
Python Decision Making.....	75
If statements.....	76
Syntax: .....	76
Flow Diagram: .....	76
Example: .....	76
if...else statements .....	77

Syntax: .....	77
Flow Diagram: .....	77
Example: .....	78
The <i>elif</i> Statement .....	78
Example: .....	78
nested if statements .....	79
Syntax: .....	79
Example: .....	79
Single Statement Suites: .....	80
<b>Python Loops</b> .....	<b>81</b>
while loop .....	82
Syntax: .....	82
Flow Diagram: .....	82
Example: .....	83
The Infinite Loop: .....	83
The else Statement Used with Loops .....	84
Single Statement Suites: .....	84
Syntax: .....	84
Flow Diagram: .....	85
Example: .....	85
Iterating by Sequence Index: .....	86
The else Statement Used with Loops .....	86
Syntax: .....	87
Example: .....	87
Loop Control Statements: .....	88
Syntax: .....	88
Flow Diagram: .....	89
Example: .....	89
Syntax: .....	90
Flow Diagram: .....	90
Example: .....	90
Syntax: .....	91
Example: .....	91
<b>Python Numbers</b> .....	<b>92</b>
Examples: .....	92
Number Type Conversion: .....	93
Mathematical Functions: .....	93
Description .....	94
Syntax .....	94

Parameters.....	94
Return Value .....	94
Example .....	94
Description .....	95
Syntax .....	95
Parameters.....	95
Return Value .....	95
Example .....	95
Description .....	95
Syntax .....	95
Parameters.....	96
Return Value .....	96
Example .....	96
Description .....	96
Syntax .....	96
Parameters.....	96
Return Value .....	96
Example .....	96
Description .....	97
Syntax .....	97
Parameters.....	97
Return Value .....	97
Example .....	97
Description .....	98
Syntax .....	98
Parameters.....	98
Return Value .....	98
Example .....	98
Description .....	99
Syntax .....	99
Parameters.....	99
Return Value .....	99
Example .....	99
Description .....	99
Syntax .....	99
Parameters.....	100
Return Value .....	100
Example .....	100
Description .....	100

Syntax .....	100
Parameters.....	100
Return Value .....	100
Example .....	100
Description .....	101
Syntax .....	101
Parameters.....	101
Return Value .....	101
Example .....	101
Description .....	102
Syntax .....	102
Parameters.....	102
Return Value .....	102
Example .....	102
Description .....	102
Syntax .....	103
Parameters.....	103
Return Value .....	103
Example .....	103
Description .....	103
Syntax .....	103
Parameters.....	103
Return Value .....	103
Example .....	104
Description .....	104
Syntax .....	104
Parameters.....	104
Return Value .....	104
Example .....	104
Random Number Functions: .....	105
Description .....	105
Syntax .....	105
Parameters.....	105
Return Value .....	105
Example .....	105
Description .....	106
Syntax .....	106
Parameters.....	106
Return Value .....	106

Example .....	106
Description .....	107
Syntax .....	107
Parameters.....	107
Return Value .....	107
Example .....	107
Description .....	107
Syntax .....	107
Parameters.....	108
Return Value .....	108
Example .....	108
Description .....	108
Syntax .....	108
Parameters.....	109
Return Value .....	109
Example .....	109
Description .....	109
Syntax .....	109
Parameters.....	109
Return Value .....	110
Example .....	110
Trigonometric Functions:.....	110
Description .....	110
Syntax .....	111
Parameters.....	111
Return Value .....	111
Example .....	111
Description .....	111
Syntax .....	111
Parameters.....	111
Return Value .....	111
Example .....	112
Description .....	112
Syntax .....	112
Parameters.....	112
Return Value .....	112
Example .....	112
Description .....	113
Syntax .....	113

Parameters.....	113
Return Value .....	113
Example .....	113
Description .....	114
Syntax .....	114
Parameters.....	114
Return Value .....	114
Example .....	114
Description .....	114
Syntax .....	114
Parameters.....	115
Return Value .....	115
Example .....	115
Description .....	115
Syntax .....	115
Parameters.....	115
Return Value .....	115
Example .....	115
Description .....	116
Syntax .....	116
Parameters.....	116
Return Value .....	116
Example .....	116
Description .....	117
Syntax .....	117
Parameters.....	117
Return Value .....	117
Example .....	117
Description .....	118
Syntax .....	118
Parameters.....	118
Return Value .....	118
Example .....	118
Mathematical Constants:.....	119
Python Strings.....	120
Accessing Values in Strings:.....	120
Updating Strings:.....	120
Escape Characters:.....	121
String Special Operators: .....	121

String Formatting Operator:.....	122
Triple Quotes:.....	123
Raw String:.....	124
Unicode String:.....	124
Built-in String Methods:.....	125
Description .....	127
Syntax .....	127
Parameters.....	127
Return Value .....	127
Example .....	127
Description .....	128
Syntax .....	128
Parameters.....	128
Return Value .....	128
Example .....	128
Description .....	128
Syntax .....	128
Parameters.....	128
Return Value .....	129
Example .....	129
Description .....	129
Syntax .....	129
Parameters.....	129
Return Value .....	129
Example .....	129
Description .....	130
Syntax .....	130
Parameters.....	130
Return Value .....	130
Example .....	130
Description .....	130
Syntax .....	131
Parameters.....	131
Return Value .....	131
Example .....	131
Description .....	131
Syntax .....	131
Parameters.....	132
Return Value .....	132

Example .....	132
Description .....	132
Syntax .....	132
Parameters.....	132
Return Value .....	132
Example .....	132
Description .....	133
Syntax .....	133
Parameters.....	133
Return Value .....	133
Example .....	133
Description .....	134
Syntax .....	134
Parameters.....	134
Return Value .....	134
Example .....	134
Description .....	134
Syntax .....	134
Parameters.....	134
Return Value .....	134
Example .....	135
Description .....	135
Syntax .....	135
Parameters.....	135
Return Value .....	135
Example .....	135
Description .....	136
Syntax .....	136
Parameters.....	136
Return Value .....	136
Example .....	136
Description .....	136
Syntax .....	136
Parameters.....	136
Return Value .....	136
Example .....	137
Description .....	137
Syntax .....	137
Parameters.....	137

Return Value .....	137
Example .....	137
Description .....	138
Syntax .....	138
Parameters.....	138
Return Value .....	138
Example .....	138
Description .....	138
Syntax .....	138
Parameters.....	139
Return Value .....	139
Example .....	139
Description .....	139
Syntax .....	139
Parameters.....	139
Return Value .....	139
Example .....	139
Description .....	140
Syntax .....	140
Parameters.....	140
Return Value .....	140
Example .....	140
Description .....	140
Syntax .....	140
Parameters.....	140
Return Value .....	141
Example .....	141
Description .....	141
Syntax .....	141
Parameters.....	141
Return Value .....	141
Example .....	141
Description .....	141
Syntax .....	142
Parameters.....	142
Return Value .....	142
Example .....	142
Description .....	142
Syntax .....	142

Parameters.....	142
Return Value .....	142
Example .....	142
Description .....	143
Syntax .....	143
Parameters.....	143
Return Value .....	143
Example .....	143
Description .....	143
Syntax .....	144
Parameters.....	144
Return Value .....	144
Example .....	144
Description .....	144
Syntax .....	144
Parameters.....	144
Return Value .....	145
Example .....	145
Description .....	145
Syntax .....	145
Parameters.....	145
Return Value .....	145
Example .....	145
Description .....	146
Syntax .....	146
Parameters.....	146
Return Value .....	146
Example .....	146
Description .....	147
Syntax .....	147
Parameters.....	147
Return Value .....	147
Example .....	147
Description .....	147
Syntax .....	147
Parameters.....	147
Return Value .....	147
Example .....	148
Description .....	148

Syntax .....	148
Parameters.....	148
Return Value .....	148
Example .....	148
Description .....	148
Syntax .....	149
Parameters.....	149
Return Value .....	149
Example .....	149
Description .....	149
Syntax .....	149
Parameters.....	149
Return Value .....	149
Example .....	150
Description .....	150
Syntax .....	150
Parameters.....	150
Return Value .....	150
Example .....	150
Description .....	151
Syntax .....	151
Parameters.....	151
Return Value .....	151
Example .....	151
Description .....	151
Syntax .....	151
Parameters.....	151
Return Value .....	151
Example .....	152
Description .....	152
Syntax .....	152
Parameters.....	152
Return Value .....	152
Example .....	152
Description .....	153
Syntax .....	153
Parameters.....	153
Return Value .....	153
Example .....	153

Description .....	154
Syntax .....	154
Parameters.....	154
Return Value .....	154
Example .....	154
Syntax .....	154
Parameters.....	155
Return Value .....	155
Example .....	155
<b>Python Lists .....</b>	<b>156</b>
Python Lists:.....	156
Accessing Values in Lists:.....	156
Updating Lists: .....	157
Delete List Elements: .....	157
Basic List Operations: .....	157
Indexing, Slicing, and Matrixes:.....	158
Built-in List Functions & Methods: .....	158
Description .....	159
Syntax .....	159
Parameters.....	159
Return Value .....	159
Example .....	159
Description .....	159
Syntax .....	160
Parameters.....	160
Return Value .....	160
Example .....	160
Description .....	160
Syntax .....	160
Parameters.....	160
Return Value .....	160
Example .....	160
Description .....	161
Syntax .....	161
Parameters.....	161
Return Value .....	161
Example .....	161
Description .....	161
Syntax .....	161

Parameters.....	162
Return Value .....	162
Example .....	162
Description .....	163
Syntax .....	163
Parameters.....	163
Return Value .....	163
Example .....	163
Description .....	163
Syntax .....	163
Parameters.....	163
Return Value .....	163
Example .....	164
Description .....	164
Syntax .....	164
Parameters.....	164
Return Value .....	164
Example .....	164
Description .....	165
Syntax .....	165
Parameters.....	165
Return Value .....	165
Example .....	165
Description .....	165
Syntax .....	165
Parameters.....	165
Return Value .....	166
Example .....	166
Description .....	166
Syntax .....	166
Parameters.....	166
Return Value .....	166
Example .....	166
Description .....	167
Syntax .....	167
Parameters.....	167
Return Value .....	167
Example .....	167
Description .....	167

Syntax .....	167
Parameters.....	167
Return Value .....	167
Example .....	168
Description .....	168
Syntax .....	168
Parameters.....	168
Return Value .....	168
Example .....	168
<b>Python Tuples.....</b>	<b>169</b>
Accessing Values in Tuples: .....	169
Updating Tuples: .....	170
Delete Tuple Elements: .....	170
Basic Tuples Operations: .....	170
Indexing, Slicing, and Matrixes:.....	171
No Enclosing Delimiters: .....	171
Built-in Tuple Functions:.....	171
Description .....	172
Syntax .....	172
Parameters.....	172
Return Value .....	172
Example .....	172
Description .....	173
Syntax .....	173
Parameters.....	173
Return Value .....	173
Example .....	173
Description .....	173
Syntax .....	173
Parameters.....	173
Return Value .....	173
Example .....	174
Description .....	174
Syntax .....	174
Parameters.....	174
Return Value .....	174
Example .....	174
Description .....	175
Syntax .....	175

Parameters.....	175
Return Value .....	175
Example .....	175
<b>Python Dictionary .....</b>	<b>176</b>
Accessing Values in Dictionary: .....	176
Updating Dictionary: .....	177
Delete Dictionary Elements: .....	177
Properties of Dictionary Keys: .....	178
Built-in Dictionary Functions & Methods:.....	178
Description .....	179
Syntax .....	179
Parameters.....	179
Return Value .....	179
Example .....	179
Description .....	179
Syntax .....	180
Parameters.....	180
Return Value .....	180
Example .....	180
Description .....	180
Syntax .....	180
Parameters.....	180
Return Value .....	180
Example .....	180
Description .....	181
Syntax .....	181
Parameters.....	181
Return Value .....	181
Example .....	181
Description .....	182
Syntax .....	182
Parameters.....	182
Return Value .....	182
Example .....	182
Description .....	182
Syntax .....	183
Parameters.....	183
Return Value .....	183
Example .....	183

Description .....	183
Syntax .....	183
Parameters.....	183
Return Value .....	183
Example .....	183
Description .....	184
Syntax .....	184
Parameters.....	184
Return Value .....	184
Example .....	184
Description .....	184
Syntax .....	185
Parameters.....	185
Return Value .....	185
Example .....	185
Description .....	185
Syntax .....	185
Parameters.....	185
Return Value .....	185
Example .....	185
Description .....	186
Syntax .....	186
Parameters.....	186
Return Value .....	186
Example .....	186
Description .....	186
Syntax .....	186
Parameters.....	186
Return Value .....	187
Example .....	187
Description .....	187
Syntax .....	187
Parameters.....	187
Return Value .....	187
Example .....	187
Description .....	188
Syntax .....	188
Parameters.....	188
Return Value .....	188

Example .....	188
Python Date & Time .....	189
What is Tick?.....	189
Example: .....	189
What is TimeTuple? .....	189
Getting current time :-.....	190
Getting formatted time :-.....	190
Getting calendar for a month :-.....	191
The time Module: .....	191
Description .....	192
Syntax .....	192
Parameters.....	192
Return Value .....	192
Example .....	192
Description .....	193
Syntax .....	193
Parameters.....	193
Return Value .....	193
Example .....	193
Description .....	193
Syntax .....	193
Parameters.....	194
Return Value .....	194
Example .....	194
Description .....	194
Syntax .....	194
Parameters.....	194
Return Value .....	194
Example .....	195
Description .....	195
Syntax .....	195
Parameters.....	195
Return Value .....	195
Example .....	195
Description .....	195
Syntax .....	196
Parameters.....	196
Return Value .....	196
Example .....	196

Description .....	196
Syntax .....	196
Parameters.....	196
Return Value .....	196
Example .....	196
Description .....	197
Syntax .....	197
Parameters.....	197
Return Value .....	197
Example .....	197
Description .....	197
Syntax .....	198
Parameters.....	198
Directive .....	198
Return Value .....	199
Example .....	199
Description .....	199
Syntax .....	199
Parameters.....	199
Directive .....	199
Return Value .....	200
Example .....	200
Description .....	200
Syntax .....	201
Parameters.....	201
Return Value .....	201
Example .....	201
Description .....	201
Syntax .....	202
Parameters.....	202
Return Value .....	202
Example .....	202
The <i>calendar</i> Module .....	202
Other Modules & Functions:.....	203
Python Function .....	204
Defining a Function .....	204
Syntax: .....	204
Example: .....	204
Calling a Function .....	205

Pass by reference vs value .....	205
Function Arguments: .....	206
Required arguments: .....	206
Keyword arguments: .....	207
Default arguments: .....	207
Variable-length arguments: .....	208
The <i>Anonymous Functions</i> : .....	208
Syntax: .....	209
The <i>return Statement</i> : .....	209
Scope of Variables: .....	210
Global vs. Local variables: .....	210
Python Modules .....	211
Example: .....	211
The <i>import Statement</i> : .....	211
The <i>from...import Statement</i> : .....	212
The <i>from...import *</i> Statement: .....	212
Locating Modules: .....	212
The <i>PYTHONPATH Variable</i> : .....	212
Namespaces and Scoping: .....	213
The <i>dir( ) Function</i> : .....	213
The <i>globals()</i> and <i>locals()</i> Functions: .....	214
The <i>reload()</i> Function: .....	214
Packages in Python: .....	214
Python Files I/O .....	216
Printing to the Screen: .....	216
Reading Keyboard Input: .....	216
The <i>raw_input Function</i> : .....	216
The <i>input Function</i> : .....	217
Opening and Closing Files: .....	217
The <i>open Function</i> : .....	217
SYNTAX: .....	217
The <i>file object attributes</i> : .....	218
EXAMPLE: .....	218
The <i>close()</i> Method: .....	219
SYNTAX: .....	219
EXAMPLE: .....	219
Reading and Writing Files: .....	219
The <i>write()</i> Method: .....	219
SYNTAX: .....	219

EXAMPLE: .....	219
The <i>read()</i> Method: .....	220
SYNTAX:.....	220
EXAMPLE: .....	220
File Positions:.....	220
EXAMPLE: .....	220
Renaming and Deleting Files: .....	221
The <i>rename()</i> Method:.....	221
SYNTAX:.....	221
EXAMPLE: .....	221
The <i>remove()</i> Method:.....	221
SYNTAX:.....	221
EXAMPLE: .....	221
Directories in Python: .....	222
The <i>mkdir()</i> Method: .....	222
SYNTAX:.....	222
EXAMPLE: .....	222
The <i>chdir()</i> Method: .....	222
SYNTAX:.....	222
EXAMPLE: .....	222
The <i>getcwd()</i> Method: .....	222
SYNTAX:.....	222
EXAMPLE: .....	222
The <i>rmdir()</i> Method: .....	223
SYNTAX:.....	223
EXAMPLE: .....	223
File & Directory Related Methods:.....	223
File Object Methods .....	223
Description .....	224
Syntax .....	224
Parameters.....	224
Return Value .....	224
Example .....	224
Description .....	225
Syntax .....	225
Parameters.....	225
Return Value .....	225
Example .....	225
Description .....	226

Syntax .....	226
Parameters.....	226
Return Value .....	226
Example .....	226
Description .....	226
Syntax .....	226
Parameters.....	227
Return Value .....	227
Example .....	227
Description .....	227
Syntax .....	227
Parameters.....	227
Return Value .....	227
Example .....	227
Description .....	228
Syntax .....	228
Parameters.....	228
Return Value .....	228
Example .....	228
Description .....	229
Syntax .....	229
Parameters.....	229
Return Value .....	229
Example .....	229
Description .....	230
Syntax .....	230
Parameters.....	230
Return Value .....	230
Example .....	230
Description .....	231
Syntax .....	231
Parameters.....	231
Return Value .....	231
Example .....	231
Description .....	232
Syntax .....	232
Parameters.....	232
Return Value .....	232
Example .....	232

Description .....	233
Syntax .....	233
Parameters.....	233
Return Value .....	233
Example .....	233
Description .....	234
Syntax .....	234
Parameters.....	234
Return Value .....	234
Example .....	234
Description .....	235
Syntax .....	235
Parameters.....	235
Return Value .....	236
Example .....	236
Description .....	240
Syntax .....	240
Parameters.....	240
Return Value .....	240
Example .....	240
Description .....	241
Syntax .....	241
Parameters.....	241
Return Value .....	241
Example .....	241
Description .....	242
Syntax .....	242
Parameters.....	242
Return Value .....	242
Example .....	242
Description .....	243
Syntax .....	243
Parameters.....	243
Return Value .....	243
Example .....	244
Description .....	244
Syntax .....	244
Parameters.....	244
Return Value .....	244

Example .....	244
Description .....	245
Syntax .....	245
Parameters.....	245
Return Value .....	245
Example .....	245
Description .....	245
Syntax .....	245
Parameters.....	245
Return Value .....	246
Example .....	246
Description .....	246
Syntax .....	246
Parameters.....	246
Return Value .....	246
Example .....	247
Description .....	247
Syntax .....	247
Parameters.....	247
Return Value .....	247
Example .....	247
Description .....	248
Syntax .....	248
Parameters.....	248
Return Value .....	248
Example .....	248
Description .....	249
Syntax .....	249
Parameters.....	249
Return Value .....	249
Example .....	249
Description .....	250
Syntax .....	250
Parameters.....	250
Return Value .....	250
Example .....	250
Description .....	251
Syntax .....	251
Parameters.....	251

Return Value .....	251
Example .....	251
Description .....	252
Syntax .....	252
Parameters.....	252
Return Value .....	252
Example .....	252
Description .....	253
Syntax .....	253
Parameters.....	253
Return Value .....	253
Example .....	253
Description .....	254
Syntax .....	254
Parameters.....	254
Return Value .....	255
Example .....	255
Description .....	255
Syntax .....	256
Parameters.....	256
Return Value .....	256
Example .....	256
Description .....	257
Syntax .....	257
Parameters.....	257
Return Value .....	257
Example .....	257
Description .....	258
Syntax .....	258
Parameters.....	258
Return Value .....	258
Example .....	258
Description .....	259
Syntax .....	259
Parameters.....	259
Return Value .....	259
Example .....	259
Description .....	260
Syntax .....	260

Parameters.....	260
Return Value .....	260
Example .....	260
Description .....	260
Syntax .....	260
Parameters.....	261
Return Value .....	261
Example .....	261
Description .....	261
Syntax .....	261
Parameters.....	261
Return Value .....	262
Example .....	262
Description .....	262
Syntax .....	263
Parameters.....	263
Return Value .....	263
Example .....	263
Description .....	263
Syntax .....	264
Parameters.....	264
Return Value .....	264
Example .....	264
Description .....	265
Syntax .....	265
Parameters.....	265
Return Value .....	265
Example .....	265
Description .....	266
Syntax .....	266
Parameters.....	266
Return Value .....	266
Example .....	266
Description .....	266
Syntax .....	266
Parameters.....	267
Return Value .....	267
Example .....	267
Description .....	267

Syntax .....	267
Parameters.....	267
Return Value .....	268
Example .....	268
Description .....	268
Syntax .....	269
Parameters.....	269
Return Value .....	269
Example .....	269
Description .....	270
Syntax .....	270
Parameters.....	270
Return Value .....	270
Example .....	270
Description .....	270
Syntax .....	270
Parameters.....	271
Return Value .....	271
Example .....	271
Description .....	271
Syntax .....	271
Parameters.....	271
Return Value .....	272
Example .....	272
Description .....	272
Syntax .....	272
Parameters.....	272
Return Value .....	272
Example .....	272
os.mkdir(path[, mode]) Description .....	273
Syntax .....	273
Parameters.....	273
Return Value .....	273
Example .....	273
os.mknod(filename[, mode=0600, device]) .....	274
Description .....	274
Syntax .....	274
Parameters.....	275
Return Value .....	275

Example .....	275
os.open(file, flags[, mode]) .....	275
Description .....	275
Syntax .....	275
Parameters.....	275
Return Value .....	276
Example .....	276
os.pathconf(path, name) Description .....	277
Syntax .....	277
Parameters.....	277
Return Value .....	277
Example .....	277
Description .....	278
Syntax .....	278
Parameters.....	278
Return Value .....	278
Example .....	278
Description .....	279
Syntax .....	279
Parameters.....	279
Return Value .....	279
Example .....	279
Description .....	280
Syntax .....	280
Parameters.....	280
Return Value .....	280
Example .....	280
Description .....	281
Syntax .....	281
Parameters.....	281
Return Value .....	281
Example .....	281
Description .....	281
Syntax .....	281
Parameters.....	282
Return Value .....	282
Example .....	282
Description .....	282
Syntax .....	282

Parameters.....	282
Return Value .....	282
Example .....	282
Description .....	283
Syntax .....	283
Parameters.....	283
Return Value .....	283
Example .....	283
Description .....	284
Syntax .....	284
Parameters.....	284
Return Value .....	284
Example .....	284
Description .....	285
Syntax .....	285
Parameters.....	285
Return Value .....	285
Example .....	285
Description .....	286
Syntax .....	286
Parameters.....	286
Return Value .....	286
Example .....	286
Description .....	287
Syntax .....	287
Parameters.....	287
Return Value .....	287
Example .....	287
Description .....	287
Syntax .....	287
Parameters.....	288
Return Value .....	288
Example .....	288
Description .....	288
Syntax .....	288
Parameters.....	288
Return Value .....	289
Example .....	289
Description .....	289

Syntax .....	289
Parameters.....	289
Return Value .....	289
Example .....	289
Description .....	290
Syntax .....	290
Parameters.....	290
Return Value .....	290
Example .....	290
Description .....	291
Syntax .....	291
Parameters.....	291
Return Value .....	291
Example .....	291
Description .....	292
Syntax .....	292
Parameters.....	292
Return Value .....	292
Example .....	292
Description .....	292
Syntax .....	292
Parameters.....	293
Return Value .....	293
Example .....	293
Description .....	293
Syntax .....	293
Parameters.....	293
Return Value .....	293
Example .....	293
Description .....	294
Syntax .....	294
Parameters.....	294
Return Value .....	294
Example .....	294
Description .....	295
Syntax .....	295
Parameters.....	295
Return Value .....	295
Example .....	295

Description .....	296
Syntax .....	296
Parameters.....	296
Return Value .....	296
Example .....	296
Description .....	297
Syntax .....	297
Parameters.....	297
Return Value .....	297
Example .....	297
<b>Python Exceptions .....</b>	<b>299</b>
The <i>assert</i> Statement:.....	300
Handling an exception:.....	301
SYNTAX:.....	301
EXAMPLE: .....	302
EXAMPLE: .....	302
The <i>except</i> clause with no exceptions:.....	302
The <i>except</i> clause with multiple exceptions: .....	303
The try-finally clause: .....	303
EXAMPLE: .....	303
Argument of an Exception:.....	304
EXAMPLE: .....	304
Raising an exceptions:.....	305
SYNTAX:.....	305
EXAMPLE: .....	305
User-Defined Exceptions:.....	305
Python Classes/Objects .....	306
Overview of OOP Terminology.....	306
Creating Classes:.....	306
EXAMPLE: .....	307
Creating instance objects: .....	307
Accessing attributes: .....	307
Built-In Class Attributes: .....	308
Destroying Objects (Garbage Collection): .....	309
EXAMPLE: .....	309
Class Inheritance: .....	310
SYNTAX:.....	310
EXAMPLE: .....	310
Overriding Methods: .....	311

EXAMPLE: .....	311
Base Overloading Methods: .....	311
Overloading Operators: .....	312
EXAMPLE: .....	312
Data Hiding: .....	312
EXAMPLE: .....	313
Python Regular Expressions .....	314
The <i>match</i> Function .....	314
EXAMPLE: .....	315
The <i>search</i> Function .....	315
EXAMPLE: .....	315
Matching vs Searching: .....	316
EXAMPLE: .....	316
Search and Replace: .....	316
SYNTAX: .....	316
EXAMPLE: .....	317
Regular-expression Modifiers - Option Flags .....	317
Regular-expression patterns: .....	317
Regular-expression Examples .....	319
Literal characters: .....	319
Character classes: .....	319
Special Character Classes: .....	319
Repetition Cases: .....	320
Nongreedy repetition: .....	320
Grouping with parentheses: .....	320
Backreferences: .....	320
Alternatives: .....	321
Anchors: .....	321
Special syntax with parentheses: .....	321
Python CGI Programming .....	322
Web Browsing .....	322
CGI Architecture Diagram .....	323
Web Server Support & Configuration .....	323
First CGI Program .....	323
Content-type: text/html .....	324
<b>Hello Word! This is my first CGI program</b> .....	324
HTTP Header .....	324
CGI Environment Variables .....	324
GET and POST Methods .....	325

Passing Information using GET method:.....	325
Simple URL Example : Get Method .....	325
Content-type:text/html .....	326
<b>Hello ZARA ALI.....</b>	326
Simple FORM Example: GET Method.....	326
Passing Information using POST method: .....	326
Passing Checkbox Data to CGI Program .....	327
Passing Radio Button Data to CGI Program .....	328
Passing Text Area Data to CGI Program .....	329
Passing Drop Down Box Data to CGI Program.....	330
Using Cookies in CGI .....	330
How It Works.....	331
Setting up Cookies .....	331
Retrieving Cookies .....	331
File Upload Example:.....	332
How To Raise a "File Download" Dialog Box ? .....	333
<b>Python Database Access .....</b>	334
What is MySQLdb? .....	335
How do I install the MySQLdb? .....	335
Database Connection:.....	335
EXAMPLE: .....	335
Creating Database Table: .....	336
EXAMPLE: .....	336
INSERT Operation: .....	337
EXAMPLE: .....	337
EXAMPLE: .....	338
READ Operation: .....	338
EXAMPLE: .....	338
Update Operation:.....	339
EXAMPLE: .....	339
DELETE Operation: .....	339
EXAMPLE: .....	339
Performing Transactions: .....	340
EXAMPLE: .....	340
COMMIT Operation:.....	340
ROLLBACK Operation: .....	341
Disconnecting Database: .....	341
Handling Errors: .....	341
Python Networking.....	342

What is Sockets? .....	342
The <i>socket</i> Module:.....	343
Server Socket Methods:.....	343
Client Socket Methods: .....	343
General Socket Methods:.....	343
A Simple Server: .....	343
A Simple Client:.....	344
Python Internet modules .....	344
Further Readings: .....	345
Python Sending Email.....	346
Example: .....	346
Sending an HTML email using Python:.....	347
EXAMPLE: .....	347
Sending Attachments as an e-mail:.....	348
EXAMPLE: .....	348
Python Multithreading .....	350
Starting a New Thread: .....	350
EXAMPLE: .....	350
The <i>Threading</i> Module: .....	351
Creating Thread using <i>Threading</i> Module:.....	351
EXAMPLE: .....	352
Synchronizing Threads:.....	353
EXAMPLE: .....	353
Multithreaded Priority Queue:.....	354
EXAMPLE: .....	354
Python XML Processing.....	356
XML Parser Architectures and APIs:.....	356
Parsing XML with SAX APIs:.....	357
The <i>make_parser</i> Method: .....	357
The <i>parse</i> Method: .....	357
The <i>parseString</i> Method:.....	358
EXAMPLE: .....	358
Parsing XML with DOM APIs: .....	360
Python GUI Programming .....	362
Tkinter Programming.....	362
Example: .....	362
Tkinter Widgets .....	363
Methods: .....	365
Example: .....	365

Example: .....	367
Methods: .....	369
Example: .....	370
Syntax: .....	371
Parameters:.....	371
Methods: .....	372
Example: .....	372
Syntax: .....	373
Parameters:.....	373
Example: .....	373
Syntax: .....	374
Parameters:.....	374
Example: .....	375
Syntax: .....	376
Parameters:.....	376
Methods: .....	377
Example: .....	378
Syntax: .....	378
Parameters:.....	378
Example: .....	380
Methods: .....	381
Example: .....	382
Example: .....	384
Syntax: .....	385
Parameters:.....	385
Methods: .....	386
Example: .....	387
Scale .....	387
Syntax: .....	387
Parameters:.....	387
Methods: .....	389
Example: .....	389
Scrollbar.....	390
Syntax: .....	390
Parameters:.....	390
Methods: .....	391
Example: .....	391
Text .....	392
Syntax: .....	392

Parameters:.....	392
Methods: .....	393
Example: .....	395
Syntax: .....	395
Parameters:.....	395
Methods: .....	396
Example: .....	397
Spinbox .....	397
Syntax: .....	398
Parameters:.....	398
Methods: .....	399
Example: .....	399
PanedWindow .....	400
Syntax: .....	400
Parameters:.....	400
Methods: .....	401
Example: .....	401
LabelFrame .....	402
Syntax: .....	402
Parameters:.....	402
Example: .....	402
tkMessageBox.....	403
Syntax: .....	403
Parameters:.....	403
Example: .....	404
Standard attributes:.....	404
Length options:.....	405
Simple Tuple Fonts: .....	406
EXAMPLE: .....	406
Font object Fonts: .....	406
EXAMPLE: .....	406
X Window Fonts: .....	406
Example: .....	407
Example: .....	408
Example: .....	409
Example: .....	410
Geometry Management:.....	411
The pack() Method .....	411
Syntax: .....	411

Example: .....	411
The grid() Method.....	412
Syntax: .....	412
Example: .....	412
The place() Method .....	413
Syntax: .....	413
Example: .....	413
<b>Python Further Extensions.....</b>	<b>414</b>
Pre-Requisite: .....	414
First look at a Python extension: .....	414
The header file <i>Python.h</i> .....	414
The C functions: .....	415
The method mapping table:.....	415
EXAMPLE: .....	416
The initialization function:.....	416
EXAMPLE: .....	416
Building and Installing Extensions:.....	417
Import Extensions: .....	417
Passing Function Parameters: .....	417
The <i>PyArg_ParseTuple</i> Function: .....	418
Returning Values:.....	419
The <i>Py_BuildValue</i> Function: .....	420
<b>Python Tools/Utilities.....</b>	<b>421</b>
The <i>dis</i> Module:.....	421
EXAMPLE: .....	421
The <i>pdb</i> Module .....	422
EXAMPLE: .....	422
The <i>profile</i> Module: .....	422
EXAMPLE: .....	423
The <i>tabnanny</i> Module.....	423
EXAMPLE: .....	423

# Python Overview

**P**ython is a high-level, interpreted, interactive and object oriented-scripting language. Python was designed

to be highly readable which uses English keywords frequently where as other languages use punctuation and it has fewer syntactical constructions than other languages.

- **Python is Interpreted:** This means that it is processed at runtime by the interpreter and you do not need to compile your program before executing it. This is similar to PERL and PHP.
- **Python is Interactive:** This means that you can actually sit at a Python prompt and interact with the interpreter directly to write your programs.
- **Python is Object-Oriented:** This means that Python supports Object-Oriented style or technique of programming that encapsulates code within objects.
- **Python is Beginner's Language:** Python is a great language for the beginner programmers and supports the development of a wide range of applications, from simple text processing to WWW browsers to games.

## History of Python:

Python was developed by Guido van Rossum in the late eighties and early nineties at the National Research Institute for Mathematics and Computer Science in the Netherlands.

Python is derived from many other languages, including ABC, Modula-3, C, C++, Algol-68, SmallTalk, and Unix shell and other scripting languages.

Python is copyrighted, Like Perl, Python source code is now available under the GNU General Public License (GPL).

Python is now maintained by a core development team at the institute, although Guido van Rossum still holds a vital role in directing it's progress.

## Python Features:

Python's feature highlights include:

- **Easy-to-learn:** Python has relatively few keywords, simple structure, and a clearly defined syntax. This allows the student to pick up the language in a relatively short period of time.
- **Easy-to-read:** Python code is much more clearly defined and visible to the eyes.
- **Easy-to-maintain:** Python's success is that its source code is fairly easy-to-maintain.
- **A broad standard library:** One of Python's greatest strengths is the bulk of the library is very portable and cross-platform compatible on UNIX, Windows, and Macintosh.
- **Interactive Mode:** Support for an interactive mode in which you can enter results from a terminal right to the language, allowing interactive testing and debugging of snippets of code.

- **Portable:** Python can run on a wide variety of hardware platforms and has the same interface on all platforms.
- **Extendable:** You can add low-level modules to the Python interpreter. These modules enable programmers to add to or customize their tools to be more efficient.
- **Databases:** Python provides interfaces to all major commercial databases.
- **GUI Programming:** Python supports GUI applications that can be created and ported to many system calls, libraries, and windows systems, such as Windows MFC, Macintosh, and the X Window system of Unix.
- **Scalable:** Python provides a better structure and support for large programs than shell scripting.

Apart from the above mentioned features, Python has a big list of good features, few are listed below:

- Support for functional and structured programming methods as well as OOP.
- It can be used as a scripting language or can be compiled to byte-code for building large applications.
- Very high-level dynamic data types and supports dynamic type checking.
- Supports automatic garbage collection.
- It can be easily integrated with C, C++, COM, ActiveX, CORBA, and Java.

# Python Environment

**B**

efore we start writing our Python programs, let's understand how to setup our Python environment.

Python is available on a wide variety of platforms including Linus and Mac OS X. Try opening a terminal window and type, "python" to find out if its already installed and which version you have if it is installed.

- Unix (Solaris, Linux, FreeBSD, AIX, HP/UX, SunOS, IRIX etc.)
- Win 9x/NT/2000
- Macintosh (Intel, PPC, 68K)
- OS/2
- DOS (multiple versions)
- PalmOS
- Nokia mobile phones
- Windows CE
- Acorn/RISC OS
- BeOS
- Amiga
- VMS/OpenVMS
- QNX
- VxWorks
- Psion
- Python has also been ported to the Java and .NET virtual machines

## Getting Python:

The most up-to-date and current source code, binaries, documentation, news, etc. is available at the official website of Python:

**Python Official Website :** <http://www.python.org/>

You can download Python documentation from the following site. The documentation is available in HTML, PDF, and PostScript formats.

**Python Documentation Website :** [www.python.org/doc/](http://www.python.org/doc/)

## Install Python:

Python distribution is available for a wide variety of platforms. You need to download only the binary code applicable for your platform and install Python.

If the binary code for your platform is not available, you need a C compiler to compile the source code manually. Compiling the source code offers more flexibility in terms of choice of features that you require in your installation.

Here is a quick overview of installing Python on various platforms:

### Unix & Linux Installation:

Here are the simple steps to install Python on Unix/Linux machine.

- Open a Web browser and go to <http://www.python.org/download/>
- Follow the link to download zipped source code available for Unix/Linux.
- Download and extract files.
- Editing the *Modules/Setup* file if you want to customize some options.
- **run** `./configure` script
- **make**
- **make install**

This will install python in a standard location `/usr/local/bin` and its libraries are installed in `/usr/local/lib/pythonXX` where XX is the version of Python that you are using.

### Windows Installation:

Here are the steps to install Python on Windows machine.

- Open a Web browser and go to <http://www.python.org/download/>
- Follow the link for the Windows installer `python-XYZ.msi` file where XYZ is the version you are going to install.
- To use this installers `python-XYZ.msi`, the Windows system must support Microsoft Installer 2.0. Just save the installer file to your local machine and then run it to find out if your machine supports MSI.

- Run the downloaded file by double-clicking it in Windows Explorer. This brings up the Python install wizard, which is really easy to use. Just accept the default settings, wait until the install is finished, and you're ready to roll!

## Macintosh Installation:

Recent Macs come with Python installed, but it may be several years out of date. See <http://www.python.org/download/mac/> for instructions on getting the current version along with extra tools to support development on the Mac. For older Mac OS's before Mac OS X 10.3 (released in 2003), MacPython is available."

Jack Jansen maintains it, and you can have full access to the entire documentation at his Web site -**Jack Jansen Website** : <http://www.cwi.nl/~jack/macpython.html>

Just go to this link and you will find complete installation detail for Mac OS installation.

## Setting up PATH:

Programs and other executable files can live in many directories, so operating systems provide a search path that lists the directories that the OS searches for executables.

The path is stored in an environment variable, which is a named string maintained by the operating system. These variables contain information available to the command shell and other programs.

The **path** variable is named PATH in Unix or Path in Windows (Unix is case-sensitive; Windows is not).

In Mac OS, the installer handles the path details. To invoke the Python interpreter from any particular directory, you must add the Python directory to your path.

## Setting path at Unix/Linux:

To add the Python directory to the path for a particular session in Unix:

- In the csh shell:** type  
setenv PATH "\$PATH:/usr/local/bin/python" and press Enter.
- In the bash shell (Linux):** type  
export PATH="\$PATH:/usr/local/bin/python" and press Enter.
- In the sh or ksh shell:** type  
PATH="\$PATH:/usr/local/bin/python" and press Enter.

**Note:** /usr/local/bin/python is the path of the Python directory

## Setting path at Windows:

To add the Python directory to the path for a particular session in Windows:

- At a command prompt :** type  
path %path%;C:\Python and press Enter.

**Note:** C:\Python is the path of the Python directory

## Python Environment Variables:

Here are important environment variables which can be recognized by Python:

Variable	Description
----------	-------------

PYTHONPATH	Has a role similar to PATH. This variable tells the Python interpreter where to locate the module files you import into a program. PYTHONPATH should include the Python source library directory and the directories containing your Python source code. PYTHONPATH is sometimes preset by the Python installer.
PYTHONSTARTUP	Contains the path of an initialization file containing Python source code that is executed every time you start the interpreter (similar to the Unix .profile or .login file). This file, often named .pythonrc.py in Unix, usually contains commands that load utilities or modify PYTHONPATH.
PYTHONCASEOK	Used in Windows to instruct Python to find the first case-insensitive match in an import statement. Set this variable to any value to activate it.
PYTHONHOME	An alternative module search path. It's usually embedded in the PYTHONSTARTUP or PYTHONPATH directories to make switching module libraries easy.

## Running Python:

There are three different ways to start Python:

### (1) Interactive Interpreter:

You can enter **python** and start coding right away in the interactive interpreter by starting it from the command line. You can do this from Unix, DOS, or any other system which provides you a command-line interpreter or shell window.

```
$python          # Unix/Linux
or
python%         # Unix/Linux
or
C:>python       # Windows/DOS
```

Here is the list of all the available command line options:

Option	Description
-d	provide debug output
-O	generate optimized bytecode (resulting in .pyo files)
-S	do not run import site to look for Python paths on startup
-v	verbose output (detailed trace on import statements)
-X	disable class-based built-in exceptions (just use strings); obsolete starting with version 1.6
-c cmd	run Python script sent in as cmd string
file	run Python script from given file

## (2) Script from the Command-line:

A Python script can be executed at command line by invoking the interpreter on your application, as in the following:

```
$python script.py          # Unix/Linux  
or  
python% script.py          # Unix/Linux  
or  
C:>python script.py       # Windows/DOS
```

**Note:** Be sure the file permission mode allows execution.

## (3) Integrated Development Environment

You can run Python from a graphical user interface (GUI) environment as well. All you need is a GUI application on your system that supports Python.

- **Unix:** IDLE is the very first Unix IDE for Python.
- **Windows:** PythonWin is the first Windows interface for Python and is an IDE with a GUI.
- **Macintosh:** The Macintosh version of Python along with the IDLE IDE is available from the main website, downloadable as either MacBinary or BinHex'd files.

Before proceeding to next chapter, make sure your environment is properly setup and working perfectly fine. If you are not able to setup the environment properly then you can take help from your system admin.

All the examples given in subsequent chapters have been executed with Python 2.4.3 version available on CentOS flavor of Linux.

# Python Basic Syntax

T

he Python language has many similarities to Perl, C, and Java. However, there are some definite differences between the languages. This chapter is designed to quickly get you up to speed on the syntax that is expected in Python.

## First Python Program:

### INTERACTIVE MODE PROGRAMMING:

Invoking the interpreter without passing a script file as a parameter brings up the following prompt:

```
$ python
Python 2.4.3 (#1, Nov 11 2010, 13:34:43)
[GCC 4.1.2 20080704 (Red Hat 4.1.2-48)] on linux2
Type "help", "copyright", "credits" or "license" for more information.
>>>
```

Type the following text to the right of the Python prompt and press the Enter key:

```
>>> print "Hello, Python!";
```

If you are running new version of Python then you would need to use print statement with parenthesis like `print ("Hello, Python!");`. However at Python version 2.4.3, this will produce following result:

```
Hello, Python!
```

### SCRIPT MODE PROGRAMMING :

Invoking the interpreter with a script parameter begins execution of the script and continues until the script is finished. When the script is finished, the interpreter is no longer active.

Let us write a simple Python program in a script. All python files will have extension `.py`. So put the following source code in a `test.py` file.

```
print "Hello, Python!";
```

Here I assumed that you have Python interpreter set in PATH variable. Now try to run this program as follows:

```
$ python test.py
```

This will produce following result:

```
Hello, Python!
```

Let's try another way to execute a Python script. Below is the modified test.py file:

```
#!/usr/bin/python  
print "Hello, Python!";
```

Here I assumed that you have Python interpreter available in /usr/bin directory. Now try to run this program as follows:

```
$ chmod +x test.py      # This is to make file executable  
$./test.py
```

This will produce following result:

```
Hello, Python!
```

## Python Identifiers:

A Python identifier is a name used to identify a variable, function, class, module, or other object. An identifier starts with a letter A to Z or a to z or an underscore (\_) followed by zero or more letters, underscores, and digits (0 to 9).

Python does not allow punctuation characters such as @, \$, and % within identifiers. Python is a case sensitive programming language. Thus **Manpower** and **manpower** are two different identifiers in Python.

Here are following identifier naming convention for Python:

- Class names start with an uppercase letter and all other identifiers with a lowercase letter.
- Starting an identifier with a single leading underscore indicates by convention that the identifier is meant to be private.
- Starting an identifier with two leading underscores indicates a strongly private identifier.
- If the identifier also ends with two trailing underscores, the identifier is a language-defined special name.

## Reserved Words:

The following list shows the reserved words in Python. These reserved words may not be used as constant or variable or any other identifier names. All the Python keywords contain lowercase letters only.

And	Exec	Not
Assert	Finally	Or
Break	For	Pass
Class	From	Print
Continue	Global	Raise
Def	if	Return

Del	import	Try
Elif	in	While
Else	is	With
Except	lambda	Yield

## Lines and Indentation:

One of the first caveats programmers encounter when learning Python is the fact that there are no braces to indicate blocks of code for class and function definitions or flow control. Blocks of code are denoted by line indentation, which is rigidly enforced.

The number of spaces in the indentation is variable, but all statements within the block must be indented the same amount. Both blocks in this example are fine:

```
if True:
    print "True"
else:
    print "False"
```

However, the second block in this example will generate an error:

```
if True:
    print "Answer"
    print "True"
else:
    print "Answer"
    print "False"
```

Thus, in Python all the continuous lines indented with similar number of spaces would form a block. Following is the example having various statement blocks:

**Note:** Don't try to understand logic or different functions used. Just make sure you understood various blocks even if they are without braces.

```
#!/usr/bin/python

import sys

try:
    # open file stream
    file = open(file_name, "w")
except IOError:
    print "There was an error writing to", file_name
    sys.exit()
print "Enter ''", file_finish,
print "' When finished"
while file_text != file_finish:
    file_text = raw_input("Enter text: ")
    if file_text == file_finish:
        # close the file
        file.close
        break
    file.write(file_text)
    file.write("\n")
file.close()
file_name = raw_input("Enter filename: ")
```

```
if len(file_name) == 0:  
    print "Next time please enter something"  
    sys.exit()  
try:  
    file = open(file_name, "r")  
except IOError:  
    print "There was an error reading file"  
    sys.exit()  
file_text = file.read()  
file.close()  
print file_text
```

## Multi-Line Statements:

Statements in Python typically end with a new line. Python does, however, allow the use of the line continuation character (\) to denote that the line should continue. For example:

```
total = item_one + \  
       item_two + \  
       item_three
```

Statements contained within the [], {}, or () brackets do not need to use the line continuation character. For example:

```
days = ['Monday', 'Tuesday', 'Wednesday',  
        'Thursday', 'Friday']
```

## Quotation in Python:

Python accepts single ('), double ("") and triple ("'" or "'''") quotes to denote string literals, as long as the same type of quote starts and ends the string.

The triple quotes can be used to span the string across multiple lines. For example, all the following are legal:

```
word = 'word'  
sentence = "This is a sentence."  
paragraph = """This is a paragraph. It is  
made up of multiple lines and sentences."""
```

## Comments in Python:

A hash sign (#) that is not inside a string literal begins a comment. All characters after the # and up to the physical line end are part of the comment, and the Python interpreter ignores them.

```
#!/usr/bin/python  
  
# First comment  
print "Hello, Python!"; # second comment
```

This will produce following result:

```
Hello, Python!
```

A comment may be on the same line after a statement or expression:

```
name = "Madisetti" # This is again comment
```

You can comment multiple lines as follows:

```
# This is a comment.  
# This is a comment, too.  
# This is a comment, too.  
# I said that already.
```

## Using Blank Lines:

A line containing only whitespace, possibly with a comment, is known as a blank line, and Python totally ignores it.

In an interactive interpreter session, you must enter an empty physical line to terminate a multiline statement.

## Waiting for the User:

The following line of the program displays the prompt, Press the enter key to exit. and waits for the user to press the Enter key:

```
#!/usr/bin/python  
  
raw_input("\n\nPress the enter key to exit.")
```

Here "\n\n" are being used to create two new lines before displaying the actual line. Once the user presses the key, the program ends. This is a nice trick to keep a console window open until the user is done with an application.

## Multiple Statements on a Single Line:

The semicolon ( ; ) allows multiple statements on the single line given that neither statement starts a new code block. Here is a sample snip using the semicolon:

```
import sys; x = 'foo'; sys.stdout.write(x + '\n')
```

## Multiple Statement Groups as Suites:

A groups of individual statements which makes a single code block are called **suites** in Python. Compound or complex statements, such as if, while, def, and class, are those which require a header line and a suite.

Header lines begin the statement (with the keyword) and terminate with a colon ( : ) and are followed by one or more lines which make up the suite. For example:

```
if expression :  
    suite  
elif expression :  
    suite  
else :  
    suite
```

## Command Line Arguments:

You may have seen, for instance, that many programs can be run so that they provide you with some basic information about how they should be run. Python enables you to do this with -h:

```
$ python -h  
usage: python [option] ... [-c cmd | -m mod | file | -] [arg] ...
```

```
Options and arguments (and corresponding environment variables):
-c cmd : program passed in as string (terminates option list)
-d      : debug output from parser (also PYTHONDEBUG=x)
-E      : ignore environment variables (such as PYTHONPATH)
-h      : print this help message and exit

[ etc. ]
```

You can also program your script in such a way that it should accept various options

## Accessing Command Line Arguments:

Python provides a **getopt** module that helps you parse command-line options and arguments.

```
$ python test.py arg1 arg2 arg3
```

The Python **sys** module provides access to any command-line arguments via the **sys.argv**. This serves two purpose:

- **sys.argv** is the list of command-line arguments.
- **len(sys.argv)** is the number of command-line arguments.

Here **sys.argv[0]** is the program ie. script name.

### Example:

Consider the following script **test.py**:

```
#!/usr/bin/python

import sys

print 'Number of arguments:', len(sys.argv), 'arguments.'
print 'Argument List:', str(sys.argv)
```

Now run above script as follows:

```
$ python test.py arg1 arg2 arg3
```

This will produce following result:

```
Number of arguments: 4 arguments.
Argument List: ['test.py', 'arg1', 'arg2', 'arg3']
```

**NOTE:** As mentioned above, first argument is always script name and it is also being counted in number of arguments.

## Parsing Command Line Arguments:

Python provided a **getopt** module that helps you parse command-line options and arguments. This module provides two functions and an exception to enable command line argument parsing. This tutorial would discuss about one method and one exception which are sufficient for your programming requirements.

### getopt.getopt method:

This method parses command line options and parameter list. Following is simple syntax for this method:

```
getopt getopt(args, options[, long_options])
```

Here is the detail of the parameters:

- **args**: This is the argument list to be parsed.
- **options**: This is the string of option letters that the script wants to recognize, with options that require an argument should be followed by a colon (:).
- **long\_options**: This is optional parameter and if specified, must be a list of strings with the names of the long options which should be supported. Long options which require an argument should be followed by an equal sign ('='). To accept only long options, options should be an empty string.

This method returns value consists of two elements: the first is a list of (**option, value**) pairs. The second is the list of program arguments left after the option list was stripped.

Each option-and-value pair returned has the option as its first element, prefixed with a hyphen for short options (e.g., '-x') or two hyphens for long options (e.g., '--long-option').

### exception getopt.GetoptError:

This is raised when an unrecognized option is found in the argument list or when an option requiring an argument is given none.

The argument to the exception is a string indicating the cause of the error. The attributes **msg** and **opt** give the error message and related option

### Example

Consider we want to pass two file names through command line, and we also want to give an option to check the usage of the script. Usage of the script is as follows:

```
usage: test.py -i <inputfile> -o <outputfile>
```

Here is the following script to test.py:

```
#!/usr/bin/python

import sys, getopt

def main(argv):
    inputfile = ''
    outputfile = ''
    try:
        opts, args = getopt.getopt(argv,"hi:o:",["ifile=","ofile="])
    except getopt.GetoptError:
        print 'test.py -i <inputfile> -o <outputfile>'
        sys.exit(2)
    for opt, arg in opts:
        if opt == '-h':
            print 'test.py -i <inputfile> -o <outputfile>'
            sys.exit()
        elif opt in ("-i", "--ifile"):
            inputfile = arg
        elif opt in ("-o", "--ofile"):
            outputfile = arg
    print 'Input file is "', inputfile
    print 'Output file is "', outputfile

if __name__ == "__main__":
    main(sys.argv[1:])
```

Now run above script as follows:

```
$ test.py -h  
usage: test.py -i <inputfile> -o <outputfile>  
  
$ test.py -i BMP -o  
usage: test.py -i <inputfile> -o <outputfile>  
  
$ test.py -i inputfile  
Input file is " inputfile  
Output file is "
```

# Python Variable Types

# V

ariables are nothing but reserved memory locations to store values. This means that when you create a variable you reserve some space in memory.

Based on the data type of a variable, the interpreter allocates memory and decides what can be stored in the reserved memory. Therefore, by assigning different data types to variables, you can store integers, decimals, or characters in these variables.

## Assigning Values to Variables:

Python variables do not have to be explicitly declared to reserve memory space. The declaration happens automatically when you assign a value to a variable. The equal sign (=) is used to assign values to variables.

The operand to the left of the = operator is the name of the variable, and the operand to the right of the = operator is the value stored in the variable. For example:

```
#!/usr/bin/python

counter = 100          # An integer assignment
miles   = 1000.0        # A floating point
name    = "John"         # A string

print counter
print miles
print name
```

Here 100, 1000.0 and "John" are the values assigned to *counter*, *miles* and *name* variables, respectively. While running this program, this will produce following result:

```
100
1000.0
John
```

## Multiple Assignment:

Python allows you to assign a single value to several variables simultaneously. For example:

```
a = b = c = 1
```

Here, an integer object is created with the value 1, and all three variables are assigned to the same memory location. You can also assign multiple objects to multiple variables. For example:

```
a, b, c = 1, 2, "john"
```

Here two integer objects with values 1 and 2 are assigned to variables a and b, and one string object with the value "john" is assigned to the variable c.

## Standard Data Types:

The data stored in memory can be of many types. For example, a person's age is stored as a numeric value and his or her address is stored as alphanumeric characters. Python has various standard types that are used to define the operations possible on them and the storage method for each of them.

Python has five standard data types:

- Numbers
- String
- List
- Tuple
- Dictionary

## Python Numbers:

Number data types store numeric values. They are immutable data types, which means that changing the value of a number data type results in a newly allocated object.

Number objects are created when you assign a value to them. For example:

```
var1 = 1  
var2 = 10
```

You can also delete the reference to a number object by using the **del** statement. The syntax of the del statement is:

```
del var1[,var2[,var3[....,varN]]]]
```

You can delete a single object or multiple objects by using the del statement. For example:

```
del var  
del var_a, var_b
```

Python supports four different numerical types:

- int (signed integers)
- long (long integers [can also be represented in octal and hexadecimal])
- float (floating point real values)

- complex (complex numbers)

## Examples:

Here are some examples of numbers:

Int	Long	float	complex
10	51924361L	0.0	3.14j
100	-0x19323L	15.20	45.j
-786	0122L	-21.9	9.322e-36j
080	0xDEFAFBCECBDAECBFBAE1	32.3+e18	.876j
-0490	535633629843L	-90.	-.6545+0J
-0x260	-052318172735L	-32.54e100	3e+26J
0x69	-4721885298529L	70.2-E12	4.53e-7j

- Python allows you to use a lowercase L with long, but it is recommended that you use only an uppercase L to avoid confusion with the number 1. Python displays long integers with an uppercase L.
- A complex number consists of an ordered pair of real floatingpoint numbers denoted by  $a + bj$ , where a is the real part and b is the imaginary part of the complex number.

## Python Strings:

Strings in Python are identified as a contiguous set of characters in between quotation marks. Python allows for either pairs of single or double quotes. Subsets of strings can be taken using the slice operator ( [ ] and [ : ] ) with indexes starting at 0 in the beginning of the string and working their way from -1 at the end.

The plus ( + ) sign is the string concatenation operator, and the asterisk ( \* ) is the repetition operator. For example:

```
#!/usr/bin/python

str = 'Hello World!'

print str           # Prints complete string
print str[0]         # Prints first character of the string
print str[2:5]       # Prints characters starting from 3rd to 5th
print str[2:]         # Prints string starting from 3rd character
print str * 2        # Prints string two times
print str + "TEST"   # Prints concatenated string
```

This will produce following result:

```
Hello World!
H
llo
llo World!
Hello World!Hello World!
Hello World!TEST
```

## Python Lists:

Lists are the most versatile of Python's compound data types. A list contains items separated by commas and enclosed within square brackets ([]). To some extent, lists are similar to arrays in C. One difference between them is that all the items belonging to a list can be of different data type.

The values stored in a list can be accessed using the slice operator ( [ ] and [ : ] ) with indexes starting at 0 in the beginning of the list and working their way to end-1. The plus ( + ) sign is the list concatenation operator, and the asterisk ( \* ) is the repetition operator. For example:

```
#!/usr/bin/python

list = [ 'abcd', 786 , 2.23, 'john', 70.2 ]
tinylist = [123, 'john']

print list          # Prints complete list
print list[0]        # Prints first element of the list
print list[1:3]      # Prints elements starting from 2nd till 3rd
print list[2:]       # Prints elements starting from 3rd element
print tinylist * 2  # Prints list two times
print list + tinylist # Prints concatenated lists
```

This will produce following result:

```
['abcd', 786, 2.23, 'john', 70.20000000000003]
abcd
[786, 2.23]
[2.23, 'john', 70.20000000000003]
[123, 'john', 123, 'john']
['abcd', 786, 2.23, 'john', 70.20000000000003, 123, 'john']
```

## Python Tuples:

A tuple is another sequence data type that is similar to the list. A tuple consists of a number of values separated by commas. Unlike lists, however, tuples are enclosed within parentheses.

The main differences between lists and tuples are: Lists are enclosed in brackets ( [ ] ), and their elements and size can be changed, while tuples are enclosed in parentheses ( ( ) ) and cannot be updated. Tuples can be thought of as **read-only** lists. For example:

```
#!/usr/bin/python

tuple = ( 'abcd', 786 , 2.23, 'john', 70.2 )
tinytuple = (123, 'john')

print tuple          # Prints complete list
print tuple[0]        # Prints first element of the list
print tuple[1:3]      # Prints elements starting from 2nd till 3rd
print tuple[2:]       # Prints elements starting from 3rd element
print tinytuple * 2  # Prints list two times
print tuple + tinytuple # Prints concatenated lists
```

This will produce following result:

```
('abcd', 786, 2.23, 'john', 70.20000000000003)
abcd
(786, 2.23)
```

```
(2.23, 'john', 70.200000000000003)
(123, 'john', 123, 'john')
('abcd', 786, 2.23, 'john', 70.200000000000003, 123, 'john')
```

Following is invalid with tuple, because we attempted to update a tuple, which is not allowed. Similar case is possible with lists:

```
#!/usr/bin/python

tuple = ('abcd', 786, 2.23, 'john', 70.2)
list = [ 'abcd', 786, 2.23, 'john', 70.2 ]
tuple[2] = 1000 # Invalid syntax with tuple
list[2] = 1000 # Valid syntax with list
```

## Python Dictionary:

Python's dictionaries are kind of hash table type. They work like associative arrays or hashes found in Perl and consist of key-value pairs. A dictionary keys can be almost any Python type, but are usually numbers or strings. Values, on the other hand, can be any arbitrary Python object.

Dictionaries are enclosed by curly braces ( { } ) and values can be assigned and accessed using square braces ( [] ). For example:

```
#!/usr/bin/python

dict = {}
dict['one'] = "This is one"
dict[2] = "This is two"

tinydict = {'name': 'john', 'code':6734, 'dept': 'sales'}

print dict['one']      # Prints value for 'one' key
print dict[2]          # Prints value for 2 key
print tinydict         # Prints complete dictionary
print tinydict.keys()  # Prints all the keys
print tinydict.values()# Prints all the values
```

This will produce following result:

```
This is one
This is two
{'dept': 'sales', 'code': 6734, 'name': 'john'}
['dept', 'code', 'name']
['sales', 6734, 'john']
```

Dictionaries have no concept of order among elements. It is incorrect to say that the elements are "out of order"; they are simply unordered.

## Data Type Conversion:

Sometimes you may need to perform conversions between the built-in types. To convert between types you simply use the type name as a function.

There are several built-in functions to perform conversion from one data type to another. These functions return a new object representing the converted value.

<b>Function</b>	<b>Description</b>
int(x [,base])	Converts x to an integer. base specifies the base if x is a string.
long(x [,base] )	Converts x to a long integer. base specifies the base if x is a string.
float(x)	Converts x to a floating-point number.
complex(real [,imag])	Creates a complex number.
str(x)	Converts object x to a string representation.
repr(x)	Converts object x to an expression string.
eval(str)	Evaluates a string and returns an object.
tuple(s)	Converts s to a tuple.
list(s)	Converts s to a list.
set(s)	Converts s to a set.
dict(d)	Creates a dictionary. d must be a sequence of (key,value) tuples.
frozenset(s)	Converts s to a frozen set.
chr(x)	Converts an integer to a character.
unichr(x)	Converts an integer to a Unicode character.

ord(x)	Converts a single character to its integer value.
hex(x)	Converts an integer to a hexadecimal string.
oct(x)	Converts an integer to an octal string.

# Python Basic Operators

## What is an Operator?

S

imple answer can be given using expression  $4 + 5$  is equal to 9. Here 4 and 5 are called operands and + is called operator. Python language supports following type of operators.

- Arithmetic Operators
- Comparision (ie Relational) Operators
- Assignment Operators
- Logical Operators
- Bitwise Operators
- Membership Operators
- Identity Operators

Lets have a look on all operators one by one.

## Python Arithmetic Operators:

Assume variable a holds 10 and variable b holds 20 then:

Operator	Description	Example
+	Addition - Adds values on either side of the operator	$a + b$ will give 30
-	Subtraction - Subtracts right hand operand from left hand operand	$a - b$ will give -10
*	Multiplication - Multiplies values on either side of the operator	$a * b$ will give 200

/	Division - Divides left hand operand by right hand operand	b / a will give 2
%	Modulus - Divides left hand operand by right hand operand and returns remainder	b % a will give 0
**	Exponent - Performs exponential (power) calculation on operators	a**b will give 10 to the power 20
//	Floor Division - The division of operands where the result is the quotient in which the digits after the decimal point are removed.	9//2 is equal to 4 and 9.0//2.0 is equal to 4.0

## Example:

Try following example to understand all the arithmetic operators available in Python programming language:

```
#!/usr/bin/python

a = 21
b = 10
c = 0

c = a + b
print "Line 1 - Value of c is ", c

c = a - b
print "Line 2 - Value of c is ", c

c = a * b
print "Line 3 - Value of c is ", c

c = a / b
print "Line 4 - Value of c is ", c

c = a % b
print "Line 5 - Value of c is ", c

a = 2
b = 3
c = a**b
print "Line 6 - Value of c is ", c

a = 10
b = 5
c = a//b
print "Line 7 - Value of c is ", c
```

When you execute the above program it produces following result:

```
Line 1 - Value of c is 31
Line 2 - Value of c is 11
Line 3 - Value of c is 210
Line 4 - Value of c is 2
```

**TUTORIALS POINT**

Simply Easy Learning

```

Line 5 - Value of c is 1
Line 6 - Value of c is 8
Line 7 - Value of c is 2

```

## Python Comparison Operators:

Following table shows all the comparison operators supported by Python language. Assume variable a holds 10 and variable b holds 20 then:

Operator	Description	Example
<code>==</code>	Checks if the value of two operands are equal or not, if yes then condition becomes true.	<code>(a == b)</code> is not true.
<code>!=</code>	Checks if the value of two operands are equal or not, if values are not equal then condition becomes true.	<code>(a != b)</code> is true.
<code>&lt;&gt;</code>	Checks if the value of two operands are equal or not, if values are not equal then condition becomes true.	<code>(a &lt;&gt; b)</code> is true. This is similar to <code>!=</code> operator.
<code>&gt;</code>	Checks if the value of left operand is greater than the value of right operand, if yes then condition becomes true.	<code>(a &gt; b)</code> is not true.
<code>&lt;</code>	Checks if the value of left operand is less than the value of right operand, if yes then condition becomes true.	<code>(a &lt; b)</code> is true.
<code>&gt;=</code>	Checks if the value of left operand is greater than or equal to the value of right operand, if yes then condition becomes true.	<code>(a &gt;= b)</code> is not true.
<code>&lt;=</code>	Checks if the value of left operand is less than or equal to the value of right operand, if yes then condition becomes true.	<code>(a &lt;= b)</code> is true.

### Example:

Try following example to understand all the comparison operators available in Python programming language:

```

#!/usr/bin/python

a = 21
b = 10
c = 0

if ( a == b ):
    print "Line 1 - a is equal to b"
else:
    print "Line 1 - a is not equal to b"

```

```

if ( a != b ):
    print "Line 2 - a is not equal to b"
else:
    print "Line 2 - a is equal to b"

if ( a <> b ):
    print "Line 3 - a is not equal to b"
else:
    print "Line 3 - a is equal to b"

if ( a < b ):
    print "Line 4 - a is less than b"
else:
    print "Line 4 - a is not less than b"

if ( a > b ):
    print "Line 5 - a is greater than b"
else:
    print "Line 5 - a is not greater than b"

a = 5;
b = 20;
if ( a <= b ):
    print "Line 6 - a is either less than or equal to b"
else:
    print "Line 6 - a is neither less than nor equal to b"

if ( b >= a ):
    print "Line 7 - b is either greater than or equal to b"
else:
    print "Line 7 - b is neither greater than nor equal to b"

```

When you execute the above program it produces following result:

```

Line 1 - a is not equal to b
Line 2 - a is not equal to b
Line 3 - a is not equal to b
Line 4 - a is not less than b
Line 5 - a is greater than b
Line 6 - a is either less than or equal to b
Line 7 - b is either greater than or equal to b

```

## Python Assignment Operators:

Assume variable a holds 10 and variable b holds 20 then:

Operator	Description	Example
=	Simple assignment operator, Assigns values from right side operands to left side operand	c = a + b will assigne value of a + b into c
+=	Add AND assignment operator, It adds right operand to the left operand and assign the result to left operand	c += a is equivalent to c = c + a
-=	Subtract AND assignment operator, It subtracts right operand from the left operand and assign the result to left operand	c -= a is equivalent to c = c - a
*=	Multiply AND assignment operator, It multiplies right operand with the left operand and assign the result to left operand	c *= a is equivalent to c = c * a
/=	Divide AND assignment operator, It divides left operand with the right operand and assign the result to left operand	c /= a is equivalent to c = c / a
%=	Modulus AND assignment operator, It takes modulus using two operands and assign the result to left operand	c %= a is equivalent to c = c % a
**=	Exponent AND assignment operator, Performs exponential (power) calculation on operators and assign value to the left operand	c **= a is equivalent to c = c ** a
//=	Floor Division and assigns a value, Performs floor division on operators and assign value to the left operand	c //= a is equivalent to c = c // a

### Example:

Try following example to understand all the assignment operators available in Python programming language:

```

#!/usr/bin/python

a = 21
b = 10
c = 0

c = a + b
print "Line 1 - Value of c is ", c

c += a
print "Line 2 - Value of c is ", c

c *= a
print "Line 3 - Value of c is ", c

c /= a
print "Line 4 - Value of c is ", c

c = 2
c %= a
print "Line 5 - Value of c is ", c

c **= a
print "Line 6 - Value of c is ", c

c //= a
print "Line 7 - Value of c is ", c

```

When you execute the above program it produces following result:

```

Line 1 - Value of c is 31
Line 2 - Value of c is 52
Line 3 - Value of c is 1092
Line 4 - Value of c is 52
Line 5 - Value of c is 2
Line 6 - Value of c is 2097152
Line 7 - Value of c is 99864

```

## Python Bitwise Operators:

Bitwise operator works on bits and perform bit by bit operation. Assume if  $a = 60$ ; and  $b = 13$ ; Now in binary format they will be as follows:

$a = 0011\ 1100$

$b = 0000\ 1101$

-----

$a \& b = 0000\ 1100$

$a | b = 0011\ 1101$

$a ^ b = 0011\ 0001$

$\sim a = 1100\ 0011$

There are following Bitwise operators supported by Python language

Operator	Description	Example
&	Binary AND Operator copies a bit to the result if it exists in both operands.	(a & b) will give 12 which is 0000 1100
	Binary OR Operator copies a bit if it exists in either operand.	(a   b) will give 61 which is 0011 1101
^	Binary XOR Operator copies the bit if it is set in one operand but not both.	(a ^ b) will give 49 which is 0011 0001
~	Binary Ones Complement Operator is unary and has the effect of 'flipping' bits.	(~a) will give -60 which is 1100 0011
<<	Binary Left Shift Operator. The left operand's value is moved left by the number of bits specified by the right operand.	a << 2 will give 240 which is 1111 0000
>>	Binary Right Shift Operator. The left operand's value is moved right by the number of bits specified by the right operand.	a >> 2 will give 15 which is 0000 1111

## Example:

Try following example to understand all the bitwise operators available in Python programming language:

```
#!/usr/bin/python

a = 60          # 60 = 0011 1100
b = 13          # 13 = 0000 1101
c = 0

c = a & b;      # 12 = 0000 1100
print "Line 1 - Value of c is ", c

c = a | b;      # 61 = 0011 1101
print "Line 2 - Value of c is ", c

c = a ^ b;      # 49 = 0011 0001
print "Line 3 - Value of c is ", c
```

```

c = ~a;           # -61 = 1100 0011
print "Line 4 - Value of c is ", c

c = a << 2;      # 240 = 1111 0000
print "Line 5 - Value of c is ", c

c = a >> 2;      # 15 = 0000 1111
print "Line 6 - Value of c is ", c

```

When you execute the above program it produces following result:

```

Line 1 - Value of c is 12
Line 2 - Value of c is 61
Line 3 - Value of c is 49
Line 4 - Value of c is -61
Line 5 - Value of c is 240
Line 6 - Value of c is 15

```

## Python Logical Operators:

There are following logical operators supported by Python language. Assume variable a holds 10 and variable b holds 20 then:

Operator	Description	Example
and	Called Logical AND operator. If both the operands are true then then condition becomes true.	(a and b) is true.
or	Called Logical OR Operator. If any of the two operands are non zero then then condition becomes true.	(a or b) is true.
not	Called Logical NOT Operator. Use to reverses the logical state of its operand. If a condition is true then Logical NOT operator will make false.	not(a and b) is false.

### Example:

Try following example to understand all the logical operators available in Python programming language:

```

#!/usr/bin/python

a = 10
b = 20
c = 0

if ( a and b ):
    print "Line 1 - a and b are true"
else:
    print "Line 1 - Either a is not true or b is not true"

if ( a or b ):

```

```

print "Line 2 - Either a is true or b is true or both are true"
else:
    print "Line 2 - Neither a is true nor b is true"

a = 0

if ( a and b ):
    print "Line 3 - a and b are true"
else:
    print "Line 3 - Either a is not true or b is not true"

if ( a or b ):
    print "Line 4 - Either a is true or b is true or both are true"
else:
    print "Line 4 - Neither a is true nor b is true"

if not( a and b ):
    print "Line 5 - a and b are true"
else:
    print "Line 5 - Either a is not true or b is not true"

```

When you execute the above program it produces following result:

```

Line 1 - a and b are true
Line 2 - Either a is true or b is true or both are true
Line 3 - Either a is not true or b is not true
Line 4 - Either a is true or b is true or both are true
Line 5 - a and b are true

```

## Python Membership Operators:

In addition to the operators discussed previously, Python has membership operators, which test for membership in a sequence, such as strings, lists, or tuples. There are two membership operators explained below:

Operator	Description	Example
in	Evaluates to true if it finds a variable in the specified sequence and false otherwise.	x in y, here <b>in</b> results in a 1 if x is a member of sequence y.
not in	Evaluates to true if it does not finds a variable in the specified sequence and false otherwise.	x not in y, here <b>not in</b> results in a 1 if x is not a member of

		sequence y.
--	--	-------------

## Example:

Try following example to understand all the membership operators available in Python programming language:

```
#!/usr/bin/python

a = 10
b = 20
list = [1, 2, 3, 4, 5];

if ( a in list ):
    print "Line 1 - a is available in the given list"
else:
    print "Line 1 - a is not available in the given list"

if ( b not in list ):
    print "Line 2 - b is not available in the given list"
else:
    print "Line 2 - b is available in the given list"

a = 2
if ( a in list ):
    print "Line 3 - a is available in the given list"
else:
    print "Line 3 - a is not available in the given list"
```

When you execute the above program it produces following result:

```
Line 1 - a is not available in the given list
Line 2 - b is not available in the given list
Line 3 - a is available in the given list
```

## Python Identity Operators:

Identity operators compare the memory locations of two objects. There are two Identity operators explained below:

Operator	Description	Example
is	Evaluates to true if the variables on either side of the operator point to the same object and false otherwise.	x is y, here <b>is</b> results in 1 if id(x) equals id(y).
is not	Evaluates to false if the variables on either side of the operator point to the same object and true otherwise.	x is not y, here <b>is not</b> results in 1 if id(x) is not equal to id(y).

## Example:

Try following example to understand all the identity operators available in Python programming language:

```

#!/usr/bin/python

a = 20

b = 20

if ( a is b ):

    print "Line 1 - a and b have same identity"

else:

    print "Line 1 - a and b do not have same identity"


if ( id(a) == id(b) ):

    print "Line 2 - a and b have same identity"

else:

    print "Line 2 - a and b do not have same identity"


b = 30

if ( a is b ):

    print "Line 3 - a and b have same identity"

else:

    print "Line 3 - a and b do not have same identity"


if ( a is not b ):

    print "Line 4 - a and b do not have same identity"

else:

    print "Line 4 - a and b have same identity"

```

When you execute the above program it produces following result:

```

Line 1 - a and b have same identity
Line 2 - a and b have same identity
Line 3 - a and b do not have same identity
Line 4 - a and b do not have same identity

```

## Python Operators Precedence

Operator precedence determines the grouping of terms in an expression. This affects how an expression is evaluated. Certain operators have higher precedence than others; for example, the multiplication operator has higher precedence than the addition operator:

For example `x = 7 + 3 * 2`; Here `x` is assigned 13, not 20 because operator `*` has higher precedence than `+` so it first gets multiplied with `3*2` and then adds into 7.

Here operators with the highest precedence appear at the top of the table, those with the lowest appear at the bottom. Within an expression, higher precedence operators will be evaluated first.

The following table lists all operators from highest precedence to lowest:

Operator	Description
<code>**</code>	Exponentiation (raise to the power)
<code>~ + -</code>	Complement, unary plus and minus (method names for the last two are <code>+@</code> and <code>-@</code> )
<code>* / % //</code>	Multiply, divide, modulo and floor division
<code>+ -</code>	Addition and subtraction
<code>&gt;&gt; &lt;&lt;</code>	Right and left bitwise shift
<code>&amp;</code>	Bitwise 'AND'
<code>^  </code>	Bitwise exclusive 'OR' and regular 'OR'
<code>&lt;= &lt; &gt; &gt;=</code>	Comparison operators
<code>&lt;&gt; == !=</code>	Equality operators
<code>= %= /= //= -= += *= **=</code>	Assignment operators
<code>is is not</code>	Identity operators
<code>in not in</code>	Membership operators
<code>not or and</code>	Logical operators

## Example:

Try following example to understand operator precedence available in Python programming language:

```
#!/usr/bin/python

a = 20
b = 10
c = 15
d = 5
e = 0

e = (a + b) * c / d      #( 30 * 15 ) / 5
print "Value of (a + b) * c / d is ", e

e = ((a + b) * c) / d    # (30 * 15 ) / 5
```

```
print "Value of ((a + b) * c) / d is ", e

e = (a + b) * (c / d);      # (30) * (15/5)
print "Value of (a + b) * (c / d) is ", e

e = a + (b * c) / d;        # 20 + (150/5)
print "Value of a + (b * c) / d is ", e
```

When you execute the above program it produces following result:


```
Value of (a + b) * c / d is 90
Value of ((a + b) * c) / d is 90
Value of (a + b) * (c / d) is 90
Value of a + (b * c) / d is 50
```

# Python Decision Making

Decision making structures require that the programmer specify one or more conditions to be evaluated

or tested by the program, along with a statement or statements to be executed if the condition is determined to be true, and optionally, other statements to be executed if the condition is determined to be false.

Following is the general form of a typical decision making structure found in most of the programming languages:

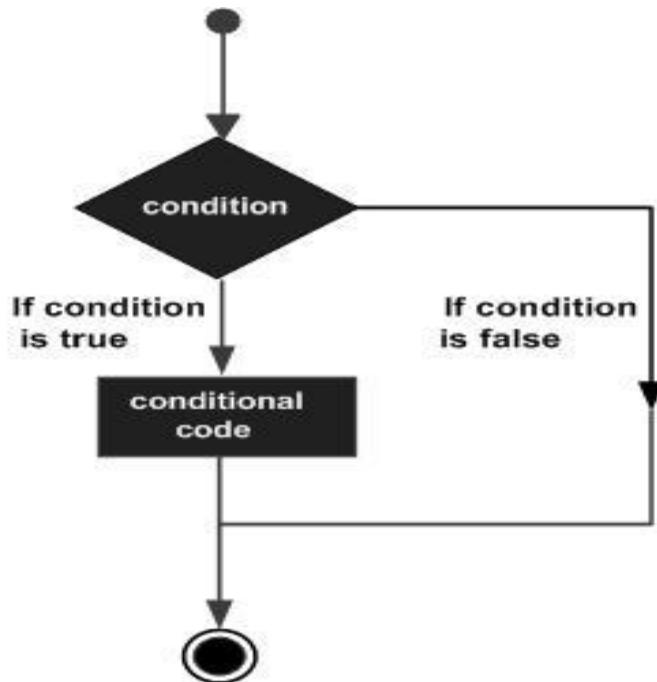

Python programming language assumes any **non-zero** and **non-null** values as **true** and if it is either **zero** or **null** then it is assumed as **false** value.

Python programming language provides following types of decision making statements. Click the following links to check their detail.

Statement	Description
-----------	-------------

<b>if statements</b>	An <b>if statement</b> consists of a boolean expression followed by one or more statements.
<b>if...else statements</b>	An <b>if statement</b> can be followed by an optional <b>else statement</b> , which executes when the boolean expression is false.
<b>nested if statements</b>	You can use one <b>if</b> or <b>else if</b> statement inside another <b>if</b> or <b>else if</b> statement(s).

## If statements

The **if** statement of Python is similar to that of other languages. The **if** statement contains a logical expression using which data is compared, and a decision is made based on the result of the comparison.

### Syntax:


The syntax of an if statement in Python programming language is:

```
if expression:  
    statement(s)
```

If the boolean **expression** evaluates to **true** then the block of statement(s) inside the if statement will be executed. If boolean expression evaluates to **false** then the first set of code after the end of the if statement(s) will be executed.

Python programming language assumes any **non-zero** and **non-null** values as **true** and if it is either **zero** or **null** then it is assumed as **false** value.

### Flow Diagram:

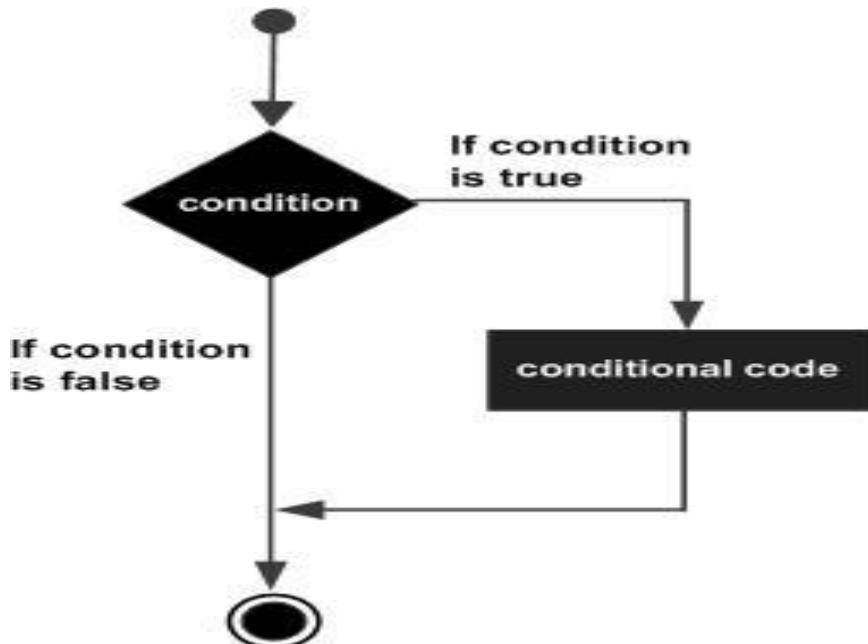

### Example:

```
#!/usr/bin/python  
  
var1 = 100
```

```

if var1:
    print "1 - Got a true expression value"
    print var1

var2 = 0
if var2:
    print "2 - Got a true expression value"
    print var2
print "Good bye!"
```

When the above code is executed, it produces following result:

```

1 - Got a true expression value
100
Good bye!
```

## if...else statements

An **else** statement can be combined with an **if** statement. An **else** statement contains the block of code that executes if the conditional expression in the if statement resolves to 0 or a false value.

The **else** statement is an optional statement and there could be at most only one **else** statement following **if**.


### Syntax:

The syntax of the *if...else* statement is:

```

if expression:
    statement(s)
else:
    statement(s)
```

### Flow Diagram:

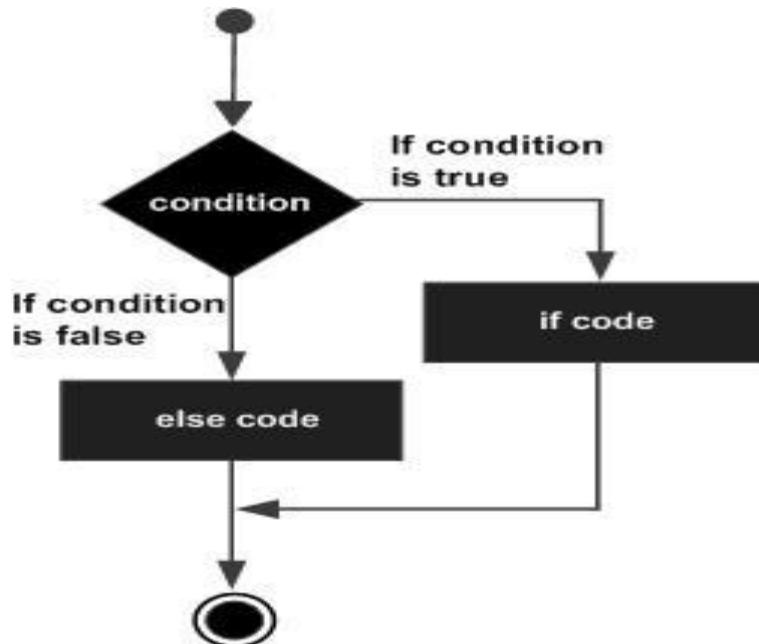

## Example:

```
#!/usr/bin/python

var1 = 100
if var1:
    print "1 - Got a true expression value"
    print var1
else:
    print "1 - Got a false expression value"
    print var1

var2 = 0
if var2:
    print "2 - Got a true expression value"
    print var2
else:
    print "2 - Got a false expression value"
    print var2

print "Good bye!"
```

When the above code is executed, it produces following result:

```
1 - Got a true expression value
100
2 - Got a false expression value
0
Good bye!
```

## The *elif* Statement

The **elif** statement allows you to check multiple expressions for truth value and execute a block of code as soon as one of the conditions evaluates to true.

Like the **else**, the **elif** statement is optional. However, unlike **else**, for which there can be at most one statement, there can be an arbitrary number of **elif** statements following an **if**.

The syntax of the *if...elif* statement is:

```
if expression1:
    statement(s)
elif expression2:
    statement(s)
elif expression3:
    statement(s)
else:
    statement(s)
```

Python does not currently support switch or case statements as in other languages.

## Example:

```
#!/usr/bin/python

var = 100
if var == 200:
    print "1 - Got a true expression value"
    print var
```

```

elif var == 150:
    print "2 - Got a true expression value"
    print var2
elif var == 100:
    print "3 - Got a true expression value"
    print var
else:
    print "4 - Got a false expression value"
    print var

print "Good bye!"

```

When the above code is executed, it produces following result:

```

3 - Got a true expression value
100
Good bye!

```

## nested if statements

There may be a situation when you want to check for another condition after a condition resolves to true. In such a situation, you can use the nested **if** construct.

In a nested **if** construct, you can have an **if...elif...else** construct inside another **if...elif...else** construct.

### Syntax:

The syntax of the nested **if...elif...else** construct may be:

```

if expression1:
    statement(s)
    if expression2:
        statement(s)
    elif expression3:
        statement(s)
    else:
        statement(s)
elif expression4:
    statement(s)
else:
    statement(s)

```

### Example:

```

#!/usr/bin/python

var = 100
if var < 200:
    print "Expression value is less than 200"
    if var == 150:
        print "Which is 150"
    elif var == 100:
        print "Which is 100"
    elif var == 50:
        print "Which is 50"
    elif var < 50:
        print "Expression value is less than 50"
else:
    print "Could not find true expression"

```

```
print "Good bye!"
```

When the above code is executed, it produces following result:

```
Expression value is less than 200
Which is 100
Good bye!
```

## Single Statement Suites:

If the suite of an **if** clause consists only of a single line, it may go on the same line as the header statement.

Here is an example of a **one-line if** clause:

```
#!/usr/bin/python

var = 100

if ( var == 100 ) : print "Value of expression is 100"

print "Good bye!"
```

When the above code is executed, it produces following result:

```
Value of expression is 100
Good bye!
```


# Python Loops

T

here may be a situation when you need to execute a block of code several number of times. In general statements are executed sequentially: The first statement in a function is executed first, followed by the second, and so on.

Programming languages provide various control structures that allow for more complicated execution paths.

A loop statement allows us to execute a statement or group of statements multiple times and following is the general form of a loop statement in most of the programming languages:

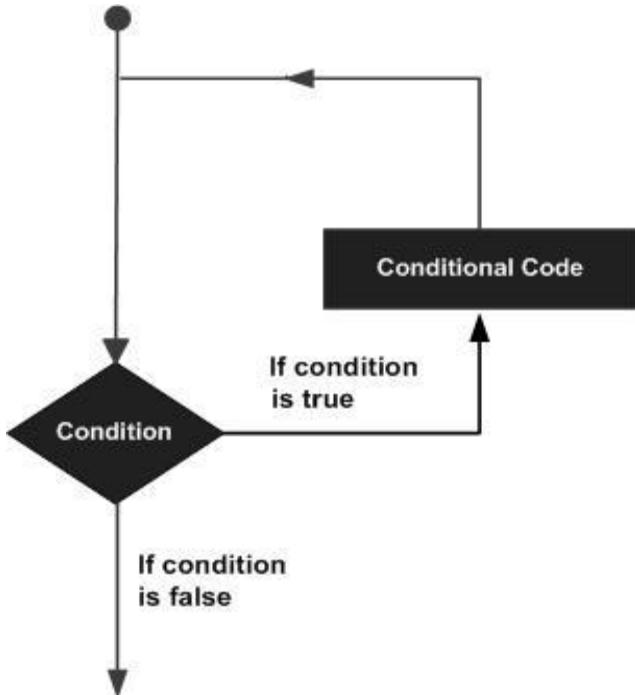

Python programming language provides following types of loop to handle looping requirements. Click the following links to check their detail.

Loop Type	Description
<b>while loop</b>	Repeats a statement or group of statements while a given condition is true. It tests the condition before executing the loop body.
<b>for loop</b>	Execute a sequence of statements multiple times and abbreviates the code that manages the loop variable.
<b>nested loops</b>	You can use one or more loop inside any another while, for or do..while loop.

## while loop

A **while** loop statement in Python programming language repeatedly executes a target statement as long as a given condition is true.

### Syntax:

The syntax of a **while** loop in Python programming language is:


```
while expression:
    statement(s)
```

Here **statement(s)** may be a single statement or a block of statements. The **condition** may be any expression, and true is any nonzero value. The loop iterates while the condition is true.

When the condition becomes false, program control passes to the line immediately following the loop.

In Python, all the statements indented by the same number of character spaces after a programming construct are considered to be part of a single block of code. Python uses indentation as its method of grouping statements.

### Flow Diagram:

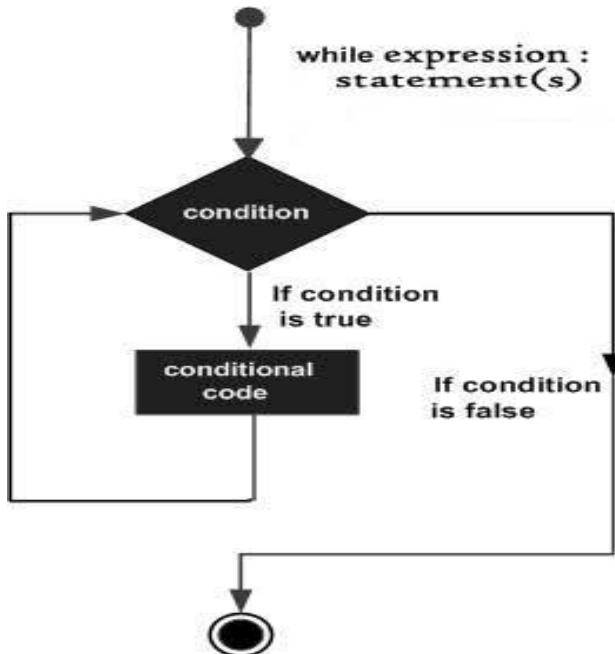

Here key point of the `while` loop is that the loop might not ever run. When the condition is tested and the result is false, the loop body will be skipped and the first statement after the while loop will be executed.

### Example:

```
#!/usr/bin/python

count = 0
while (count < 9):
    print 'The count is:', count
    count = count + 1

print "Good bye!"
```

When the above code is executed, it produces following result:

```
The count is: 0
The count is: 1
The count is: 2
The count is: 3
The count is: 4
The count is: 5
The count is: 6
The count is: 7
The count is: 8
Good bye!
```

The block here, consisting of the print and increment statements, is executed repeatedly until count is no longer less than 9. With each iteration, the current value of the index count is displayed and then increased by 1.

### The Infinite Loop:

A loop becomes infinite loop if a condition never becomes false. You must use caution when using while loops because of the possibility that this condition never resolves to a false value. This results in a loop that never ends. Such a loop is called an infinite loop.

An infinite loop might be useful in client/server programming where the server needs to run continuously so that client programs can communicate with it as and when required.

```
#!/usr/bin/python

var = 1
while var == 1 : # This constructs an infinite loop
    num = raw_input("Enter a number :")
    print "You entered: ", num

print "Good bye!"
```

When the above code is executed, it produces following result:

```
Enter a number :20
You entered: 20
Enter a number :29
You entered: 29
Enter a number :3
You entered: 3
Enter a number between :Traceback (most recent call last):
  File "test.py", line 5, in <module>
    num = raw_input("Enter a number :")
```

```
KeyboardInterrupt
```

Above example will go in an infinite loop and you would need to use CTRL+C to come out of the program.

## The else Statement Used with Loops

Python supports to have an **else** statement associated with a loop statements.

- If the **else** statement is used with a **for** loop, the **else** statement is executed when the loop has exhausted iterating the list.
- If the **else** statement is used with a **while** loop, the **else** statement is executed when the condition becomes false.

The following example illustrates the combination of an else statement with a while statement that prints a number as long as it is less than 5 otherwise else statement gets executed.

```
#!/usr/bin/python

count = 0
while count < 5:
    print count, " is less than 5"
    count = count + 1
else:
    print count, " is not less than 5"
```

When the above code is executed, it produces following result:

```
0 is less than 5
1 is less than 5
2 is less than 5
3 is less than 5
4 is less than 5
5 is not less than 5
```

## Single Statement Suites:

Similar to the **if** statement syntax, if your **while** clause consists only of a single statement, it may be placed on the same line as the while header.

Here is the syntax and example of a **one-line while** clause:

```
#!/usr/bin/python

flag = 1

while (flag): print 'Given flag is really true!'

print "Good bye!"
```

Do not try above example because it will go in infinite loop and you will have to use CTRL+C keys to come out.

## for loop

The **for** loop in Python has the ability to iterate over the items of any sequence, such as a list or a string.

### Syntax:


The syntax of a **for** loop look is as follows:

```
for iterating_var in sequence:
```

```
statements(s)
```

If a sequence contains an expression list, it is evaluated first. Then, the first item in the sequence is assigned to the iterating variable *iterating\_var*. Next, the statements block is executed. Each item in the list is assigned to *iterating\_var*, and the statements(s) block is executed until the entire sequence is exhausted.

### Flow Diagram:

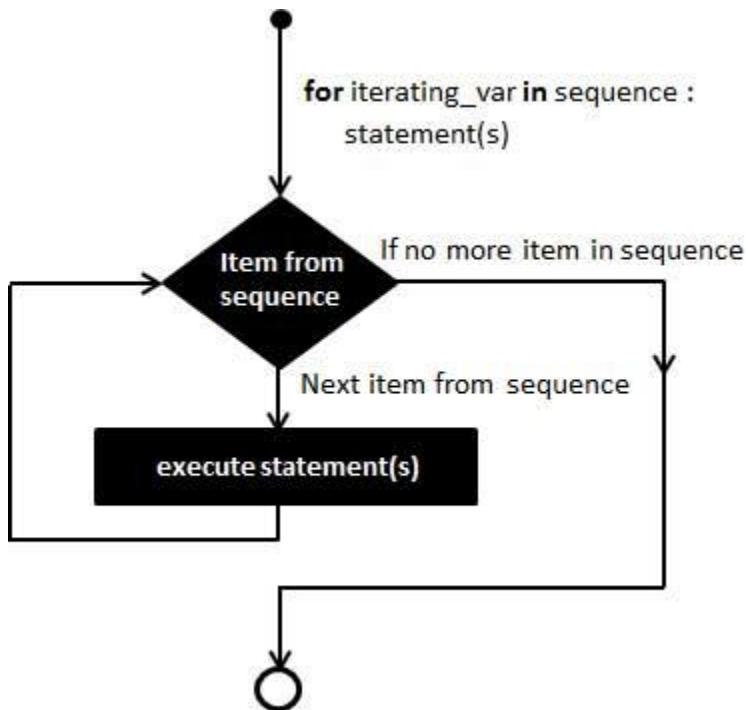

### Example:

```
#!/usr/bin/python

for letter in 'Python':      # First Example
    print 'Current Letter :', letter

fruits = ['banana', 'apple', 'mango']
for fruit in fruits:         # Second Example
    print 'Current fruit :', fruit

print "Good bye!"
```

When the above code is executed, it produces following result:

```
Current Letter : P
Current Letter : y
Current Letter : t
Current Letter : h
Current Letter : o
Current Letter : n
Current fruit : banana
Current fruit : apple
Current fruit : mango
Good bye!
```

## Iterating by Sequence Index:

An alternative way of iterating through each item is by index offset into the sequence itself. Following is a simple example:

```
#!/usr/bin/python

fruits = ['banana', 'apple', 'mango']
for index in range(len(fruits)):
    print 'Current fruit:', fruits[index]

print "Good bye!"
```

When the above code is executed, it produces following result:

```
Current fruit : banana
Current fruit : apple
Current fruit : mango
Good bye!
```

Here we took the assistance of the `len()` built-in function, which provides the total number of elements in the tuple as well as the `range()` built-in function to give us the actual sequence to iterate over.

## The else Statement Used with Loops

Python supports to have an `else` statement associated with a loop statements.

- If the `else` statement is used with a `for` loop, the `else` statement is executed when the loop has exhausted iterating the list.
- If the `else` statement is used with a `while` loop, the `else` statement is executed when the condition becomes false.

The following example illustrates the combination of an `else` statement with a `for` statement that searches for prime numbers from 10 through 20.

```
#!/usr/bin/python

for num in range(10,20): #to iterate between 10 to 20
    for i in range(2,num): #to iterate on the factors of the number
        if num%i == 0: #to determine the first factor
            j=num/i #to calculate the second factor
            print '%d equals %d * %d' % (num,i,j)
            break #to move to the next number, the #first FOR
        else: # else part of the loop
            print num, 'is a prime number'
```

When the above code is executed, it produces following result:

```
10 equals 2 * 5
11 is a prime number
12 equals 2 * 6
13 is a prime number
14 equals 2 * 7
15 equals 3 * 5
16 equals 2 * 8
17 is a prime number
18 equals 2 * 9
19 is a prime number
```

## nested loops

Python programming language allows to use one loop inside another loop. Following section shows few examples to illustrate the concept.

## Syntax:

The syntax for a **nested for loop** statement in Python is as follows:

```
for iterating_var in sequence:  
    for iterating_var in sequence:  
        statements(s)  
        statements(s)
```

The syntax for a **nested while loop** statement in Python programming language is as follows:

```
while expression:  
    while expression:  
        statement(s)  
        statement(s)
```

A final note on loop nesting is that you can put any type of loop inside of any other type of loop. For example a for loop can be inside a while loop or vice versa.

## Example:

The following program uses a nested for loop to find the prime numbers from 2 to 100:

```
#!/usr/bin/python  
  
i = 2  
while(i < 100):  
    j = 2  
    while(j <= (i/j)):  
        if not(i%j): break  
        j = j + 1  
    if (j > i/j) : print i, " is prime"  
    i = i + 1  
  
print "Good bye!"
```

When the above code is executed, it produces following result:

```
2 is prime  
3 is prime  
5 is prime  
7 is prime  
11 is prime  
13 is prime  
17 is prime  
19 is prime  
23 is prime  
29 is prime  
31 is prime  
37 is prime  
41 is prime  
43 is prime  
47 is prime  
53 is prime  
59 is prime  
61 is prime  
67 is prime
```

```
71 is prime
73 is prime
79 is prime
83 is prime
89 is prime
97 is prime
Good bye!
```

## Loop Control Statements:

Loop control statements change execution from its normal sequence. When execution leaves a scope, all automatic objects that were created in that scope are destroyed.

Python supports the following control statements. Click the following links to check their detail.

Control Statement	Description
<b>break statement</b>	Terminates the <b>loop</b> statement and transfers execution to the statement immediately following the loop.
<b>continue statement</b>	Causes the loop to skip the remainder of its body and immediately retest its condition prior to reiterating.
<b>pass statement</b>	The pass statement in Python is used when a statement is required syntactically but you do not want any command or code to execute.

## break statement

The **break** statement in Python terminates the current loop and resumes execution at the next statement, just like the traditional break found in C.

The most common use for break is when some external condition is triggered requiring a hasty exit from a loop. The **break** statement can be used in both *while* and *for* loops.


If you are using nested loops ( ie. one loop inside another loop), the break statement will stop the execution of the innermost loop and start executing the next line of code after the block.

### Syntax:

The syntax for a **break** statement in Python is as follows:

```
break
```

## Flow Diagram:

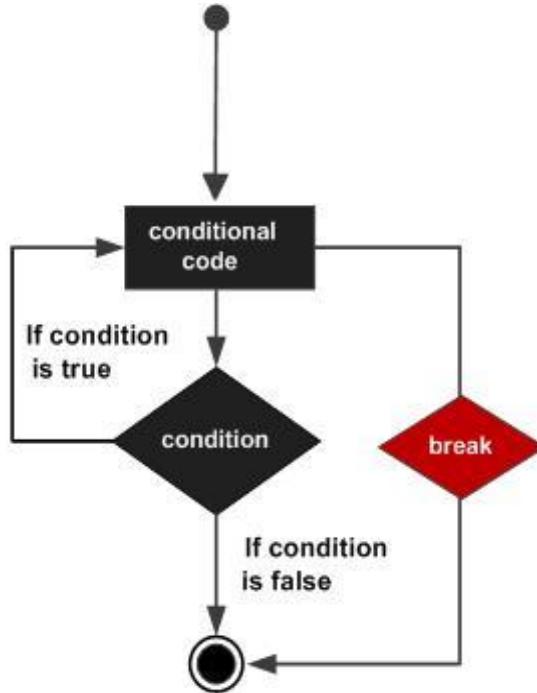

## Example:

```
#!/usr/bin/python

for letter in 'Python':      # First Example
    if letter == 'h':
        break
    print 'Current Letter :', letter

var = 10                      # Second Example
while var > 0:
    print 'Current variable value :', var
    var = var -1
    if var == 5:
        break

print "Good bye!"
```

When the above code is executed, it produces following result:

```
Current Letter : P
Current Letter : y
Current Letter : t
Current variable value : 10
Current variable value : 9
Current variable value : 8
Current variable value : 7
Current variable value : 6
Good bye!
```

## continue statement

The **continue** statement in Python returns the control to the beginning of the while loop. The **continue** statement rejects all the remaining statements in the current iteration of the loop and moves the control back to the top of the loop.


The **continue** statement can be used in both *while* and *for* loops.

## Syntax:

The syntax for a **continue** statement in Python is as follows:

```
continue
```

## Flow Diagram:

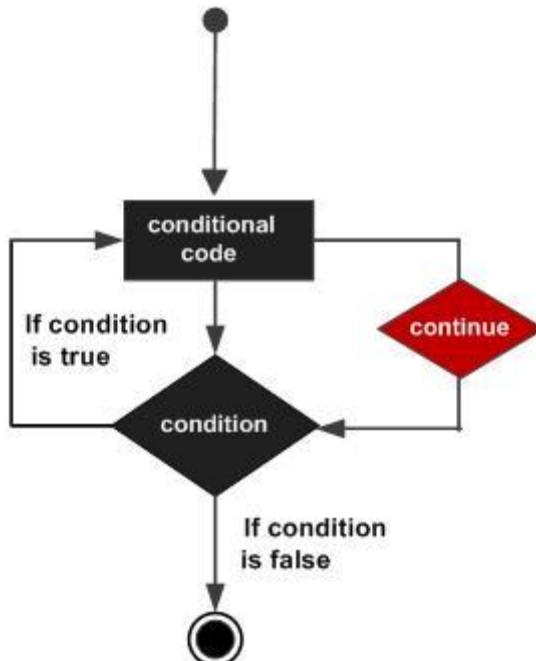

## Example:

```
#!/usr/bin/python

for letter in 'Python':      # First Example
    if letter == 'h':
        continue
    print 'Current Letter :', letter

var = 10                      # Second Example
while var > 0:
    var = var -1
    if var == 5:
        continue
    print 'Current variable value :', var
print "Good bye!"
```

When the above code is executed, it produces following result:

```
Current Letter : P
Current Letter : y
Current Letter : t
Current Letter : o
```

```
Current Letter : n
Current variable value : 9
Current variable value : 8
Current variable value : 7
Current variable value : 6
Current variable value : 4
Current variable value : 3
Current variable value : 2
Current variable value : 1
Current variable value : 0
Good bye!
```

## pass statement

The **pass** statement in Python is used when a statement is required syntactically but you do not want any command or code to execute.

The **pass** statement is a *null* operation; nothing happens when it executes. The **pass** is also useful in places where your code will eventually go, but has not been written yet (e.g., in stubs for example):

### Syntax:

The syntax for a **pass** statement in Python is as follows:

```
pass
```

### Example:

```
#!/usr/bin/python

for letter in 'Python':
    if letter == 'h':
        pass
    print 'This is pass block'
    print 'Current Letter :', letter

print "Good bye!"
```

When the above code is executed, it produces following result:

```
Current Letter : P
Current Letter : y
Current Letter : t
This is pass block
Current Letter : h
Current Letter : o
Current Letter : n
Good bye!
```

# Python Numbers

**N**umber data types store numeric values. They are immutable data types, which means that changing

the value of a number data type results in a newly allocated object.

Number objects are created when you assign a value to them. For example:

```
var1 = 1
var2 = 10
```

You can also delete the reference to a number object by using the **del** statement. The syntax of the del statement is:

```
del var1[, var2[, var3[...., varN]]]]
```

You can delete a single object or multiple objects by using the del statement. For example:

```
del var
del var_a, var_b
```

Python supports four different numerical types:

- **int (signed integers)**: often called just integers or ints, are positive or negative whole numbers with no decimal point.
- **long (long integers)**: or longs, are integers of unlimited size, written like integers and followed by an uppercase or lowercase L.
- **float (floating point real values)**: or floats, represent real numbers and are written with a decimal point dividing the integer and fractional parts. Floats may also be in scientific notation, with E or e indicating the power of 10 ( $2.5\text{e}2 = 2.5 \times 10^2 = 250$ ).
- **complex (complex numbers)**: are of the form  $a + bJ$ , where a and b are floats and J (or j) represents the square root of -1 (which is an imaginary number). a is the real part of the number, and b is the imaginary part. Complex numbers are not used much in Python programming.

## Examples:

Here are some examples of numbers:

int	Long	Float	complex
10	51924361L	0.0	3.14j

100	-0x19323L	15.20	45.j
-786	0122L	-21.9	9.322e-36j
080	0xDEFAFBCECBDAECBFBAE1	32.3+e18	.876j
-0490	535633629843L	-90.	-.6545+0J
-0x260	-052318172735L	-32.54e100	3e+26J
0x69	-4721885298529L	70.2-E12	4.53e-7j

- Python allows you to use a lowercase L with long, but it is recommended that you use only an uppercase L to avoid confusion with the number 1. Python displays long integers with an uppercase L.
- A complex number consists of an ordered pair of real floating point numbers denoted by  $a + bj$ , where  $a$  is the real part and  $b$  is the imaginary part of the complex number.

## Number Type Conversion:

Python converts numbers internally in an expression containing mixed types to a common type for evaluation. But sometimes, you'll need to coerce a number explicitly from one type to another to satisfy the requirements of an operator or function parameter.

- Type **int(x)** to convert  $x$  to a plain integer.
- Type **long(x)** to convert  $x$  to a long integer.
- Type **float(x)** to convert  $x$  to a floating-point number.
- Type **complex(x)** to convert  $x$  to a complex number with real part  $x$  and imaginary part zero.
- Type **complex(x, y)** to convert  $x$  and  $y$  to a complex number with real part  $x$  and imaginary part  $y$ .  $x$  and  $y$  are numeric expressions

## Mathematical Functions:

Python includes following functions that perform mathematical calculations.

Function	Returns ( description )
<b>abs(x)</b>	The absolute value of $x$ : the (positive) distance between $x$ and zero.
<b>ceil(x)</b>	The ceiling of $x$ : the smallest integer not less than $x$
<b>cmp(x, y)</b>	-1 if $x < y$ , 0 if $x == y$ , or 1 if $x > y$
<b>exp(x)</b>	The exponential of $x$ : $e^x$
<b>fabs(x)</b>	The absolute value of $x$ .
<b>floor(x)</b>	The floor of $x$ : the largest integer not greater than $x$
<b>log(x)</b>	The natural logarithm of $x$ , for $x > 0$
<b>log10(x)</b>	The base-10 logarithm of $x$ for $x > 0$ .

<b>max(x1, x2,...)</b>	The largest of its arguments: the value closest to positive infinity
<b>min(x1, x2,...)</b>	The smallest of its arguments: the value closest to negative infinity
<b>modf(x)</b>	The fractional and integer parts of x in a two-item tuple. Both parts have the same sign as x. The integer part is returned as a float.
<b>pow(x, y)</b>	The value of $x^{**}y$ .
<b>round(x [,n])</b>	$x$ rounded to n digits from the decimal point. Python rounds away from zero as a tie-breaker: round(0.5) is 1.0 and round(-0.5) is -1.0.
<b>sqrt(x)</b>	The square root of x for $x > 0$

These Mathematical functions are explained here:

## abs(x)

### Description

The method **abs()** returns absolute value of **x** - the (positive) distance between x and zero.

### Syntax

Following is the syntax for **abs()** method

```
abs ( x )
```

### Parameters

- **x** -- This is a numeric expression.

### Return Value

This method returns absolute value of x.

### Example

The following example shows the usage of abs() method.

```
#!/usr/bin/python

print "abs (-45) : ", abs (-45)
print "abs (100.12) : ", abs (100.12)
print "abs (119L) : ", abs (119L)
```

Let us compile and run the above program, this will produce the following result:

```
abs (-45) : 45
```

**TUTORIALS POINT**

Simply Easy Learning

```
abs(100.12) : 100.12
abs(119L) : 119
```

## ceil(x)

### Description

The method **ceil()** returns ceiling value of **x** - the smallest integer not less than **x**.

### Syntax

Following is the syntax for **ceil()** method

```
import math

math.ceil( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **x** -- This is a numeric expression.

### Return Value

This method returns smallest integer not less than **x**.

### Example

The following example shows the usage of **ceil()** method.

```
#!/usr/bin/python
import math # This will import math module

print "math.ceil(-45.17) : ", math.ceil(-45.17)
print "math.ceil(100.12) : ", math.ceil(100.12)
print "math.ceil(100.72) : ", math.ceil(100.72)
print "math.ceil(119L) : ", math.ceil(119L)
print "math.ceil(math.pi) : ", math.ceil(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.ceil(-45.17) : -45.0
math.ceil(100.12) : 101.0
math.ceil(100.72) : 101.0
math.ceil(119L) : 119.0
math.ceil(math.pi) : 4.0
```

## cmp(x, y)

### Description

The method **cmp()** returns the sign of the difference of two numbers : -1 if **x < y**, 0 if **x == y**, or 1 if **x > y** .

### Syntax

Following is the syntax for **cmp()** method

```
cmp( x, y )
```

## Parameters

- **x** -- This is a numeric expression.
- **y** -- This is also a numeric expression.

## Return Value

This method returns -1 if  $x < y$ , returns 0 if  $x == y$  and 1 if  $x > y$

## Example

The following example shows the usage of `cmp()` method.

```
#!/usr/bin/python

print "cmp(80, 100) : ", cmp(80, 100)
print "cmp(180, 100) : ", cmp(180, 100)
print "cmp(-80, 100) : ", cmp(-80, 100)
print "cmp(80, -100) : ", cmp(80, -100)
```

Let us compile and run the above program, this will produce the following result:

```
cmp(80, 100) : -1
cmp(180, 100) : 1
cmp(-80, 100) : -1
cmp(80, -100) : 1
```

# exp(x)

## Description

The method `exp()` returns returns exponential of  $x$ :  $e^x$ .

## Syntax

Following is the syntax for `exp()` method

```
import math

math.exp( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This is a numeric expression.

## Return Value

This method returns exponential of  $x$ :  $e^x$ .

## Example

The following example shows the usage of `exp()` method.

```
#!/usr/bin/python
import math    # This will import math module

print "math.exp(-45.17) : ", math.exp(-45.17)
print "math.exp(100.12) : ", math.exp(100.12)
print "math.exp(100.72) : ", math.exp(100.72)
print "math.exp(119L) : ", math.exp(119L)
print "math.exp(math.pi) : ", math.exp(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.exp(-45.17) : 2.41500621326e-20
math.exp(100.12) : 3.03084361407e+43
math.exp(100.72) : 5.52255713025e+43
math.exp(119L) : 4.7978133273e+51
math.exp(math.pi) : 23.1406926328
```

## fabs(x)

### Description

The method **fabs()** returns the absolute value of x.

### Syntax

Following is the syntax for **fabs()** method

```
import math

math.fabs( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **x** -- This is a numeric value.

### Return Value

This method returns absolute value of x.

### Example

The following example shows the usage of **fabs()** method.

```
#!/usr/bin/python

import math    # This will import math module

print "math.fabs(-45.17) : ", math.fabs(-45.17)
print "math.fabs(100.12) : ", math.fabs(100.12)
print "math.fabs(100.72) : ", math.fabs(100.72)
print "math.fabs(119L) : ", math.fabs(119L)
print "math.fabs(math.pi) : ", math.fabs(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.fabs(-45.17) : 45.17
math.fabs(100.12) : 100.12
math.fabs(100.72) : 100.72
math.fabs(119L) : 119.0
math.fabs(math.pi) : 3.14159265359
```

## floor(x)

### Description

The method **floor()** returns floor of x - the largest integer not greater than x.

### Syntax

Following is the syntax for **floor()** method

```
import math

math.floor( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- x -- This is a numeric expression.

### Return Value

This method returns largest integer not greater than x.

## Example

The following example shows the usage of floor() method.

```
#!/usr/bin/python
import math    # This will import math module

print "math.floor(-45.17) : ", math.floor(-45.17)
print "math.floor(100.12) : ", math.floor(100.12)
print "math.floor(100.72) : ", math.floor(100.72)
print "math.floor(119L) : ", math.floor(119L)
print "math.floor(math.pi) : ", math.floor(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.floor(-45.17) : -46.0
math.floor(100.12) : 100.0
math.floor(100.72) : 100.0
math.floor(119L) : 119.0
math.floor(math.pi) : 3.0
```

## log(x)

## Description

The method **log()** returns natural logarithm of x, for  $x > 0$ .

## Syntax

Following is the syntax for **log()** method

```
import math  
  
math.log( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- $x$  -- This is a numeric expression.

## Return Value

This method returns natural logarithm of  $x$ , for  $x > 0$ .

## Example

The following example shows the usage of **log()** method.

```
#!/usr/bin/python  
import math    # This will import math module  
  
print "math.log(100.12) : ", math.log(100.12)  
print "math.log(100.72) : ", math.log(100.72)  
print "math.log(119L) : ", math.log(119L)  
print "math.log(math.pi) : ", math.log(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.log(100.12) : 4.60636946656  
math.log(100.72) : 4.61234438974  
math.log(119L) : 4.77912349311  
math.log(math.pi) : 1.14472988585
```

## log10(x)

## Description

The method **log10()** returns base-10 logarithm of  $x$  for  $x > 0$ .

## Syntax

Following is the syntax for **log10()** method

```
import math  
  
math.log10( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This is a numeric expression.

## Return Value

This method returns base-10 logarithm of x for x > 0.

## Example

The following example shows the usage of log10() method.

```
#!/usr/bin/python
import math    # This will import math module

print "math.log10(100.12) : ", math.log10(100.12)
print "math.log10(100.72) : ", math.log10(100.72)
print "math.log10(119L) : ", math.log10(119L)
print "math.log10(math.pi) : ", math.log10(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.log10(100.12) : 2.00052084094
math.log10(100.72) : 2.0031157171
math.log10(119L) : 2.07554696139
math.log10(math.pi) : 0.497149872694
```

## max(x1, x2,...)

## Description

The method **max()** returns the largest of its arguments: the value closest to positive infinity.

## Syntax

Following is the syntax for **max()** method

```
max( x, y, z, .... )
```

## Parameters

- **x** -- This is a numeric expression.
- **y** -- This is also a numeric expression.
- **z** -- This is also a numeric expression.

## Return Value

This method returns largest of its arguments.

## Example

The following example shows the usage of max() method.

```
#!/usr/bin/python

print "max(80, 100, 1000) : ", max(80, 100, 1000)
print "max(-20, 100, 400) : ", max(-20, 100, 400)
```

```
print "max(-80, -20, -10) : ", max(-80, -20, -10)
print "max(0, 100, -400) : ", max(0, 100, -400)
```

Let us compile and run the above program, this will produce the following result:

```
max(80, 100, 1000) : 1000
max(-20, 100, 400) : 400
max(-80, -20, -10) : -10
max(0, 100, -400) : 100
```

## min(x1, x2,...)

### Description

The method **min()** returns the smallest of its arguments: the value closest to negative infinity.

### Syntax

Following is the syntax for **min()** method

```
min( x, y, z, .... )
```

### Parameters

- **x** -- This is a numeric expression.
- **y** -- This is also a numeric expression.
- **z** -- This is also a numeric expression.

### Return Value

This method returns smallest of its arguments.

### Example

The following example shows the usage of min() method.

```
#!/usr/bin/python

print "min(80, 100, 1000) : ", min(80, 100, 1000)
print "min(-20, 100, 400) : ", min(-20, 100, 400)
print "min(-80, -20, -10) : ", min(-80, -20, -10)
print "min(0, 100, -400) : ", min(0, 100, -400)
```

Let us compile and run the above program, this will produce the following result:

```
min(80, 100, 1000) : 80
min(-20, 100, 400) : -20
min(-80, -20, -10) : -80
min(0, 100, -400) : -400
```

## modf(x)

## Description

The method **modf()** returns the fractional and integer parts of x in a two-item tuple. Both parts have the same sign as x. The integer part is returned as a float.

## Syntax

Following is the syntax for **modf()** method

```
import math  
  
math.modf( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This is a numeric expression.

## Return Value

This method returns the fractional and integer parts of x in a two-item tuple. Both parts have the same sign as x. The integer part is returned as a float.

## Example

The following example shows the usage of modf() method.

```
#!/usr/bin/python  
  
import math    # This will import math module  
  
  
print "math.modf(100.12) : ", math.modf(100.12)  
print "math.modf(100.72) : ", math.modf(100.72)  
print "math.modf(119L) : ", math.modf(119L)  
print "math.modf(math.pi) : ", math.modf(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.modf(100.12) : (0.12000000000000455, 100.0)  
math.modf(100.72) : (0.7199999999999886, 100.0)  
math.modf(119L) : (0.0, 119.0)  
math.modf(math.pi) : (0.14159265358979312, 3.0)
```

## pow(x, y)

## Description

The method **pow()** returns returns the value of  $x^y$ .

## Syntax

Following is the syntax for **pow()** method

```
import math  
  
math.pow( x, y )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This is a numeric expression..
- **y** -- This is also a numeric expression..

## Return Value

This method returns value of  $x^y$ .

## Example

The following example shows the usage of pow() method.

```
#!/usr/bin/python  
import math # This will import math module  
  
print "math.pow(100, 2) : ", math.pow(100, 2)  
print "math.pow(100, -2) : ", math.pow(100, -2)  
print "math.pow(2, 4) : ", math.pow(2, 4)  
print "math.pow(3, 0) : ", math.pow(3, 0)
```

Let us compile and run the above program, this will produce the following result:

```
math.pow(100, 2) : 10000.0  
math.pow(100, -2) : 0.0001  
math.pow(2, 4) : 16.0  
math.pow(3, 0) : 1.0
```

## round(x [,n])

### Description

The method **round()** returns x rounded to n digits from the decimal point.

## Syntax

Following is the syntax for **round()** method

```
round( x [, n] )
```

## Parameters

- **x** -- This is a numeric expression..
- **n** -- This is also a numeric expression..

## Return Value

This method returns x rounded to n digits from the decimal point.

## Example

The following example shows the usage of round() method.

```
#!/usr/bin/python

print "round(80.23456, 2) : ", round(80.23456, 2)
print "round(100.000056, 3) : ", round(100.000056, 3)
print "round(-100.000056, 3) : ", round(-100.000056, 3)
```

Let us compile and run the above program, this will produce the following result:

```
round(80.23456, 2) : 80.23
round(100.000056, 3) : 100.0
round(-100.000056, 3) : -100.0
```

## sqrt(x)

### Description

The method **sqrt()** returns the square root of x for  $x > 0$ .

### Syntax

Following is the syntax for **sqrt()** method

```
import math

math.sqrt( x )
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **x** -- This is a numeric expression.

### Return Value

This method returns square root of x for  $x > 0$ .

## Example

The following example shows the usage of sqrt() method.

```
#!/usr/bin/python

import math    # This will import math module

print "math.sqrt(100) : ", math.sqrt(100)
print "math.sqrt(7) : ", math.sqrt(7)
print "math.sqrt(math.pi) : ", math.sqrt(math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
math.sqrt(100) : 10.0
math.sqrt(7) : 2.64575131106
```

```
math.sqrt(math.pi) : 1.77245385091
```

## Random Number Functions:

Random numbers are used for games, simulations, testing, security, and privacy applications. Python includes following functions that are commonly used.

Function	Description
choice(seq)	A random item from a list, tuple, or string.
randrange ([start,] stop [,step])	A randomly selected element from range(start, stop, step)
random()	A random float r, such that 0 is less than or equal to r and r is less than 1
seed([x])	Sets the integer starting value used in generating random numbers. Call this function before calling any other random module function. Returns None.
shuffle(lst)	Randomizes the items of a list in place. Returns None.
uniform(x, y)	A random float r, such that x is less than or equal to r and r is less than y

The Random Number Functions are explained here:

### choice(seq)

#### Description

The method **choice()** returns a random item from a list, tuple, or string.

#### Syntax

Following is the syntax for **choice()** method

```
choice( seq )
```

**Note:** This function is not accessible directly so we need to import random module and then we need to call this function using random static object.

#### Parameters

- **seq** -- This could be a list, tuple, or string...

#### Return Value

This method returns a random item.

#### Example

The following example shows the usage of choice() method.

```
#!/usr/bin/python
import random

print "choice([1, 2, 3, 5, 9]) : ", random.choice([1, 2, 3, 5, 9])
```

```
print "choice('A String') : ", random.choice('A String')
```

Let us compile and run the above program, this will produce the following result:

```
choice([1, 2, 3, 5, 9]) : 2
choice('A String') : n
```

## randrange ([start,] stop [,step])

### Description

The method **randrange()** returns a randomly selected element from range(start, stop, step).

### Syntax

Following is the syntax for **randrange()** method

```
randrange ([start,] stop [,step])
```

**Note:** This function is not accessible directly so we need to import random module and then we need to call this function using random static object.

### Parameters

- **start** -- Start point of the range. This would be included in the range..
- **stop** -- Stop point of the range. This would be excluded from the range..
- **step** -- Steps to be added in a number to decide a random number..

### Return Value

This method returns a random item from the given range

### Example

The following example shows the usage of randrange() method.

```
#!/usr/bin/python

import random


# Select an even number in 100 <= number < 1000
print "randrange(100, 1000, 2) : ", random.randrange(100, 1000, 2)

# Select another number in 100 <= number < 1000
print "randrange(100, 1000, 3) : ", random.randrange(100, 1000, 3)
```

Let us compile and run the above program, this will produce the following result:

```
randrange(100, 1000, 2) : 976
randrange(100, 1000, 3) : 520
```

# random()

## Description

The method **random()** returns a random float r, such that 0 is less than or equal to r and r is less than 1.

## Syntax

Following is the syntax for **random()** method

```
random ( )
```

**Note:** This function is not accessible directly so we need to import random module and then we need to call this function using random static object.

## Parameters

- NA

## Return Value

This method returns a random float r, such that 0 is less than or equal to r and r is less than 1.

## Example

The following example shows the usage of random() method.

```
#!/usr/bin/python
import random

# First random number
print "random() : ", random.random()

# Second random number
print "random() : ", random.random()
```

Let us compile and run the above program, this will produce the following result:

```
random() : 0.281954791393
random() : 0.309090465205
```

# seed([x])

## Description

The method **seed()** sets the integer starting value used in generating random numbers. Call this function before calling any other random module function.

## Syntax

Following is the syntax for **seed()** method

```
seed ( [x] )
```

**Note:** This function is not accessible directly so we need to import seed module and then we need to call this function using random static object.

## Parameters

- **x** -- This is the seed for the next random number. If omitted then it takes system time to generate next random number.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of seed() method.

```
#!/usr/bin/python

import random


random.seed( 10 )

print "Random number with seed 10 : ", random.random()

# It will generate same random number
random.seed( 10 )

print "Random number with seed 10 : ", random.random()

# It will generate same random number
random.seed( 10 )

print "Random number with seed 10 : ", random.random()
```

Let us compile and run the above program, this will produce the following result:

```
Random number with seed 10 :  0.57140259469
Random number with seed 10 :  0.57140259469
Random number with seed 10 :  0.57140259469
```

## shuffle(lst)

### Description

The method **shuffle()** randomizes the items of a list in place.

### Syntax

Following is the syntax for **shuffle()** method

```
shuffle (lst )
```

**Note:** This function is not accessible directly so we need to import shuffle module and then we need to call this function using random static object.

## Parameters

- **Ist** -- This could be a list or tuple.

## Return Value

This method returns reshuffled list.

## Example

The following example shows the usage of shuffle() method.

```
#!/usr/bin/python

import random


list = [20, 16, 10, 5];
random.shuffle(list)
print "Reshuffled list : ", list

random.shuffle(list)
print "Reshuffled list : ", list
```

Let us compile and run the above program, this will produce the following result:

```
Reshuffled list :  [16, 5, 10, 20]
Reshuffled list :  [16, 5, 20, 10]
```

## uniform(x, y)

### Description

The method **uniform()** returns a random float r, such that x is less than or equal to r and r is less than y.

### Syntax

Following is the syntax for **uniform()** method

```
uniform(x, y)
```

**Note:** This function is not accessible directly so we need to import uniform module and then we need to call this function using random static object.

## Parameters

- **x** -- Sets the lower limit of the random float.
- **y** -- Sets the upper limit of the random float.

## Return Value

This method returns a floating point number.

### Example

The following example shows the usage of uniform() method.

```
#!/usr/bin/python
import random

print "Random Float uniform(5, 10) : ", random.uniform(5, 10)
print "Random Float uniform(7, 14) : ", random.uniform(7, 14)
```

Let us compile and run the above program, this will produce the following result:

```
Random Float uniform(5, 10) :  5.52615217015
Random Float uniform(7, 14) :  12.5326369199
```

## Trigonometric Functions:

Python includes following functions that perform trigonometric calculations.

Function	Description
acos(x)	Return the arc cosine of x, in radians.
asin(x)	Return the arc sine of x, in radians.
atan(x)	Return the arc tangent of x, in radians.
atan2(y, x)	Return atan(y / x), in radians.
cos(x)	Return the cosine of x radians.
hypot(x, y)	Return the Euclidean norm, sqrt(x*x + y*y).
sin(x)	Return the sine of x radians.
tan(x)	Return the tangent of x radians.
degrees(x)	Converts angle x from radians to degrees.
radians(x)	Converts angle x from degrees to radians.

The Trigonometric Functions are explained here:

### acos(x)

#### Description

The method **acos()** returns the arc cosine of x, in radians.

## Syntax

Following is the syntax for **acos()** method

```
acos (x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This must be a numeric value in the range -1 to 1. If x is greater than 1 then it will generate an error.

## Return Value

This method returns arc cosine of x, in radians.

## Example

The following example shows the usage of acos() method.

```
#!/usr/bin/python
import math

print "acos(0.64) : ", math.acos(0.64)
print "acos(0) : ", math.acos(0)
print "acos(-1) : ", math.acos(-1)
print "acos(1) : ", math.acos(1)
```

Let us compile and run the above program, this will produce the following result:

```
acos(0.64) : 0.876298061168
acos(0) : 1.57079632679
acos(-1) : 3.14159265359
acos(1) : 0.0
```

## asin(x)

## Description

The method **asin()** returns the arc sine of x, in radians.

## Syntax

Following is the syntax for **asin()** method

```
asin(x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This must be a numeric value in the range -1 to 1. If x is greater than 1 then it will generate an error.

## Return Value

This method returns arc sine of x, in radians.

## Example

The following example shows the usage of asin() method.

```
#!/usr/bin/python
import math

print "asin(0.64) : ", math.asin(0.64)
print "asin(0) : ", math.asin(0)
print "asin(-1) : ", math.asin(-1)
print "asin(1) : ", math.asin(1)
```

Let us compile and run the above program, this will produce the following result:

```
asin(0.64) : 0.694498265627
asin(0) : 0.0
asin(-1) : -1.57079632679
asin(1) : 1.57079632679
```

## atan(x)

### Description

The method **atan()** returns the arc tangent of x, in radians.

### Syntax

Following is the syntax for **atan()** method

```
atan(x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **x** -- This must be a numeric value.

### Return Value

This method returns arc tangent of x, in radians.

## Example

The following example shows the usage of atan() method.

```
#!/usr/bin/python
import math

print "atan(0.64) : ", math.atan(0.64)
print "atan(0) : ", math.atan(0)
print "atan(10) : ", math.atan(10)
print "atan(-1) : ", math.atan(-1)
print "atan(1) : ", math.atan(1)
```

Let us compile and run the above program, this will produce the following result:

```
atan(0.64) : 0.569313191101
atan(0) : 0.0
atan(10) : 1.4711276743
atan(-1) : -0.785398163397
atan(1) : 0.785398163397
```

## atan2(y, x)

### Description

The method **atan2()** returns atan(y / x), in radians.

### Syntax

Following is the syntax for **atan2()** method

```
atan2(y, x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **y** -- This must be a numeric value.
- **x** -- This must be a numeric value.

### Return Value

This method returns atan(y / x), in radians.

### Example

The following example shows the usage of atan2() method.

```
#!/usr/bin/python
import math

print "atan2(-0.50,-0.50) : ", math.atan2(-0.50,-0.50)
print "atan2(0.50,0.50) : ", math.atan2(0.50,0.50)
print "atan2(5,5) : ", math.atan2(5,5)
print "atan2(-10,10) : ", math.atan2(-10,10)

print "atan2(10,20) : ", math.atan2(10,20)
```

Let us compile and run the above program, this will produce the following result:

```
atan2(-0.50,-0.50) : -2.35619449019
atan2(0.50,0.50) : 0.785398163397
atan2(5,5) : 0.785398163397
atan2(-10,10) : -0.785398163397
atan2(10,20) : 0.463647609001
```

## cos(x)

## Description

The method **cos()** returns the cosine of x radians.

## Syntax

Following is the syntax for **cos()** method

```
cos (x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This must be a numeric value.

## Return Value

This method returns a numeric value between -1 and 1, which represents the cosine of the angle.

## Example

The following example shows the usage of cos() method.

```
#!/usr/bin/python
import math

print "cos(3) : ", math.cos(3)
print "cos(-3) : ", math.cos(-3)
print "cos(0) : ", math.cos(0)
print "cos(math.pi) : ", math.cos(math.pi)
print "cos(2*math.pi) : ", math.cos(2*math.pi)
```

Let us compile and run the above program, this will produce the following result:

```
cos(3) : -0.9899924966
cos(-3) : -0.9899924966
cos(0) : 1.0
cos(math.pi) : -1.0
cos(2*math.pi) : 1.0
```

## hypot(x, y)

## Description

The method **hypot()** return the Euclidean norm,  $\sqrt{x^2 + y^2}$ .

## Syntax

Following is the syntax for **hypot()** method

```
hypot (x, y)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This must be a numeric value.
- **y** -- This must be a numeric value.

## Return Value

This method returns Euclidean norm,  $\sqrt{x^*x + y^*y}$ .

## Example

The following example shows the usage of hypot() method.

```
#!/usr/bin/python
import math

print "hypot(3, 2) : ", math.hypot(3, 2)
print "hypot(-3, 3) : ", math.hypot(-3, 3)
print "hypot(0, 2) : ", math.hypot(0, 2)
```

Let us compile and run the above program, this will produce the following result:

```
hypot(3, 2) : 3.60555127546
hypot(-3, 3) : 4.24264068712
hypot(0, 2) : 2.0
```

## sin(x)

## Description

The method **sin()** returns the sine of x, in radians.

## Syntax

Following is the syntax for **sin()** method

```
sin(x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

## Parameters

- **x** -- This must be a numeric value.

## Return Value

This method returns a numeric value between -1 and 1, which represents the sine of the parameter x.

## Example

The following example shows the usage of sin() method.

```
#!/usr/bin/python
import math

print "sin(3) : ", math.sin(3)
```

```
print "sin(-3) : ", math.sin(-3)
print "sin(0) : ", math.sin(0)
print "sin(math.pi) : ", math.sin(math.pi)
print "sin(math.pi/2) : ", math.sin(math.pi/2)
```

Let us compile and run the above program, this will produce the following result:

```
sin(3) : 0.14112000806
sin(-3) : -0.14112000806
sin(0) : 0.0
sin(math.pi) : 1.22460635382e-16
sin(math.pi/2) : 1.0
```

## **tan(x)**

### **Description**

The method **tan()** returns the tangent of x radians.

### **Syntax**

Following is the syntax for **tan()** method

```
tan(x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### **Parameters**

- **x** -- This must be a numeric value.

### **Return Value**

This method returns a numeric value between -1 and 1, which represents the tangent of the parameter x.

### **Example**

The following example shows the usage of tan() method.

```
#!/usr/bin/python

import math


print "tan(3) : ", math.tan(3)
print "tan(-3) : ", math.tan(-3)
print "tan(0) : ", math.tan(0)
print "tan(math.pi) : ", math.tan(math.pi)
print "tan(math.pi/2) : ", math.tan(math.pi/2)
```

```
print "tan(math.pi/4) : ", math.tan(math.pi/4)
```

Let us compile and run the above program, this will produce the following result:

```
tan(3) : -0.142546543074
tan(-3) : 0.142546543074
tan(0) : 0.0
tan(math.pi) : -1.22460635382e-16
tan(math.pi/2) : 1.63317787284e+16
tan(math.pi/4) : 1.0
```

## degrees(x)

### Description

The method **degrees()** converts angle x from radians to degrees..

### Syntax

Following is the syntax for **degrees()** method

```
degrees (x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **x** -- This must be a numeric value.

### Return Value

This method returns degree value of an angle.

## Example

The following example shows the usage of degrees() method.

```
#!/usr/bin/python

import math


print "degrees(3) : ", math.degrees(3)
print "degrees(-3) : ", math.degrees(-3)
print "degrees(0) : ", math.degrees(0)
print "degrees(math.pi) : ", math.degrees(math.pi)
print "degrees(math.pi/2) : ", math.degrees(math.pi/2)
print "degrees(math.pi/4) : ", math.degrees(math.pi/4)
```

Let us compile and run the above program, this will produce the following result:

```
degrees(3) : 171.887338539
```

**TUTORIALS POINT**

Simply Easy Learning

```
degrees(-3) : -171.887338539
degrees(0) : 0.0
degrees(math.pi) : 180.0
degrees(math.pi/2) : 90.0
degrees(math.pi/4) : 45.0
```

## radians(x)

### Description

The method **radians()** converts angle x from degrees to radians.

### Syntax

Following is the syntax for **radians()** method

```
radians (x)
```

**Note:** This function is not accessible directly so we need to import math module and then we need to call this function using math static object.

### Parameters

- **x** -- This must be a numeric value.

### Return Value

This method returns radian value of an angle.

### Example

The following example shows the usage of radians() method.

```
#!/usr/bin/python

import math

print "radians(3) : ", math.radians(3)
print "radians(-3) : ", math.radians(-3)
print "radians(0) : ", math.radians(0)
print "radians(math.pi) : ", math.radians(math.pi)
print "radians(math.pi/2) : ", math.radians(math.pi/2)
print "radians(math.pi/4) : ", math.radians(math.pi/4)
```

Let us compile and run the above program, this will produce the following result:

```
radians(3) : 0.0523598775598
radians(-3) : -0.0523598775598
radians(0) : 0.0
radians(math.pi) : 0.0548311355616
radians(math.pi/2) : 0.0274155677808
```

```
radians(math.pi/4) : 0.0137077838904
```

## Mathematical Constants:

The module also defines two mathematical constants:

Constants	Description
Pi	The mathematical constant pi.
E	The mathematical constant e.

# Python Strings

S

trings are amongst the most popular types in Python. We can create them simply by enclosing characters in quotes. Python treats single quotes the same as double quotes.

Creating strings is as simple as assigning a value to a variable. For example:

```
var1 = 'Hello World!'
var2 = "Python Programming"
```

## Accessing Values in Strings:

Python does not support a character type; these are treated as strings of length one, thus also considered a substring.

To access substrings, use the square brackets for slicing along with the index or indices to obtain your substring. Following is a simple example:

```
#!/usr/bin/python

var1 = 'Hello World!'
var2 = "Python Programming"

print "var1[0]: ", var1[0]
print "var2[1:5]: ", var2[1:5]
```

When the above code is executed, it produces following result:

```
var1[0]: H
var2[1:5]: ytho
```

## Updating Strings:

You can "update" an existing string by (re)assigning a variable to another string. The new value can be related to its previous value or to a completely different string altogether. Following is a simple example:

```
#!/usr/bin/python

var1 = 'Hello World!'
```

```
print "Updated String :- ", var1[:6] + 'Python'
```

When the above code is executed, it produces following result:

```
Updated String :- Hello Python
```

## Escape Characters:

Following table is a list of escape or non-printable characters that can be represented with backslash notation.

Backslash notation	Hexadecimal character	Description
\a	0x07	Bell or alert
\b	0x08	Backspace
\cx		Control-x
\C-x		Control-x
\e	0x1b	Escape
\f	0x0c	Formfeed
\M-\C-x		Meta-Control-x
\n	0x0a	Newline
\nnn		Octal notation, where n is in the range 0..7
\r	0x0d	Carriage return
\s	0x20	Space
\t	0x09	Tab
\v	0x0b	Vertical tab
\x		Character x
\nnn		Hexadecimal notation, where n is in the range 0..9, a..f, or A..F

## String Special Operators:

Assume string variable a holds 'Hello' and variable b holds 'Python' then:

Operator	Description	Example
+	Concatenation - Adds values on either side of the operator	a + b will give

		HelloPython
*	Repetition - Creates new strings, concatenating multiple copies of the same string	a*2 will give -HelloHello
[]	Slice - Gives the character from the given index	a[1] will give e
[ : ]	Range Slice - Gives the characters from the given range	a[1:4] will give ell
In	Membership - Returns true if a character exists in the given string	H in a will give 1
not in	Membership - Returns true if a character does not exist in the given string	M not in a will give 1
r/R	Raw String - Suppress actual meaning of Escape characters. The syntax for raw strings is exactly the same as for normal strings with the exception of the raw string operator, the letter "r," which precedes the quotation marks. The "r" can be lowercase (r) or uppercase (R) and must be placed immediately preceding the first quote mark.	print '\\n' prints \\n and print R'\\n' prints \\n
%	Format - Performs String formatting	See at next section

## String Formatting Operator:

One of Python's coolest features is the string format operator %. This operator is unique to strings and makes up for the lack of having functions from C's printf() family. Following is a simple example:

```
#!/usr/bin/python

print "My name is %s and weight is %d kg!" % ('Zara', 21)
```

When the above code is executed, it produces following result:

```
My name is Zara and weight is 21 kg!
```

Here is the list of complete set of symbols which can be used along with %:

Format Symbol	Conversion
%c	Character
%s	string conversion via str() prior to formatting
%i	signed decimal integer
%d	signed decimal integer
%u	unsigned decimal integer

%o	octal integer
%x	hexadecimal integer (lowercase letters)
%X	hexadecimal integer (UPPERcase letters)
%e	exponential notation (with lowercase 'e')
%E	exponential notation (with UPPERcase 'E')
%f	floating point real number
%g	the shorter of %f and %e
%G	the shorter of %f and %E

Other supported symbols and functionality are listed in the following table:

Symbol	Functionality
*	argument specifies width or precision
-	left justification
+	display the sign
<sp>	leave a blank space before a positive number
#	add the octal leading zero ('0') or hexadecimal leading '0x' or '0X', depending on whether 'x' or 'X' were used.
0	pad from left with zeros (instead of spaces)
%	'%%' leaves you with a single literal '%'
(var)	mapping variable (dictionary arguments)
m.n.	m is the minimum total width and n is the number of digits to display after the decimal point (if appl.)

## Triple Quotes:

Python's triple quotes comes to the rescue by allowing strings to span multiple lines, including verbatim NEWLINES, TABs, and any other special characters.

The syntax for triple quotes consists of three consecutive **single or double** quotes.

```
#!/usr/bin/python

para_str = """this is a long string that is made up of
several lines and non-printable characters such as
TAB ( \t ) and they will show up that way when displayed.
NEWLINES within the string, whether explicitly given like
this within the brackets [ \n ], or just a NEWLINE within
```

```
the variable assignment will also show up.  
"""  
print para_str;
```

When the above code is executed, it produces following result:. Note how every single special character has been converted to its printed form, right down to the last NEWLINE at the end of the string between the "up." and closing triple quotes. Also note that NEWLINEs occur either with an explicit carriage return at the end of a line or its escape code (\n):

```
this is a long string that is made up of  
several lines and non-printable characters such as  
TAB (    ) and they will show up that way when displayed.  
NEWLINES within the string, whether explicitly given like  
this within the brackets [  
], or just a NEWLINE within  
the variable assignment will also show up.
```

## Raw String:

Raw strings don't treat the backslash as a special character at all. Every character you put into a raw string stays the way you wrote it:

```
#!/usr/bin/python  
  
print 'C:\\\\nowhere'
```

When the above code is executed, it produces following result:

```
C:\\nowhere
```

Now let's make use of raw string. We would put expression in **r'expression'** as follows:

```
#!/usr/bin/python  
  
print r'C:\\\\nowhere'
```

When the above code is executed, it produces following result:

```
C:\\\\nowhere
```

## Unicode String:

Normal strings in Python are stored internally as 8-bit ASCII, while Unicode strings are stored as 16-bit Unicode. This allows for a more varied set of characters, including special characters from most languages in the world. I'll restrict my treatment of Unicode strings to the following:

```
#!/usr/bin/python  
  
print u'Hello, world!'
```

When the above code is executed, it produces following result:

```
Hello, world!
```

As you can see, Unicode strings use the prefix u, just as raw strings use the prefix r.

# Built-in String Methods:

Python includes following built-in methods to manipulate strings:

SN	Methods with Description
1	<b>capitalize()</b> Capitalizes first letter of string
2	<b>center(width, fillchar)</b> Returns a space-padded string with the original string centered to a total of width columns
3	<b>count(str, beg= 0,end=len(string))</b> Counts how many times str occurs in string, or in a substring of string if starting index beg and ending index end are given
4	<b>decode(encoding='UTF-8',errors='strict')</b> Decodes the string using the codec registered for encoding. encoding defaults to the default string encoding.
5	<b>encode(encoding='UTF-8',errors='strict')</b> Returns encoded string version of string; on error, default is to raise a ValueError unless errors is given with 'ignore' or 'replace'.
6	<b>endswith(suffix, beg=0, end=len(string))</b> Determines if string or a substring of string (if starting index beg and ending index end are given) ends with suffix; Returns true if so, and false otherwise
7	<b>expandtabs(tabsize=8)</b> Expands tabs in string to multiple spaces; defaults to 8 spaces per tab if tabsize not provided
8	<b>find(str, beg=0 end=len(string))</b> Determine if str occurs in string, or in a substring of string if starting index beg and ending index end are given; returns index if found and -1 otherwise
9	<b>index(str, beg=0, end=len(string))</b> Same as find(), but raises an exception if str not found
10	<b>isalnum()</b> Returns true if string has at least 1 character and all characters are alphanumeric and false otherwise
11	<b>isalpha()</b> Returns true if string has at least 1 character and all characters are alphabetic and false otherwise
12	<b>isdigit()</b> Returns true if string contains only digits and false otherwise
13	<b>islower()</b> Returns true if string has at least 1 cased character and all cased characters are in lowercase and false otherwise
14	<b>isnumeric()</b> Returns true if a unicode string contains only numeric characters and false otherwise
15	<b>isspace()</b> Returns true if string contains only whitespace characters and false otherwise

16	<b>istitle()</b> Returns true if string is properly "titlecased" and false otherwise
17	<b>isupper()</b> Returns true if string has at least one cased character and all cased characters are in uppercase and false otherwise
18	<b>join(seq)</b> Merges (concatenates) the string representations of elements in sequence seq into a string, with separator string
19	<b>len(string)</b> Returns the length of the string
20	<b>ljust(width[, fillchar])</b> Returns a space-padded string with the original string left-justified to a total of width columns
21	<b>lower()</b> Converts all uppercase letters in string to lowercase
22	<b>lstrip()</b> Removes all leading whitespace in string
23	<b>maketrans()</b> Returns a translation table to be used in translate function.
24	<b>max(str)</b> Returns the max alphabetical character from the string str
25	<b>min(str)</b> Returns the min alphabetical character from the string str
26	<b>replace(old, new [, max])</b> Replaces all occurrences of old in string with new, or at most max occurrences if max given
27	<b>rfind(str, beg=0,end=len(string))</b> Same as find(), but search backwards in string
28	<b>rindex( str, beg=0, end=len(string))</b> Same as index(), but search backwards in string
29	<b>rjust(width,[, fillchar])</b> Returns a space-padded string with the original string right-justified to a total of width columns.
30	<b>rstrip()</b> Removes all trailing whitespace of string
31	<b>split(str="", num=string.count(str))</b> Splits string according to delimiter str (space if not provided) and returns list of substrings; split into at most num substrings if given
32	<b>splitlines( num=string.count('\n'))</b> Splits string at all (or num) NEWLINEs and returns a list of each line with NEWLINEs removed
33	<b>startswith(str, beg=0,end=len(string))</b> Determines if string or a substring of string (if starting index beg and ending index end are given) starts with substring str; Returns true if so, and false otherwise

34	<b>strip([chars])</b> Performs both lstrip() and rstrip() on string
35	<b>swapcase()</b> Inverts case for all letters in string
36	<b>title()</b> Returns "titlecased" version of string, that is, all words begin with uppercase, and the rest are lowercase
37	<b>translate(table, deletechars="")</b> Translates string according to translation table str(256 chars), removing those in the del string
38	<b>upper()</b> Converts lowercase letters in string to uppercase
39	<b>zfill (width)</b> Returns original string leftpadded with zeros to a total of width characters; intended for numbers, zfill() retains any sign given (less one zero)
40	<b>isdecimal()</b> Returns true if a unicode string contains only decimal characters and false otherwise

The functions are explained below:

## capitalize()

### Description

The method **capitalize()** returns a copy of the string with only its first character capitalized. For 8-bit strings, this method is locale-dependent.

### Syntax

Following is the syntax for **capitalize()** method

```
str.capitalize()
```

### Parameters

- NA

### Return Value

This method returns a copy of the string with only its first character capitalized.

### Example

The following example shows the usage of capitalize() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

print "str.capitalize() : ", str.capitalize()
```

Let us compile and run the above program, this will produce the following result:

```
str.capitalize() : This is string example....wow!!!
```

## center(width, fillchar)

### Description

The method **center()** returns centered in a string of length *width*. Padding is done using the specified *fillchar*. Default filler is a space.

### Syntax

Following is the syntax for **center()** method

```
str.center(width[, fillchar])
```

### Parameters

- **width** -- This is the total width of the string.
- **fillchar** -- This is the filler character.

### Return Value

This method returns centered in a string of length *width*.

### Example

The following example shows the usage of center() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

print "str.center(40, 'a') : ", str.center(40, 'a')
```

Let us compile and run the above program, this will produce the following result:

```
str.center(40, 'a') :  aaaathis is string example....wow!!!aaaa
```

## count(str, beg= 0,end=len(string))

### Description

The method **count()** returns the number of occurrences of substring *sub* in the range [start, end]. Optional arguments start and end are interpreted as in slice notation.

### Syntax

Following is the syntax for **count()** method

```
str.count(sub, start= 0,end=len(string))
```

### Parameters

- **sub** -- This is the substring to be searched.
- **start** -- Search starts from this index. First character starts from 0 index. By default search starts from 0 index.
- **end** -- Search ends from this index. First character starts from 0 index. By default search ends at the last index.

## Return Value

This method returns centered in a string of length width.

## Example

The following example shows the usage of count() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

sub = "i";
print "str.count(sub, 4, 40) : ", str.count(sub, 4, 40)
sub = "wow";
print "str.count(sub) : ", str.count(sub)
```

Let us compile and run the above program, this will produce the following result:

```
str.count(sub, 4, 40) :  2
str.count(sub) :  1
```

## decode(encoding='UTF-8',errors='strict')

### Description

The method **decode()** decodes the string using the codec registered for *encoding*. It defaults to the default string encoding.

### Syntax

Following is the syntax for **decode()** method

```
str.decode(encoding='UTF-8', errors='strict')
```

### Parameters

- **encoding** -- This is the encodings to be used. For a list of all encoding schemes please visit:[Standard Encodings](#).
- **errors** -- This may be given to set a different error handling scheme. The default for errors is 'strict', meaning that encoding errors raise a UnicodeError. Other possible values are 'ignore', 'replace', 'xmlcharrefreplace', 'backslashreplace' and any other name registered via codecs.register\_error().

## Return Value

This method returns an decoded version of the string.

## Example

The following example shows the usage of decode() method.

```
#!/usr/bin/python
```

```

str = "this is string example....wow!!!";
str = str.encode('base64','strict');

print "Encoded String: " + str;
print "Decoded String: " + str.decode('base64','strict')

```

Let us compile and run the above program, this will produce the following result:

```

Encoded String: dGhpcyBpcyBzdHJpbmcgZXhhbXBsZS4uLi53b3chISE=
Decoded String: this is string example....wow!!!

```

## encode(encoding='UTF-8',errors='strict')

### Description

The method **encode()** returns an encoded version of the string. Default encoding is the current default string encoding. errors may be given to set a different error handling scheme.

### Syntax

Following is the syntax for **encode()** method

```
str.encode(encoding='UTF-8',errors='strict')
```

### Parameters

- **encoding** -- This is the encodings to be used. For a list of all encoding schemes please visit[Standard Encodings](#).
- **errors** -- This may be given to set a different error handling scheme. The default for errors is 'strict', meaning that encoding errors raise a UnicodeError. Other possible values are 'ignore', 'replace', 'xmlcharrefreplace', 'backslashreplace' and any other name registered via codecs.register\_error().

### Return Value

This method returns an encoded version of the string.

### Example

The following example shows the usage of encode() method.

```

#!/usr/bin/python

str = "this is string example....wow!!!";

print "Encoded String: " + str.encode('base64','strict')

```

Let us compile and run the above program, this will produce the following result:

```

Encoded String: dGhpcyBpcyBzdHJpbmcgZXhhbXBsZS4uLi53b3chISE=

```

## endswith(suffix, beg=0, end=len(string))

### Description

The method **endswith()** returns True if the string ends with the specified *suffix*, otherwise return False optionally restricting the matching with the given indices *start* and *end*.

## Syntax

Following is the syntax for **endswith()** method

```
str.endswith(suffix[, start[, end]])
```

## Parameters

- **suffix** -- This could be a string or could also be a tuple of suffixes to look for.
- **start** -- The slice begins from here.
- **end** -- The slice ends here.

## Return Value

This method returns True if the string ends with the specified suffix, otherwise return False.

## Example

The following example shows the usage of `endswith()` method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

suffix = "wow!!!";
print str.endswith(suffix);
print str.endswith(suffix,20);

suffix = "is";
print str.endswith(suffix, 2, 4);
print str.endswith(suffix, 2, 6);
```

Let us compile and run the above program, this will produce the following result:

```
True
True
True
False
```

## expandtabs(tabsize=8)

### Description

The method **expandtabs()** returns a copy of the string in which tab characters ie. '\t' have been expanded using spaces, optionally using the given tabsize (default 8).

## Syntax

Following is the syntax for **expandtabs()** method

```
str.expandtabs (tabsize=8)
```

## Parameters

- **tabsize** -- This specifies the number of characters to be replaced for a tab character '\t'.

## Return Value

This method returns a copy of the string in which tab characters ie. '\t' have been expanded using spaces.

## Example

The following example shows the usage of expandtabs() method.

```
#!/usr/bin/python

str = "this is\tstring example....wow!!!";

print "Original string: " + str;
print "Defualt exapanded tab: " + str.expandtabs();
print "Double exapanded tab: " + str.expandtabs(16);
```

Let us compile and run the above program, this will produce the following result:

```
Original string: this is      string example....wow!!!
Defualt exapanded tab: this is string example....wow!!!
Double exapanded tab: this is      string example....wow!!!
```

## find(str, beg=0 end=len(string))

### Description

The method **find()** determines if string *str* occurs in string, or in a substring of string if starting index *beg* and ending index *end* are given.

### Syntax

Following is the syntax for **find()** method

```
str.find(str, beg=0 end=len(string))
```

## Parameters

- **str** -- This specifies the string to be searched.
- **beg** -- This is the starting index, by default its 0.
- **end** -- This is the ending index, by default its equal to the lenght of the string.

## Return Value

This method returns index if found and -1 otherwise.

## Example

The following example shows the usage of find() method.

```
#!/usr/bin/python

str1 = "this is string example....wow!!!";
str2 = "exam";

print str1.find(str2);
print str1.find(str2, 10);
```

## TUTORIALS POINT

Simply Easy Learning

```
print str1.find(str2, 40);
```

Let us compile and run the above program, this will produce the following result:

```
15  
15  
-1
```

## index(str, beg=0, end=len(string))

### Description

The method **index()** determines if string *str* occurs in string, or in a substring of string if starting index *beg* and ending index *end* are given. This method is same as *find()*, but raises an exception if sub is not found.

### Syntax

Following is the syntax for **index()** method

```
str.index(str, beg=0 end=len(string))
```

### Parameters

- **str** -- This specifies the string to be searched.
- **beg** -- This is the starting index, by default its 0.
- **end** -- This is the ending index, by default its equal to the length of the string.

### Return Value

This method returns index if found otherwise raises an exception if str is not found.

### Example

The following example shows the usage of **index()** method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";
str = "exam";

print str.index(str);
print str.index(str, 10);
print str.index(str, 40);
```

Let us compile and run the above program, this will produce the following result:

```
15  
15  
Traceback (most recent call last):  
  File "test.py", line 8, in  
    print str.index(str, 40);  
ValueError: substring not found

shell returned 1
```

**Note:** We would see how to handle exceptions in subsequent chapters. So for the time being leave it as it is.

## isalnum()

## Description

The method **isalnum()** checks whether the string consists of alphanumeric characters.

## Syntax

Following is the syntax for **isalnum()** method

```
str.isalnum()
```

## Parameters

- NA

## Return Value

This method returns true if all characters in the string are alphanumeric and there is at least one character, false otherwise.

## Example

The following example shows the usage of isalnum() method.

```
#!/usr/bin/python

str = "this2009"; # No space in this string
print str.isalnum();

str = "this is string example....wow!!!";
print str.isalnum();
```

Let us compile and run the above program, this will produce the following result:

```
True
False
```

## isalpha()

## Description

The method **isalpha()** checks whether the string consists of alphabetic characters only.

## Syntax

Following is the syntax for **isalpha()** method

```
str.isalpha()
```

## Parameters

- NA

## Return Value

This method returns true if all characters in the string are alphabetic and there is at least one character, false otherwise.

## Example

The following example shows the usage of `isalpha()` method.

```
#!/usr/bin/python

str = "this"; # No space & digit in this string
print str.isalpha();

str = "this is string example....wow!!!";
print str.isalpha();
```

Let us compile and run the above program, this will produce the following result:

```
True
False
```

## isdigit()

### Description

The method `isdigit()` checks whether the string consists of digits only.

### Syntax

Following is the syntax for `isdigit()` method

```
str.isdigit()
```

### Parameters

- NA

### Return Value

This method returns true if all characters in the string are digits and there is at least one character, false otherwise.

## Example

The following example shows the usage of `isdigit()` method.

```
#!/usr/bin/python

str = "123456"; # Only digit in this string
print str.isdigit();

str = "this is string example....wow!!!";
print str.isdigit();
```

Let us compile and run the above program, this will produce the following result:

```
True
False
```

## islower()

## Description

The method **islower()** checks whether all the case-based characters (letters) of the string are lowercase.

## Syntax

Following is the syntax for **islower()** method

```
str.islower()
```

## Parameters

- NA

## Return Value

This method returns true if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.

## Example

The following example shows the usage of islower() method.

```
#!/usr/bin/python

str = "THIS is string example....wow!!!";
print str.islower();

str = "this is string example....wow!!!";
print str.islower();
```

Let us compile and run the above program, this will produce the following result:

```
False
True
```

## isnumeric()

## Description

The method **isnumeric()** checks whether the string consists of only numeric characters. This method are present only on unicode objects.

**Note:** To define a string as Unicode, one simply prefixes a 'u' to the opening quotation mark of the assignment. Below is the example..

## Syntax

Following is the syntax for **isnumeric()** method

```
str.isnumeric()
```

## Parameters

- NA

## Return Value

This method returns true if all characters in the string are numeric, false otherwise.

## Example

The following example shows the usage of isnumeric() method.

```
#!/usr/bin/python

str = u"This2009";
print str.isnumeric();

str = u"23443434";
print str.isnumeric();
```

Let us compile and run the above program, this will produce the following result:

```
False
True
```

## isspace()

### Description

The method **isspace()** checks whether the string consists of whitespace.

### Syntax

Following is the syntax for **isspace()** method

```
str.isspace()
```

### Parameters

- NA

### Return Value

This method returns true if there are only whitespace characters in the string and there is at least one character, false otherwise.

## Example

The following example shows the usage of isspace() method.

```
#!/usr/bin/python

str = "      ";
print str.isspace();

str = "This is string example....wow!!!";
print str.isspace();
```

Let us compile and run the above program, this will produce the following result:

```
True
```

```
False
```

## istitle()

### Description

The method **istitle()** checks whether all the case-based characters in the string following non-casebased letters are uppercase and all other case-based characters are lowercase.

### Syntax

Following is the syntax for **istitle()** method

```
str.istitle()
```

### Parameters

- NA

### Return Value

This method returns true if the string is a titlecased string and there is at least one character, for example uppercase characters may only follow uncased characters and lowercase characters only cased ones. It returns false otherwise.

### Example

The following example shows the usage of **istitle()** method.

```
#!/usr/bin/python

str = "This Is String Example...Wow!!!";
print str.istitle();

str = "This is string example....wow!!!";
print str.istitle();
```

Let us compile and run the above program, this will produce the following result:

```
True
False
```

## isupper()

### Description

The method **isupper()** checks whether all the case-based characters (letters) of the string are uppercase.

### Syntax

Following is the syntax for **isupper()** method

```
str.isupper()
```

## Parameters

- NA

## Return Value

This method returns true if all cased characters in the string are uppercase and there is at least one cased character, false otherwise.

## Example

The following example shows the usage of isupper() method.

```
#!/usr/bin/python

str = "THIS IS STRING EXAMPLE....WOW!!!";
print str.isupper();

str = "THIS is string example....wow!!!";
print str.isupper();
```

Let us compile and run the above program, this will produce the following result:

```
True
False
```

## join(seq)

### Description

The method **join()** returns a string in which the string elements of sequence have been joined by *str*separator.

### Syntax

Following is the syntax for **join()** method

```
str.join(sequence)
```

## Parameters

- **sequence** -- This is a sequence of the elements to be joined.

## Return Value

This method returns a string which is the concatenation of the strings in the sequence seq. The separator between elements is the string providing this method.

## Example

The following example shows the usage of join() method.

```
#!/usr/bin/python

str = "-";
seq = ("a", "b", "c"); # This is sequence of strings.
print str.join( seq );
```

Let us compile and run the above program, this will produce the following result:

```
a-b-c
```

## len(string)

### Description

The method **len()** returns the length of the string.

### Syntax

Following is the syntax for **len()** method

```
len( str )
```

### Parameters

- NA

### Return Value

This method returns the length of the string.

### Example

The following example shows the usage of len() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

print "Length of the string: ", len(str);
```

Let us compile and run the above program, this will produce the following result:

```
Length of the string: 32
```

## ljust(width[, fillchar])

### Description

The method **ljust()** returns the string left justified in a string of length *width*. Padding is done using the specified *fillchar* (default is a space). The original string is returned if width is less than len(s).

### Syntax

Following is the syntax for **ljust()** method

```
str.ljust(width[, fillchar])
```

### Parameters

- **width** -- This is string length in total after padding.
- **fillchar** -- This is filler character, default is a space.

## Return Value

This method returns the string left justified in a string of length width. Padding is done using the specified fillchar (default is a space). The original string is returned if width is less than len(s).

## Example

The following example shows the usage of ljust() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

print str.ljust(50, '0');
```

Let us compile and run the above program, this will produce the following result:

```
this is string example....wow!!!00000000000000000000
```

## lower()

### Description

The method **lower()** returns a copy of the string in which all case-based characters have been lowercased.

### Syntax

Following is the syntax for **lower()** method

```
str.lower()
```

### Parameters

- NA

## Return Value

This method returns a copy of the string in which all case-based characters have been lowercased.

## Example

The following example shows the usage of lower() method.

```
#!/usr/bin/python

str = "THIS IS STRING EXAMPLE....WOW!!!";

print str.lower();
```

Let us compile and run the above program, this will produce the following result:

```
this is string example....wow!!!
```

## lstrip()

### Description

The method **lstrip()** returns a copy of the string in which all chars have been stripped from the beginning of the string (default whitespace characters).

## Syntax

Following is the syntax for **lstrip()** method

```
str.lstrip([chars])
```

## Parameters

- **chars** -- You can supply what chars have to be trimmed.

## Return Value

This method returns a copy of the string in which all chars have been stripped from the beginning of the string (default whitespace characters).

## Example

The following example shows the usage of lstrip() method.

```
#!/usr/bin/python

str = "      this is string example....wow!!!      ";
print str.lstrip();
str = "88888888this is string example....wow!!!8888888";
print str.lstrip('8');
```

Let us compile and run the above program, this will produce the following result:

```
this is string example....wow!!!
this is string example....wow!!!8888888
```

## maketrans()

### Description

The method **maketrans()** returns a translation table that maps each character in the *intab* string into the character at the same position in the *outtab* string. Then this table is passed to the *translate()* function.

**Note:** both intab and outtab must have the same length.

## Syntax

Following is the syntax for **maketrans()** method

```
str.maketrans(intab, outtab);
```

## Parameters

- **intab** -- This is the string having actual characters.
- **outtab** -- This is the string having corresponding mapping character.

## Return Value

This method returns a translate table to be used *translate()* function.

## Example

The following example shows the usage of maketrans() method. Under this every vowel in a string is replaced by its vowel position:

```
#!/usr/bin/python

from string import maketrans # Required to call maketrans function.

intab = "aeiou"
outtab = "12345"
trantab = maketrans(intab, outtab)

str = "this is string example....wow!!!";
print str.translate(trantab);
```

Let us compile and run the above program, this will produce the following result:

```
th3s 3s str3ng 2x1mpl2....w4w!!!
```

## max(str)

### Description

The method **max()** returns the max alphabetical character from the string *str*.

### Syntax

Following is the syntax for **max()** method

```
max (str)
```

### Parameters

- **str** -- This is the string from which max alphabetical character needs to be returned.

### Return Value

This method returns the max alphabetical character from the string *str*.

## Example

The following example shows the usage of **max()** method.

```
#!/usr/bin/python

str = "this is really a string example....wow!!!";
print "Max character: " + max(str);

str = "this is a string example....wow!!!";
print "Max character: " + max(str);
```

Let us compile and run the above program, this will produce the following result:

```
Max character: y
Max character: x
```

## min(str)

### Description

The method **min()** returns the min alphabetical character from the string *str*.

## Syntax

Following is the syntax for **min()** method

```
min(str)
```

## Parameters

- **str** -- This is the string from which min alphabetical character needs to be returned.

## Return Value

This method returns the max alphabetical character from the string str.

## Example

The following example shows the usage of min() method.

```
#!/usr/bin/python

str = "this-is-real-string-example....wow!!!";
print "Min character: " + min(str);

str = "this-is-a-string-example....wow!!!";
print "Min character: " + min(str);
```

Let us compile and run the above program, this will produce the following result:

```
Min character: !
Min character: !
```

## replace(old, new [, max])

### Description

The method **replace()** returns a copy of the string in which the occurrences of *old* have been replaced with *new*, optionally restricting the number of replacements to *max*.

## Syntax

Following is the syntax for **replace()** method

```
str.replace(old, new[, max])
```

## Parameters

- **old** -- This is old substring to be replaced.
- **new** -- This is new substring which would replace old substring.
- **max** -- If this optional argument max is given, only the first count occurrences are replaced.

## Return Value

This method returns a copy of the string with all occurrences of substring old replaced by new. If the optional argument max is given, only the first count occurrences are replaced.

### Example

The following example shows the usage of replace() method.

```
#!/usr/bin/python

str = "this is string example....wow!!! this is really string";
print str.replace("is", "was");
print str.replace("is", "was", 3);
```

Let us compile and run the above program, this will produce the following result:

```
thwas was string example....wow!!! thwas was really string
thwas was string example....wow!!! thwas is really string
```

## rfind(str, beg=0,end=len(string))

### Description

The method **rfind()** returns the last index where the substring str is found, or -1 if no such index exists, optionally restricting the search to string[beg:end].

### Syntax

Following is the syntax for **rfind()** method

```
str.rfind(str, beg=0 end=len(string))
```

### Parameters

- **str** -- This specifies the string to be searched.
- **beg** -- This is the starting index, by default its 0.
- **end** -- This is the ending index, by default its equal to the length of the string.

## Return Value

This method returns last index if found and -1 otherwise.

### Example

The following example shows the usage of rfind() method.

```
#!/usr/bin/python

str = "this is really a string example....wow!!!";
str = "is";

print str.rfind(str);
print str.rfind(str, 0, 10);
print str.rfind(str, 10, 0);
```

```
print str.find(str);
print str.find(str, 0, 10);
print str.find(str, 10, 0);
```

Let us compile and run the above program, this will produce the following result:

```
5
5
-1
2
2
-1
```

## rindex( str, beg=0, end=len(string))

### Description

The method **rindex()** returns the last index where the substring *str* is found, or raises an exception if no such index exists, optionally restricting the search to string[beg:end].

### Syntax

Following is the syntax for **rindex()** method

```
str.rindex(str, beg=0 end=len(string))
```

### Parameters

- **str** -- This specifies the string to be searched.
- **beg** -- This is the starting index, by default its 0
- **len** -- This is ending index, by default its equal to the length of the string.

### Return Value

This method returns last index if found otherwise raises an exception if str is not found.

### Example

The following example shows the usage of rindex() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";
str = "is";

print str.rindex(str);
print str.index(str);
```

Let us compile and run the above program, this will produce the following result:

```
5
2
```

## rjust(width,[, fillchar])

## Description

The method **rjust()** returns the string right justified in a string of length *width*. Padding is done using the specified *fillchar* (default is a space). The original string is returned if width is less than len(s).

## Syntax

Following is the syntax for **rjust()** method

```
str.rjust(width[, fillchar])
```

## Parameters

- **width** -- This is the string length in total after padding.
- **fillchar** -- This is the filler character, default is a space.

## Return Value

This method returns the string right justified in a string of length width. Padding is done using the specified fillchar (default is a space). The original string is returned if width is less than len(s).

## Example

The following example shows the usage of rjust() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

print str.rjust(50, '0');
```

Let us compile and run the above program, this will produce the following result:

```
000000000000000000000000this is string example....wow!!!
```

## rstrip()

## Description

The method **rstrip()** returns a copy of the string in which all *chars* have been stripped from the end of the string (default whitespace characters).

## Syntax

Following is the syntax for **rstrip()** method

```
str.rstrip([chars])
```

## Parameters

- **chars** -- You can supply what chars have to be trimmed.

## Return Value

This method returns a copy of the string in which all chars have been stripped from the end of the string (default whitespace characters).

## Example

The following example shows the usage of `rstrip()` method.

```
#!/usr/bin/python

str = "      this is string example....wow!!!      ";
print str.rstrip();
str = "88888888this is string example....wow!!!88888888";
print str.rstrip('8');
```

Let us compile and run the above program, this will produce the following result:

```
this is string example....wow!!!
88888888this is string example....wow!!!
```

## `split(str="", num=string.count(str))`

### Description

The method `split()` returns a list of all the words in the string, using `str` as the separator (splits on all whitespace if left unspecified), optionally limiting the number of splits to `num`.

### Syntax

Following is the syntax for `split()` method

```
str.split(str="", num=string.count(str)).
```

### Parameters

- `str` -- This is any delimiter, by default it is space.
- `num` -- this is number of lines to be made.

### Return Value

This method returns a list of lines.

## Example

The following example shows the usage of `split()` method.

```
#!/usr/bin/python

str = "Line1-abcdef \nLine2-abc \nLine4-abcd";
print str.split();
print str.split(' ', 1);
```

Let us compile and run the above program, this will produce the following result:

```
['Line1-abcdef', 'Line2-abc', 'Line4-abcd']
['Line1-abcdef', '\nLine2-abc \nLine4-abcd']
```

## `splitlines( num=string.count('\n') )`

### Description

The method `splitlines()` returns a list with all the lines in string, optionally including the line breaks (if `num` is supplied and is true)

## Syntax

Following is the syntax for **splitlines()** method

```
str.splitlines( num=string.count ('\n') )
```

## Parameters

- **num** -- This is any number, if present then it would be assumed that line breaks need to be included in the lines.

## Return Value

This method returns true if found matching string otherwise false.

## Example

The following example shows the usage of splitlines() method.

```
#!/usr/bin/python

str = "Line1-a b c d e f\nLine2- a b c\n\nLine4- a b c d";
print str.splitlines( );
print str.splitlines( 0 );
print str.splitlines( 3 );
print str.splitlines( 4 );
print str.splitlines( 5 );
```

Let us compile and run the above program, this will produce the following result:

```
['Line1-a b c d e f', 'Line2- a b c', '', 'Line4- a b c d']
['Line1-a b c d e f', 'Line2- a b c', '', 'Line4- a b c d']
['Line1-a b c d e f\n', 'Line2- a b c\n', '\n', 'Line4- a b c d']
['Line1-a b c d e f\n', 'Line2- a b c\n', '\n', 'Line4- a b c d']
['Line1-a b c d e f\n', 'Line2- a b c\n', '\n', 'Line4- a b c d']
```

## startswith(str, beg=0,end=len(string))

### Description

The method **startswith()** checks whether string starts with *str*, optionally restricting the matching with the given indices *start* and *end*.

## Syntax

Following is the syntax for **startswith()** method

```
str.startswith(str, beg=0,end=len(string));
```

## Parameters

- **str** -- This is the string to be checked.
- **beg** -- This is the optional parameter to set start index of the matching boundary.
- **end** -- This is the optional parameter to set start index of the matching boundary.

## Return Value

This method returns true if found matching string otherwise false.

## Example

The following example shows the usage of `startswith()` method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";
print str.startswith( 'this' );
print str.startswith( 'is', 2, 4 );
print str.startswith( 'this', 2, 4 );
```

Let us compile and run the above program, this will produce the following result:

```
True
True
False
```

## strip([chars])

### Description

The method `strip()` returns a copy of the string in which all chars have been stripped from the beginning and the end of the string (default whitespace characters).

### Syntax

Following is the syntax for `strip()` method

```
str.strip([chars]);
```

### Parameters

- `chars` -- The characters to be removed from beginning or end of the string.

### Return Value

This method returns a copy of the string in which all chars have been stripped from the beginning and the end of the string.

## Example

The following example shows the usage of `strip()` method.

```
#!/usr/bin/python

str = "0000000this is string example....wow!!!0000000";
print str.strip( '0' );
```

Let us compile and run the above program, this will produce the following result:

```
this is string example....wow!!!
```

## swapcase()

## Description

The method **swapcase()** returns a copy of the string in which all the case-based characters have had their case swapped.

## Syntax

Following is the syntax for **swapcase()** method

```
str.swapcase();
```

## Parameters

- NA

## Return Value

This method returns a copy of the string in which all the case-based characters have had their case swapped.

## Example

The following example shows the usage of swapcase() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";
print str.swapcase();

str = "THIS IS STRING EXAMPLE....WOW!!!";
print str.swapcase();
```

Let us compile and run the above program, this will produce the following result:

```
THIS IS STRING EXAMPLE....WOW!!!
this is string example....wow!!!
```

## title()

### Description

The method **title()** returns a copy of the string in which first characters of all the words are capitalized.

## Syntax

Following is the syntax for **title()** method

```
str.title();
```

## Parameters

- NA

## Return Value

This method returns a copy of the string in which first characters of all the words are capitalized.

## Example

The following example shows the usage of title() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";
print str.title();
```

Let us compile and run the above program, this will produce the following result:

```
This Is String Example....Wow!!!
```

## translate(table, deletechars="")

### Description

The method **translate()** returns a copy of the string in which all characters have been translated using *table* (constructed with the maketrans() function in the string module), optionally deleting all characters found in the string *deletechars*.

### Syntax

Following is the syntax for **translate()** method

```
str.translate(table[, deletechars]);
```

### Parameters

- **table** -- You can use the maketrans() helper function in the string module to create a translation table.
- **deletechars** -- The list of characters to be removed from the source string.

### Return Value

This method returns a translated copy of the string.

## Example

The following example shows the usage of translate() method. Under this every vowel in a string is replaced by its vowel position:

```
#!/usr/bin/python

from string import maketrans    # Required to call maketrans function.

intab = "aeiou"
outtab = "12345"
trantab = maketrans(intab, outtab)

str = "this is string example....wow!!!";
print str.translate(trantab);
```

Let us compile and run the above program, this will produce the following result:

```
th3s 3s str3ng 2x1mpl2....w4w!!!
```

Following is the example to delete 'x' and 'm' characters from the string:

```
#!/usr/bin/python

from string import maketrans    # Required to call maketrans function.

intab = "aeiou"
outtab = "12345"
trantab = maketrans(intab, outtab)

str = "this is string example....wow!!!";
print str.translate(trantab, 'xm');
```

This will produce following result:

```
th3s 3s str3ng 21pl2....w4w!!!
```

## upper()

### Description

The method **upper()** returns a copy of the string in which all case-based characters have been uppercased.

### Syntax

Following is the syntax for **upper()** method

```
str.upper()
```

### Parameters

- NA

### Return Value

This method returns a copy of the string in which all case-based characters have been uppercased.

### Example

The following example shows the usage of **upper()** method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";
```

```
print "str.upper() : ", str.upper()
```

Let us compile and run the above program, this will produce the following result:

```
str.upper() : THIS IS STRING EXAMPLE....WOW!!!
```

## zfill (width)

### Description

The method **zfill()** pads string on the left with zeros to fill width.

### Syntax

Following is the syntax for **zfill()** method

```
str.zfill(width)
```

### Parameters

- **width** -- This is final width of the string. This is the width which we would get after filling zeros.

### Return Value

This method returns padded string.

## Example

The following example shows the usage of zfill() method.

```
#!/usr/bin/python

str = "this is string example....wow!!!";

print str.zfill(40);
print str.zfill(50);
```

Let us compile and run the above program, this will produce the following result:

```
00000000this is string example....wow!!!
000000000000000000000000this is string example....wow!!!
```

## isdecimal()

The method **isdecimal()** checks whether the string consists of only decimal characters. This method are present only on unicode objects.

**Note:** To define a string as Unicode, one simply prefixes a 'u' to the opening quotation mark of the assignment. Below is the example.

### Syntax

Following is the syntax for **isdecimal()** method

```
str.isdecimal()
```

## Parameters

- NA

## Return Value

This method returns true if all characters in the string are decimal, false otherwise.

## Example

The following example shows the usage of isdecimal() method.

```
#!/usr/bin/python

str = u"This2009";
print str.isdecimal();

str = u"23443434";
print str.isdecimal();
```

Let us compile and run the above program, this will produce the following result:

```
False
True
```

# Python Lists

**T**

he most basic data structure in Python is the **sequence**. Each element of a sequence is assigned a number - its position, or index. The first index is zero, the second index is one, and so forth.

Python has six built-in types of sequences, but the most common ones are lists and tuples which we would see in this tutorial.

There are certain things you can do with all sequence types. These operations include indexing, slicing, adding, multiplying, and checking for membership. In addition, Python has built-in functions for finding the length of a sequence, and for finding its largest and smallest elements.

## Python Lists:

The list is a most versatile datatype available in Python, which can be written as a list of comma-separated values (items) between square brackets. Good thing about a list that items in a list need not all have the same type:

Creating a list is as simple as putting different comma-separated values between square brackets. For example:

```
list1 = ['physics', 'chemistry', 1997, 2000];
list2 = [1, 2, 3, 4, 5 ];
list3 = ["a", "b", "c", "d"];
```

Like string indices, list indices start at 0, and lists can be sliced, concatenated and so on.

## Accessing Values in Lists:

To access values in lists, use the square brackets for slicing along with the index or indices to obtain value available at that index. Following is a simple example:

```
#!/usr/bin/python

list1 = ['physics', 'chemistry', 1997, 2000];
list2 = [1, 2, 3, 4, 5, 6, 7 ];

print "list1[0]: ", list1[0]
print "list2[1:5]: ", list2[1:5]
```

When the above code is executed, it produces following result:

```
list1[0]: physics
```

```
list2[1:5]: [2, 3, 4, 5]
```

## Updating Lists:

You can update single or multiple elements of lists by giving the slice on the left-hand side of the assignment operator, and you can add to elements in a list with the append() method. Following is a simple example:

```
#!/usr/bin/python

list = ['physics', 'chemistry', 1997, 2000];

print "Value available at index 2 : "
print list[2];
list[2] = 2001;
print "New value available at index 2 : "
print list[2];
```

**Note:** append() method is discussed in subsequent section.

When the above code is executed, it produces following result:

```
Value available at index 2 :
1997
New value available at index 2 :
2001
```

## Delete List Elements:

To remove a list element, you can use either the del statement if you know exactly which element(s) you are deleting or the remove() method if you do not know. Following is a simple example:

```
#!/usr/bin/python

list1 = ['physics', 'chemistry', 1997, 2000];

print list1;
del list1[2];
print "After deleting value at index 2 : "
print list1;
```

When the above code is executed, it produces following result:

```
['physics', 'chemistry', 1997, 2000]
After deleting value at index 2 :
['physics', 'chemistry', 2000]
```

**Note:** remove() method is discussed in subsequent section.

## Basic List Operations:

Lists respond to the + and \* operators much like strings; they mean concatenation and repetition here too, except that the result is a new list, not a string.

In fact, lists respond to all of the general sequence operations we used on strings in the prior chapter :

Python Expression	Results	Description
<code>len([1, 2, 3])</code>	3	Length
<code>[1, 2, 3] + [4, 5, 6]</code>	<code>[1, 2, 3, 4, 5, 6]</code>	Concatenation
<code>['Hi!'] * 4</code>	<code>['Hi!', 'Hi!', 'Hi!', 'Hi!']</code>	Repetition
<code>3 in [1, 2, 3]</code>	True	Membership
<code>for x in [1, 2, 3]: print x,</code>	1 2 3	Iteration

## Indexing, Slicing, and Matrixes:

Because lists are sequences, indexing and slicing work the same way for lists as they do for strings.

Assuming following input:

```
L = ['spam', 'Spam', 'SPAM!']
```

Python Expression	Results	Description
<code>L[2]</code>	'SPAM!'	Offsets start at zero
<code>L[-2]</code>	'Spam'	Negative: count from the right
<code>L[1:]</code>	<code>['Spam', 'SPAM!']</code>	Slicing fetches sections

## Built-in List Functions & Methods:

Python includes following list functions

SN	Function with Description
1	<b><code>cmp(list1, list2)</code></b> Compares elements of both lists.
2	<b><code>len(list)</code></b> Gives the total length of the list.
3	<b><code>max(list)</code></b> Returns item from the list with max value.
4	<b><code>min(list)</code></b> Returns item from the list with min value.
5	<b><code>list(seq)</code></b> Converts a tuple into list.

The functions are explained below:

### **`cmp(list1, list2)`**

## Description

The method **cmp()** compares elements of two lists.

## Syntax

Following is the syntax for **cmp()** method

```
cmp(list1, list2)
```

## Parameters

- **list1** -- This is the first list to be compared.
- **list2** -- This is the second list to be compared.

## Return Value

If elements are of the same type, perform the compare and return the result. If elements are different types, check to see if they are numbers.

- If numbers, perform numeric coercion if necessary and compare.
- If either element is a number, then the other element is "larger" (numbers are "smallest").
- Otherwise, types are sorted alphabetically by name.

If we reached the end of one of the lists, the longer list is "larger." If we exhaust both lists and share the same data, the result is a tie, meaning that 0 is returned.

## Example

The following example shows the usage of **cmp()** method.

```
#!/usr/bin/python

list1, list2 = [123, 'xyz'], [456, 'abc']

print cmp(list1, list2);
print cmp(list2, list1);
list3 = list2 + [786];
print cmp(list2, list3)
```

Let us compile and run the above program, this will produce the following result:

```
-1
1
-1
```

## len(list)

## Description

The method **len()** returns the number of elements in the *list*.

## Syntax

Following is the syntax for **len()** method

```
len(list)
```

## Parameters

- **list** -- This is a list for which number of elements to be counted.

## Return Value

This method returns the number of elements in the list.

## Example

The following example shows the usage of len() method.

```
#!/usr/bin/python

list1, list2 = [123, 'xyz', 'zara'], [456, 'abc']

print "First list length : ", len(list1);
print "Second list length : ", len(list2);
```

Let us compile and run the above program, this will produce the following result:

```
First list length : 3
Second list length : 2
```

## max(list)

### Description

The method **max** returns the elements from the *list* with maximum value.

## Syntax

Following is the syntax for **max()** method

```
max(list)
```

## Parameters

- **list** -- This is a list from which max valued element to be returned.

## Return Value

This method returns the elements from the list with maximum value.

## Example

The following example shows the usage of max() method.

```
#!/usr/bin/python

list1, list2 = [123, 'xyz', 'zara', 'abc'], [456, 700, 200]
```

```
print "Max value element : ", max(list1);
print "Max value element : ", max(list2);
```

Let us compile and run the above program, this will produce the following result:

```
Max value element : zara
Max value element : 700
```

## min(list)

### Description

The method **min()** returns the elements from the *list* with minimum value.

### Syntax

Following is the syntax for **min()** method

```
min(list)
```

### Parameters

- **list** -- This is a list from which min valued element to be returned.

### Return Value

This method returns the elements from the list with minimum value.

### Example

The following example shows the usage of **min()** method.

```
#!/usr/bin/python

list1, list2 = [123, 'xyz', 'zara', 'abc'], [456, 700, 200]

print "min value element : ", min(list1);
print "min value element : ", min(list2);
```

Let us compile and run the above program, this will produce the following result:

```
min value element : 123
min value element : 200
```

## list(seq)

### Description

The method **list()** takes sequence types and convert them to lists. This is used to convert a given tuple into list.

**Note:** Tuple are very similar to lists with only difference that element values of a tuple can not be changed and tuple elements are put between parenthesis instead of square bracket.

### Syntax

Following is the syntax for **list()** method

```
list( seq )
```

## Parameters

- **seq** -- This is a tuple to be converted into list.

## Return Value

This method returns the list.

## Example

The following example shows the usage of list() method.

```
#!/usr/bin/python

aTuple = (123, 'xyz', 'zara', 'abc');
aList = list(aTuple)

print "List elements : ", aList
```

Let us compile and run the above program, this will produce the following result:

```
List elements : [123, 'xyz', 'zara', 'abc']
```

Python includes following list methods

SN	Methods with Description
1	<b>list.append(obj)</b> Appends object obj to list
2	<b>list.count(obj)</b> Returns count of how many times obj occurs in list
3	<b>list.extend(seq)</b> Appends the contents of seq to list
4	<b>list.index(obj)</b> Returns the lowest index in list that obj appears
5	<b>list.insert(index, obj)</b> Inserts object obj into list at offset index
6	<b>list.pop(obj=list[-1])</b> Removes and returns last object or obj from list
7	<b>list.remove(obj)</b> Removes object obj from list
8	<b>list.reverse()</b> Reverses objects of list in place
9	<b>list.sort([func])</b> Sorts objects of list, use compare func if given

The methods are explained below:

# list.append(obj)

## Description

The method **append()** appends a passed *obj* into the existing list.

## Syntax

Following is the syntax for **append()** method

```
list.append(obj)
```

## Parameters

- **obj** -- This is the object to be appended in the list.

## Return Value

This method does not return any value but updates existing list.

## Example

The following example shows the usage of append() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc'];
aList.append( 2009 );
print "Updated List : ", aList;
```

Let us compile and run the above program, this will produce the following result:

```
Updated List : [123, 'xyz', 'zara', 'abc', 2009]
```

# list.count(obj)

## Description

The method **cmp()** compares elements of two lists.

## Syntax

Following is the syntax for **cmp()** method

```
cmp(list1, list2)
```

## Parameters

- **list1** -- This is the first list to be compared.
- **list2** -- This is the second list to be compared.

## Return Value

If elements are of the same type, perform the compare and return the result. If elements are different types, check to see if they are numbers.

- If numbers, perform numeric coercion if necessary and compare.

- If either element is a number, then the other element is "larger" (numbers are "smallest").
- Otherwise, types are sorted alphabetically by name.

If we reached the end of one of the lists, the longer list is "larger." If we exhaust both lists and share the same data, the result is a tie, meaning that 0 is returned.

## Example

The following example shows the usage of cmp() method.

```
#!/usr/bin/python

list1, list2 = [123, 'xyz'], [456, 'abc']

print cmp(list1, list2);
print cmp(list2, list1);
list3 = list2 + [786];
print cmp(list2, list3)
```

Let us compile and run the above program, this will produce the following result:

```
-1
1
-1
```

## list.extend(seq)

### Description

The method **extend()** appends the contents of *seq* to list.

### Syntax

Following is the syntax for **extend()** method

```
list.extend(seq)
```

### Parameters

- **seq** -- This is the list of elements

### Return Value

This method does not return any value but add the content to existing list.

## Example

The following example shows the usage of extend() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc', 123];
bList = [2009, 'manni'];
aList.extend(bList)

print "Extended List : ", aList ;
```

Let us compile and run the above program, this will produce the following result:

```
Extended List : [123, 'xyz', 'zara', 'abc', 123, 2009, 'manni']
```

## list.index(obj)

### Description

The method **index()** returns the lowest index in list that *obj* appears.

### Syntax

Following is the syntax for **index()** method

```
list.index(obj)
```

### Parameters

- **obj** -- This is the object to be find out.

### Return Value

This method returns index of the found object otherwise raise an exception indicating that value does not find.

### Example

The following example shows the usage of **index()** method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc'];

print "Index for xyz : ", aList.index( 'xyz' ) ;
print "Index for xxx : ", aList.index( 'zara' ) ;
```

Let us compile and run the above program, this will produce the following result:

```
Index for xyz : 1
Index for xxx : 2
```

## list.insert(index, obj)

### Description

The method **insert()** inserts object *obj* into list at offset *index*.

### Syntax

Following is the syntax for **insert()** method

```
list.insert(index, obj)
```

### Parameters

- **index** -- This is the Index where the object *obj* need to be inserted.
- **obj** -- This is the Object to be inserted into the given list.

---

## TUTORIALS POINT

Simply Easy Learning

## Return Value

This method does not return any value but it inserts the given element at the given index.

### Example

The following example shows the usage of insert() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc'];

print "Final List : ", aList.insert( 3, 2009);
```

Let us compile and run the above program, this will produce the following result:

```
Final List : [123, 'xyz', 'zara', 2009, 'abc']
```

## list.pop(obj=list[-1])

### Description

The method **pop()** removes and returns last object or *obj* from the list.

### Syntax

Following is the syntax for **pop()** method

```
list.pop(obj=list[-1])
```

### Parameters

- **obj** -- This is an optional parameter, index of the object to be removed from the list.

### Return Value

This method returns the removed object from the list.

### Example

The following example shows the usage of pop() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc'];

print "A List : ", aList.pop();
print "B List : ", aList.pop(2);
```

Let us compile and run the above program, this will produce the following result:

```
A List : abc
B List : zara
```

# list.remove(obj)

## Description

The method **remove()** removes first *obj* from the list.

## Syntax

Following is the syntax for **remove()** method

```
list.remove (obj)
```

## Parameters

- **obj** -- This is the object to be removed from the list.

## Return Value

This method does not return any value but removes the given object from the list.

## Example

The following example shows the usage of remove() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc', 'xyz'];

aList.remove('xyz');
print "List : ", aList;
aList.remove('abc');
print "List : ", aList;
```

Let us compile and run the above program, this will produce the following result:

```
List : [123, 'zara', 'abc', 'xyz']
List : [123, 'zara', 'xyz']
```

# list.reverse()

## Description

The method **reverse()** reverses objects of list in place.

## Syntax

Following is the syntax for **reverse()** method

```
list.reverse ()
```

## Parameters

- NA

## Return Value

This method does not return any value but reverse the given object from the list.

## Example

The following example shows the usage of reverse() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc', 'xyz'];

aList.reverse();
print "List : ", aList;
```

Let us compile and run the above program, this will produce the following result:

```
List : ['xyz', 'abc', 'zara', 'xyz', 123]
```

## list.sort([func])

### Description

The method **sort()** sorts objects of list, use compare *func* if given.

### Syntax

Following is the syntax for **sort()** method

```
list.sort([func])
```

### Parameters

- **func** -- This is an optional parameter, if given the it would use that function to sort the objects of the list..

### Return Value

This method does not return any value but sort the given object from the list.

## Example

The following example shows the usage of sort() method.

```
#!/usr/bin/python

aList = [123, 'xyz', 'zara', 'abc', 'xyz'];

aList.sort();
print "List : ", aList;
```

Let us compile and run the above program, this will produce the following result:

```
List : [123, 'abc', 'xyz', 'xyz', 'zara']
```

# Python Tuples

A tuple is a sequence of immutable Python objects. Tuples are sequences, just like lists. The only difference is that tuples can't be changed ie. tuples are immutable and tuples use parentheses and lists use square brackets.

Creating a tuple is as simple as putting different comma-separated values and optionally you can put these comma-separated values between parentheses also. For example:

```
tup1 = ('physics', 'chemistry', 1997, 2000);
tup2 = (1, 2, 3, 4, 5 );
tup3 = "a", "b", "c", "d";
```

The empty tuple is written as two parentheses containing nothing:

```
tup1 = ();
```

To write a tuple containing a single value you have to include a comma, even though there is only one value:

```
tup1 = (50,);
```

Like string indices, tuple indices start at 0, and tuples can be sliced, concatenated and so on.

## Accessing Values in Tuples:

To access values in tuple, use the square brackets for slicing along with the index or indices to obtain value available at that index. Following is a simple example:

```
#!/usr/bin/python

tup1 = ('physics', 'chemistry', 1997, 2000);
tup2 = (1, 2, 3, 4, 5, 6, 7 );

print "tup1[0]: ", tup1[0]
print "tup2[1:5]: ", tup2[1:5]
```

When the above code is executed, it produces following result:

```
tup1[0]: physics
tup2[1:5]: [2, 3, 4, 5]
```

## Updating Tuples:

Tuples are immutable which means you cannot update them or change values of tuple elements. But we able to take portions of an existing tuples to create a new tuples as follows. Following is a simple example:

```
#!/usr/bin/python

tup1 = (12, 34.56);
tup2 = ('abc', 'xyz');

# Following action is not valid for tuples
# tup1[0] = 100;

# So let's create a new tuple as follows
tup3 = tup1 + tup2;
print tup3;
```

When the above code is executed, it produces following result:

```
(12, 34.56, 'abc', 'xyz')
```

## Delete Tuple Elements:

Removing individual tuple elements is not possible. There is, of course, nothing wrong with putting together another tuple with the undesired elements discarded.

To explicitly remove an entire tuple, just use the **del** statement. Following is a simple example:

```
#!/usr/bin/python

tup = ('physics', 'chemistry', 1997, 2000);

print tup;
del tup;
print "After deleting tup : "
print tup;
```

This will produce following result. Note an exception raised, this is because after **del tup** tuple does not exist any more:

```
('physics', 'chemistry', 1997, 2000)
After deleting tup :
Traceback (most recent call last):
  File "test.py", line 9, in <module>
    print tup;
NameError: name 'tup' is not defined
```

## Basic Tuples Operations:

Tuples respond to the + and \* operators much like strings; they mean concatenation and repetition here too, except that the result is a new tuple, not a string.

In fact, tuples respond to all of the general sequence operations we used on strings in the prior chapter:

Python Expression	Results	Description
len((1, 2, 3))	3	Length

(1, 2, 3) + (4, 5, 6)	(1, 2, 3, 4, 5, 6)	Concatenation
['Hi!'] * 4	('Hi!', 'Hi!', 'Hi!', 'Hi!')	Repetition
3 in (1, 2, 3)	True	Membership
for x in (1, 2, 3): print x,	1 2 3	Iteration

## Indexing, Slicing, and Matrixes:

Because tuples are sequences, indexing and slicing work the same way for tuples as they do for strings.  
Assuming following input:

```
L = ('spam', 'Spam', 'SPAM!')
```

Python Expression	Results	Description
L[2]	'SPAM!'	Offsets start at zero
L[-2]	'Spam'	Negative: count from the right
L[1:]	['Spam', 'SPAM!']	Slicing fetches sections

## No Enclosing Delimiters:

Any set of multiple objects, comma-separated, written without identifying symbols, i.e., brackets for lists, parentheses for tuples, etc., default to tuples, as indicated in these short examples:

```
#!/usr/bin/python

print 'abc', -4.24e93, 18+6.6j, 'xyz';
x, y = 1, 2;
print "Value of x , y : ", x,y;
```

When the above code is executed, it produces following result:

```
abc -4.24e+93 (18+6.6j) xyz
Value of x , y : 1 2
```

## Built-in Tuple Functions:

Python includes following tuple functions

SN	Function with Description
1	<b>cmp(tuple1, tuple2)</b> Compares elements of both tuples.
2	<b>len(tuple)</b> Gives the total length of the tuple.

3	<b>max(tuple)</b> Returns item from the tuple with max value.
4	<b>min(tuple)</b> Returns item from the tuple with min value.
5	<b>tuple(seq)</b> Converts a list into tuple.

The functions are explained below in detail:

## cmp(tuple1, tuple2)

### Description

The method **cmp()** compares elements of two tuples.

### Syntax

Following is the syntax for **cmp()** method

```
cmp(tuple1, tuple2)
```

### Parameters

- **tuple1** -- This is the first tuple to be compared
- **tuple2** -- This is the second tuple to be compared

### Return Value

If elements are of the same type, perform the compare and return the result. If elements are different types, check to see if they are numbers.

- If numbers, perform numeric coercion if necessary and compare.
- If either element is a number, then the other element is "larger" (numbers are "smallest").
- Otherwise, types are sorted alphabetically by name.

If we reached the end of one of the tuples, the longer tuple is "larger." If we exhaust both tuples and share the same data, the result is a tie, meaning that 0 is returned.

### Example

The following example shows the usage of cmp() method.

```
#!/usr/bin/python

tuple1, tuple2 = (123, 'xyz'), (456, 'abc')

print cmp(tuple1, tuple2);
print cmp(tuple2, tuple1);
tuple3 = tuple2 + (786,);
print cmp(tuple2, tuple3)
```

Let us compile and run the above program, this will produce the following result:

```
-1
1
-1
```

## len(tuple)

### Description

The method **len()** returns the number of elements in the tuple.

### Syntax

Following is the syntax for **len()** method

```
len(tuple)
```

### Parameters

- **tuple** -- This is a tuple for which number of elements to be counted.

### Return Value

This method returns the number of elements in the tuple.

### Example

The following example shows the usage of len() method.

```
#!/usr/bin/python

tuple1, tuple2 = (123, 'xyz', 'zara'), (456, 'abc')

print "First tuple length : ", len(tuple1);
print "Second tuple length : ", len(tuple2);
```

Let us compile and run the above program, this will produce the following result:

```
First tuple length : 3
Second tuple length : 2
```

## max(tuple)

### Description

The method **max()** returns the elements from the tuple with maximum value.

### Syntax

Following is the syntax for **max()** method

```
max(tuple)
```

### Parameters

- **tuple** -- This is a tuple from which max valued element to be returned.

### Return Value

This method returns the elements from the tuple with maximum value.

## Example

The following example shows the usage of max() method.

```
#!/usr/bin/python

tuple1, tuple2 = (123, 'xyz', 'zara', 'abc'), (456, 700, 200)

print "Max value element : ", max(tuple1);
print "Max value element : ", max(tuple2);
```

Let us compile and run the above program, this will produce the following result:

```
Max value element : zara
Max value element : 700
```

## min(tuple)

### Description

The method **min()** returns the elements from the tuple with minimum value.

### Syntax

Following is the syntax for **min()** method

```
min(tuple)
```

### Parameters

- **tuple** -- This is a tuple from which min valued element to be returned.

### Return Value

This method returns the elements from the tuple with minimum value.

## Example

The following example shows the usage of min() method.

```
#!/usr/bin/python

tuple1, tuple2 = (123, 'xyz', 'zara', 'abc'), (456, 700, 200)

print "min value element : ", min(tuple1);
print "min value element : ", min(tuple2);
```

Let us compile and run the above program, this will produce the following result:

```
min value element : 123
min value element : 200
```

# tuple(seq)

## Description

The method **tuple()** compares elements of two tuples.

## Syntax

Following is the syntax for **tuple()** method

```
tuple( seq )
```

## Parameters

- **seq** -- This is a tuple to be converted into tuple.

## Return Value

This method returns the tuple.

## Example

The following example shows the usage of tuple() method.

```
#!/usr/bin/python

aList = (123, 'xyz', 'zara', 'abc');
aTuple = tuple(aList)

print "Tuple elements : ", aTuple
```

Let us compile and run the above program, this will produce the following result:

```
Tuple elements : (123, 'xyz', 'zara', 'abc')
```

# Python Dictionary

A dictionary is mutable and is another container type that can store any number of Python objects, including other container types. Dictionaries consist of pairs (called items) of keys and their corresponding values.

Python dictionaries are also known as associative arrays or hash tables. The general syntax of a dictionary is as follows:

```
dict = {'Alice': '2341', 'Beth': '9102', 'Cecil': '3258'}
```

You can create dictionary in the following way as well:

```
dict1 = { 'abc': 456 };
dict2 = { 'abc': 123, 98.6: 37 };
```

Each key is separated from its value by a colon (:), the items are separated by commas, and the whole thing is enclosed in curly braces. An empty dictionary without any items is written with just two curly braces, like this: {}.

Keys are unique within a dictionary while values may not be. The values of a dictionary can be of any type, but the keys must be of an immutable data type such as strings, numbers, or tuples.

## Accessing Values in Dictionary:

To access dictionary elements, you can use the familiar square brackets along with the key to obtain its value. Following is a simple example:

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7, 'Class': 'First'};

print "dict['Name']: ", dict['Name'];
print "dict['Age']: ", dict['Age'];
```

When the above code is executed, it produces following result:

```
dict['Name']: Zara
dict['Age']: 7
```

If we attempt to access a data item with a key which is not part of the dictionary, we get an error as follows:

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7, 'Class': 'First'};

print "dict['Alice']: ", dict['Alice'];
```

When the above code is executed, it produces following result:

```
dict['Alice']:
Traceback (most recent call last):
  File "test.py", line 4, in <module>
    print "dict['Alice']: ", dict['Alice'];
KeyError: 'Alice'
```

## Updating Dictionary:

You can update a dictionary by adding a new entry or item (i.e., a key-value pair), modifying an existing entry, or deleting an existing entry as shown below in the simple example:

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7, 'Class': 'First'};

dict['Age'] = 8; # update existing entry
dict['School'] = "DPS School"; # Add new entry

print "dict['Age']: ", dict['Age'];
print "dict['School']: ", dict['School'];
```

When the above code is executed, it produces following result:

```
dict['Age']: 8
dict['School']: DPS School
```

## Delete Dictionary Elements:

You can either remove individual dictionary elements or clear the entire contents of a dictionary. You can also delete entire dictionary in a single operation.

To explicitly remove an entire dictionary, just use the **del** statement. Following is a simple example:

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7, 'Class': 'First'};

del dict['Name']; # remove entry with key 'Name'
dict.clear();     # remove all entries in dict
del dict;         # delete entire dictionary

print "dict['Age']: ", dict['Age'];
print "dict['School']: ", dict['School'];
```

This will produce following result. Note an exception raised, this is because after **del dict** dictionary does not exist any more:

```
dict['Age']:
Traceback (most recent call last):
  File "test.py", line 8, in <module>
    print "dict['Age']: ", dict['Age'];
TypeError: 'type' object is unsubscriptable
```

**Note:** `del()` method is discussed in subsequent section.

## Properties of Dictionary Keys:

Dictionary values have no restrictions. They can be any arbitrary Python object, either standard objects or user-defined objects. However, same is not true for the keys.

There are two important points to remember about dictionary keys:

**(a)** More than one entry per key not allowed. Which means no duplicate key is allowed. When duplicate keys encountered during assignment, the last assignment wins. Following is a simple example:

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7, 'Name': 'Manni'};

print "dict['Name']: ", dict['Name'];
```

When the above code is executed, it produces following result:

```
dict['Name']: Manni
```

**(b)** Keys must be immutable. Which means you can use strings, numbers, or tuples as dictionary keys but something like `['key']` is not allowed. Following is a simple example:

```
#!/usr/bin/python

dict = {[('Name'): 'Zara', 'Age': 7};

print "dict['Name']: ", dict['Name'];
```

When the above code is executed, it produces following result:

```
Traceback (most recent call last):
  File "test.py", line 3, in <module>
    dict = {[('Name'): 'Zara', 'Age': 7};
TypeError: list objects are unhashable
```

## Built-in Dictionary Functions & Methods:

Python includes following dictionary functions

SN	Function with Description
1	<b>cmp(dict1, dict2)</b> Compares elements of both dict.
2	<b>len(dict)</b> Gives the total length of the dictionary. This would be equal to the number of items in the dictionary.

3	<b>str(dict)</b> Produces a printable string representation of a dictionary
4	<b>type(variable)</b> Returns the type of the passed variable. If passed variable is dictionary then it would return a dictionary type.

The dictionary functions are explained below individually:

## cmp(dict1, dict2)

### Description

The method **cmp()** compare two dictionaries based on key and values.

### Syntax

Following is the syntax for **cmp()** method

```
cmp (dict1, dict2)
```

### Parameters

- **dict1** -- This is the first dictionary to be compared with dict2.
- **dict2** -- This is the second dictionary to be compared with dict1.

### Return Value

This method returns 0 if both dictionaries are equal, -1 if dict1 < dict2 and 1 if dict1 > dict2.

### Example

The following example shows the usage of cmp() method.

```
#!/usr/bin/python

dict1 = {'Name': 'Zara', 'Age': 7};
dict2 = {'Name': 'Mahnaz', 'Age': 27};
dict3 = {'Name': 'Abid', 'Age': 27};
dict4 = {'Name': 'Zara', 'Age': 7};

print "Return Value : %d" % cmp (dict1, dict2)
print "Return Value : %d" % cmp (dict2, dict3)
print "Return Value : %d" % cmp (dict1, dict4)
```

Let us compile and run the above program, this will produce the following result:

```
Return Value : -1
Return Value : 1
Return Value : 0
```

## len(dict)

### Description

The method **len()** gives the total length of the dictionary. This would be equal to the number of items in the dictionary.

## Syntax

Following is the syntax for **len()** method

```
len(dict)
```

## Parameters

- **dict** -- This is the dictionary which length needs to be calculated.

## Return Value

This method returns the length.

## Example

The following example shows the usage of len() method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7};
print "Length : %d" % len (dict)
```

Let us compile and run the above program, this will produce the following result:

```
Length : 2
```

## str(dict)

## Description

The method **str()** produces a printable string representation of a dictionary.

## Syntax

Following is the syntax for **str()** method

```
str(dict)
```

## Parameters

- **dict** -- This is the dictionary.

## Return Value

This method returns string representation.

## Example

The following example shows the usage of str() method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7};
print "Equivalent String : %s" % str (dict)
```

Let us compile and run the above program, this will produce the following result:

```
Equivalent String : {'Age': 7, 'Name': 'Zara'}
```

# type(variable)

## Description

The method **type()** returns the type of the passed variable. If passed variable is dictionary then it would return a dictionary type.

## Syntax

Following is the syntax for **type()** method

```
type(dict)
```

## Parameters

- **dict** -- This is the dictionary.

## Return Value

This method returns the type of the passed variable.

## Example

The following example shows the usage of **type()** method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7};
print "Variable Type : %s" % type (dict)
```

Let us compile and run the above program, this will produce the following result:

```
Variable Type : <type 'dict'>
```

Python includes following dictionary methods

SN	Methods with Description
1	<b>dict.clear()</b> Removes all elements of dictionary <i>dict</i>
2	<b>dict.copy()</b> Returns a shallow copy of dictionary <i>dict</i>
3	<b>dict.fromkeys()</b> Create a new dictionary with keys from seq and values set to <i>value</i> .
4	<b>dict.get(key, default=None)</b> For <i>key</i> key, returns value or default if key not in dictionary
5	<b>dict.has_key(key)</b> Returns <i>true</i> if key in dictionary <i>dict</i> , <i>false</i> otherwise
6	<b>dict.items()</b> Returns a list of <i>dict's</i> (key, value) tuple pairs

7	<b>dict.keys()</b> Returns list of dictionary <i>dict</i> 's keys
8	<b>dict.setdefault(key, default=None)</b> Similar to get(), but will set <i>dict[key]=default</i> if <i>key</i> is not already in <i>dict</i>
9	<b>dict.update(dict2)</b> Adds dictionary <i>dict2</i> 's key-values pairs to <i>dict</i>
10	<b>dict.values()</b> Returns list of dictionary <i>dict</i> 's values

The methods are explained below individually:

## dict.clear()

### Description

The method **clear()** remove all items from the dictionary.

### Syntax

Following is the syntax for **clear()** method

```
dict.clear()
```

### Parameters

- NA

### Return Value

This method does not return any value.

### Example

The following example shows the usage of **clear()** method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7};

print "Start Len : %d" % len(dict)
dict.clear()
print "End Len : %d" % len(dict)
```

Let us compile and run the above program, this will produce the following result:

```
Start Len : 2
End Len : 0
```

## dict.copy()

### Description

The method **copy()** returns a shallow copy of the dictionary.

## Syntax

Following is the syntax for **copy()** method

```
dict.copy()
```

## Parameters

- NA

## Return Value

This method returns a shallow copy of the dictionary.

## Example

The following example shows the usage of **copy()** method.

```
#!/usr/bin/python

dict1 = {'Name': 'Zara', 'Age': 7};

dict2 = dict1.copy()
print "New Dictionary : %s" % str(dict2)
```

Let us compile and run the above program, this will produce the following result:

```
New Dictionary : {'Age': 7, 'Name': 'Zara'}
```

## dict.fromkeys()

### Description

The method **fromkeys()** creates a new dictionary with keys from *seq* and *values* set to value.

## Syntax

Following is the syntax for **fromkeys()** method

```
dict.fromkeys(seq[, value])
```

## Parameters

- **seq** -- This is the list of values which would be used for dictionary keys preparation.
- **value** -- This is optional, if provided then value would be set to this value

## Return Value

This method returns the list.

## Example

The following example shows the usage of **fromkeys()** method.

```
#!/usr/bin/python
```

```

seq = ('name', 'age', 'sex')

dict = dict.fromkeys(seq)
print "New Dictionary : %s" % str(dict)

dict = dict.fromkeys(seq, 10)
print "New Dictionary : %s" % str(dict)

```

Let us compile and run the above program, this will produce the following result:

```

New Dictionary : {'age': None, 'name': None, 'sex': None}
New Dictionary : {'age': 10, 'name': 10, 'sex': 10}

```

## dict.get(key, default=None)

### Description

The method **get()** return a value for the given key. If key is not available then returns default value None.

### Syntax

Following is the syntax for **get()** method

```
dict.get(key, default=None)
```

### Parameters

- key** -- This is the Key to be searched in the dictionary.
- default** -- This is the Value to be returned in case key does not exist.

### Return Value

This method return a value for the given key. If key is not available then return returns default value None.

### Example

The following example shows the usage of get() method.

```

#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}

print "Value : %s" % dict.get('Age')
print "Value : %s" % dict.get('Sex', "Never")

```

Let us compile and run the above program, this will produce the following result:

```

Value : 7
Value : Never

```

## dict.has\_key(key)

### Description

The method **has\_key()** return true if a given *key* is available in the dictionary otherwise it returns a false.

## Syntax

Following is the syntax for **has\_key()** method

```
dict.has_key(key)
```

## Parameters

- **key** -- This is the Key to be searched in the dictionary.

## Return Value

This method return true if a given key is available in the dictionary otherwise it returns a false.

## Example

The following example shows the usage of has\_key() method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}

print "Value : %s" % dict.has_key('Age')
print "Value : %s" % dict.has_key('Sex')
```

Let us compile and run the above program, this will produce the following result:

```
Value : True
Value : False
```

## dict.items()

## Description

The method **items()** returns a list of dict's (key, value) tuple pairs

## Syntax

Following is the syntax for **items()** method

```
dict.items()
```

## Parameters

- NA

## Return Value

This method returns a list of tuple pairs.

## Example

The following example shows the usage of items() method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}

print "Value : %s" % dict.items()
```

Let us compile and run the above program, this will produce the following result:

```
Value : [('Age', 7), ('Name', 'Zara')]
```

## dict.keys()

### Description

The method **keys()** returns a list of all the available keys in the dictionary.

### Syntax

Following is the syntax for **keys()** method

```
dict.keys ()
```

### Parameters

- NA

### Return Value

This method returns a list of all the available keys in the dictionary.

### Example

The following example shows the usage of **keys()** method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}

print "Value : %s" % dict.keys ()
```

Let us compile and run the above program, this will produce the following result:

```
Value : ['Age', 'Name']
```

## dict.setdefault(key, default=None)

### Description

The method **setdefault()** is similar to **get()**, but will set *dict[key]=default* if key is not already in dict.

### Syntax

Following is the syntax for **setdefault()** method

```
dict.setdefault (key, default=None)
```

### Parameters

- **key** -- This is the key be searched.
- **default** -- This is the Value to be returned in case key is not found.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of setdefault() method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}

print "Value : %s" % dict.setdefault('Age', None)
print "Value : %s" % dict.setdefault('Sex', None)
```

Let us compile and run the above program, this will produce the following result:

```
Value : 7
Value : None
```

## dict.update(dict2)

### Description

The method **update()** adds dictionary dict2's key-values pairs in to dict. This function does not return anything.

### Syntax

Following is the syntax for **update()** method

```
dict.update(dict2)
```

### Parameters

- **dict2** -- This is the dictionary to be added into dict.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of update() method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}
dict2 = {'Sex': 'female' }

dict.update(dict2)
print "Value : %s" % dict
```

Let us compile and run the above program, this will produce the following result:

```
Value : {'Age': 7, 'Name': 'Zara', 'Sex': 'female'}
```

# dict.values()

## Description

The method **values()** returns a list of all the values available in a given dictionary.

## Syntax

Following is the syntax for **values()** method

```
dict.values()
```

## Parameters

- NA

## Return Value

This method returns a list of all the values available in a given dictionary.

## Example

The following example shows the usage of **values()** method.

```
#!/usr/bin/python

dict = {'Name': 'Zara', 'Age': 7}

print "Value : %s" % dict.values()
```

Let us compile and run the above program, this will produce the following result:

```
Value : [7, 'Zara']
```

# Python Date & Time

A python program can handle date & time in several ways. Converting between date formats is a common chore for computers. Python's time and calendar modules help track dates and times.

## What is Tick?

Time intervals are floating-point numbers in units of seconds. Particular instants in time are expressed in seconds since 12:00am, January 1, 1970(epoch).

There is a popular **time** module available in Python which provides functions for working with times, and for converting between representations. The function `time.time()` returns the current system time in ticks since 12:00am, January 1, 1970(epoch).

### Example:

```
#!/usr/bin/python
import time; # This is required to include time module.

ticks = time.time()
print "Number of ticks since 12:00am, January 1, 1970:", ticks
```

This would produce a result something as follows:

```
Number of ticks since 12:00am, January 1, 1970: 7186862.73399
```

Date arithmetic is easy to do with ticks. However, dates before the epoch cannot be represented in this form. Dates in the far future also cannot be represented this way - the cutoff point is sometime in 2038 for UNIX and Windows.

## What is TimeTuple?

Many of Python's time functions handle time as a tuple of 9 numbers, as shown below:

Index	Field	Values
0	4-digit year	2008
1	Month	1 to 12
2	Day	1 to 31

3	Hour	0 to 23
4	Minute	0 to 59
5	Second	0 to 61 (60 or 61 are leap-seconds)
6	Day of Week	0 to 6 (0 is Monday)
7	Day of year	1 to 366 (Julian day)
8	Daylight savings	-1, 0, 1, -1 means library determines DST

The above tuple is equivalent to **struct\_time** structure. This structure has following attributes:

Index	Attributes	Values
0	tm_year	2008
1	tm_mon	1 to 12
2	tm_mday	1 to 31
3	tm_hour	0 to 23
4	tm_min	0 to 59
5	tm_sec	0 to 61 (60 or 61 are leap-seconds)
6	tm_wday	0 to 6 (0 is Monday)
7	tm_yday	1 to 366 (Julian day)
8	tm_isdst	-1, 0, 1, -1 means library determines DST

## Getting current time :-

To translate a time instant from a *seconds since the epoch* floating-point value into a time-tuple, pass the floating-point value to a function (e.g., `localtime`) that returns a time-tuple with all nine items valid:

```
#!/usr/bin/python

localtime = time.localtime(time.time())
print "Local current time : ", localtime
```

This would produce following result which could be formatted in any other presentable form:

```
Local current time : time.struct_time(tm_year=2008, tm_mon=5, tm_mday=15,
tm_hour=12, tm_min=55, tm_sec=32, tm_wday=0, tm_yday=136, tm_isdst=1)
```

## Getting formatted time :-

You can format any time as per your requirement, but simple method to get time in readable format is `asctime()`:

```
#!/usr/bin/python
import time;
```

```

localtime = time.asctime( time.localtime(time.time()) )
print "Local current time :", localtime

```

This would produce following result:

```
Local current time : Tue Jan 13 10:17:09 2009
```

## Getting calendar for a month :-

The calendar module gives a wide range of methods to play with yearly and monthly calendars. Here we print a calendar for a given month ( Jan 2008 ):

```

#!/usr/bin/python
import calendar

cal = calendar.month(2008, 1)
print "Here is the calendar:"
print cal;

```

This would produce following result:

```

Here is the calendar:
      January 2008
Mo Tu We Th Fr Sa Su
    1  2  3  4  5  6
  7  8  9 10 11 12 13
14 15 16 17 18 19 20
21 22 23 24 25 26 27
28 29 30 31

```

## The time Module:

There is a popular **time** module available in Python which provides functions for working with times, and for converting between representations. Here is the list of all available methods:

<b>SN</b>	<b>Function with Description</b>
1	<b>time.altzone()</b> The offset of the local DST timezone, in seconds west of UTC, if one is defined. This is negative if the local DST timezone is east of UTC (as in Western Europe, including the UK). Only use this if daylight is nonzero.
2	<b>time.asctime([tupletime])</b> Accepts a time-tuple and returns a readable 24-character string such as 'Tue Dec 11 18:07:14 2008'.
3	<b>time.clock()</b> Returns the current CPU time as a floating-point number of seconds. To measure computational costs of different approaches, the value of time.clock is more useful than that of time.time().
4	<b>time.ctime([secs])</b> Like asctime(localtime(secs)) and without arguments is like asctime()
5	<b>time.gmtime([secs])</b> Accepts an instant expressed in seconds since the epoch and returns a time-tuple t with the UTC time. Note : t.tm_isdst is always 0
6	<b>time.localtime([secs])</b>

	Accepts an instant expressed in seconds since the epoch and returns a time-tuple t with the local time (t.tm_isdst is 0 or 1, depending on whether DST applies to instant secs by local rules).
7	<b>time.mktime(tupletime)</b> Accepts an instant expressed as a time-tuple in local time and returns a floating-point value with the instant expressed in seconds since the epoch.
8	<b>time.sleep(secs)</b> Suspends the calling thread for secs seconds.
9	<b>time.strptime(fmt[,tupletime])</b> Accepts an instant expressed as a time-tuple in local time and returns a string representing the instant as specified by string fmt.
10	<b>time.strptime(str,fmt='"%a %b %d %H:%M:%S %Y")</b> Parses str according to format string fmt and returns the instant in time-tuple format.
11	<b>time.time()</b> Returns the current time instant, a floating-point number of seconds since the epoch.
12	<b>time.tzset()</b> Resets the time conversion rules used by the library routines. The environment variable TZ specifies how this is done.

The methods are explained here individually:

## time.altzone()

### Description

The method **altzone()** is the attribute of the **time** module. This returns the offset of the local DST timezone, in seconds west of UTC, if one is defined. This is negative if the local DST timezone is east of UTC (as in Western Europe, including the UK). Only use this if daylight is nonzero.

### Syntax

Following is the syntax for **altzone()** method

```
time.altzone
```

### Parameters

- NA

### Return Value

This method returns the offset of the local DST timezone, in seconds west of UTC, if one is defined.

### Example

The following example shows the usage of altzone() method.

```
#!/usr/bin/python
import time

print "time.altzone %d " % time.altzone
```

Let us compile and run the above program, this will produce the following result:

```
time.altzone() 25200
```

## time.asctime([tupletime])

### Description

The method **asctime()** converts a tuple or struct\_time representing a time as returned by gmtime() or localtime() to a 24-character string of the following form: 'Tue Feb 17 23:21:05 2009'.

### Syntax

Following is the syntax for **asctime()** method

```
time.asctime([t]))
```

### Parameters

- t -- This is a tuple of 9 elements or struct\_time representing a time as returned by gmtime() or localtime() function.

### Return Value

This method returns 24-character string of the following form: 'Tue Feb 17 23:21:05 2009'.

### Example

The following example shows the usage of asctime() method.

```
#!/usr/bin/python
import time

t = time.localtime()
print "timeasctime(t): %s" % timeasctime(t)
```

Let us compile and run the above program, this will produce the following result on my machine:

```
timeasctime(t): Tue Feb 17 09:42:58 2009
```

## time.clock( )

### Description

The method **clock()** returns the current processor time as a floating point number expressed in seconds on **Unix**. The precision depends on that of the C function of the same name, but in any case, this is the function to use for benchmarking Python or timing algorithms.

On **Windows**, this function returns wall-clock seconds elapsed since the first call to this function, as a floating point number, based on the Win32 function QueryPerformanceCounter.

### Syntax

Following is the syntax for **clock()** method

```
time.clock()
```

## Parameters

- NA

## Return Value

This method returns the current processor time as a floating point number expressed in seconds on *Unix* and in *Windows* it returns wall-clock seconds elapsed since the first call to this function, as a floating point number.

## Example

The following example shows the usage of `clock()` method.

```
#!/usr/bin/python
import time

def procedure():
    time.sleep(2.5)

# measure process time
t0 = time.clock()
procedure()
print time.clock() - t0, "seconds process time"

# measure wall time
t0 = time.time()
procedure()
print time.time() - t0, "seconds wall time"
```

Let us compile and run the above program, this will produce the following result:

```
0.0 seconds process time
2.50023603439 seconds wall time
```

**Note:** Not all systems can measure the true process time. On such systems (including Windows), `clock` usually measures the wall time since the program was started.

## time.ctime([secs])

### Description

The method `ctime()` convert a time expressed in seconds since the epoch to a string representing local time. If `secs` is not provided or `None`, the current time as returned by `time()` is used. This function is equivalent to `asctime(localtime(secs))`. Locale information is not used by `ctime()`.

### Syntax

Following is the syntax for `ctime()` method

```
time.ctime([ sec ])
```

## Parameters

- `sec` -- These are the number of seconds to be converted into string representation.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of ctime() method.

```
#!/usr/bin/python
import time

print "time.ctime() : %s" % time.ctime()
```

Let us compile and run the above program, this will produce the following result:

```
time.ctime() : Tue Feb 17 10:00:18 2009
```

## time.gmtime([secs])

### Description

The method **gmtime()** converts a time expressed in seconds since the epoch to a struct\_time in UTC in which the dst flag is always zero. If secs is not provided or None, the current time as returned by time() is used.

### Syntax

Following is the syntax for **gmtime()** method

```
time.gmtime([ sec ])
```

### Parameters

- **sec** -- These are the number of seconds to be converted into structure struct\_time representation.

### Return Value

This method does not return any value.

## Example

The following example shows the usage of gmtime() method.

```
#!/usr/bin/python
import time

print "time.gmtime() : %s" % time.gmtime()
```

Let us compile and run the above program, this will produce the following result:

```
time.gmtime() : time.struct_time(tm_year=2013, tm_mon=4, tm_mday=28, tm_hour=12,
tm_min=29, tm_sec=48, tm_wday=6, tm_yday=118, tm_isdst=0)
```

## time.localtime([secs])

### Description

The method **localtime()** is similar to gmtime() but it converts number of seconds to local time. If secs is not provided or None, the current time as returned by time() is used. The dst flag is set to 1 when DST applies to the given time.

## Syntax

Following is the syntax for **localtime()** method

```
time.localtime( [ sec ] )
```

## Parameters

- **sec** -- These are the number of seconds to be converted into structure struct\_time representation.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of localtime() method.

```
#!/usr/bin/python
import time

print "time.localtime() : %s" % time.localtime()
```

Let us compile and run the above program, this will produce the following result:

```
time.localtime() : time.struct_time(tm_year=2013, tm_mon=4, tm_mday=28, tm_hour=5,
tm_min=28, tm_sec=41, tm_wday=6, tm_yday=118, tm_isdst=0)
```

## time.mktime(tupletime)

## Description

The method **mktime()** is the inverse function of localtime(). Its argument is the struct\_time or full 9-tuple and it returns a floating point number, for compatibility with time().

If the input value cannot be represented as a valid time, either *OverflowError* or *ValueError* will be raised.

## Syntax

Following is the syntax for **mktime()** method

```
time.mktime(t)
```

## Parameters

- **t** -- This is the struct\_time or full 9-tuple.

## Return Value

This method returns a floating point number, for compatibility with time().

## Example

The following example shows the usage of mktime() method.

```
#!/usr/bin/python
import time

t = (2009, 2, 17, 17, 3, 38, 1, 48, 0)
```

```
secs = time.mktime( t )
print "time.mktime(t) : %f" % secs
print "asctime(localtime(secs)) : %s" % time.asctime(time.localtime(secs))
```

Let us compile and run the above program, this will produce the following result:

```
time.mktime(t) : 1234915418.000000
asctime(localtime(secs)): Tue Feb 17 17:03:38 2009
```

## time.sleep(secs)

### Description

The method **sleep()** suspends execution for the given number of seconds. The argument may be a floating point number to indicate a more precise sleep time.

The actual suspension time may be less than that requested because any caught signal will terminate the sleep() following execution of that signal's catching routine.

### Syntax

Following is the syntax for **sleep()** method

```
time.sleep(t)
```

### Parameters

- **t** -- This is the number of seconds execution to be suspended.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of sleep() method.

```
#!/usr/bin/python
import time

print "Start : %s" % time.ctime()
time.sleep( 5 )
print "End : %s" % time.ctime()
```

Let us compile and run the above program, this will produce the following result:

```
Start : Tue Feb 17 10:19:18 2009
End : Tue Feb 17 10:19:23 2009
```

## time.strftime(fmt[,tupletime])

### Description

The method **strftime()** converts a tuple or struct\_time representing a time as returned by gmtime() or localtime() to a string as specified by the format argument.

If `t` is not provided, the current time as returned by `localtime()` is used. `format` must be a string. An exception `ValueError` is raised if any field in `t` is outside of the allowed range.

## Syntax

Following is the syntax for `strftime()` method

```
time.strftime(format [, t])
```

## Parameters

- `t` -- This is the time in number of seconds to be formatted.
- `format` -- This is the directive which would be used to format given time.

The following directives can be embedded in the format string.

## Directive

- `%a` - abbreviated weekday name
- `%A` - full weekday name
- `%b` - abbreviated month name
- `%B` - full month name
- `%c` - preferred date and time representation
- `%C` - century number (the year divided by 100, range 00 to 99)
- `%d` - day of the month (01 to 31)
- `%D` - same as `%m/%d/%y`
- `%e` - day of the month (1 to 31)
- `%g` - like `%G`, but without the century
- `%G` - 4-digit year corresponding to the ISO week number (see `%V`).
- `%h` - same as `%b`
- `%H` - hour, using a 24-hour clock (00 to 23)
- `%I` - hour, using a 12-hour clock (01 to 12)
- `%j` - day of the year (001 to 366)
- `%m` - month (01 to 12)
- `%M` - minute
- `%n` - newline character
- `%p` - either am or pm according to the given time value
- `%r` - time in a.m. and p.m. notation
- `%R` - time in 24 hour notation
- `%S` - second
- `%t` - tab character
- `%T` - current time, equal to `%H:%M:%S`
- `%u` - weekday as a number (1 to 7), Monday=1. Warning: In Sun Solaris Sunday=1
- `%U` - week number of the current year, starting with the first Sunday as the first day of the first week
- `%V` - The ISO 8601 week number of the current year (01 to 53), where week 1 is the first week that has at least 4 days in the current year, and with Monday as the first day of the week
- `%W` - week number of the current year, starting with the first Monday as the first day of the first week
- `%w` - day of the week as a decimal, Sunday=0
- `%x` - preferred date representation without the time
- `%X` - preferred time representation without the date
- `%y` - year without a century (range 00 to 99)
- `%Y` - year including the century
- `%Z` or `%z` - time zone or name or abbreviation
- `%%` - a literal % character

## Return Value

This method does not return any value.

## Example

The following example shows the usage of strftime() method.

```
#!/usr/bin/python
import time

t = (2009, 2, 17, 17, 3, 38, 1, 48, 0)
t = time.mktime(t)
print time.strftime("%b %d %Y %H:%M:%S", time.gmtime(t))
```

Let us compile and run the above program, this will produce the following result:

```
Feb 18 2009 00:03:38
```

## time.strptime(str,fmt='%a %b %d %H:%M:%S %Y')

## Description

The method **strptime()** parses a string representing a time according to a format. The return value is a struct\_time as returned by gmtime() or localtime().

The format parameter uses the same directives as those used by strftime(); it defaults to "%a %b %d %H:%M:%S %Y" which matches the formatting returned by ctime().

If string cannot be parsed according to format, or if it has excess data after parsing, ValueError is raised.

## Syntax

Following is the syntax for **strptime()** method

```
time.strptime(string[, format])
```

## Parameters

- **string** -- This is the time in string format which would be parsed based on the given format.
- **format** -- This is the directive which would be used to parse the given string.

The following directives can be embedded in the format string.

## Directive

- %a - abbreviated weekday name
- %A - full weekday name
- %b - abbreviated month name
- %B - full month name
- %c - preferred date and time representation
- %C - century number (the year divided by 100, range 00 to 99)
- %d - day of the month (01 to 31)
- %D - same as %m/%d/%y
- %e - day of the month (1 to 31)
- %g - like %G, but without the century

- %G - 4-digit year corresponding to the ISO week number (see %V).
- %h - same as %b
- %H - hour, using a 24-hour clock (00 to 23)
- %I - hour, using a 12-hour clock (01 to 12)
- %j - day of the year (001 to 366)
- %m - month (01 to 12)
- %M - minute
- %n - newline character
- %p - either am or pm according to the given time value
- %r - time in a.m. and p.m. notation
- %R - time in 24 hour notation
- %S - second
- %t - tab character
- %T - current time, equal to %H:%M:%S
- %u - weekday as a number (1 to 7), Monday=1. Warning: In Sun Solaris Sunday=1
- %U - week number of the current year, starting with the first Sunday as the first day of the first week
- %V - The ISO 8601 week number of the current year (01 to 53), where week 1 is the first week that has at least 4 days in the current year, and with Monday as the first day of the week
- %W - week number of the current year, starting with the first Monday as the first day of the first week
- %w - day of the week as a decimal, Sunday=0
- %x - preferred date representation without the time
- %X - preferred time representation without the date
- %y - year without a century (range 00 to 99)
- %Y - year including the century
- %Z or %z - time zone or name or abbreviation
- % - a literal % character

## Return Value

This return value is struct\_time as returned by gmtime() or localtime().

## Example

The following example shows the usage of strftime() method.

```
#!/usr/bin/python
import time

struct_time = time.strptime("30 Nov 00", "%d %b %y")
print "returned tuple: %s" % struct_time
```

Let us compile and run the above program, this will produce the following result:

```
returned tuple: (2000, 11, 30, 0, 0, 0, 3, 335, -1)
```

## time.time( )

### Description

The method **time()** returns the time as a floating point number expressed in seconds since the epoch, in UTC.

**Note:** Even though the time is always returned as a floating point number, not all systems provide time with a better precision than 1 second. While this function normally returns non-decreasing values, it can return a lower value than a previous call if the system clock has been set back between the two calls.

## Syntax

Following is the syntax for **time()** method

```
time.time()
```

## Parameters

- NA

## Return Value

This method returns the time as a floating point number expressed in seconds since the epoch, in UTC.

## Example

The following example shows the usage of time() method.

```
#!/usr/bin/python
import time

print "time.time(): %f " % time.time()
print time.localtime( time.time() )
print time.asctime( time.localtime(time.time()) )
```

Let us compile and run the above program, this will produce the following result:

```
time.time(): 1234892919.655932
time.struct_time(tm_year=2009, tm_mon=2, tm_mday=17, tm_hour=10, tm_min=48,
tm_sec=39, tm_wday=1, tm_yday=48, tm_isdst=0)
Tue Feb 17 10:48:39 2009
```

## time.tzset()

### Description

The method **tzset()** resets the time conversion rules used by the library routines. The environment variable TZ specifies how this is done.

The standard format of the TZ environment variable is (whitespace added for clarity):

```
std offset [dst [offset [,start[/time], end[/time]]]]
```

- **std and dst:** Three or more alphanumerics giving the timezone abbreviations. These will be propagated into time.tzname.
- **offset:** The offset has the form: .hh[:mm:ss]. This indicates the value added the local time to arrive at UTC. If preceded by a '-', the timezone is east of the Prime Meridian; otherwise, it is west. If no offset follows dst, summer time is assumed to be one hour ahead of standard time.
- **start[/time], end[/time]:** Indicates when to change to and back from DST. The format of the start and end dates are one of the following:
  - **Jn:** The Julian day n (1 <= n <= 365). Leap days are not counted, so in all years February 28 is day 59 and March 1 is day 60.
  - **n:** The zero-based Julian day (0 <= n <= 365). Leap days are counted, and it is possible to refer to February 29.
  - **Mm.n.d:** The d'th day (0 <= d <= 6) or week n of month m of the year (1 <= n <= 5, 1 <= m <= 12, where week 5 means 'the last d day in month m' which may occur in either the fourth or the fifth week). Week 1 is the first week in which the d'th day occurs. Day zero is Sunday.

- **time:** This has the same format as offset except that no leading sign ('-' or '+') is allowed. The default, if time is not given, is 02:00:00.

## Syntax

Following is the syntax for **tzset()** method

```
time.tzset()
```

## Parameters

- NA

## Return Value

This method does not return any value.

## Example

The following example shows the usage of tzset() method.

```
#!/usr/bin/python
import time
import os

os.environ['TZ'] = 'EST+05EDT,M4.1.0,M10.5.0'
time.tzset()
print time.strftime('%X %x %Z')

os.environ['TZ'] = 'AEST-10AEDT-11,M10.5.0,M3.5.0'
time.tzset()
print time.strftime('%X %x %Z')
```

Let us compile and run the above program, this will produce the following result:

```
13:00:40 02/17/09 EST
05:00:40 02/18/09 AEDT
```

There are following two important attributes available with time module:

SN	Attribute with Description
1	<b>time.timezone</b> Attribute time.timezone is the offset in seconds of the local time zone (without DST) from UTC (>0 in the Americas; <=0 in most of Europe, Asia, Africa).
2	<b>time.tzname</b> Attribute time.tzname is a pair of locale-dependent strings, which are the names of the local time zone without and with DST, respectively.

## The *calendar* Module

The calendar module supplies calendar-related functions, including functions to print a text calendar for a given month or year.

By default, calendar takes Monday as the first day of the week and Sunday as the last one. To change this, call `calendar.setfirstweekday()` function.

Here is a list of functions available with the *calendar* module:

SN	Function with Description
1	<b>calendar.calendar(year,w=2,l=1,c=6)</b> Returns a multiline string with a calendar for year year formatted into three columns separated by c spaces. w is the width in characters of each date; each line has length 21*w+18+2*c. l is the number of lines for each week.
2	<b>calendar.firstweekday( )</b> Returns the current setting for the weekday that starts each week. By default, when calendar is first imported, this is 0, meaning Monday.
3	<b>calendar.isleap(year)</b> Returns True if year is a leap year; otherwise, False.
4	<b>calendar.leapdays(y1,y2)</b> Returns the total number of leap days in the years within range(y1,y2).
5	<b>calendar.month(year,month,w=2,l=1)</b> Returns a multiline string with a calendar for month month of year year, one line per week plus two header lines. w is the width in characters of each date; each line has length 7*w+6. l is the number of lines for each week.
6	<b>calendar.monthcalendar(year,month)</b> Returns a list of lists of ints. Each sublist denotes a week. Days outside month month of year year are set to 0; days within the month are set to their day-of-month, 1 and up.
7	<b>calendar.monthrange(year,month)</b> Returns two integers. The first one is the code of the weekday for the first day of the month month in year year; the second one is the number of days in the month. Weekday codes are 0 (Monday) to 6 (Sunday); month numbers are 1 to 12.
8	<b>calendar.prcal(year,w=2,l=1,c=6)</b> Like print calendar.calendar(year,w,l,c).
9	<b>calendar.prmonth(year,month,w=2,l=1)</b> Like print calendar.month(year,month,w,l).
10	<b>calendar.setfirstweekday(weekday)</b> Sets the first day of each week to weekday code weekday. Weekday codes are 0 (Monday) to 6 (Sunday).
11	<b>calendar.timegm(tupletime)</b> The inverse of time.gmtime: accepts a time instant in time-tuple form and returns the same instant as a floating-point number of seconds since the epoch.
12	<b>calendar.weekday(year,month,day)</b> Returns the weekday code for the given date. Weekday codes are 0 (Monday) to 6 (Sunday); month numbers are 1 (January) to 12 (December).

## Other Modules & Functions:

If you are interested then here you would find a list of other important modules and functions to play with date & time in Python:

- [The \*datetime\* Module](#)
- [The \*pytz\* Module](#)
- [The \*dateutil\* Module](#)

# CHAPTER

# 14

# Python Function

A function is a block of organized, reusable code that is used to perform a single, related action.

Functions provides better modularity for your application and a high degree of code reusing.

As you already know, Python gives you many built-in functions like `print()` etc. but you can also create your own functions. These functions are called *user-defined functions*.

## Defining a Function

You can define functions to provide the required functionality. Here are simple rules to define a function in Python:

- Function blocks begin with the keyword `def` followed by the function name and parentheses `( )`.
- Any input parameters or arguments should be placed within these parentheses. You can also define parameters inside these parentheses.
- The first statement of a function can be an optional statement - the documentation string of the function or *docstring*.
- The code block within every function starts with a colon `:` and is indented.
- The statement `return [expression]` exits a function, optionally passing back an expression to the caller. A `return` statement with no arguments is the same as `return None`.

### Syntax:

```
def functionname( parameters ):  
    "function_docstring"  
    function_suite  
    return [expression]
```

By default, parameters have a positional behavior, and you need to inform them in the same order that they were defined.

### Example:

Here is the simplest form of a Python function. This function takes a string as input parameter and prints it on standard screen.

```
def printme( str ):
```

```
"This prints a passed string into this function"
print str
return
```

## Calling a Function

Defining a function only gives it a name, specifies the parameters that are to be included in the function, and structures the blocks of code.

Once the basic structure of a function is finalized, you can execute it by calling it from another function or directly from the Python prompt. Following is the example to call printme() function:

```
#!/usr/bin/python

# Function definition is here
def printme( str ):
    "This prints a passed string into this function"
    print str;
    return;

# Now you can call printme function
printme("I'm first call to user defined function!");
printme("Again second call to the same function");
```

When the above code is executed, it produces following result:

```
I'm first call to user defined function!
Again second call to the same function
```

## Pass by reference vs value

All parameters (arguments) in the Python language are passed by reference. It means if you change what a parameter refers to within a function, the change also reflects back in the calling function. For example:

```
#!/usr/bin/python

# Function definition is here
def changeme( mylist ):
    "This changes a passed list into this function"
    mylist.append([1,2,3,4]);
    print "Values inside the function: ", mylist
    return

# Now you can call changeme function
mylist = [10,20,30];
changeme( mylist );
print "Values outside the function: ", mylist
```

Here we are maintaining reference of the passed object and appending values in the same object. So this would produce following result:

```
Values inside the function:  [10, 20, 30, [1, 2, 3, 4]]
Values outside the function:  [10, 20, 30, [1, 2, 3, 4]]
```

There is one more example where argument is being passed by reference but inside the function, but the reference is being over-written.

```

#!/usr/bin/python

# Function definition is here
def changeme( mylist ):
    "This changes a passed list into this function"
    mylist = [1,2,3,4]; # This would assign new reference in mylist
    print "Values inside the function: ", mylist
    return

# Now you can call changeme function
mylist = [10,20,30];
changeme( mylist );
print "Values outside the function: ", mylist

```

The parameter `mylist` is local to the function `changeme`. Changing `mylist` within the function does not affect `mylist`. The function accomplishes nothing and finally this would produce following result:

```

Values inside the function:  [1, 2, 3, 4]
Values outside the function:  [10, 20, 30]

```

## Function Arguments:

You can call a function by using the following types of formal arguments::

- Required arguments
- Keyword arguments
- Default arguments
- Variable-length arguments

## Required arguments:

Required arguments are the arguments passed to a function in correct positional order. Here the number of arguments in the function call should match exactly with the function definition.

To call the function `printme()` you definitely need to pass one argument otherwise it would give a syntax error as follows:

```

#!/usr/bin/python

# Function definition is here
def printme( str ):
    "This prints a passed string into this function"
    print str;
    return;

# Now you can call printme function
printme();

```

When the above code is executed, it produces following result:

```

Traceback (most recent call last):
  File "test.py", line 11, in <module>
    printme();

```

```
TypeError: printme() takes exactly 1 argument (0 given)
```

## Keyword arguments:

Keyword arguments are related to the function calls. When you use keyword arguments in a function call, the caller identifies the arguments by the parameter name.

This allows you to skip arguments or place them out of order because the Python interpreter is able to use the keywords provided to match the values with parameters. You can also make keyword calls to the `printme()` function in the following ways:

```
#!/usr/bin/python

# Function definition is here
def printme( str ):
    "This prints a passed string into this function"
    print str;
    return;

# Now you can call printme function
printme( str = "My string");
```

When the above code is executed, it produces following result:

```
My string
```

Following example gives more clear picture. Note, here order of the parameter does not matter:

```
#!/usr/bin/python

# Function definition is here
def printinfo( name, age ):
    "This prints a passed info into this function"
    print "Name: ", name;
    print "Age ", age;
    return;

# Now you can call printinfo function
printinfo( age=50, name="miki" );
```

When the above code is executed, it produces following result:

```
Name: miki
Age 50
```

## Default arguments:

A default argument is an argument that assumes a default value if a value is not provided in the function call for that argument. Following example gives idea on default arguments, it would print default age if it is not passed:

```
#!/usr/bin/python

# Function definition is here
def printinfo( name, age = 35 ):
    "This prints a passed info into this function"
    print "Name: ", name;
    print "Age ", age;
```

```

        return;

# Now you can call printinfo function
printinfo( age=50, name="miki" );
printinfo( name="miki" );

```

When the above code is executed, it produces following result:

```

Name: miki
Age 50
Name: miki
Age 35

```

## Variable-length arguments:

You may need to process a function for more arguments than you specified while defining the function. These arguments are called *variable-length* arguments and are not named in the function definition, unlike required and default arguments.

The general syntax for a function with non-keyword variable arguments is this:

```

def functionname([formal_args,] *var_args_tuple ):
    "function_docstring"
    function_suite
    return [expression]

```

An asterisk (\*) is placed before the variable name that will hold the values of all nonkeyword variable arguments. This tuple remains empty if no additional arguments are specified during the function call. Following is a simple example:

```

#!/usr/bin/python

# Function definition is here
def printinfo( arg1, *vartuple ):
    "This prints a variable passed arguments"
    print "Output is: "
    print arg1
    for var in vartuple:
        print var
    return;

# Now you can call printinfo function
printinfo( 10 );
printinfo( 70, 60, 50 );

```

When the above code is executed, it produces following result:

```

Output is:
10
Output is:
70
60
50

```

## The Anonymous Functions:

You can use the *lambda* keyword to create small anonymous functions. These functions are called anonymous because they are not declared in the standard manner by using the *def* keyword.

- Lambda forms can take any number of arguments but return just one value in the form of an expression. They cannot contain commands or multiple expressions.
- An anonymous function cannot be a direct call to print because lambda requires an expression.
- Lambda functions have their own local namespace and cannot access variables other than those in their parameter list and those in the global namespace.
- Although it appears that lambda's are a one-line version of a function, they are not equivalent to *inline* statements in C or C++, whose purpose is by passing function stack allocation during invocation for performance reasons.

## Syntax:

The syntax of *lambda* functions contains only a single statement, which is as follows:

```
lambda [arg1 [,arg2,.....argn]]:expression
```

Following is the example to show how *lambda* form of function works:

```
#!/usr/bin/python

# Function definition is here
sum = lambda arg1, arg2: arg1 + arg2;

# Now you can call sum as a function
print "Value of total : ", sum( 10, 20 )
print "Value of total : ", sum( 20, 20 )
```

When the above code is executed, it produces following result:

```
Value of total : 30
Value of total : 40
```

## The *return* Statement:

The statement `return [expression]` exits a function, optionally passing back an expression to the caller. A return statement with no arguments is the same as `return None`.

All the above examples are not returning any value, but if you like you can return a value from a function as follows:

```
#!/usr/bin/python

# Function definition is here
def sum( arg1, arg2 ):
    # Add both the parameters and return them."
    total = arg1 + arg2
    print "Inside the function : ", total
    return total;

# Now you can call sum function
total = sum( 10, 20 );
print "Outside the function : ", total
```

When the above code is executed, it produces following result:

```
Inside the function : 30
Outside the function : 30
```

## Scope of Variables:

All variables in a program may not be accessible at all locations in that program. This depends on where you have declared a variable.

The scope of a variable determines the portion of the program where you can access a particular identifier. There are two basic scopes of variables in Python:

- Global variables
- Local variables

## Global vs. Local variables:

Variables that are defined inside a function body have a local scope, and those defined outside have a global scope.

This means that local variables can be accessed only inside the function in which they are declared whereas global variables can be accessed throughout the program body by all functions. When you call a function, the variables declared inside it are brought into scope. Following is a simple example:

```
#!/usr/bin/python

total = 0; # This is global variable.
# Function definition is here
def sum( arg1, arg2 ):
    # Add both the parameters and return them."
    total = arg1 + arg2; # Here total is local variable.
    print "Inside the function local total : ", total
    return total;

# Now you can call sum function
sum( 10, 20 );
print "Outside the function global total : ", total
```

When the above code is executed, it produces following result:

```
Inside the function local total : 30
Outside the function global total : 0
```

# Python Modules

A

module allows you to logically organize your Python code. Grouping related code into a module makes the code easier to understand and use. A module is a Python object with arbitrarily named attributes that you can bind and reference.

Simply, a module is a file consisting of Python code. A module can define functions, classes, and variables. A module can also include runnable code.

## Example:

The Python code for a module named *aname* normally resides in a file named *aname.py*. Here's an example of a simple module, *hello.py*

```
def print_func( par ):
    print "Hello : ", par
    return
```

## The *import* Statement:

You can use any Python source file as a module by executing an import statement in some other Python source file. The *import* has the following syntax:

```
import module1[, module2[,... moduleN]]
```

When the interpreter encounters an import statement, it imports the module if the module is present in the search path. A search path is a list of directories that the interpreter searches before importing a module. For example, to import the module *hello.py*, you need to put the following command at the top of the script:

```
#!/usr/bin/python

# Import module hello
import hello

# Now you can call defined function that module as follows
hello.print_func("Zara")
```

When the above code is executed, it produces following result:

```
Hello : Zara
```

A module is loaded only once, regardless of the number of times it is imported. This prevents the module execution from happening over and over again if multiple imports occur.

## The *from...import* Statement

Python's *from* statement lets you import specific attributes from a module into the current namespace. The *from...import* has the following syntax:

```
from modname import name1[, name2[, ... nameN]]
```

For example, to import the function fibonacci from the module fib, use the following statement:

```
from fib import fibonacci
```

This statement does not import the entire module fib into the current namespace; it just introduces the item fibonacci from the module fib into the global symbol table of the importing module.

## The *from...import \** Statement:

It is also possible to import all names from a module into the current namespace by using the following import statement:

```
from modname import *
```

This provides an easy way to import all the items from a module into the current namespace; however, this statement should be used sparingly.

## Locating Modules:

When you import a module, the Python interpreter searches for the module in the following sequences:

- The current directory.
- If the module isn't found, Python then searches each directory in the shell variable PYTHONPATH.
- If all else fails, Python checks the default path. On UNIX, this default path is normally /usr/local/lib/python/.

The module search path is stored in the system module sys as the **sys.path** variable. The sys.path variable contains the current directory, PYTHONPATH, and the installation-dependent default.

## The **PYTHONPATH** Variable:

The PYTHONPATH is an environment variable, consisting of a list of directories. The syntax of PYTHONPATH is the same as that of the shell variable PATH.

Here is a typical PYTHONPATH from a Windows system:

```
set PYTHONPATH=c:\python20\lib;
```

And here is a typical PYTHONPATH from a UNIX system:

```
set PYTHONPATH=/usr/local/lib/python
```

## Namespaces and Scoping:

Variables are names (identifiers) that map to objects. A *namespace* is a dictionary of variable names (keys) and their corresponding objects (values).

A Python statement can access variables in a *local namespace* and in the *global namespace*. If a local and a global variable have the same name, the local variable shadows the global variable.

Each function has its own local namespace. Class methods follow the same scoping rule as ordinary functions.

Python makes educated guesses on whether variables are local or global. It assumes that any variable assigned a value in a function is local.

Therefore, in order to assign a value to a global variable within a function, you must first use the `global` statement.

The statement `global VarName` tells Python that `VarName` is a global variable. Python stops searching the local namespace for the variable.

For example, we define a variable `Money` in the global namespace. Within the function `Money`, we assign `Money` a value. Therefor Python assumes `Money` is a local variable. However, we access the value of the local variable `Money` before setting it, so an `UnboundLocalError` is the result. Uncommenting the `global` statement fixes the problem.

```
#!/usr/bin/python

Money = 2000
def AddMoney():
    # Uncomment the following line to fix the code:
    # global Money
    Money = Money + 1

print Money
AddMoney()
print Money
```

## The `dir( )` Function:

The `dir()` built-in function returns a sorted list of strings containing the names defined by a module.

The list contains the names of all the modules, variables, and functions that are defined in a module. Following is a simple example:

```
#!/usr/bin/python

# Import built-in module math
import math

content = dir(math)

print content;
```

When the above code is executed, it produces following result:

```
['__doc__', '__file__', '__name__', 'acos', 'asin', 'atan',
'atan2', 'ceil', 'cos', 'cosh', 'degrees', 'e', 'exp',
'fabs', 'floor', 'fmod', 'frexp', 'hypot', 'ldexp', 'log',
'log10', 'modf', 'pi', 'pow', 'radians', 'sin', 'sinh',
'sqrt', 'tan', 'tanh']
```

Here the special string variable `__name__` is the module's name, and `__file__` is the filename from which the module was loaded.

## The `globals()` and `locals()` Functions:

The `globals()` and `locals()` functions can be used to return the names in the global and local namespaces depending on the location from where they are called.

If `locals()` is called from within a function, it will return all the names that can be accessed locally from that function.

If `globals()` is called from within a function, it will return all the names that can be accessed globally from that function.

The return type of both these functions is dictionary. Therefore, names can be extracted using the `keys()` function.

## The `reload()` Function:

When the module is imported into a script, the code in the top-level portion of a module is executed only once.

Therefore, if you want to reexecute the top-level code in a module, you can use the `reload()` function. The `reload()` function imports a previously imported module again. The syntax of the `reload()` function is this:

```
reload(module_name)
```

Here `module_name` is the name of the module you want to reload and not the string containing the module name. For example to re-load `hello` module, do the following:

```
reload(hello)
```

## Packages in Python:

A package is a hierarchical file directory structure that defines a single Python application environment that consists of modules and subpackages and sub-subpackages, and so on.

Consider a file `Pots.py` available in `Phone` directory. This file has following line of source code:

```
#!/usr/bin/python

def Pots():
    print "I'm Pots Phone"
```

Similar way we have another two files having different functions with the same name as above:

- `Phone/lsdn.py` file having function `lsdn()`
- `Phone/G3.py` file having function `G3()`

Now create one more file `__init__.py` in `Phone` directory :

- `Phone/__init__.py`

To make all of your functions available when you've imported `Phone`, you need to put explicit import statements in `__init__.py` as follows:

```
from Pots import Pots
from Isdn import Isdn
```

**TUTORIALS POINT**

Simply Easy Learning

```
from G3 import G3
```

After you've added these lines to `__init__.py`, you have all of these classes available when you've imported the Phone package:

```
#!/usr/bin/python

# Now import your Phone Package.
import Phone

Phone.Pots()
Phone.Isdn()
Phone.G3()
```

When the above code is executed, it produces following result:

```
I'm Pots Phone
I'm 3G Phone
I'm ISDN Phone
```

In the above example, we have taken example of a single functions in each file, but you can keep multiple functions in your files. You can also define different Python classes in those files and then you can create your packages out of those classes.

# Python Files I/O

T

his chapter will cover all the basic I/O functions available in Python. For more functions please refer to standard Python documentation.

## Printing to the Screen:

The simplest way to produce output is using the *print* statement where you can pass zero or more expressions, separated by commas. This function converts the expressions you pass it to a string and writes the result to standard output as follows:

```
#!/usr/bin/python  
  
print "Python is really a great language,", "isn't it?";
```

This would produce following result on your standard screen:

```
Python is really a great language, isn't it?
```

## Reading Keyboard Input:

Python provides two built-in functions to read a line of text from standard input, which by default comes from the keyboard. These functions are:

- `raw_input`
- `input`

## The `raw_input` Function:

The `raw_input([prompt])` function reads one line from standard input and returns it as a string (removing the trailing newline):

```
#!/usr/bin/python  
  
str = raw_input("Enter your input: ");  
print "Received input is : ", str
```

This would prompt you to enter any string and it would display same string on the screen. When I typed "Hello Python!", its output is like this:

```
Enter your input: Hello Python
```

```
Received input is : Hello Python
```

## The *input* Function:

The `input([prompt])` function is equivalent to `raw_input`, except that it assumes the input is a valid Python expression and returns the evaluated result to you:

```
#!/usr/bin/python

str = input("Enter your input: ");
print "Received input is : ", str
```

This would produce following result against the entered input:

```
Enter your input: [x*5 for x in range(2,10,2)]
Recieved input is : [10, 20, 30, 40]
```

## Opening and Closing Files:

Until now, you have been reading and writing to the standard input and output. Now we will see how to play with actual data files.

Python provides basic functions and methods necessary to manipulate files by default. You can do your most of the file manipulation using a `file` object.

## The *open* Function:

Before you can read or write a file, you have to open it using Python's built-in `open()` function. This function creates a `file` object which would be utilized to call other support methods associated with it.

### SYNTAX:

```
file object = open(file_name [, access_mode] [, buffering])
```

Here is paramters detail:

- **file\_name:** The `file_name` argument is a string value that contains the name of the file that you want to access.
- **access\_mode:** The `access_mode` determines the mode in which the file has to be opened ie. `read`, `write`, `append` etc. A complete list of possible values is given below in the table. This is optional parameter and the default file access mode is `read (r)`
- **buffering:** If the `buffering` value is set to 0, no buffering will take place. If the `buffering` value is 1, line buffering will be performed while accessing a file. If you specify the `buffering` value as an integer greater than 1, then buffering action will be performed with the indicated buffer size. If negative, the buffer size is the system default(default behavior).

Here is a list of the different modes of opening a file:

Modes	Description
R	Opens a file for reading only. The file pointer is placed at the beginning of the file. This is the default mode.
Rb	Opens a file for reading only in binary format. The file pointer is placed at the beginning of the file. This is the default mode.
r+	Opens a file for both reading and writing. The file pointer will be at the beginning of the file.
rb+	Opens a file for both reading and writing in binary format. The file pointer will be at the beginning of the file.

W	Opens a file for writing only. Overwrites the file if the file exists. If the file does not exist, creates a new file for writing.
Wb	Opens a file for writing only in binary format. Overwrites the file if the file exists. If the file does not exist, creates a new file for writing.
w+	Opens a file for both writing and reading. Overwrites the existing file if the file exists. If the file does not exist, creates a new file for reading and writing.
wb+	Opens a file for both writing and reading in binary format. Overwrites the existing file if the file exists. If the file does not exist, creates a new file for reading and writing.
A	Opens a file for appending. The file pointer is at the end of the file if the file exists. That is, the file is in the append mode. If the file does not exist, it creates a new file for writing.
Ab	Opens a file for appending in binary format. The file pointer is at the end of the file if the file exists. That is, the file is in the append mode. If the file does not exist, it creates a new file for writing.
a+	Opens a file for both appending and reading. The file pointer is at the end of the file if the file exists. The file opens in the append mode. If the file does not exist, it creates a new file for reading and writing.
ab+	Opens a file for both appending and reading in binary format. The file pointer is at the end of the file if the file exists. The file opens in the append mode. If the file does not exist, it creates a new file for reading and writing.

## The *file* object attributes:

Once a file is opened and you have one *file* object, you can get various information related to that file.

Here is a list of all attributes related to file object:

Attribute	Description
file.closed	Returns true if file is closed, false otherwise.
file.mode	Returns access mode with which file was opened.
file.name	Returns name of the file.
file.softspace	Returns false if space explicitly required with print, true otherwise.

## EXAMPLE:

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "wb")
print "Name of the file: ", fo.name
print "Closed or not : ", fo.closed
print "Opening mode : ", fo.mode
print "Softspace flag : ", fo.softspace
```

This would produce following result:

```
Name of the file: foo.txt
Closed or not : False
Opening mode : wb
Softspace flag : 0
```

## The *close()* Method:

The *close()* method of a *file* object flushes any unwritten information and closes the file object, after which no more writing can be done.

Python automatically closes a file when the reference object of a file is reassigned to another file. It is a good practice to use the *close()* method to close a file.

### SYNTAX:

```
fileObject.close();
```

### EXAMPLE:

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "wb")
print "Name of the file: ", fo.name

# Close opend file
fo.close()
```

This would produce following result:

```
Name of the file: foo.txt
```

## Reading and Writing Files:

The *file* object provides a set of access methods to make our lives easier. We would see how to use *read()* and *write()* methods to read and write files.

### The *write()* Method:

The *write()* method writes any string to an open file. It is important to note that Python strings can have binary data and not just text.

The *write()* method does not add a newline character ('\n') to the end of the string:

### SYNTAX:

```
fileObject.write(string);
```

Here passed parameter is the content to be written into the opend file.

### EXAMPLE:

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "wb")
fo.write( "Python is a great language.\nYeah its great!!\n");

# Close opend file
fo.close()
```

The above method would create `foo.txt` file and would write given content in that file and finally it would close that file. If you would open this file, it would have following content

```
Python is a great language.  
Yeah its great!!
```

## The `read()` Method:

The `read()` method read a string from an open file. It is important to note that Python strings can have binary data and not just text.

### SYNTAX:

```
fileObject.read([count]);
```

Here passed parameter is the number of bytes to be read from the open file. This method starts reading from the beginning of the file and if `count` is missing then it tries to read as much as possible, may be until the end of file.

### EXAMPLE:

Let's take a file `foo.txt` which we have created above.

```
#!/usr/bin/python  
  
# Open a file  
fo = open("foo.txt", "r+");  
str = fo.read(10);  
print "Read String is : ", str  
# Close open file  
fo.close()
```

This would produce following result:

```
Read String is : Python is
```

## File Positions:

The `tell()` method tells you the current position within the file in other words, the next read or write will occur at that many bytes from the beginning of the file:

The `seek(offset[, from])` method changes the current file position. The `offset` argument indicates the number of bytes to be moved. The `from` argument specifies the reference position from where the bytes are to be moved. If `from` is set to 0, it means use the beginning of the file as the reference position and 1 means use the current position as the reference position and if it is set to 2 then the end of the file would be taken as the reference position.

### EXAMPLE:

Let's take a file `foo.txt` which we have created above.

```
#!/usr/bin/python  
  
# Open a file  
fo = open("foo.txt", "r+");  
str = fo.read(10);  
print "Read String is : ", str
```

```

# Check current position
position = fo.tell();
print "Current file position : ", position

# Reposition pointer at the beginning once again
position = fo.seek(0, 0);
str = fo.read(10);
print "Again read String is : ", str
# Close open file
fo.close()

```

This would produce following result:

```

Read String is : Python is
Current file position : 10
Again read String is : Python is

```

## Renaming and Deleting Files:

Python **os** module provides methods that help you perform file-processing operations, such as renaming and deleting files.

To use this module you need to import it first and then you can call any related functions.

### The rename() Method:

The *rename()* method takes two arguments, the current filename and the new filename.

#### SYNTAX:

```
os.rename(current_file_name, new_file_name)
```

#### EXAMPLE:

Following is the example to rename an existing file *test1.txt*:

```

#!/usr/bin/python
import os

# Rename a file from test1.txt to test2.txt
os.rename( "test1.txt", "test2.txt" )

```

### The remove() Method:

You can use the *remove()* method to delete files by supplying the name of the file to be deleted as the argument.

#### SYNTAX:

```
os.remove(file_name)
```

#### EXAMPLE:

Following is the example to delete an existing file *test2.txt*:

```

#!/usr/bin/python
import os

# Delete file test2.txt

```

```
os.remove("text2.txt")
```

## Directories in Python:

All files are contained within various directories, and Python has no problem handling these too. The `os` module has several methods that help you create, remove, and change directories.

### The `mkdir()` Method:

You can use the `mkdir()` method of the `os` module to create directories in the current directory. You need to supply an argument to this method, which contains the name of the directory to be created.

#### SYNTAX:

```
os.mkdir("newdir")
```

#### EXAMPLE:

Following is the example to create a directory `test` in the current directory:

```
#!/usr/bin/python
import os

# Create a directory "test"
os.mkdir("test")
```

### The `chdir()` Method:

You can use the `chdir()` method to change the current directory. The `chdir()` method takes an argument, which is the name of the directory that you want to make the current directory.

#### SYNTAX:

```
os.chdir("newdir")
```

#### EXAMPLE:

Following is the example to go into `/home/newdir` directory:

```
#!/usr/bin/python
import os

# Changing a directory to "/home/newdir"
os.chdir("/home/newdir")
```

### The `getcwd()` Method:

The `getcwd()` method displays the current working directory.

#### SYNTAX:

```
os.getcwd()
```

#### EXAMPLE:

Following is the example to give current directory:

```

#!/usr/bin/python
import os

# This would give location of the current directory
os.getcwd()

```

## The *rmdir()* Method:

The *rmdir()* method deletes the directory, which is passed as an argument in the method.

Before removing a directory, all the contents in it should be removed.

### SYNTAX:

```
os.rmdir('dirname')
```

### EXAMPLE:

Following is the example to remove "/tmp/test" directory. It is required to give fully qualified name of the directory otherwise it would search for that directory in the current directory.

```

#!/usr/bin/python
import os

# This would remove "/tmp/test" directory.
os.rmdir( "/tmp/test" )

```

## File & Directory Related Methods:

There are three important sources which provide a wide range of utility methods to handle and manipulate files & directories on Windows and Unix operating systems. They are as follows:

- **File Object Methods:** The *file* object provides functions to manipulate files.
- **OS Object Methods.:** This provides methods to process files as well as directories.

## File Object Methods

A **file** object is created using *open* function and here is a list of functions which can be called on this object:

SN	Methods with Description
1	<b>file.close()</b> Close the file. A closed file cannot be read or written any more.
2	<b>file.flush()</b> Flush the internal buffer, like stdio's fflush. This may be a no-op on some file-like objects.
3	<b>file.fileno()</b> Return the integer file descriptor that is used by the underlying implementation to request I/O operations from the operating system.
4	<b>file.isatty()</b> Return True if the file is connected to a tty(-like) device, else False.
5	<b>file.next()</b> Returns the next line from the file each time it is being called.
6	<b>file.read([size])</b>

	Read at most size bytes from the file (less if the read hits EOF before obtaining size bytes).
7	<b>file.readline([size])</b> Read one entire line from the file. A trailing newline character is kept in the string.
8	<b>file.readlines([sizehint])</b> Read until EOF using readline() and return a list containing the lines. If the optional sizehint argument is present, instead of reading up to EOF, whole lines totalling approximately sizehint bytes (possibly after rounding up to an internal buffer size) are read.
9	<b>file.seek(offset[, whence])</b> Set the file's current position.
10	<b>file.tell()</b> Return the file's current position
11	<b>file.truncate([size])</b> Truncate the file's size. If the optional size argument is present, the file is truncated to (at most) that size.
12	<b>file.write(str)</b> Write a string to the file. There is no return value.
13	<b>file.writelines(sequence)</b> Write a sequence of strings to the file. The sequence can be any iterable object producing strings, typically a list of strings.

## file.close()

### Description

The method **close()** closes the opend file. A closed file cannot be read or written any more. Any operation which requires that the file be open will raise a *ValueError* after the file has been closed. Calling close() more than once is allowed.

Python automatically closes a file when the reference object of a file is reassigned to another file. It is a good practice to use the close() method to close a file.

### Syntax

Following is the syntax for **close()** method

```
fileObject.close();
```

### Parameters

- NA

### Return Value

This method does not return any value.

### Example

The following example shows the usage of close() method.

```
#!/usr/bin/python

# Open a file
```

```
fo = open("foo.txt", "wb")
print "Name of the file: ", fo.name

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
```

## file.flush()

### Description

The method **flush()** flushes the internal buffer, like stdio's fflush. This may be a no-op on some file-like objects.

Python automatically flushes the files when closing them. But you may want to flush the data before closing any file.

### Syntax

Following is the syntax for **flush()** method

```
fileObject.flush();
```

### Parameters

- NA

### Return Value

This method does not return any value.

### Example

The following example shows the usage of flush() method.

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "wb")
print "Name of the file: ", fo.name

# Here it does nothing, but you can call it with read operation.
fo.flush()

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
```

# file.fileno()

## Description

The method **fileno()** returns the integer file descriptor that is used by the underlying implementation to request I/O operations from the operating system.

## Syntax

Following is the syntax for **fileno()** method

```
fileObject.fileno();
```

## Parameters

- NA

## Return Value

This method returns the integer file descriptor.

## Example

The following example shows the usage of fileno() method.

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "wb")
print "Name of the file: ", fo.name

fid = fo.fileno()
print "File Descriptor: ", fid

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
File Descriptor: 3
```

# file.isatty()

## Description

The method **isatty()** return True if the file is connected (is associated with a terminal device) to a tty(-like) device, else False.

## Syntax

Following is the syntax for **isatty()** method

```
fileObject.isatty();
```

## Parameters

- NA

## Return Value

This method return true if the file is connected (is associated with a terminal device) to a tty(-like) device, else false.

## Example

The following example shows the usage of isatty() method.

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "wb")
print "Name of the file: ", fo.name

ret = fo.isatty()
print "Return value : ", ret

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
Return value : False
```

## file.next()

### Description

The method **next()** is used when a file is used as an iterator, typically in a loop, the next() method is called repeatedly. This method returns the next input line, or raises *StopIteration* when EOF is hit. Combining next() method with other file methods like *readline()* does not work right. However, using *seek()* to reposition the file to an absolute position will flush the read-ahead buffer.

### Syntax

Following is the syntax for **next()** method

```
fileObject.next();
```

## Parameters

- NA

## Return Value

This method returns the next input line.

## Example

The following example shows the usage of next() method.

```

#!/usr/bin/python

# Open a file
fo = open("foo.txt", "r")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

for index in range(5):
    line = fo.next()
    print "Line No %d - %s" % (index, line)

# Close opened file
fo.close()

```

Let us compile and run the above program, this will produce the following result:

```

Name of the file: foo.txt
Line No 0 - This is 1st line
Line No 1 - This is 2nd line
Line No 2 - This is 3rd line
Line No 3 - This is 4th line
Line No 4 - This is 5th line

```

## file.read([size])

### Description

The method **read()** at most size bytes from the file. If the read hits EOF before obtaining size bytes then it read only available bytes.

### Syntax

Following is the syntax for **read()** method

```
fileObject.read( size );
```

### Parameters

- **size** -- This is the number of bytes to be read from the file.

### Return Value

This method returns the bytes read in string.

### Example

The following example shows the usage of **read()** method.

```

#!/usr/bin/python

# Open a file
fo = open("foo.txt", "r")

```

```

print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

line = fo.read(10)
print "Read Line: %s" % (line)

# Close opend file
fo.close()

```

Let us compile and run the above program, this will produce the following result:

```

Name of the file: foo.txt
Read Line: This is 1s

```

## file.readline([size])

### Description

The method **readline()** read one entire line from the file. A trailing newline character is kept in the string. If the **size** argument is present and non-negative, it is a maximum byte count including the trailing newline and an incomplete line may be returned.

An empty string is returned only when EOF is encountered immediately.

### Syntax

Following is the syntax for **readline()** method

```
fileObject.readline( size );
```

### Parameters

- **size** -- This is the number of bytes to be read from the file.

### Return Value

This method returns the line read from the file.

### Example

The following example shows the usage of **readline()** method.

```

#!/usr/bin/python

# Open a file
fo = open("foo.txt", "r")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line

```

```
# This is 4th line
# This is 5th line

line = fo.readline()
print "Read Line: %s" % (line)

line = fo.readline(5)
print "Read Line: %s" % (line)

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
Read Line: This is 1st line

Read Line: This
```

## file.readlines([sizehint])

### Description

The method **readlines()** read until EOF using readline() and return a list containing the lines. If the optional **sizehint** argument is present, instead of reading up to EOF, whole lines totalling approximately **sizehint** bytes (possibly after rounding up to an internal buffer size) are read.

### Syntax

Following is the syntax for **readlines()** method

```
fileObject.readlines( sizehint );
```

### Parameters

- **sizehint** -- This is the number of bytes to be read from the file.

### Return Value

This method returns a list containing the lines.

### Example

The following example shows the usage of **readlines()** method.

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "r")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line
```

```
line = fo.readlines()
print "Read Line: %s" % (line)

line = fo.readlines(2)
print "Read Line: %s" % (line)

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
Read Line: ['This is 1st line\n', 'This is 2nd line\n',
            'This is 3rd line\n', 'This is 4th line\n',
            'This is 5th line\n']
Read Line: []
```

## file.seek(offset[, whence])

### Description

The method **seek()** method sets the file's current position at the offset. The whence argument is optional and defaults to 0 which means absolute file positioning, other values are 1 which means seek relative to the current position and 2 means seek relative to the file's end.

There is no return value. Note that if the file is opened for appending using either 'a' or 'a+', any seek() operations will be undone at the next write.

If the file is only opened for writing in append mode using 'a', this method is essentially a no-op, but it remains useful for files opened in append mode with reading enabled (mode 'a+').

If the file is opened in text mode using 't', only offsets returned by tell() are legal. Use of other offsets causes undefined behavior.

Note that not all file objects are seekable.

### Syntax

Following is the syntax for **seek()** method

```
fileObject.seek(offset [, whence])
```

### Parameters

- **offset** -- This is the position of the read/write pointer within the file.
- **whence** -- This is optional and defaults to 0 which means absolute file positioning, other values are 1 which means seek relative to the current position and 2 means seek relative to the file's end.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of seek() method.

```

#!/usr/bin/python

# Open a file
fo = open("foo.txt", "r")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

line = fo.readline()
print "Read Line: %s" % (line)

# Again set the pointer to the beginning
fo.seek(0, 0)
line = fo.readline()
print "Read Line: %s" % (line)

# Close opened file
fo.close()

```

Let us compile and run the above program, this will produce the following result:

```

Name of the file: foo.txt
Read Line: This is 1st line

Read Line: This is 1st line

```

## file.tell()

### Description

The method **tell()** returns the current position of the file read/write pointer within the file.

### Syntax

Following is the syntax for **tell()** method

```
fileObject.tell()
```

### Parameters

- NA

### Return Value

This method returns the current position of the file read/write pointer within the file.

### Example

The following example shows the usage of tell() method.

```

#!/usr/bin/python

# Open a file

```

```

fo = open("foo.txt", "r")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

line = fo.readline()
print "Read Line: %s" % (line)

# Get the current position of the file.
pos = fo.tell()
print "Current Position: %d" % (pos)

# Close opened file
fo.close()

```

Let us compile and run the above program, this will produce the following result:

```

Name of the file: foo.txt
Read Line: This is 1st line

Current Position: 17

```

## file.truncate([size])

### Description

The method **truncate()** truncates the file's size. If the optional size argument is present, the file is truncated to (at most) that size..

The size defaults to the current position. The current file position is not changed. Note that if a specified size exceeds the file's current size, the result is platform-dependent.

**Note:** This method would not work in case file is opened in read only mode.

### Syntax

Following is the syntax for **truncate()** method

```
fileObject.truncate( [ size ] )
```

### Parameters

- **size** -- If this optional argument is present, the file is truncated to (at most) that size.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of **truncate()** method.

```
#!/usr/bin/python
```

```

# Open a file
fo = open("foo.txt", "rw+")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

line = fo.readline()
print "Read Line: %s" % (line)

# Now truncate remaining file.
fo.truncate()

# Try to read file now
line = fo.readline()
print "Read Line: %s" % (line)

# Close opened file
fo.close()

```

Let us compile and run the above program, this will produce the following result:

```

Name of the file: foo.txt
Read Line: This is 1st line

Read Line:

```

## file.write(str)

### Description

The method **write()** writes a string *str* to the file. There is no return value. Due to buffering, the string may not actually show up in the file until the flush() or close() method is called.

### Syntax

Following is the syntax for **write()** method

```
fileObject.write( str )
```

### Parameters

- **str** -- This is the String to be written in the file.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of write() method.

```

#!/usr/bin/python

# Open a file
fo = open("foo.txt", "rw+")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

str = "This is 6th line"
# Write a line at the end of the file.
fo.seek(0, 2)
line = fo.write( str )

# Now read complete file from beginning.
fo.seek(0,0)
for index in range(6):
    line = fo.next()
    print "Line No %d - %s" % (index, line)

# Close opened file
fo.close()

```

Let us compile and run the above program, this will produce the following result:

```

Name of the file: foo.txt
Line No 0 - This is 1st line

Line No 1 - This is 2nd line

Line No 2 - This is 3rd line

Line No 3 - This is 4th line

Line No 4 - This is 5th line

Line No 5 - This is 6th line

```

## file.writelines(sequence)

### Description

The method **writelines()** writes a sequence of strings to the file. The sequence can be any iterable object producing strings, typically a list of strings. There is no return value.

### Syntax

Following is the syntax for **writelines()** method

```
fileObject.writelines( sequence )
```

### Parameters

- **sequence** -- This is the Sequence of the strings.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of writelines() method.

```
#!/usr/bin/python

# Open a file
fo = open("foo.txt", "rw+")
print "Name of the file: ", fo.name

# Assuming file has following 5 lines
# This is 1st line
# This is 2nd line
# This is 3rd line
# This is 4th line
# This is 5th line

seq = ["This is 6th line\n", "This is 7th line"]
# Write sequence of lines at the end of the file.
fo.seek(0, 2)
line = fo.writelines( seq )

# Now read complete file from beginning.
fo.seek(0, 0)
for index in range(7):
    line = fo.next()
    print "Line No %d - %s" % (index, line)

# Close opend file
fo.close()
```

Let us compile and run the above program, this will produce the following result:

```
Name of the file: foo.txt
Line No 0 - This is 1st line

Line No 1 - This is 2nd line

Line No 2 - This is 3rd line

Line No 3 - This is 4th line

Line No 4 - This is 5th line

Line No 5 - This is 6th line

Line No 6 - This is 7th line
```

# OS Object Methods

The **os** module provides a big range of useful methods to manipulate files and directories. Most of the useful methods are listed here:

SN	Methods with Description
1	<b>os.access(path, mode)</b> Use the real uid/gid to test for access to path.
2	<b>os.chdir(path)</b> Change the current working directory to path
3	<b>os.chflags(path, flags)</b> Set the flags of path to the numeric flags.
4	<b>os.chmod(path, mode)</b> Change the mode of path to the numeric mode.
5	<b>os.chown(path, uid, gid)</b> Change the owner and group id of path to the numeric uid and gid.
6	<b>os.chroot(path)</b> Change the root directory of the current process to path.
7	<b>os.close(fd)</b> Close file descriptor fd.
8	<b>os.closerange(fd_low, fd_high)</b> Close all file descriptors from fd_low (inclusive) to fd_high (exclusive), ignoring errors.
9	<b>os.dup(fd)</b> Return a duplicate of file descriptor fd.
10	<b>os.dup2(fd, fd2)</b> Duplicate file descriptor fd to fd2, closing the latter first if necessary.
11	<b>os.fchdir(fd)</b> Change the current working directory to the directory represented by the file descriptor fd.
12	<b>os.fchmod(fd, mode)</b> Change the mode of the file given by fd to the numeric mode.
13	<b>os.fchown(fd, uid, gid)</b> Change the owner and group id of the file given by fd to the numeric uid and gid.
14	<b>os.fdatasync(fd)</b> Force write of file with filedescriptor fd to disk.
15	<b>os.fdopen(fd[, mode[, bufsize]])</b> Return an open file object connected to the file descriptor fd.
16	<b>os.fpathconf(fd, name)</b> Return system configuration information relevant to an open file. name specifies the configuration value to retrieve.
17	<b>os.fstat(fd)</b> Return status for file descriptor fd, like stat().
18	<b>os.fstatvfs(fd)</b> Return information about the filesystem containing the file associated with file descriptor fd, like statvfs().

19	<b>os.fsync(fd)</b> Force write of file with filedescriptor fd to disk.
20	<b>os.ftruncate(fd, length)</b> Truncate the file corresponding to file descriptor fd, so that it is at most length bytes in size.
21	<b>os.getcwd()</b> Return a string representing the current working directory.
22	<b>os.getcwdu()</b> Return a Unicode object representing the current working directory.
23	<b>os.isatty(fd)</b> Return True if the file descriptor fd is open and connected to a tty(-like) device, else False.
24	<b>os.lchflags(path, flags)</b> Set the flags of path to the numeric flags, like chflags(), but do not follow symbolic links.
25	<b>os.lchmod(path, mode)</b> Change the mode of path to the numeric mode.
26	<b>os.lchown(path, uid, gid)</b> Change the owner and group id of path to the numeric uid and gid. This function will not follow symbolic links.
27	<b>os.link(src, dst)</b> Create a hard link pointing to src named dst.
28	<b>os.listdir(path)</b> Return a list containing the names of the entries in the directory given by path.
29	<b>os.lseek(fd, pos, how)</b> Set the current position of file descriptor fd to position pos, modified by how.
30	<b>os.lstat(path)</b> Like stat(), but do not follow symbolic links.
31	<b>os.major(device)</b> Extract the device major number from a raw device number.
32	<b>os.makedev(major, minor)</b> Compose a raw device number from the major and minor device numbers.
33	<b>os.makedirs(path[, mode])</b> Recursive directory creation function.
34	<b>os.minor(device)</b> Extract the device minor number from a raw device number .
35	<b>os.mkdir(path[, mode])</b> Create a directory named path with numeric mode mode.
36	<b>os.mkfifo(path[, mode])</b> Create a FIFO (a named pipe) named path with numeric mode mode. The default mode is 0666 (octal).
37	<b>os.mknod(filename[, mode=0600, device])</b> Create a filesystem node (file, device special file or named pipe) named filename.
38	<b>os.open(file, flags[, mode])</b> Open the file file and set various flags according to flags and possibly its mode according to mode.
39	<b>os.openpty()</b> Open a new pseudo-terminal pair. Return a pair of file descriptors (master, slave) for the pty and

	the tty, respectively.
40	<b>os.pathconf(path, name)</b> Return system configuration information relevant to a named file.
41	<b>os.pipe()</b> Create a pipe. Return a pair of file descriptors (r, w) usable for reading and writing, respectively.
42	<b>os.popen(command[, mode[, bufsize]])</b> Open a pipe to or from command.
43	<b>os.read(fd, n)</b> Read at most n bytes from file descriptor fd. Return a string containing the bytes read. If the end of the file referred to by fd has been reached, an empty string is returned.
44	<b>os.readlink(path)</b> Return a string representing the path to which the symbolic link points.
45	<b>os.remove(path)</b> Remove the file path.
46	<b>os.removedirs(path)</b> Remove directories recursively.
47	<b>os.rename(src, dst)</b> Rename the file or directory src to dst.
48	<b>os.renames(old, new)</b> Recursive directory or file renaming function.
49	<b>os.rmdir(path)</b> Remove the directory path
50	<b>os.stat(path)</b> Perform a stat system call on the given path.
51	<b>os.stat_float_times([newvalue])</b> Determine whether stat_result represents time stamps as float objects.
52	<b>os.statvfs(path)</b> Perform a statvfs system call on the given path.
53	<b>os.symlink(src, dst)</b> Create a symbolic link pointing to src named dst.
54	<b>os.tcgetpgrp(fd)</b> Return the process group associated with the terminal given by fd (an open file descriptor as returned by open()).
55	<b>os.tcsetpgrp(fd, pg)</b> Set the process group associated with the terminal given by fd (an open file descriptor as returned by open()) to pg.
56	<b>os.tempnam([dir[, prefix]])</b> Return a unique path name that is reasonable for creating a temporary file.
57	<b>os.tmpfile()</b> Return a new file object opened in update mode (w+b).
58	<b>os.tmpnam()</b> Return a unique path name that is reasonable for creating a temporary file.
59	<b>os.ttyname(fd)</b> Return a string which specifies the terminal device associated with file descriptor fd. If fd is not

	associated with a terminal device, an exception is raised.
60	<b>os.unlink(path)</b> Remove the file path.
61	<b>os.utime(path, times)</b> Set the access and modified times of the file specified by path.
62	<b>os.walk(top[, topdown=True[, onerror=None[, followlinks=False]]])</b> Generate the file names in a directory tree by walking the tree either top-down or bottom-up.
63	<b>os.write(fd, str)</b> Write the string str to file descriptor fd. Return the number of bytes actually written.

## os.access(path, mode)

### Description

The method **access()** uses the real uid/gid to test for access to path. Most operations will use the effective uid/gid, therefore this routine can be used in a suid/sgid environment to test if the invoking user has the specified access to path. It returns True if access is allowed, False if not.

### Syntax

Following is the syntax for **access()** method

```
os.access(path, mode);
```

### Parameters

- **path** -- This is the path which would be tested for existence or any access.
- **mode** -- This should be F\_OK to test the existence of path, or it can be the inclusive OR of one or more of R\_OK, W\_OK, and X\_OK to test permissions.
  - **os.F\_OK**: Value to pass as the mode parameter of access() to test the existence of path.
  - **os.R\_OK**: Value to include in the mode parameter of access() to test the readability of path.
  - **os.W\_OK**: Value to include in the mode parameter of access() to test the writability of path.
  - **os.X\_OK**: Value to include in the mode parameter of access() to determine if path can be executed.

### Return Value

This method returns True if access is allowed, False if not.

### Example

The following example shows the usage of access() method.

```
#!/usr/bin/python

import os, sys

# Assuming /tmp/foo.txt exists and has read/write permissions.

ret = os.access("/tmp/foo.txt", os.F_OK)

print "F_OK - return value %s"% ret
```

```

ret = os.access("/tmp/foo.txt", os.R_OK)
print "R_OK - return value %s"% ret

ret = os.access("/tmp/foo.txt", os.W_OK)
print "W_OK - return value %s"% ret

ret = os.access("/tmp/foo.txt", os.X_OK)
print "X_OK - return value %s"% ret

```

Let us compile and run the above program, this will produce the following result:

```

F_OK - return value True
R_OK - return value True
W_OK - return value True
X_OK - return value False

```

## os.chdir(path)

### Description

The method **chdir()** changes the current working directory to the given path. It returns None in all the cases.

### Syntax

Following is the syntax for **chdir()** method

```
os.chdir(path)
```

### Parameters

- **path** -- This is complete path of the directory to be changed to a new location.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of chdir() method.

```

#!/usr/bin/python

import os

path = "/usr/tmp"

# Check current working directory.
retval = os.getcwd()
print "Current working directory %s" % retval

```

```

# Now change the directory
os.chdir( path )

# Check current working directory.
retval = os.getcwd()

print "Directory changed successfully %s" % retval

```

Let us compile and run the above program, this will produce the following result:

```

Current working directory /usr
Directory changed successfully /usr/tmp

```

## os.chflags(path, flags)

### Description

The method **chflags()** sets the flags of *path* to the numeric *flags*. The flags may take a combination (bitwise OR) of the various values described below.

**Note:** This method is available Python version 2.6 onwards. Most of the flags can be changed by super-user only.

### Syntax

Following is the syntax for **chflags()** method

```
os.chflags(path, flags)
```

### Parameters

- **path** -- This is complete path of the directory to be changed to a new location.
- **flags** -- The flags specified are formed by OR'ing the following values:
  - **so.UF\_NODUMP**: Do not dump the file.
  - **so.UF\_IMMUTABLE**: The file may not be changed.
  - **so.UF\_APPEND**: The file may only be appended to.
  - **so.UF\_NOUNLINK**: The file may not be renamed or deleted.
  - **so.UF\_OPAQUE**: The directory is opaque when viewed through a union stack.
  - **so.SF\_ARCHIVED**: The file may be archived.
  - **so.SF\_IMMUTABLE**: The file may not be changed.
  - **so.SF\_APPEND**: The file may only be appended to.
  - **so.SF\_NOUNLINK**: The file may not be renamed or deleted.
  - **so.SF\_SNAPSHOT**: The file is a snapshot file.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of chflags() method.

```

#!/usr/bin/python
import os

path = "/tmp/foo.txt"

# Set a flag so that file may not be renamed or deleted.
flags = os.SF_NOUNLINK
retval = os.chflags(path, flags)
print "Return Value: %s" % retval

```

Let us compile and run the above program, this will produce the following result:

```
Return Value : None
```

## os.chmod(path, mode)

### Description

The method **chmod()** changes the mode of *path* to the passed numeric *mode*. The mode may take one of the following values or bitwise ORed combinations of them:

- **stat.S\_ISUID**: Set user ID on execution.
- **stat.S\_ISGID**: Set group ID on execution.
- **stat.S\_ENFMT**: Record locking enforced.
- **stat.S\_ISVTX**: Save text image after execution.
- **stat.S\_IREAD**: Read by owner.
- **stat.S\_IWRITE**: Write by owner.
- **stat.S\_IEXEC**: Execute by owner.
- **stat.S\_IRWXU**: Read, write, and execute by owner.
- **stat.S\_IRUSR**: Read by owner.
- **stat.S\_IWUSR**: Write by owner.
- **stat.S\_IXUSR**: Execute by owner.
- **stat.S\_IRWXG**: Read, write, and execute by group.
- **stat.S\_IRGRP**: Read by group.
- **stat.S\_IWGRP**: Write by group.
- **stat.S\_IXGRP**: Execute by group.
- **stat.S\_IRWXO**: Read, write, and execute by others.
- **stat.S\_IROTH**: Read by others.
- **stat.S\_IWOTH**: Write by others.
- **stat.S\_IXOTH**: Execute by others.

### Syntax

Following is the syntax for **chmod()** method

```
os.chmod(path, mode);
```

### Parameters

- **path** -- This is the path for which mode would be set.
- **mode** -- This may take one of the above mentioned values or bitwise ORed combinations of them.

### Return Value

This method does not return any value.

## Example

The following example shows the usage of chmod() method.

```
#!/usr/bin/python

import os, sys, stat

# Assuming /tmp/foo.txt exists, Set a file execute by the group.

os.chmod("/tmp/foo.txt", stat.S_IXGRP)

# Set a file write by others.
os.chmod("/tmp/foo.txt", stat.S_IWOTH)

print "Changed mode successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Changed mode successfully!!
```

## os.chown(path, uid, gid)

### Description

The method **chown()** changes the owner and group id of path to the numeric uid and gid. To leave one of the ids unchanged, set it to -1. To set ownership, you would need super user privilege..

### Syntax

Following is the syntax for **chown()** method

```
os.chown(path, uid, gid);
```

### Parameters

- **path** -- This is the path for which owner id and group id need to be setup.
- **uid** -- This is Owner ID to be set for the file.
- **gid** -- This is Group ID to be set for the file.

### Return Value

This method does not return any value.

## Example

The following example shows the usage of chown() method.

```
#!/usr/bin/python

import os, sys

# Assuming /tmp/foo.txt exists.
# To set owner ID 100 following has to be done.
os.chown("/tmp/foo.txt", 100, -1)

print "Changed ownership successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Changed ownership successfully!!
```

## os.chroot(path)

### Description

The method **chroot()** changes the root directory of the current process to the given path. To use this method, you would need super user privilege.

### Syntax

Following is the syntax for **chroot()** method

```
os.chroot(path);
```

### Parameters

- **path** -- This is the path which would be set as root for the current process.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of chroot() method.

```
#!/usr/bin/python

import os, sys

# To set the current root path to /tmp/usr
os.chroot("/tmp/usr")

print "Changed root path successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Changed root path successfully!!
```

## os.close(fd)

### Description

The method **close()** closes the associated with file descriptor *fd*.

### Syntax

Following is the syntax for **close()** method

```
os.close(fd);
```

### Parameters

- **fd** -- This is the file descriptor of the file.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of close() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Close opened file
os.close( fd )

print "Closed the file successfully!"
```

Let us compile and run the above program, this will produce the following result:

```
Closed the file successfully!
```

## os.closerange(fd\_low, fd\_high)

### Description

The method **closerange()** closes all file descriptors from fd\_low (inclusive) to fd\_high (exclusive), ignoring errors. This method is introduced in Python version 2.6.

### Syntax

Following is the syntax for closerange() method

```
os.closerange(fd_low, fd_high);
```

### Parameters

- **fd\_low** -- This is the Lowest file descriptor to be closed.
- **fd\_high** -- This is the Highest file descriptor to be closed.

This function is equivalent to:

```
for fd in xrange(fd_low, fd_high):
    try:
        os.close(fd)
    except OSError:
        pass
```

## Return Value

This method does not return any value.

## Example

The following example shows the usage of closerange() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Close a single opened file
os.closerange( fd, fd)

print "Closed the file successfully!"
```

This would create given file **foo.txt** and then write given content in that file. This will produce the following result:

```
Closed the file successfully!!
```

## os.dup(fd)

### Description

The method **dup()** returns a duplicate of file descriptor *fd* which can be used in place of original descriptor.

### Syntax

Following is the syntax for **dup()** method

```
os.dup(fd);
```

### Parameters

- **fd** -- This is the original file descriptor.

### Return Value

This method returns a duplicate of file descriptor.

## Example

The following example shows the usage of dup() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Get one duplicate file descriptor
d_fd = os.dup( fd )

# Write one string using duplicate fd
```

## TUTORIALS POINT

Simply Easy Learning

```
os.write(d_fd, "This is test")

# Close a single opened file
os.closerange( fd, d_fd)

print "Closed all the files successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Closed all the files successfully!!
```

## os.dup2(fd, fd2)

### Description

The method **dup2()** duplicates file descriptor *fd* to *fd2*, closing the latter first if necessary.

**Note:** New file description would be assigned only when it is available. In the following example given below, 1000 would be assigned as a duplicate fd in case when 1000 is available.

### Syntax

Following is the syntax for **dup2()** method

```
os.dup2(fd, fd2);
```

### Parameters

- **fd** -- This is File descriptor to be duplicated.
- **fd2** -- This is Duplicate file descriptor.

### Return Value

This method returns a duplicate of file descriptor.

### Example

The following example shows the usage of dup2() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Now duplicate this file descriptor as 1000
fd2 = 1000
os.dup2(fd, fd2);

# Now read this file from the beginning using fd2.
os.lseek(fd2, 0, 0)
str = os.read(fd2, 100)
print "Read String is : ", str

# Close opened file
os.close( fd )
```

```
print "Closed the file successfully!"
```

Let us compile and run the above program, this will produce the following result:

```
Read String is : This is test
Closed the file successfully!!
```

## os.fchdir(fd)

### Description

The method **fchdir()** change the current working directory to the directory represented by the file descriptor *fd*. The descriptor must refer to an opened directory, not an open file.

### Syntax

Following is the syntax for **fchdir()** method

```
os.fchdir(fd);
```

### Parameters

- **fd** -- This is Directory descriptor.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of fchdir() method.

```
#!/usr/bin/python

import os, sys

# First go to the "/var/www/html" directory
os.chdir("/var/www/html" )

# Print current working directory
print "Current working dir : %s" % os.getcwd()

# Now open a directory "/tmp"
fd = os.open( "/tmp", os.O_RDONLY )

# Use os.fchdir() method to change the dir
os.fchdir(fd)

# Print current working directory
print "Current working dir : %s" % os.getcwd()

# Close opened directory.
os.close( fd )
```

Let us compile and run the above program, this will produce the following result:

```
Current working dir : /var/www/html
```

```
Current working dir : /tmp
```

## os.fchmod(fd, mode)

### Description

The method **fchmod()** changes the mode of the file given by *fd* to the numeric mode. The mode may take one of the following values or bitwise ORed combinations of them:

**Note:** This method is available from Python 2.6 onwards.

- **stat.S\_ISUID:** Set user ID on execution.
- **stat.S\_ISGID:** Set group ID on execution.
- **stat.S\_ENFMT:** Record locking enforced.
- **stat.S\_ISVTX:** Save text image after execution.
- **stat.S\_IREAD:** Read by owner.
- **stat.S\_IWRITE:** Write by owner.
- **stat.S\_IEXEC:** Execute by owner.
- **stat.S\_IRWXU:** Read, write, and execute by owner.
- **stat.S\_IRUSR:** Read by owner.
- **stat.S\_IWUSR:** Write by owner.
- **stat.S\_IXUSR:** Execute by owner.
- **stat.S\_IRWXG:** Read, write, and execute by group.
- **stat.S\_IRGRP:** Read by group.
- **stat.S\_IWGRP:** Write by group.
- **stat.S\_IXGRP:** Execute by group.
- **stat.S\_IRWXO:** Read, write, and execute by others.
- **stat.S\_IROTH:** Read by others.
- **stat.S\_IWOTH:** Write by others.
- **stat.S\_IXOTH:** Execute by others.

### Syntax

Following is the syntax for **fchmod()** method

```
os.fchmod(fd, mode);
```

### Parameters

- **fd** -- This is the file descriptor for which mode would be set.
- **mode** -- This may take one of the above mentioned values or bitwise ORed combinations of them.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of fchmod() method.

```
#!/usr/bin/python

import os, sys, stat
```

**TUTORIALS POINT**

Simply Easy Learning

```

# Now open a file "/tmp/foo.txt"
fd = os.open( "/tmp", os.O_RDONLY )

# Set a file execute by the group.

os.fchmod( fd, stat.S_IXGRP)

# Set a file write by others.

os.fchmod(fd, stat.S_IWOTH)

print "Changed mode successfully!!"

# Close opened file.

os.close( fd )

```

Let us compile and run the above program, this will produce the following result:

```
Changed mode successfully!!
```

## os.fchown(fd, uid, gid)

### Description

The method **fchown()** changes the owner and group id of the file given by fd to the numeric uid and gid. To leave one of the ids unchanged, set it to -1.

**Note:**This method is available Python 2.6 onwards.

### Syntax

Following is the syntax for **fchown()** method

```
os.fchown(fd, uid, gid);
```

### Parameters

- **fd** -- This is the file descriptor for which owner id and group id need to be setup.
- **uid** -- This is Owner ID to be set for the file.
- **gid** -- This is Group ID to be set for the file.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of fchown() method.

```
#!/usr/bin/python

import os, sys, stat

# Now open a file "/tmp/foo.txt"
fd = os.open( "/tmp", os.O_RDONLY )

# Set the user Id to 100 for this file.
os.fchown( fd, 100, -1)

# Set the group Id to 50 for this file.
os.fchown( fd, -1, 50)

print "Changed ownership successfully!!"

# Close opened file.
os.close( fd )
```

Let us compile and run the above program, this will produce the following result:

```
Changed ownership successfully!!
```

## os.fdatasync(fd)

### Description

The method **fdatasync()** forces write of file with filedescriptor *fd* to disk. This does not force update of metadata. If you want to flush your buffer then you can use this method.

### Syntax

Following is the syntax for **fdatasync()** method

```
os.fdatasync( fd );
```

### Parameters

- **fd** -- This is the file descriptor for which data to be written.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of fdatasync() method.

```

#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Now you can use fdatasync() method.
# Infact here you would not be able to see its effect.
os.fdatasync(fd)

# Now read this file from the beginning.
os.lseek(fd, 0, 0)
str = os.read(fd, 100)
print "Read String is : ", str

# Close opened file
os.close( fd )

print "Closed the file successfully!!"

```

Let us compile and run the above program, this will produce the following result:

```

Read String is : This is test
Closed the file successfully!!

```

## os.fdopen(fd[, mode[, bufsize]])

### Description

The method **fdopen()** returns an open file object connected to the file descriptor *fd*. Then you can perform all the defined functions on file object.

### Syntax

Following is the syntax for **fdopen()** method

```
os.fdopen(fd, [, mode[, bufsize]]);
```

### Parameters

- **fd** -- This is the file descriptor for which a file object is to be returned.
- **mode** -- This optional argument is a string indicating how the file is to be opened. The most commonly-used values of mode are 'r' for reading, 'w' for writing (truncating the file if it already exists), and 'a' for appending.
- **bufsize** -- This optional argument specifies the file's desired buffer size: 0 means unbuffered, 1 means line buffered, any other positive value means use a buffer of (approximately) that size.

### Return Value

This method returns an open file object connected to the file descriptor.

### Example

The following example shows the usage of **fdopen()** method.

```

#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Now get a file object for the above file.
fo = os.fdopen(fd, "w+")

# Tell the current position
print "Current I/O pointer position :%d" % fo.tell()

# Write one string
fo.write( "Python is a great language.\nYeah its great!!\n" )

# Now read this file from the beginning.
os.lseek(fd, 0, 0)
str = os.read(fd, 100)
print "Read String is : ", str

# Tell the current position
print "Current I/O pointer position :%d" % fo.tell()

# Close opened file
fo.close()

print "Closed the file successfully!!"

```

Let us compile and run the above program, this will produce the following result:

```

Current I/O pointer position :0
Read String is : This is testPython is a great language.
Yeah its great!!

Current I/O pointer position :45
Closed the file successfully!!

```

## os.fpathconf(fd, name)

### Description

The method **fpathconf()** returns system configuration information relevant to an open file. This variable is very similar to unix system call **fpathconf()** and accept the similar arguments.

### Syntax

Following is the syntax for **fpathconf()** method

```
os.fpathconf(fd, name)
```

### Parameters

- **fd** -- This is the file descriptor for which system configuration information is to be returned.
- **name** -- This specifies the configuration value to retrieve; it may be a string which is the name of a defined system value; these names are specified in a number of standards (POSIX.1, Unix 95, Unix 98, and others). The names known to the host operating system are given in the **os.pathconf\_names** dictionary.

## Return Value

This method returns system configuration information relevant to an open file.

## Example

The following example shows the usage of fpathconf() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

print "%s" % os.pathconf_names

# Now get maximum number of links to the file.
no = os.fpathconf(fd, 'PC_LINK_MAX')
print "Maximum number of links to the file. :%d" % no

# Now get maximum length of a filename
no = os.fpathconf(fd, 'PC_NAME_MAX')
print "Maximum length of a filename :%d" % no

# Close opened file
os.close(fd)

print "Closed the file successfully!"
```

Let us compile and run the above program, this will produce the following result:

```
{'PC_MAX_INPUT': 2, 'PC_VDISABLE': 8, 'PC_SYNC_IO': 9,
'PC SOCK_MAXBUF': 12, 'PC_NAME_MAX': 3, 'PC_MAX_CANON': 1,
'PC_PRIO_IO': 11, 'PC_CHOWN_RESTRICTED': 6, 'PC_ASYNC_IO': 10,
'PC_NO_TRUNC': 7, 'PC_FILESIZEBITS': 13, 'PC_LINK_MAX': 0,
'PC_PIPE_BUF': 5, 'PC_PATH_MAX': 4}

Maximum number of links to the file. :127
Maximum length of a filename :255
Closed the file successfully!
```

## os.fstat(fd)

### Description

The method **fstat()** returns information about a file associated with the fd. Here is the structure returned by fstat method:

- **st\_dev**: ID of device containing file
- **st\_ino**: inode number
- **st\_mode**: protection
- **st\_nlink**: number of hard links
- **st\_uid**: user ID of owner
- **st\_gid**: group ID of owner
- **st\_rdev**: device ID (if special file)
- **st\_size**: total size, in bytes
- **st\_blksize**: blocksize for filesystem I/O

- **st\_blocks**: number of blocks allocated
- **st\_atime**: time of last access
- **st\_mtime**: time of last modification
- **st\_ctime**: time of last status change

## Syntax

Following is the syntax for **fstat()** method

```
os.fstat(fd)
```

## Parameters

- **fd** -- This is the file descriptor for which system information is to be returned.

## Return Value

This method returns information about a file associated with the fd.

## Example

The following example shows the usage of chdir() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Now get the touple
info = os.fstat(fd)

print "File Info :", info

# Now get uid of the file
print "UID of the file :%d" % info.st_uid

# Now get gid of the file
print "GID of the file :%d" % info.st_gid

# Close opened file
os.close( fd)
```

Let us compile and run the above program, this will produce the following result:

```
File Info : (33261, 3753776L, 103L, 1, 0, 0,
             102L, 1238783197, 1238786767, 1238786767)
UID of the file :0
GID of the file :0
```

## os.fstatvfs(fd)

## Description

The method **fstatvfs()** returns information about the file system containing the file associated with file descriptor fd. This returns the following structure:

- **f\_bsize:** file system block size
- **f\_frsize:** fragment size
- **f\_blocks:** size of fs in f\_frsize units
- **f\_bfree:** free blocks
- **f\_bavail:** free blocks for non-root
- **f\_files:** inodes
- **f\_ffree:** free inodes
- **f\_favail:** free inodes for non-root
- **f\_fsid:** file system ID
- **f\_flag:** mount flags
- **f\_namemax:** maximum filename length

## Syntax

Following is the syntax for **fstatvfs()** method

```
os.fstatvfs(fd)
```

## Parameters

- **fd** -- This is the file descriptor for which system information is to be returned.

## Return Value

This method returns information about the file system containing the file associated.

## Example

The following example shows the usage of fstatvfs() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Now get the tuple
info = os.fstatvfs(fd)

print "File Info :", info

# Now get maximum filename length
print "Maximum filename length :%d" % info.f_namemax:

# Now get free blocks
print "Free blocks :%d" % info.f_bfree

# Close opened file
os.close( fd)
```

Let us compile and run the above program, this will produce the following result:

```
File Info : (4096, 4096, 2621440L, 1113266L, 1113266L,
```

**TUTORIALS POINT**

Simply Easy Learning

```
8929602L, 8764252L, 8764252L, 0, 255
Maximum filename length :255
Free blocks :1113266
```

## os.fsync(fd)

### Description

The method **fsync()** forces write of file with file descriptor fd to disk. If you're starting with a Python file object f, first do f.flush(), and then do os.fsync(f.fileno()), to ensure that all internal buffers associated with f are written to disk.

### Syntax

Following is the syntax for **fsync()** method

```
os.fsync(fd)
```

### Parameters

- **fd** -- This is the file descriptor for buffer sync is required.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of fsync() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Now you can use fsync() method.
# Infact here you would not be able to see its effect.
os.fsync(fd)

# Now read this file from the beginning
os.lseek(fd, 0, 0)
str = os.read(fd, 100)
print "Read String is : ", str

# Close opened file
os.close( fd )

print "Closed the file successfully!"
```

Let us compile and run the above program, this will produce the following result:

```
Read String is : This is test
Closed the file successfully!!
```

# os.ftruncate(fd, length)

## Description

The method **ftruncate()** truncates the file corresponding to file descriptor fd, so that it is at most length bytes in size.

## Syntax

Following is the syntax for **ftruncate()** method

```
os.ftruncate(fd, length)
```

## Parameters

- **fd** -- This is the file descriptor which needs to be truncated.
- **length** -- This is the length of the file where file needs to be truncated.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of ftruncate() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test - This is test")

# Now you can use ftruncate() method.
os.ftruncate(fd, 10)

# Now read this file from the beginning.
os.lseek(fd, 0, 0)
str = os.read(fd, 100)
print "Read String is : ", str

# Close opened file
os.close( fd )

print "Closed the file successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Read String is : This is te
Closed the file successfully!!
```

# os.getcwd()

## Description

The method **getcwd()** returns current working directory of a process.

## Syntax

Following is the syntax for **getcwd()** method

```
os.chdir(path)
```

## Parameters

- NA

## Return Value

This method returns current working directory of a process.

## Example

The following example shows the usage of getcwd() method.

```
#!/usr/bin/python

import os, sys

# First go to the "/var/www/html" directory
os.chdir("/var/www/html" )

# Print current working directory
print "Current working dir : %s" % os.getcwd()

# Now open a directory "/tmp"
fd = os.open( "/tmp", os.O_RDONLY )

# Use os.fchdir() method to change the dir
os.fchdir(fd)

# Print current working directory
print "Current working dir : %s" % os.getcwd()

# Close opened directory.
os.close( fd )
```

Let us compile and run the above program, this will produce the following result:

```
Current working dir : /var/www/html
Current working dir : /tmp
```

## os.getcwdu()

## Description

The method **getcwdu()** returns a unicode object representing the current working directory.

## Syntax

Following is the syntax for **getcwdu()** method

```
os.getcwd()
```

## Parameters

- NA

## Return Value

This method returns a unicode object representing the current working directory.

## Example

The following example shows the usage of getcwd() method.

```
#!/usr/bin/python

import os, sys

# First go to the "/var/www/html" directory
os.chdir("/var/www/html" )

# Print current working directory
print "Current working dir : %s" % os.getcwd()

# Now open a directory "/tmp"
fd = os.open( "/tmp", os.O_RDONLY )

# Use os.fchdir() method to change the dir
os.fchdir(fd)

# Print current working directory
print "Current working dir : %s" % os.getcwd()

# Close opened directory.
os.close( fd )
```

Let us compile and run the above program, this will produce the following result:

```
Current working dir : /var/www/html
Current working dir : /tmp
```

## os.isatty(fd)

### Description

The method **isatty()** returns True if the file descriptor fd is open and connected to a tty(-like) device, else False.

### Syntax

Following is the syntax for **isatty()** method

```
os.isatty( fd )
```

## Parameters

- **fd** -- This is the file descriptor for which association needs to be checked.

## Return Value

This method returns True if the file descriptor fd is open and connected to a tty(-like) device, else False.

## Example

The following example shows the usage of isatty() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Now use isatty() to check the file.
ret = os.isatty(fd)

print "Returned value is: ", ret

# Close opened file
os.close( fd )
```

Let us compile and run the above program, this will produce the following result:

```
Returned value is: False
```

## os.lchflags(path, flags)

### Description

The method **lchflags()** sets the flags of path to the numeric flags. This method does not follow symbolic links unlike chflags() method.

Here flags may take a combination (bitwise OR) of the following values (as defined in the stat module):

- **UF\_NODUMP:** Do not dump the file.
- **UF\_IMMUTABLE:** The file may not be changed.
- **UF\_APPEND:** The file may only be appended to.
- **UF\_NOUNLINK:** The file may not be renamed or deleted.
- **UF\_OPAQUE:** The directory is opaque when viewed through a union stack.
- **SF\_ARCHIVED:** The file may be archived.
- **SF\_IMMUTABLE:** The file may not be changed.

- **SF\_APPEND**: The file may only be appended to.
- **SF\_NOUNLINK**: The file may not be renamed or deleted.
- **SF\_SNAPSHOT**: The file is a snapshot file.

**Note:** This method has been introduced in Python 2.6

## Syntax

Following is the syntax for **lchflags()** method

```
os.lchflags(path, flags)
```

## Parameters

- **path** -- This is the file path for which flags to be set.
- **flags** -- This could be a combination (bitwise OR) of the above defined flags values.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of lchflags() method.

```
#!/usr/bin/python

import os, sys

# Open a file
path = "/var/www/html/foo.txt"
fd = os.open( path, os.O_RDWR|os.O_CREAT )

# Close opened file
os.close( fd )

# Now change the file flag.
ret = os.lchflags(path, os.UF_IMMUTABLE )

print "Changed file flag successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Changed file flag successfully!!
```

## os.lchmod(path, mode)

### Description

The method **lchmod()** changes the mode of path to the numeric mode. If path is a symlink, this affects the symlink rather than the target.

The mode may take one of the following values or bitwise ORed combinations of them:

- **stat.S\_ISUID**: Set user ID on execution.
- **stat.S\_ISGID**: Set group ID on execution.
- **stat.S\_ENFMT**: Record locking enforced.

- **stat.S\_ISVTX**: Save text image after execution.
- **stat.S\_IREAD**: Read by owner.
- **stat.S\_IWRITE**: Write by owner.
- **stat.S\_IEXEC**: Execute by owner.
- **stat.S\_IRWXU**: Read, write, and execute by owner.
- **stat.S\_IRUSR**: Read by owner.
- **stat.S\_IWUSR**: Write by owner.
- **stat.S\_IXUSR**: Execute by owner.
- **stat.S\_IRWXG**: Read, write, and execute by group.
- **stat.S\_IRGRP**: Read by group.
- **stat.S\_IWGRP**: Write by group.
- **stat.S\_IXGRP**: Execute by group.
- **stat.S\_IRWXO**: Read, write, and execute by others.
- **stat.S\_IROTH**: Read by others.
- **stat.S\_IWOTH**: Write by others.
- **stat.S\_IXOTH**: Execute by others.

**Note:**This method has been introduced in Python 2.6

## Syntax

Following is the syntax for **lchmod()** method

```
os.lchmod(path, mode)
```

## Parameters

- **path** -- This is the file path for which mode to be set.
- **mode** -- This may take one of the above mentioned values or bitwise ORed combinations of them.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of lchmod() method.

```
#!/usr/bin/python

import os, sys

# Open a file
path = "/var/www/html/foo.txt"
fd = os.open( path, os.O_RDWR|os.O_CREAT )

# Close opened file
os.close( fd )

# Now change the file mode.
# Set a file execute by group.
os.lchmod( path, stat.S_IXGRP)

# Set a file write by others.
os.lchmod("/tmp/foo.txt", stat.S_IWOTH)

print "Changed mode successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
print "Changed mode successfully!!"
```

## os.lchown(path, uid, gid)

### Description

The method **lchown()** changes the owner and group id of path to the numeric uid and gid. This function will not follow symbolic links. To leave one of the ids unchanged, set it to -1. .

### Syntax

Following is the syntax for **lchown()** method

```
os.lchown(path, uid, gid)
```

### Parameters

- **path** -- This is the file path for which ownership to be set.
- **uid** -- This is the Owner ID to be set for the file.
- **gid** -- This is the Group ID to be set for the file.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of lchown() method.

```
#!/usr/bin/python

import os, sys

# Open a file
path = "/var/www/html/foo.txt"
fd = os.open( path, os.O_RDWR|os.O_CREAT )

# Close opened file
os.close( fd )

# Now change the file ownership.
# Set a file owner ID
os.lchown( path, 500, -1)

# Set a file group ID
os.lchown( path, -1, 500)

print "Changed ownership successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
print "Changed ownership successfully!!"
```

## os.link(src, dst)

## Description

The method **link()** creates a hard link pointing to *src* named *dst*. This method is very useful to create a copy of existing file.

## Syntax

Following is the syntax for **link()** method

```
os.link(src, dst)
```

## Parameters

- **src** -- This is the source file path for which hard link would be created.
- **dest** -- This is the target file path where hard link would be created.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of link() method.

```
#!/usr/bin/python

import os, sys

# Open a file
path = "/var/www/html/foo.txt"
fd = os.open( path, os.O_RDWR|os.O_CREAT )

# Close opened file
os.close( fd )

# Now create another copy of the above file.
dst = "/tmp/foo.txt"
os.link( path, dst)

print "Created hard link successfully!!"
```

This would produce following result:

```
print "Created hard link successfully!!"
```

## os.listdir(path)

## Description

The method **listdir()** returns a list containing the names of the entries in the directory given by path. The list is in arbitrary order. It does not include the special entries '.' and '..' even if they are present in the directory.

## Syntax

Following is the syntax for **listdir()** method

```
os.listdir(path)
```

## Parameters

- **path** -- This is the directory which needs to be explored.

## Return Value

This method returns a list containing the names of the entries in the directory given by path.

## Example

The following example shows the usage of `listdir()` method.

```
#!/usr/bin/python

import os, sys

# Open a file
path = "/var/www/html/"
dirs = os.listdir( path )

# This would print all the files and directories
for file in dirs:
    print file
```

Let us compile and run the above program, this will produce the following result:

```
test.htm
stamp
faq.htm
_vti_txt
robots.txt
itemlisting
resumelisting
writing_effective_resume.htm
advertisebusiness.htm
papers
resume
```

## os.lseek(fd, pos, how)

### Description

The method **`lseek()`** sets the current position of file descriptor *fd* to the given position *pos*, modified by *how*.

### Syntax

Following is the syntax for **`lseek()`** method

```
os.lseek(fd, pos, how)
```

## Parameters

- **fd** -- This is the file descriptor which needs to be processed.
- **pos** -- This is the position in the file with respect to given parameter *how*. You give `os.SEEK_SET` or 0 to set the position relative to the beginning of the file, `os.SEEK_CUR` or 1 to set it relative to the current position; `os.SEEK_END` or 2 to set it relative to the end of the file.
- **how** -- This is the reference point with-in the file. `os.SEEK_SET` or 0 means beginning of the file, `os.SEEK_CUR` or 1 means the current position and `os.SEEK_END` or 2 means end of the file.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of lseek() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Now you can use fsync() method.
# Infact here you would not be able to see its effect.
os.fsync(fd)

# Now read this file from the beginning
os.lseek(fd, 0, 0)
str = os.read(fd, 100)
print "Read String is : ", str

# Close opened file
os.close( fd )

print "Closed the file successfully!"
```

Let us compile and run the above program, this will produce the following result:

```
Read String is : This is test
Closed the file successfully!!
```

## os.lstat(path)

### Description

The method **lstat()** is very similar to fstat() and returns the information about a file, but do not follow symbolic links. This is an alias for fstat() on platforms that do not support symbolic links, such as Windows.

Here is the structure returned by lstat method:

- **st\_dev**: ID of device containing file
- **st\_ino**: inode number
- **st\_mode**: protection
- **st\_nlink**: number of hard links
- **st\_uid**: user ID of owner
- **st\_gid**: group ID of owner
- **st\_rdev**: device ID (if special file)
- **st\_size**: total size, in bytes
- **st\_blksize**: blocksize for filesystem I/O
- **st\_blocks**: number of blocks allocated
- **st\_atime**: time of last access
- **st\_mtime**: time of last modification

- **st\_ctime:** time of last status change

## Syntax

Following is the syntax for **Istat()** method

```
os.lstat(path)
```

## Parameters

- **path** -- This is the file for which information would be returned.

## Return Value

This method returns the information about a file.

## Example

The following example shows the usage of Istat() method.

```
#!/usr/bin/python

import os, sys

# Open a file
path = "/var/www/html/foo.txt"
fd = os.open( path, os.O_RDWR|os.O_CREAT )

# Close opened file
os.close( fd )

# Now get the touple
info = os.lstat(path)

print "File Info :", info

# Now get uid of the file
print "UID of the file :%d" % info.st_uid

# Now get gid of the file
print "GID of the file :%d" % info.st_gid
```

Let us compile and run the above program, this will produce the following result:

```
File Info : (33261, 3450178L, 103L, 1, 500, 500, 0L,
           1238866944, 1238866944, 1238948312)
UID of the file :500
GID of the file :500
```

## os.major(device)

## Description

The method **major()** extract the device major number from a raw device number (usually the st\_dev or st\_rdev field from stat).

## Syntax

Following is the syntax for **major()** method

```
os.major(device)
```

## Parameters

- **device** -- This is a raw device number (usually the st\_dev or st\_rdev field from stat).

## Return Value

This method returns the device major number.

## Example

The following example shows the usage of major() method.

```
#!/usr/bin/python

import os, sys

path = "/var/www/html/foo.txt"

# Now get the touple
info = os.lstat(path)

# Get major and minor device number
major_dnum = os.major(info.st_dev)
minor_dnum = os.minor(info.st_dev)

print "Major Device Number :", major_dnum
print "Minor Device Number :", minor_dnum
```

Let us compile and run the above program, this will produce the following result:

```
Major Device Number : 0
Minor Device Number : 103
```

## os.makedev(major, minor)

## Description

The method **makedev()** composes a raw device number from the major and minor device numbers.

## Syntax

Following is the syntax for **makedev()** method

```
os.makedev(major, minor)
```

## Parameters

- **major** -- This is Major device number.
- **minor** -- This is Minor device number.

## Return Value

This method returns the device number.

## Example

The following example shows the usage of makedev() method.

```
#!/usr/bin/python

import os, sys

path = "/var/www/html/foo.txt"

# Now get the tuple
info = os.lstat(path)

# Get major and minor device number
major_dnum = os.major(info.st_dev)
minor_dnum = os.minor(info.st_dev)

print "Major Device Number :", major_dnum
print "Minor Device Number :", minor_dnum

# Make a device number
dev_num = os.makedev(major_dnum, minor_dnum)
print "Device Number :", dev_num
```

Let us compile and run the above program, this will produce the following result:

```
Major Device Number : 0
Minor Device Number : 103
Device Number : 103
```

## os.makedirs(path[, mode])

### Description

The method **makedirs()** is recursive directory creation function. Like mkdir(), but makes all intermediate-level directories needed to contain the leaf directory.

### Syntax

Following is the syntax for **makedirs()** method

```
os.makedirs(path[, mode])
```

## Parameters

- **path** -- This is the path which needs to be created recursively.
- **mode** -- This is the Mode of the directories to be given.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of makedirs() method.

```
#!/usr/bin/python

import os, sys

# Path to be created
path = "/tmp/home/monthly/daily"

os.makedirs( path, 0755 );

print "Path is created"
```

Let us compile and run the above program, this will produce the following result:

```
Path is created
```

## os.minor(device)

### Description

The method **minor()** extract the device minor number from a raw device number (usually the st\_dev or st\_rdev field from stat).

### Syntax

Following is the syntax for **minor()** method

```
os.minor(device)
```

### Parameters

- **device** -- This is a raw device number (usually the st\_dev or st\_rdev field from stat).

## Return Value

This method returns the device minor number.

## Example

The following example shows the usage of minor() method.

```
#!/usr/bin/python

import os, sys

path = "/var/www/html/foo.txt"

# Now get the tuple
info = os.lstat(path)

# Get major and minor device number
major_dnum = os.major(info.st_dev)
```

```
minor_dnum = os.minor(info.st_dev)

print "Major Device Number :", major_dnum
print "Minor Device Number :", minor_dnum
```

Let us compile and run the above program, this will produce the following result:

```
Major Device Number : 0
Minor Device Number : 103
```

## os.mkdir(path[, mode])

### Description

The method **mkdir()** create a directory named path with numeric mode mode. The default mode is 0777 (octal). On some systems, mode is ignored. Where it is used, the current umask value is first masked out.

### Syntax

Following is the syntax for **mkdir()** method

```
os.mkdir(path[, mode])
```

### Parameters

- **path** -- This is the path which needs to be created.
- **mode** -- This is the mode of the directories to be given.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of mkdir() method.

```
#!/usr/bin/python

import os, sys

# Path to be created
path = "/tmp/home/monthly/daily/hourly"

os.mkdir( path, 0755 );
print "Path is created"
```

Let us compile and run the above program, this will produce the following result:

```
Path is created
```

## os.mkfifo(path[, mode])

### Description

The method **mkfifo()** create a FIFO named path with numeric mode. The default mode is 0666 (octal).The current umask value is first masked out.

### Syntax

Following is the syntax for **mkfifo()** method

```
os.mkfifo(path[, mode])
```

### Parameters

- **path** -- This is the path which needs to be created.
- **mode** -- This is the mode of the named path to be given.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of mkfifo() method.

```
#!/usr/bin/python

import os, sys

# Path to be created
path = "/tmp/hourly"

os.mkfifo( path, 0644 )

print "Path is created"
```

Let us compile and run the above program, this will produce the following result:

```
Path is created
```

## os.mknod(filename[, mode=0600, device])

### Description

The method **mknod()** creates a filesystem node (file, device special file or named pipe) named filename.

### Syntax

Following is the syntax for **mknod()** method

```
os.mknod(filename[, mode=0600[, device=0]])
```

## Parameters

- **filename** -- This is the filesystem node to be created.
- **mode** -- The mode specifies both the permissions to use and the type of node to be created combined (bitwise OR) with one of the values stat.S\_IFREG, stat.S\_IFCHR, stat.S\_IFBLK, and stat.S\_IFIFO. They can be ORed base don requirement.
- **device** -- This is the device special file created and its optional to provide.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of mknod() method.

```
# !/usr/bin/python

import os
import stat

filename = '/tmp/tmpfile'
mode = 0600|stat.S_IRUSR

# filesystem node specified with different modes
os.mknod(filename, mode)
```

Let us compile and run the above program, this will create a simple file in /tmp directory with a name tmpfile:

```
-rw----- 1 root root 0 Apr 30 02:38 tmpfile
```

## os.open(file, flags[, mode])

### Description

The method **open()** opens the file file and set various flags according to flags and possibly its mode according to mode. The default mode is 0777 (octal), and the current umask value is first masked out.

### Syntax

Following is the syntax for **open()** method

```
os.open(file, flags[, mode]);
```

## Parameters

- **file** -- File name to be opened.
- **flags** -- This is the following constants are options for the flags. They can be combined using the bitwise OR operator |. Some of them are not available on all platforms.
  - **os.O\_RDONLY**: open for reading only
  - **os.O\_WRONLY**: open for writing only
  - **os.O\_RDWR** : open for reading and writing

- **os.O\_NONBLOCK:** do not block on open
- **os.O\_APPEND:** append on each write
- **os.O\_CREAT:** create file if it does not exist
- **os.O\_TRUNC:** truncate size to 0
- **os.O\_EXCL:** error if create and file exists
- **os.O\_SHLOCK:** atomically obtain a shared lock
- **os.O\_EXLOCK:** atomically obtain an exclusive lock
- **os.O\_DIRECT:** eliminate or reduce cache effects
- **os.O\_FSYNC :** synchronous writes
- **os.O\_NOFOLLOW:** do not follow symlinks
- **mode** -- This work in similar way as it works for [chmod\(\)](#) method.

## Return Value

This method returns the file descriptor for the newly opened file.

## Example

The following example shows the usage of open() method.

```
#!/usr/bin/python

import os, sys

# Open a file
fd = os.open( "foo.txt", os.O_RDWR|os.O_CREAT )

# Write one string
os.write(fd, "This is test")

# Close opened file
os.close( fd )

print "Closed the file successfully!"
```

This would create given file *foo.txt* and then would write given content in that file and would produce following result:

```
Closed the file successfully!
```

## os.openpty()

### Description

The method **openpty()** opens a pseudo-terminal pair and returns a pair of file descriptors(master,slave) for the pty & the tty respectively.

### Syntax

Following is the syntax for **openpty()** method

```
os.openpty()
```

### Parameters

---

**TUTORIALS POINT**

Simply Easy Learning

- NA

## Return Value

This method returns a pair of file descriptors i.e master and slave.

## Example

The following example shows the usage of `openpty()` method.

```
#!/usr/bin/python

import os

# master for pty, slave for tty
m,s = os.openpty()

print m
print s

# showing terminal name
s = os.ttyname(s)
print m
print s
```

Let us compile and run the above program, this will produce the following result:

```
3
4
3
/dev/pty0
```

## os.pathconf(path, name)

### Description

The method `pathconf()` returns system configuration information relevant to a named file.

### Syntax

Following is the syntax for `pathconf()` method

```
os.pathconf(path, name)
```

### Parameters

- **path** -- This is the file path.
- **name** -- This specifies the configuration value to retrieve; it may be a string which is the name of a defined system value; these names are specified in a number of standards (POSIX.1, Unix 95, Unix 98, and others). The names known to the host operating system are given in the `os.pathconf_names` dictionary.

## Return Value

This method returns system configuration information of a file.

## Example

The following example shows the usage of `pathconf()` method.

```
#!/usr/bin/python
```

**TUTORIALS POINT**

Simply Easy Learning

```

import os, sys

print "%s" % os.pathconf_names

# Retrieve maximum length of a filename
no = os.pathconf('a2.py', 'PC_NAME_MAX')
print "Maximum length of a filename :%d" % no

# Retrieve file size
no = os.pathconf('a2.py', 'PC_FILESIZEBITS')
print "file size in bits :%d" % no

```

Let us compile and run the above program, this will produce the following result:

```

{'PC_MAX_INPUT': 2, 'PC_VDISABLE': 8, 'PC_SYNC_IO': 9,
'PC SOCK_MAXBUF': 12, 'PC_NAME_MAX': 3, 'PC_MAX_CANON': 1,
'PC_PRIO_IO': 11, 'PC_CHOWN_RESTRICTED': 6, 'PC_ASYNC_IO': 10,
'PC_NO_TRUNC': 7, 'PC_FILESIZEBITS': 13, 'PC_LINK_MAX': 0,
'PC_PIPE_BUF': 5, 'PC_PATH_MAX': 4}
Maximum length of a filename :255
file size in bits : 64

```

## os.pipe()

### Description

The method **pipe()** creates a pipe and return a pair of file descriptors (r, w) usable for reading and writing, respectively

### Syntax

Following is the syntax for **pipe()** method

```
os.pipe()
```

### Parameters

- NA

### Return Value

This method returns a pair of file descriptors.

### Example

The following example shows the usage of pipe() method.

```

#!/usr/bin/python

import os, sys

print "The child will write text to a pipe and "
print "the parent will read the text written by child..."

# file descriptors r, w for reading and writing
r, w = os.pipe()

processid = os.fork()

```

## TUTORIALS POINT

Simply Easy Learning

```

if processid:
    # This is the parent process
    # Closes file descriptor w
    os.close(w)
    r = os.fdopen(r)
    print "Parent reading"
    str = r.read()
    print "text =", str
    sys.exit(0)
else:
    # This is the child process
    os.close(r)
    w = os.fdopen(w, 'w')
    print "Child writing"
    w.write("Text written by child...")
    w.close()
    print "Child closing"
    sys.exit(0)

```

Let us compile and run the above program, this will produce the following result:

```

The child will write text to a pipe and
the parent will read the text written by child...
Parent reading
Child writing
Child closing
text = Text written by child...

```

## os.popen(command[, mode[, bufsize]])

### Description

The method **popen()** open a pipe to or from command. The return value is an open file object connected to the pipe, which can be read or written depending on whether mode is 'r' (default) or 'w'. The bufsize argument has the same meaning as in [open\(\)](#) function.

### Syntax

Following is the syntax for **popen()** method

```
os.popen(command[, mode[, bufsize]])
```

### Parameters

- command** -- This is command used.
- mode** -- This is the Mode can be 'r'(default) or 'w'.
- bufsize** -- If the buffering value is set to 0, no buffering will take place. If the buffering value is 1, line buffering will be performed while accessing a file. If you specify the buffering value as an integer greater than 1, then buffering action will be performed with the indicated buffer size. If negative, the buffer size is the system default(default behavior).

### Return Value

This method returns an open file object connected to the pipe.

### Example

The following example shows the usage of **popen()** method.

## TUTORIALS POINT

Simply Easy Learning

```
# !/usr/bin/python

import os, sys

# using command mkdir
a = 'mkdir nwdir'

b = os.popen(a, 'r', 1)

print b
```

Let us compile and run the above program, this will produce the following result:

```
open file 'mkdir nwdir', mode 'r' at 0x81614d0
```

## os.read(fd, n)

### Description

The method **read()** read at most *n* bytes from file descriptor *fd*, return a string containing the bytes read. If the end of file referred to by *fd* has been reached, an empty string is returned.

### Syntax

Following is the syntax for **read()** method

```
os.read(fd, n)
```

### Parameters

- **fd** -- This is the file descriptor of the file.
- **n** -- These are *n* bytes from file descriptor *fd*.

### Return Value

This method returns a string containing the bytes read.

### Example

The following example shows the usage of **read()** method.

```
# !/usr/bin/python

import os, sys
# Open a file
fd = os.open("f1.txt", os.O_RDWR)

# Reading text
ret = os.read(fd, 12)
print ret

# Close opened file
os.close(fd)
print "Closed the file successfully!!"
```

Let us compile and run the above program, this will print the contents of file *f1.txt*.

```
This is test  
Closed the file successfully!!
```

## os.readlink(path)

### Description

The method **readlink()** returns a string representing the path to which the symbolic link points. It may return an absolute or relative pathname.

### Syntax

Following is the syntax for **readlink()** method

```
os.readlink(path)
```

### Parameters

- **path** -- This is the path or symbolic link for which we are going to find source of the link.

### Return Value

This method return a string representing the path to which the symbolic link points.

### Example

The following example shows the usage of **readlink()** method.

```
# !/usr/bin/python  
import os  
  
src = '/usr/bin/python'  
dst = '/tmp/python'  
  
# This creates a symbolic link on python in tmp directory  
os.symlink(src, dst)  
  
# Now let us use readlink to display the source of the link.  
path = os.readlink( dst )  
print path
```

Let us compile and run the above program, this will create a symbolic link to /usr/bin/python and later it will read the source of the symbolic link using **readlink()** call. Before running this program make sure you do not have /tmp/python already available.

```
/usr/bin/python
```

## os.remove(path)

### Description

The method **remove()** removes the file path. If the path is a directory, **OSError** is raised.

### Syntax

Following is the syntax for **remove()** method

```
os.remove(path)
```

## Parameters

- **path** -- This is the path which is to be removed.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of remove() method.

```
# !/usr/bin/python

import os, sys

# listing directories
print "The dir is: %s" %os.listdir(os.getcwd())

# removing
os.remove("aa.txt")

# listing directories after removing path
print "The dir after removal of path : %s" %os.listdir(os.getcwd())
```

Let us compile and run the above program, this will produce the following result:

```
The dir is:
[ 'a1.txt', 'aa.txt', 'resume.doc', 'a3.py', 'tutorialsdir', 'amrood.admin' ]
The dir after removal of path :
[ 'a1.txt', 'resume.doc', 'a3.py', 'tutorialsdir', 'amrood.admin' ]
```

## os.removedirs(path)

### Description

The method **removedirs()** removes dirs recursively. If the leaf directory is successfully removed, removedirs tries to successively remove every parent directory displayed in path.

### Syntax

Following is the syntax for **removedirs()** method

```
os.removedirs(path)
```

## Parameters

- **path** -- This is the path of the directory which needs to be removed.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of removedirs() method.

```
# !/usr/bin/python
```

```

import os, sys

# listing directories
print "The dir is: %s" %os.listdir(os.getcwd())

# removing
os.removedirs("/tutorialsdir")

# listing directories after removing directory
print "The dir after removal is:" %os.listdir(os.getcwd())

```

Let us compile and run the above program, this will produce the following result:

```

The dir is:
[ 'a1.txt','resume.doc','a3.py','tutorialsdir','amrood.admin' ]
The dir after removal is:
[ 'a1.txt','resume.doc','a3.py','amrood.admin' ]

```

## os.rename(src, dst)

### Description

The method **rename()** rename the file or directory *src* to *dst*.If *dst* is a file or directory(already present),[OSError](#) will be raised.

### Syntax

Following is the syntax for **rename()** method

```
os.rename(src, dst)
```

### Parameters

- **src** -- This is the actual name of the file or directory.
- **dst** -- This is the new name of the file or directory.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of **rename()** method.

```

#!/usr/bin/python

import os, sys

# listing directories
print "The dir is: %s" %os.listdir(os.getcwd())

# renaming directory ''tutorialsdir"
os.rename("tutorialsdir","tutorialsdirectory")

print "Successfully renamed."

# listing directories after renaming "tutorialsdir"
print "the dir is: %s" %os.listdir(os.getcwd())

```

Let us compile and run the above program, this will produce the following result:

```
The dir is:  
[ 'a1.txt','resume.doc','a3.py','tutorialsdir','amrood.admin' ]  
Successfully renamed.  
The dir is:  
[ 'a1.txt','resume.doc','a3.py','tutorialsdirectory','amrood.admin' ]
```

## os.renames(old, new)

### Description

The method **renames()** is recursive directory or file renaming function. It does the same functioning as [os.rename\(\)](#), but it also moves a file to a directory, or a whole tree of directories, that do not exist.

### Syntax

Following is the syntax for **renames()** method

```
os.renames (old, new)
```

### Parameters

- **old** -- This is the actual name of the file or directory to be renamed.
- **new** -- This is the new name of the file or directory. It can even include a file to a directory, or a whole tree of directories, that do not exist.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of renames() method.

```
#!/usr/bin/python  
  
import os, sys  
print "Current directory is: %s" %os.getcwd()  
  
# listing directories  
print "The dir is: %s"%os.listdir(os.getcwd())  
  
# renaming file "a1.txt"  
os.renames("a1.txt","newdir/aanew.txt")  
  
print "Successfully renamed."  
  
# listing directories after renaming and moving "a1.txt"  
print "The dir is: %s" %os.listdir(os.getcwd())
```

Let us compile and run the above program, this will produce the following result:

```
Current directory is: /tmp  
The dir is:  
[ 'a1.txt','resume.doc','a3.py','a1.txt','Administrator','amrood.admin' ]  
Successfully renamed.  
The dir is:
```

```
[ 'a1.txt','resume.doc','a3.py','Administrator','amrood.admin' ]
```

The file `aa1.txt` is not visible here, as it is been moved to `newdir` and renamed as `aanew.txt`. The directory `newdir` and its contents are shown below:

```
[ 'aanew.txt' ]
```

## os.rmdir(path)

### Description

The method `rmdir()` removes the directory path. It works only when the directory is empty, else [OSError](#) is raised.

### Syntax

Following is the syntax for `rmdir()` method

```
os.rmdir(path)
```

### Parameters

- `path` -- This is the path of the directory which needs to be removed.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of `rmdir()` method.

```
# !/usr/bin/python

import os, sys

# listing directories
print "the dir is: %s" %os.listdir(os.getcwd())

# removing path
os.rmdir("mydir")

# listing directories after removing directory path
print "the dir is:" %os.listdir(os.getcwd())
```

Let us compile and run the above program, this will produce the following result:

```
the dir is:
[ 'a1.txt','resume.doc','a3.py','mydir','Administrator','amrood.admin' ]
os.rmdir("mydir")
OSError: [Errno 90] Directory not empty: 'mydir'
```

The error is coming as 'mydir' directory is not empty. If 'mydir' is an empty directory, then this would produce following result:

```
the dir is:
[ 'a1.txt','resume.doc','a3.py','mydir','Administrator','amrood.admin' ]
the dir is:
```

```
[ 'a1.txt','resume.doc','a3.py','Administrator','amrood.admin' ]
```

## os.stat(path)

### Description

The method **stat()** perform a stat system call on the given path.

### Syntax

Following is the syntax for **stat()** method

```
os.stat(path)
```

### Parameters

- **path** -- This is the path whose stat information is required.

### Return Value

Here is the list of members of stat structure:

- **st\_mode**: protection bits.
- **st\_ino**: inode number.
- **st\_dev**: device.
- **st\_nlink**: number of hard links.
- **st\_uid**: user id of owner.
- **st\_gid**: group id of owner.
- **st\_size**: size of file, in bytes.
- **st\_atime**: time of most recent access.
- **st\_mtime**: time of most recent content modification.
- **st\_ctime**: time of most recent metadata change.

### Example

The following example shows the usage of stat() method.

```
#!/usr/bin/python

import os, sys

# showing stat information of file "a2.py"
statinfo = os.stat('a2.py')

print statinfo
```

Let us compile and run the above program, this will produce the following result:

```
posix.stat_result(st_mode=33188, st_ino=3940649674337682L, st_dev=277923425L, st_nlink=1, st_uid=400, st_gid=401, st_size=335L, st_atime=1330498089, st_mtime=1330498089, st_ctime=1330498089)
```

## os.stat\_float\_times([newvalue])

## Description

The method **stat\_float\_times()** determine whether stat\_result represents time stamps as float objects.

## Syntax

Following is the syntax for **stat\_float\_times()** method

```
os.stat_float_times([newvalue])
```

## Parameters

- **newvalue** -- If newvalue is True, future calls to stat() return floats, if it is False, future calls return ints. If newvalue is not mentioned, it returns the current settings.

## Return Value

This method returns true or false.

## Example

The following example shows the usage of stat\_float\_times() method.

```
# !/usr/bin/python

import os, sys

# stat information
statinfo = os.stat('a2.py')

print statinfo
statinfo = os.stat_float_times()
print statinfo
```

Let us compile and run the above program, this will produce the following result:

```
posix.stat_result(st_mode=33188, st_ino=3940649674337682L, st_dev=277923425L,
st_nlink=1, st_uid=400, st_gid=401, st_size=335L, st_atime=1330498089, st_mtime=13
30498089, st_ctime=1330498089)
True
```

## os.statvfs(path)

## Description

The method **statvfs()** perform a statvfs system call on the given path.

## Syntax

Following is the syntax for **statvfs()** method

```
os.statvfs(path)
```

## Parameters

- **path** -- This is the path whose statvfs information is required.

## Return Value

Here is the list of members of statvfs structure:

- **f\_bsize**: preferred file system block size.
- **f\_frsize**: fundamental file system block size.
- **f\_blocks**: total number of blocks in the filesystem.
- **f\_bfree**: total number of free blocks.
- **f\_bavail**: free blocks available to non-super user.
- **f\_files**: total number of file nodes.
- **f\_ffree**: total number of free file nodes.
- **f\_favail**: free nodes available to non-super user.
- **f\_flag**: system dependent.
- **f\_namemax**: maximum file name length.

## Example

The following example shows the usage of statvfs() method.

```
# !/usr/bin/python

import os, sys

# showing statvfs information of file "a1.py"
stinfo = os.statvfs('a1.py')

print stinfo
```

Let us compile and run the above program, this will produce the following result:

```
posix.statvfs_result(f_bsize=4096, f_frsize=4096, f_blocks=1909350L,
f_bfree=1491513L,
f_bavail=1394521L, f_files=971520L, f_ffree=883302L, f_favail=883302L, f_flag=0,
f_namemax=255)
```

## os.symlink(src, dst)

### Description

The method **symlink()** creates a symbolic link **dst** pointing to **src**.

### Syntax

Following is the syntax for **symlink()** method

```
os.symlink(src, dst)
```

## Parameters

- **src** -- This is the source.
- **dest** -- This is the destination which doesn't existed previously.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of symlink() method.

```
#!/usr/bin/python

import os

src = '/usr/bin/python'
dst = '/tmp/python'

# This creates a symbolic link on python in tmp directory
os.symlink(src, dst)

print "symlink created"
```

Let us compile and run the above program, this will create a symbolic link in /tmp directory which will be as follows:

```
lrwxrwxrwx. 1 root      root          15 Apr 30 03:00 python -> /usr/bin/python
```

## os.tcgetpgrp(fd)

### Description

The method **tcgetpgrp()** return the process group associated with the terminal given by *fd* (an open file descriptor as returned by [os.open\(\)](#))

### Syntax

Following is the syntax for **tcgetpgrp()** method

```
os.tcgetpgrp(fd)
```

### Parameters

- **fd** -- This is the file descriptor.

## Return Value

This method returns the process group.

## Example

The following example shows the usage of tcgetpgrp() method.

```
# !/usr/bin/python

import os, sys

# Showing current directory
print "Current working dir :%s" %os.getcwd()

# Changing dir to /dev/tty
```

```

fd = os.open("/dev/tty", os.O_RDONLY)
f = os.tcgetpgrp(fd)

# Showing the process group
print "the process group associated is: "
print f

os.close(fd)
print "Closed the file successfully!!"

```

Let us compile and run the above program, this will produce the following result:

```

Current working dir is :/tmp
the process group associated is:
2670
Closed the file successfully!!

```

## os.tcsetpgrp(fd, pg)

### Description

The method **tcsetpgrp()** set the process group associated with the terminal given by *fd* (an open file descriptor as returned by [os.open\(\)](#)) to *pg*.

### Syntax

Following is the syntax for **tcsetpgrp()** method

```
os.tcsetpgrp(fd, pg)
```

### Parameters

- **fd** -- This is the file descriptor.
- **pg** -- This set the process group to *pg*.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of tcsetpgrp() method.

```

#!/usr/bin/python

import os, sys

# Showing current directory
print "Current working dir :%s" %os.getcwd()

# Changing dir to /dev/tty
fd = os.open("/dev/tty", os.O_RDONLY)

f = os.tcsetpgrp(fd)

# Showing the process group
print "the process group associated is: "
print f

```

```
# Setting the process group
os.tcsetpgrp(fd,2672)
print "done"

os.close(fd)
print "Closed the file successfully!!"
```

Let us compile and run the above program, this will produce the following result:

```
Current working dir is :/tmp
the process group associated is:
2672
done
Closed the file successfully!!
```

## os.tempnam([dir[, prefix]])

### Description

The method **tempnam()** returns a unique path name that is reasonable for creating a temporary file.

### Syntax

Following is the syntax for **tempnam()** method

```
os.tempnam(dir, prefix)
```

### Parameters

- **dir** -- This is the dir where the temporary filename will be created.
- **prefix** -- This is the prefix of the generated temporary filename.

### Return Value

This method returns a unique path.

### Example

The following example shows the usage of tempnam() method.

```
# !/usr/bin/python

import os, sys

# prefix is tuts1 of the generated file
tmpfn = os.tempnam('/tmp/tutorialsdir','tuts1')

print "This is the unique path:"
print tmpfn
```

Let us compile and run the above program, this will produce the following result:

```
This is the unique path:
/tmp/tutorialsdir/tuts1IbAco8
```

# os.tmpfile()

## Description

The method **tmpfile()** returns a new temporary file object opened in update mode (w+b). The file has no directory entries associated with it and will be deleted automatically once there are no file descriptors.

## Syntax

Following is the syntax for **tmpfile()** method

```
os.tmpfile
```

## Parameters

- NA

## Return Value

This method returns a new temporary file object

## Example

The following example shows the usage of tmpfile() method.

```
# !/usr/bin/python

import os

# The file has no directory entries associated with it and will be
# deleted automatically once there are no file descriptors.
tmpfile = os.tmpfile()
tmpfile.write('Temporary newfile is here.....')
tmpfile.seek(0)

print tmpfile.read()
tmpfile.close
```

Let us compile and run the above program, this will produce the following result:

```
Temporary newfile is here.....
```

# os.tmpnam()

## Description

The method **tmpnam()** return a unique path name that is reasonable for creating a temporary file.

## Syntax

Following is the syntax for **tmpnam()** method

```
os.tmpnam()
```

## Parameters

- NA

## Return Value

This method returns a unique path name.

## Example

The following example shows the usage of tmpnam() method.

```
# !/usr/bin/python

import os, sys

# Temporary file generated in current directory
tmpfn = os.tmpnam()

print "This is the unique path:"
print tmpfn
```

Let us compile and run the above program, this will produce the following result:

```
This is the unique path:
/tmp/fileUFojpd
```

## os.ttyname(fd)

### Description

The method **ttyname()** returns a string which specifies the terminal device associated with *fd*. If *fd* is not associated with a terminal device, an exception is raised.

### Syntax

Following is the syntax for **ttyname()** method

```
os.ttyname(fd)
```

## Parameters

- **fd** -- This is the file descriptor.

## Return Value

This method returns a string which specifies the terminal device.

## Example

The following example shows the usage of ttyname() method.

```
# !/usr/bin/python

import os, sys

# Showing current directory
print "Current working dir :%s" %os.getcwd()
```

```

# Changing dir to /dev/tty
fd = os.open("/dev/tty",os.O_RDONLY)

p = os.ttyname(fd)
print "the terminal device associated is: "
print p
print "done!!"

os.close(fd)
print "Closed the file successfully!!"

```

Let us compile and run the above program, this will produce the following result:

```

Current working dir is :/tmp
the terminal device associated is:
/dev/tty
done!!
Closed the file successfully!!

```

## os.unlink(path)

### Description

The method **unlink()** removes(delete) the file path.If the path is a directory, [OSError](#) is raised.

### Syntax

Following is the syntax for **unlink()** method

```
os.unlink(path)
```

### Parameters

- **path** -- This is the path which is to be removed.

### Return Value

This method does not return any value.

### Example

The following example shows the usage of **unlink()** method.

```

#!/usr/bin/python

import os, sys

# listing directories
print "The dir is: %s" %os.listdir(os.getcwd())

os.unlink("aa.txt")

# listing directories after removing path
print "The dir after removal of path : %s" %os.listdir(os.getcwd())

```

Let us compile and run the above program, this will produce the following result:

```
The dir is:  
[ 'a1.txt','aa.txt','resume.doc','a3.py','tutorialsdir','amrood.admin' ]  
The dir after removal of path :  
[ 'a1.txt','resume.doc','a3.py','tutorialsdir','amrood.admin' ]
```

## os.utime(path, times)

### Description

The method **utime()** sets the access and modified times of the file specified by path.

### Syntax

Following is the syntax for **utime()** method

```
os.utime(path, times)
```

### Parameters

- **path** -- This is the path of the file.
- **times** -- This is the file access and modified time. If times is none, then the file access and modified times are set to the current time. The parameter times consists of row in the form of (atime, mtime) i.e (accesstime, modifiedtime).

### Return Value

This method does not return any value.

### Example

The following example shows the usage of utime() method.

```
#!/usr/bin/python  
  
import os, sys  
  
# Showing stat information of file  
stinfo = os.stat('a2.py')  
print stinfo  
  
# Using os.stat to recieve atime and mtime of file  
print "access time of a2.py: %s" %stinfo.st_atime  
print "modified time of a2.py: %s" %stinfo.st_mtime  
  
# Modifying atime and mtime  
os.utime("a2.py", (1330712280, 1330712292))  
print "done!!"
```

Let us compile and run the above program, this will produce the following result:

```
posix.stat_result(st_mode=33188, st_ino=3940649674337682L, st_dev=277923425L, st_nlink=1, st_uid=400, st_gid=401, st_size=335L, st_atime=1330498070, st_mtime=1330498074, st_ctime=1330498065)  
access time of a2.py: 1330498070  
modified time of a2.py: 1330498074  
done!!
```

```
os.walk(top[, topdown=True[, onerror=None[,  
followlinks=False]]])
```

## Description

The method **walk()** generates the file names in a directory tree by walking the tree either top-down or bottom-up.

## Syntax

Following is the syntax for **walk()** method

```
os.walk(top[, topdown=True[, onerror=None[, followlinks=False]]])
```

## Parameters

- **top** -- Each directory rooted at directory , yield 3-tuple i.e (dirpath, dirnames, filenames)
- **topdown** -- If optional argument topdown is True or not specified, directories are scanned from top-down. If topdown is set to False, directories are scanned from bottom-up.
- **onerror** -- This can show error to continue with the walk, or raise the exception to abort the walk.
- **followlinks** -- This visits directories pointed to by symlinks, if set to true.

## Return Value

This method does not return any value.

## Example

The following example shows the usage of walk() method.

```
# !/usr/bin/python

import os
for root, dirs, files in os.walk(".", topdown=False):
    for name in files:
        print(os.path.join(root, name))
    for name in dirs:
        print(os.path.join(root, name))
```

Let us compile and run the above program, this will scan all the directories and subdirectories bottom-to-up

```
./tmp/test.py
./.bash_logout
./amrood.tar.gz
./.emacs
./httpd.conf
./www.tar.gz
./mysql.tar.gz
./test.py
./.bashrc
./.bash_history
./.bash_profile
./tmp
```

If you will change the value of **topdown** to True then it will give you following result:

```
./.bash_logout
./amrood.tar.gz
./.emacs
```

**TUTORIALS POINT**

Simply Easy Learning

```
./httpd.conf  
./www.tar.gz  
./mysql.tar.gz  
./test.py  
./.bashrc  
./.bash_history  
./.bash_profile  
./tmp  
./tmp/test.py
```

## os.write(fd, str)

### Description

The method **write()** writes the string *str* to file descriptor *fd*. Return the number of bytes actually written.

### Syntax

Following is the syntax for **write()** method

```
os.write(fd, str)
```

### Parameters

- **fd** -- This is the file descriptor.
- **str** -- This is the string to be written.

### Return Value

This method returns the number of bytes actually written.

### Example

The following example shows the usage of write() method.

```
# !/usr/bin/python

import os, sys

# Open file
fd = os.open("f1.txt",os.O_RDWR|os.CREAT)

# Writing text
ret = os.write(fd,"This is test")

# ret consists of number of bytes written to f1.txt
print "the number of bytes written: "
print ret

print "written successfully"

# Close opened file
os.close(fd)
print "Closed the file successfully!"
```

Let us compile and run the above program, this will produce the following result:

```
the number of bytes written:  
12
```

```
written successfully  
Closed the file successfully!!
```

# Python Exceptions

**P**ython provides two very important features to handle any unexpected error in your Python programs and to add debugging capabilities in them:

## Exception Handling:

Here is a list standard Exceptions available in Python:

EXCEPTION NAME	DESCRIPTION
Exception	Base class for all exceptions
StopIteration	Raised when the next() method of an iterator does not point to any object.
SystemExit	Raised by the sys.exit() function.
StandardError	Base class for all built-in exceptions except StopIteration and SystemExit.
ArithmeticError	Base class for all errors that occur for numeric calculation.
OverflowError	Raised when a calculation exceeds maximum limit for a numeric type.
FloatingPointError	Raised when a floating point calculation fails.
ZeroDivisionError	Raised when division or modulo by zero takes place for all numeric types.
AssertionError	Raised in case of failure of the Assert statement.
AttributeError	Raised in case of failure of attribute reference or assignment.
EOFError	Raised when there is no input from either the raw_input() or input() function and the end of file is reached.
ImportError	Raised when an import statement fails.
KeyboardInterrupt	Raised when the user interrupts program execution, usually by pressing Ctrl+c.
LookupError	Base class for all lookup errors.
IndexError	Raised when an index is not found in a sequence.
KeyError	Raised when the specified key is not found in the dictionary.

NameError	Raised when an identifier is not found in the local or global namespace.
UnboundLocalError	Raised when trying to access a local variable in a function or method but no value has been assigned to it.
EnvironmentError	Base class for all exceptions that occur outside the Python environment.
IOError	Raised when an input/ output operation fails, such as the print statement or the open() function when trying to open a file that does not exist.
OSError	Raised for operating systemrelated errors.
SyntaxError	Raised when there is an error in Python syntax.
IndentationError	Raised when indentation is not specified properly.
SystemError	Raised when the interpreter finds an internal problem, but when this error is encountered the Python interpreter does not exit.
SystemExit	Raised when Python interpreter is quit by using the sys.exit() function. If not handled in the code, causes the interpreter to exit.
TypeError	Raised when an operation or function is attempted that is invalid for the specified data type.
ValueError	Raised when the built-in function for a data type has the valid type of arguments, but the arguments have invalid values specified.
RuntimeError	Raised when a generated error does not fall into any category.
NotImplementedError	Raised when an abstract method that needs to be implemented in an inherited class is not actually implemented.

## Assertions:

An assertion is a sanity-check that you can turn on or turn off when you are done with your testing of the program.

The easiest way to think of an assertion is to liken it to a **raise-if** statement (or to be more accurate, a raise-if-not statement). An expression is tested, and if the result comes up false, an exception is raised.

Assertions are carried out by the assert statement, the newest keyword to Python, introduced in version 1.5.

Programmers often place assertions at the start of a function to check for valid input, and after a function call to check for valid output.

### The *assert* Statement:

When it encounters an assert statement, Python evaluates the accompanying expression, which is hopefully true. If the expression is false, Python raises an *AssertionError exception*.

The syntax for assert is:

```
assert Expression[, Arguments]
```

If the assertion fails, Python uses `AssertionError` as the argument for the `AssertionError`. `AssertionError` exceptions can be caught and handled like any other exception using the `try-except` statement, but if not handled, they will terminate the program and produce a traceback.

## Example:

Here is a function that converts a temperature from degrees Kelvin to degrees Fahrenheit. Since zero degrees Kelvin is as cold as it gets, the function bails out if it sees a negative temperature:

```
#!/usr/bin/python

def KelvinToFahrenheit(Temperature):
    assert (Temperature >= 0), "Colder than absolute zero!"
    return ((Temperature-273)*1.8)+32

print KelvinToFahrenheit(273)
print int(KelvinToFahrenheit(505.78))
print KelvinToFahrenheit(-5)
```

When the above code is executed, it produces following result:

```
32.0
451
Traceback (most recent call last):
  File "test.py", line 9, in <module>
    print KelvinToFahrenheit(-5)
  File "test.py", line 4, in KelvinToFahrenheit
    assert (Temperature >= 0),"Colder than absolute zero!"
AssertionError: Colder than absolute zero!
```

## What is Exception?

An exception is an event, which occurs during the execution of a program, that disrupts the normal flow of the program's instructions. In general, when a Python script encounters a situation that it can't cope with, it raises an exception. An exception is a Python object that represents an error.

When a Python script raises an exception, it must either handle the exception immediately otherwise it would terminate and come out.

## Handling an exception:

If you have some *suspicious* code that may raise an exception, you can defend your program by placing the suspicious code in a `try:` block. After the `try:` block, include an `except:` statement, followed by a block of code which handles the problem as elegantly as possible.

### SYNTAX:

Here is simple syntax of `try....except...else` blocks:

```
try:
    You do your operations here;
    .....
except ExceptionI:
    If there is ExceptionI, then execute this block.
except ExceptionII:
    If there is ExceptionII, then execute this block.
    .....
else:
    If there is no exception then execute this block.
```

Here are few important points above the above mentioned syntax:

- A single try statement can have multiple except statements. This is useful when the try block contains statements that may throw different types of exceptions.
- You can also provide a generic except clause, which handles any exception.
- After the except clause(s), you can include an else-clause. The code in the else-block executes if the code in the try: block does not raise an exception.
- The else-block is a good place for code that does not need the try: block's protection.

## EXAMPLE:

Here is simple example which opens a file and writes the content in the file and comes out gracefully because there is no problem at all:

```
#!/usr/bin/python

try:
    fh = open("testfile", "w")
    fh.write("This is my test file for exception handling!!")
except IOError:
    print "Error: can't find file or read data"
else:
    print "Written content in the file successfully"
    fh.close()
```

This will produce following result:

```
Written content in the file successfully
```

## EXAMPLE:

Here is one more simple example which tries to open a file where you do not have permission to write in the file so it raises an exception:

```
#!/usr/bin/python

try:
    fh = open("testfile", "w")
    fh.write("This is my test file for exception handling!!")
except IOError:
    print "Error: can't find file or read data"
else:
    print "Written content in the file successfully"
```

This will produce following result:

```
Error: can't find file or read data
```

## The *except* clause with no exceptions:

You can also use the except statement with no exceptions defined as follows:

```
try:
```

```

    You do your operations here;
    .....
except:
    If there is any exception, then execute this block.
    .....
else:
    If there is no exception then execute this block.

```

This kind of a **try-except** statement catches all the exceptions that occur. Using this kind of try-except statement is not considered a good programming practice, though, because it catches all exceptions but does not make the programmer identify the root cause of the problem that may occur.

## The *except* clause with multiple exceptions:

You can also use the same *except* statement to handle multiple exceptions as follows:

```

try:
    You do your operations here;
    .....
except(Exception1[, Exception2[,...ExceptionN]]):
    If there is any exception from the given exception list,
    then execute this block.
    .....
else:
    If there is no exception then execute this block.

```

## The *try-finally* clause:

You can use a **finally:** block along with a **try:** block. The finally block is a place to put any code that must execute, whether the try-block raised an exception or not. The syntax of the try-finally statement is this:

```

try:
    You do your operations here;
    .....
    Due to any exception, this may be skipped.
finally:
    This would always be executed.
    .....

```

Note that you can provide except clause(s), or a finally clause, but not both. You can not use *else* clause as well along with a finally clause.

## EXAMPLE:

```

#!/usr/bin/python

try:
    fh = open("testfile", "w")
    fh.write("This is my test file for exception handling!!")
finally:
    print "Error: can't find file or read data"

```

If you do not have permission to open the file in writing mode then this will produce following result:

```
Error: can't find file or read data
```

Same example can be written more cleanly as follows:

```

#!/usr/bin/python

try:
    fh = open("testfile", "w")
    try:
        fh.write("This is my test file for exception handling!!")
    finally:
        fh.close()
except IOError:
    print "Error: can't find file or read data"

```

When an exception is thrown in the *try* block, the execution immediately passes to the *finally* block. After all the statements in the *finally* block are executed, the exception is raised again and is handled in the *except* statements if present in the next higher layer of the *try-except* statement.

## Argument of an Exception:

An exception can have an *argument*, which is a value that gives additional information about the problem. The contents of the argument vary by exception. You capture an exception's argument by supplying a variable in the *except* clause as follows:

```

try:
    You do your operations here;
    .....
except ExceptionType, Argument:
    You can print value of Argument here...

```

If you are writing the code to handle a single exception, you can have a variable follow the name of the exception in the *except* statement. If you are trapping multiple exceptions, you can have a variable follow the tuple of the exception.

This variable will receive the value of the exception mostly containing the cause of the exception. The variable can receive a single value or multiple values in the form of a tuple. This tuple usually contains the error string, the error number, and an error location.

## EXAMPLE:

Following is an example for a single exception:

```

#!/usr/bin/python

# Define a function here.
def temp_convert(var):
    try:
        return int(var)
    except ValueError, Argument:
        print "The argument does not contain numbers\n", Argument

# Call above function here.
temp_convert("xyz");

```

This would produce following result:

```

The argument does not contain numbers
invalid literal for int() with base 10: 'xyz'

```

## Raising an exceptions:

You can raise exceptions in several ways by using the `raise` statement. The general syntax for the `raise` statement.

### SYNTAX:

```
raise [Exception [, args [, traceback]]]
```

Here `Exception` is the type of exception (for example, `NameError`) and `argument` is a value for the exception argument. The argument is optional; if not supplied, the exception argument is `None`.

The final argument, `traceback`, is also optional (and rarely used in practice), and, if present, is the `traceback` object used for the exception.

### EXAMPLE:

An exception can be a string, a class, or an object. Most of the exceptions that the Python core raises are classes, with an argument that is an instance of the class. Defining new exceptions is quite easy and can be done as follows:

```
def functionName( level ):
    if level < 1:
        raise "Invalid level!", level
        # The code below to this would not be executed
        # if we raise the exception
```

**Note:** In order to catch an exception, an "except" clause must refer to the same exception thrown either class object or simple string. For example to capture above exception we must write our except clause as follows:

```
try:
    Business Logic here...
except "Invalid level!":
    Exception handling here...
else:
    Rest of the code here...
```

## User-Defined Exceptions:

Python also allows you to create your own exceptions by deriving classes from the standard built-in exceptions.

Here is an example related to `RuntimeError`. Here a class is created that is subclassed from `RuntimeError`. This is useful when you need to display more specific information when an exception is caught.

In the try block, the user-defined exception is raised and caught in the except block. The variable `e` is used to create an instance of the class `Networkerror`.

```
class Networkerror(RuntimeError):
    def __init__(self, arg):
        self.args = arg
```

So once you defined above class, you can raise your exception as follows:

```
try:
    raise Networkerror("Bad hostname")
except Networkerror,e:
    print e.args
```

# Python Classes/Objects

**P**ython has been an object oriented language from day one. Because of this, creating and using classes and objects are downright easy. This chapter helps you become an expert in using Python's object-oriented programming support.

If you don't have any previous experience with object-oriented (OO) programming, you may want to consult an introductory course on it or at least a tutorial of some sort so that you have a grasp of the basic concepts.

However, here is small introduction of Object-Oriented Programming (OOP) to bring you at speed:

## Overview of OOP Terminology

- **Class:** A user-defined prototype for an object that defines a set of attributes that characterize any object of the class. The attributes are data members (class variables and instance variables) and methods, accessed via dot notation.
- **Class variable:** A variable that is shared by all instances of a class. Class variables are defined within a class but outside any of the class's methods. Class variables aren't used as frequently as instance variables are.
- **Data member:** A class variable or instance variable that holds data associated with a class and its objects.
- **Function overloading:** The assignment of more than one behavior to a particular function. The operation performed varies by the types of objects (arguments) involved.
- **Instance variable:** A variable that is defined inside a method and belongs only to the current instance of a class.
- **Inheritance :** The transfer of the characteristics of a class to other classes that are derived from it.
- **Instance:** An individual object of a certain class. An object obj that belongs to a class Circle, for example, is an instance of the class Circle.
- **Instantiation :** The creation of an instance of a class.
- **Method :** A special kind of function that is defined in a class definition.
- **Object :** A unique instance of a data structure that's defined by its class. An object comprises both data members (class variables and instance variables) and methods.
- **Operator overloading:** The assignment of more than one function to a particular operator.

## Creating Classes:

The `class` statement creates a new class definition. The name of the class immediately follows the keyword `class` followed by a colon as follows:

```
class ClassName:  
    'Optional class documentation string'
```

```
class_suite
```

- The class has a documentation string which can be accessed via `ClassName.__doc__`.
- The `class_suite` consists of all the component statements, defining class members, data attributes, and functions.

## EXAMPLE:

Following is the example of a simple Python class:

```
class Employee:  
    'Common base class for all employees'  
    empCount = 0  
  
    def __init__(self, name, salary):  
        self.name = name  
        self.salary = salary  
        Employee.empCount += 1  
  
    def displayCount(self):  
        print "Total Employee %d" % Employee.empCount  
  
    def displayEmployee(self):  
        print "Name : ", self.name, ", Salary: ", self.salary
```

- The variable `empCount` is a class variable whose value would be shared among all instances of this class. This can be accessed as `Employee.empCount` from inside the class or outside the class.
- The first method `__init__()` is a special method which is called class constructor or initialization method that Python calls when you create a new instance of this class.
- You declare other class methods like normal functions with the exception that the first argument to each method is `self`. Python adds the `self` argument to the list for you; you don't need to include it when you call the methods.

## Creating instance objects:

To create instances of a class, you call the class using class name and pass in whatever arguments its `__init__` method accepts.

```
"This would create first object of Employee class"  
emp1 = Employee("Zara", 2000)  
"This would create second object of Employee class"  
emp2 = Employee("Manni", 5000)
```

## Accessing attributes:

You access the object's attributes using the dot operator with object. Class variable would be accessed using class name as follows:

```
emp1.displayEmployee()  
emp2.displayEmployee()  
print "Total Employee %d" % Employee.empCount
```

Now putting all the concepts together:

```
#!/usr/bin/python  
  
class Employee:
```

```

'Common base class for all employees'
empCount = 0

def __init__(self, name, salary):
    self.name = name
    self.salary = salary
    Employee.empCount += 1

def displayCount(self):
    print "Total Employee %d" % Employee.empCount

def displayEmployee(self):
    print "Name : ", self.name, ", Salary: ", self.salary

"This would create first object of Employee class"
emp1 = Employee("Zara", 2000)
"This would create second object of Employee class"
emp2 = Employee("Manni", 5000)
emp1.displayEmployee()
emp2.displayEmployee()
print "Total Employee %d" % Employee.empCount

```

When the above code is executed, it produces following result:

```

Name : Zara ,Salary: 2000
Name : Manni ,Salary: 5000
Total Employee 2

```

You can add, remove, or modify attributes of classes and objects at any time:

```

emp1.age = 7 # Add an 'age' attribute.
emp1.age = 8 # Modify 'age' attribute.
del emp1.age # Delete 'age' attribute.

```

Instead of using the normal statements to access attributes, you can use following functions:

- The **getattr(obj, name[, default])** : to access the attribute of object.
- The **hasattr(obj, name)** : to check if an attribute exists or not.
- The **setattr(obj, name, value)** : to set an attribute. If attribute does not exist then it would be created.
- The **delattr(obj, name)** : to delete an attribute.

```

hasattr(emp1, 'age')      # Returns true if 'age' attribute exists
getattr(emp1, 'age')      # Returns value of 'age' attribute
setattr(emp1, 'age', 8)   # Set attribute 'age' at 8
delattr(emp1, 'age')      # Delete attribute 'age'

```

## Built-In Class Attributes:

Every Python class keeps following built-in attributes and they can be accessed using dot operator like any other attribute:

- **\_\_dict\_\_** : Dictionary containing the class's namespace.
- **\_\_doc\_\_** : Class documentation string, or None if undefined.
- **\_\_name\_\_** : Class name.
- **\_\_module\_\_** : Module name in which the class is defined. This attribute is "`__main__`" in interactive mode.
- **\_\_bases\_\_** : A possibly empty tuple containing the base classes, in the order of their occurrence in the base class list.

For the above class let's try to access all these attributes:

```

print "Employee.__doc__:", Employee.__doc__
print "Employee.__name__:", Employee.__name__
print "Employee.__module__:", Employee.__module__
print "Employee.__bases__:", Employee.__bases__
print "Employee.__dict__:", Employee.__dict__

```

When the above code is executed, it produces following result:

```

Employee.__doc__: Common base class for all employees
Employee.__name__: Employee
Employee.__module__: __main__
Employee.__bases__: ()
Employee.__dict__: {'__module__': '__main__', 'displayCount':
<function displayCount at 0xb7c84994>, 'empCount': 2,
'displayEmployee': <function displayEmployee at 0xb7c8441c>,
'__doc__': 'Common base class for all employees',
'__init__': <function __init__ at 0xb7c846bc>}

```

## Destroying Objects (Garbage Collection):

Python deletes unneeded objects (built-in types or class instances) automatically to free memory space. The process by which Python periodically reclaims blocks of memory that no longer are in use is termed garbage collection.

Python's garbage collector runs during program execution and is triggered when an object's reference count reaches zero. An object's reference count changes as the number of aliases that point to it changes:

An object's reference count increases when it's assigned a new name or placed in a container (list, tuple, or dictionary). The object's reference count decreases when it's deleted with `del`, its reference is reassigned, or its reference goes out of scope. When an object's reference count reaches zero, Python collects it automatically.

```

a = 40      # Create object <40>
b = a      # Increase ref. count of <40>
c = [b]      # Increase ref. count of <40>

del a      # Decrease ref. count of <40>
b = 100    # Decrease ref. count of <40>
c[0] = -1  # Decrease ref. count of <40>

```

You normally won't notice when the garbage collector destroys an orphaned instance and reclaims its space. But a class can implement the special method `__del__()`, called a destructor, that is invoked when the instance is about to be destroyed. This method might be used to clean up any nonmemory resources used by an instance.

### EXAMPLE:

This `__del__()` destructor prints the class name of an instance that is about to be destroyed:

```

#!/usr/bin/python

class Point:
    def __init__( self, x=0, y=0 ):
        self.x = x
        self.y = y
    def __del__(self):
        class_name = self.__class__.__name__
        print class_name, "destroyed"

pt1 = Point()
pt2 = pt1

```

```
pt3 = pt1
print id(pt1), id(pt2), id(pt3) # prints the ids of the obejcts
del pt1
del pt2
del pt3
```

When the above code is executed, it produces following result:

```
3083401324 3083401324 3083401324
Point destroyed
```

**Note:** Ideally, you should define your classes in separate file then you should import them in your main program file using *import* statement. Kindly check [Python - Modules](#) chapter for more detail on importing modules and classes.

## Class Inheritance:

Instead of starting from scratch, you can create a class by deriving it from a preexisting class by listing the parent class in parentheses after the new class name:

The child class inherits the attributes of its parent class, and you can use those attributes as if they were defined in the child class. A child class can also override data members and methods from the parent.

### SYNTAX:

Derived classes are declared much like their parent class; however, a list of base classes to inherit from are given after the class name:

```
class SubClassName (ParentClass1[, ParentClass2, ...]):
    'Optional class documentation string'
    class_suite
```

### EXAMPLE:

```
#!/usr/bin/python

class Parent:          # define parent class
    parentAttr = 100
    def __init__(self):
        print "Calling parent constructor"

    def parentMethod(self):
        print 'Calling parent method'

    def setAttr(self, attr):
        Parent.parentAttr = attr

    def getAttr(self):
        print "Parent attribute :", Parent.parentAttr

class Child(Parent): # define child class
    def __init__(self):
        print "Calling child constructor"

    def childMethod(self):
        print 'Calling child method'

c = Child()           # instance of child
```

```
c.childMethod()      # child calls its method
c.parentMethod()    # calls parent's method
c.setAttr(200)       # again call parent's method
c.getAttr()          # again call parent's method
```

When the above code is executed, it produces following result:

```
Calling child constructor
Calling child method
Calling parent method
Parent attribute : 200
```

Similar way you can drive a class from multiple parent classes as follows:

```
class A:          # define your class A
.....
class B:          # define your calss B
.....
class C(A, B):   # subclass of A and B
.....
```

You can use `issubclass()` or `isinstance()` functions to check a relationships of two classes and instances:

- The `issubclass(sub, sup)` boolean function returns true if the given subclass `sub` is indeed a subclass of the superclass `sup`.
- The `isinstance(obj, Class)` boolean function returns true if `obj` is an instance of class `Class` or is an instance of a subclass of `Class`

## Overriding Methods:

You can always override your parent class methods. One reason for overriding parent's methods is because you may want special or different functionality in your subclass.

### EXAMPLE:

```
#!/usr/bin/python

class Parent:          # define parent class
    def myMethod(self):
        print 'Calling parent method'

class Child(Parent): # define child class
    def myMethod(self):
        print 'Calling child method'

c = Child()           # instance of child
c.myMethod()          # child calls overridden method
```

When the above code is executed, it produces following result:

```
Calling child method
```

## Base Overloading Methods:

Following table lists some generic functionality that you can override in your own classes:

SN	Method, Description & Sample Call
1	<b>__init__(self [,args...])</b> Constructor (with any optional arguments) Sample Call : <i>obj = className(args)</i>
2	<b>__del__(self)</b> Destructor, deletes an object Sample Call : <i>del obj</i>
3	<b>__repr__(self)</b> Evaluable string representation Sample Call : <i>repr(obj)</i>
4	<b>__str__(self)</b> Printable string representation Sample Call : <i>str(obj)</i>
5	<b>__cmp__(self, x)</b> Object comparison Sample Call : <i>cmp(obj, x)</i>

## Overloading Operators:

Suppose you've created a Vector class to represent two-dimensional vectors. What happens when you use the plus operator to add them? Most likely Python will yell at you.

You could, however, define the `__add__` method in your class to perform vector addition, and then the plus operator would behave as per expectation:

### EXAMPLE:

```
#!/usr/bin/python

class Vector:
    def __init__(self, a, b):
        self.a = a
        self.b = b

    def __str__(self):
        return 'Vector (%d, %d)' % (self.a, self.b)

    def __add__(self, other):
        return Vector(self.a + other.a, self.b + other.b)

v1 = Vector(2,10)
v2 = Vector(5,-2)
print v1 + v2
```

When the above code is executed, it produces following result:

```
Vector(7,8)
```

## Data Hiding:

An object's attributes may or may not be visible outside the class definition. For these cases, you can name attributes with a double underscore prefix, and those attributes will not be directly visible to outsiders:

## EXAMPLE:

```
#!/usr/bin/python

class JustCounter:
    __secretCount = 0

    def count(self):
        self.__secretCount += 1
        print self.__secretCount

counter = JustCounter()
counter.count()
counter.count()
print counter.__secretCount
```

When the above code is executed, it produces following result:

```
1
2
Traceback (most recent call last):
  File "test.py", line 12, in <module>
    print counter.__secretCount
AttributeError: JustCounter instance has no attribute '__secretCount'
```

Python protects those members by internally changing the name to include the class name. You can access such attributes as `object._className__attrName`. If you would replace your last line as following, then it would work for you:

```
print counter._JustCounter__secretCount
```

When the above code is executed, it produces following result:

```
1
2
2
```

# Python Regular Expressions

A regular expression is a special sequence of characters that helps you match or find other strings or sets

of strings, using a specialized syntax held in a pattern. Regular expressions are widely used in UNIX world.

The module `re` provides full support for Perl-like regular expressions in Python. The `re` module raises the exception `re.error` if an error occurs while compiling or using a regular expression.

We would cover two important functions which would be used to handle regular expressions. But a small thing first: There are various characters which would have special meaning when they are used in regular expression. To avoid any confusion while dealing with regular expressions we would use Raw Strings as `r'expression'`.

## The *match* Function

This function attempts to match RE *pattern* to *string* with optional *flags*.

Here is the syntax for this function:

```
re.match(pattern, string, flags=0)
```

Here is the description of the parameters:

Parameter	Description
pattern	This is the regular expression to be matched.
string	This is the string which would be searched to match the pattern at the beginning of string.
flags	You can specify different flags using bitwise OR ( ). These are modifiers which are listed in the table below.

The `re.match` function returns a **match** object on success, **None** on failure. We would use `group(num)` or `groups()` function of **match** object to get matched expression.

Match Object Methods	Description
<code>group(num=0)</code>	This method returns entire match (or specific subgroup num)
<code>groups()</code>	This method return all matching subgroups in a tuple (empty if there weren't any)

## EXAMPLE:

```
#!/usr/bin/python
import re

line = "Cats are smarter than dogs";

matchObj = re.match( r'(.*) are(.*?)', line, re.M|re.I)

if matchObj:
    print "matchObj.group() : ", matchObj.group()
    print "matchObj.group(1) : ", matchObj.group(1)
    print "matchObj.group(2) : ", matchObj.group(2)
else:
    print "No match!!"
```

When the above code is executed, it produces following result:

```
matchObj.group() : Cats are
matchObj.group(1) : Cats
matchObj.group(2) :
```

## The *search* Function

This function search for first occurrence of RE *pattern* within *string* with optional *flags*.

Here is the syntax for this function:

```
re.search(pattern, string, flags=0)
```

Here is the description of the parameters:

Parameter	Description
pattern	This is the regular expression to be matched.
string	This is the string which would be searched to match the pattern anywhere in the string.
flags	You can specify different flags using bitwise OR ( ). These are modifiers which are listed in the table below.

The *re.search* function returns a **match** object on success, **None** on failure. We would use *group(num)* or *groups()* function of **match** object to get matched expression.

Match Object Methods	Description
group(num=0)	This methods returns entire match (or specific subgroup num)
groups()	This method return all matching subgroups in a tuple (empty if there weren't any)

## EXAMPLE:

```
#!/usr/bin/python
import re
```

```

line = "Cats are smarter than dogs";

matchObj = re.search( r'(.*) are(.*') , line, re.M|re.I)

if matchObj:
    print "matchObj.group() : ", matchObj.group()
    print "matchObj.group(1) : ", matchObj.group(1)
    print "matchObj.group(2) : ", matchObj.group(2)
else:
    print "No match!!"

```

When the above code is executed, it produces following result:

```

matchObj.group(): Cats are
matchObj.group(1) : Cats
matchObj.group(2) :

```

## Matching vs Searching:

Python offers two different primitive operations based on regular expressions: **match** checks for a match only at the beginning of the string, while **search** checks for a match anywhere in the string (this is what Perl does by default).

### EXAMPLE:

```

#!/usr/bin/python
import re

line = "Cats are smarter than dogs";

matchObj = re.match( r'dogs' , line, re.M|re.I)
if matchObj:
    print "match --> matchObj.group() : ", matchObj.group()
else:
    print "No match!!"

matchObj = re.search( r'dogs' , line, re.M|re.I)
if matchObj:
    print "search --> matchObj.group() : ", matchObj.group()
else:
    print "No match!!"

```

When the above code is executed, it produces following result:

```

No match!!
search --> matchObj.group() :  dogs

```

## Search and Replace:

Some of the most important **re** methods that use regular expressions is **sub**.

### SYNTAX:

```
re.sub(pattern, repl, string, max=0)
```

This method replace all occurrences of the RE *pattern* in *string* with *repl*, substituting all occurrences unless *max* provided. This method would return modified string.

## EXAMPLE:

Following is the example:

```
#!/usr/bin/python
import re

phone = "2004-959-559 #This is Phone Number"

# Delete Python-style comments
num = re.sub(r'#.+$', "", phone)
print "Phone Num : ", num

# Remove anything other than digits
num = re.sub(r'\D', "", phone)
print "Phone Num : ", num
```

When the above code is executed, it produces following result:

```
Phone Num : 2004-959-559
Phone Num : 2004959559
```

## Regular-expression Modifiers - Option Flags

Regular expression literals may include an optional modifier to control various aspects of matching. The modifier are specified as an optional flag. You can provide multiple modified using exclusive OR (|), as shown previously and may be represented by one of these:

Modifier	Description
re.I	Performs case-insensitive matching.
re.L	Interprets words according to the current locale. This interpretation affects the alphabetic group (\w and \W), as well as word boundary behavior (\b and \B).
re.M	Makes \$ match the end of a line (not just the end of the string) and makes ^ match the start of any line (not just the start of the string).
re.S	Makes a period (dot) match any character, including a newline.
re.U	Interprets letters according to the Unicode character set. This flag affects the behavior of \w, \W, \b, \B.
re.X	Permits "cuter" regular expression syntax. It ignores whitespace (except inside a set []) or when escaped by a backslash), and treats unescaped # as a comment marker.

## Regular-expression patterns:

Except for control characters, (+ ? . \* ^ \$ () [] {} | \), all characters match themselves. You can escape a control character by preceding it with a backslash.

Following table lists the regular expression syntax that is available in Python.

Pattern	Description
^	Matches beginning of line.

\$	Matches end of line.
.	Matches any single character except newline. Using m option allows it to match newline as well.
[...]	Matches any single character in brackets.
[^...]	Matches any single character not in brackets
re*	Matches 0 or more occurrences of preceding expression.
re+	Matches 1 or more occurrence of preceding expression.
re?	Matches 0 or 1 occurrence of preceding expression.
re{ n}	Matches exactly n number of occurrences of preceding expression.
re{ n,}	Matches n or more occurrences of preceding expression.
re{ n, m}	Matches at least n and at most m occurrences of preceding expression.
a  b	Matches either a or b.
(re)	Groups regular expressions and remembers matched text.
(?imx)	Temporarily toggles on i, m, or x options within a regular expression. If in parentheses, only that area is affected.
(?-imx)	Temporarily toggles off i, m, or x options within a regular expression. If in parentheses, only that area is affected.
(?: re)	Groups regular expressions without remembering matched text.
(?imx: re)	Temporarily toggles on i, m, or x options within parentheses.
(?-imx: re)	Temporarily toggles off i, m, or x options within parentheses.
(?#...)	Comment.
(?= re)	Specifies position using a pattern. Doesn't have a range.
(?! re)	Specifies position using pattern negation. Doesn't have a range.
(?> re)	Matches independent pattern without backtracking.
\w	Matches word characters.
\W	Matches nonword characters.
\s	Matches whitespace. Equivalent to [\t\n\r\f].
\S	Matches nonwhitespace.
\d	Matches digits. Equivalent to [0-9].
\D	Matches nondigits.
\A	Matches beginning of string.
\Z	Matches end of string. If a newline exists, it matches just before newline.

\z	Matches end of string.
\G	Matches point where last match finished.
\b	Matches word boundaries when outside brackets. Matches backspace (0x08) when inside brackets.
\B	Matches nonword boundaries.
\n, \t, etc.	Matches newlines, carriage returns, tabs, etc.
\1...\9	Matches nth grouped subexpression.
\10	Matches nth grouped subexpression if it matched already. Otherwise refers to the octal representation of a character code.

## Regular-expression Examples

Literal characters:

Example	Description
python	Match "python".

Character classes:

Example	Description
[Pp]ython	Match "Python" or "python"
rub[ye]	Match "ruby" or "rube"
[aeiou]	Match any one lowercase vowel
[0-9]	Match any digit; same as [0123456789]
[a-z]	Match any lowercase ASCII letter
[A-Z]	Match any uppercase ASCII letter
[a-zA-Z0-9]	Match any of the above
[^aeiou]	Match anything other than a lowercase vowel
[^0-9]	Match anything other than a digit

Special Character Classes:

Example	Description
.	Match any character except newline
\d	Match a digit: [0-9]
\D	Match a nondigit: [^0-9]

\s	Match a whitespace character: [ \t\r\n\f]
\S	Match nonwhitespace: [^\t\r\n\f]
\w	Match a single word character: [A-Za-z0-9_]
\W	Match a nonword character: [^A-Za-z0-9_]

## Repetition Cases:

Example	Description
ruby?	Match "rub" or "ruby": the y is optional
ruby*	Match "rub" plus 0 or more ys
ruby+	Match "rub" plus 1 or more ys
\d{3}	Match exactly 3 digits
\d{3,}	Match 3 or more digits
\d{3,5}	Match 3, 4, or 5 digits

## Nongreedy repetition:

This matches the smallest number of repetitions:

Example	Description
<.*>	Greedy repetition: matches "<python>perl>"
<.*?>	Nongreedy: matches "<python>" in "<python>perl>"

## Grouping with parentheses:

Example	Description
\D\d+	No group: + repeats \d
(\D\d)+	Grouped: + repeats \D\d pair
([Pp]ython(, )?)+	Match "Python", "Python, python, python", etc.

## Backreferences:

This matches a previously matched group again:

Example	Description
([Pp]ython&\1ails	Match python&pails or Python&Pails
([""])[^\1]*\1	Single or double-quoted string. \1 matches whatever the 1st group matched . \2 matches whatever the 2nd group matched, etc.

## Alternatives:

Example	Description
python perl	Match "python" or "perl"
rub(y le))	Match "ruby" or "ruble"
Python(!+ \?)	"Python" followed by one or more ! or one ?

## Anchors:

This need to specify match position

Example	Description
^Python	Match "Python" at the start of a string or internal line
Python\$	Match "Python" at the end of a string or line
\A Python	Match "Python" at the start of a string
Python\Z	Match "Python" at the end of a string
\b Python\b	Match "Python" at a word boundary
\brub\B	\B is nonword boundary: match "rub" in "rube" and "ruby" but not alone
Python(?!=!)	Match "Python", if followed by an exclamation point
Python(?!=?)	Match "Python", if not followed by an exclamation point

## Special syntax with parentheses:

Example	Description
R(?#comment)	Matches "R". All the rest is a comment
R(?i)uby	Case-insensitive while matching "uby"
R(?i:uby)	Same as above
rub(?:y le)	Group only without creating \1 backreference

# Python CGI Programming

## What is CGI?

**I**t is a set of standards which include:

- The Common Gateway Interface, or CGI, is a set of standards that define how information is exchanged between the web server and a custom script.
- The CGI specs are currently maintained by the NCSA and NCSA defines CGI is as follows:
- The Common Gateway Interface, or CGI, is a standard for external gateway programs to interface with information servers such as HTTP servers.
- The current version is CGI/1.1 and CGI/1.2 is under progress.


## Web Browsing

To understand the concept of CGI, lets see what happens when we click a hyper link to browse a particular web page or URL.

- Your browser contacts the HTTP web server and demand for the URL ie. filename.
- Web Server will parse the URL and will look for the filename in if it finds that file then sends back to the browser otherwise sends an error message indicating that you have requested a wrong file.
- Web browser takes response from web server and displays either the received file or error message.

However, it is possible to set up the HTTP server so that whenever a file in a certain directory is requested that file is not sent back; instead it is executed as a program, and whatever that program outputs is sent back for your browser to display. This function is called the Common Gateway Interface or CGI and the programs are called CGI scripts. These CGI programs can be a Python Script, PERL Script, Shell Script, C or C++ program etc.

## CGI Architecture Diagram

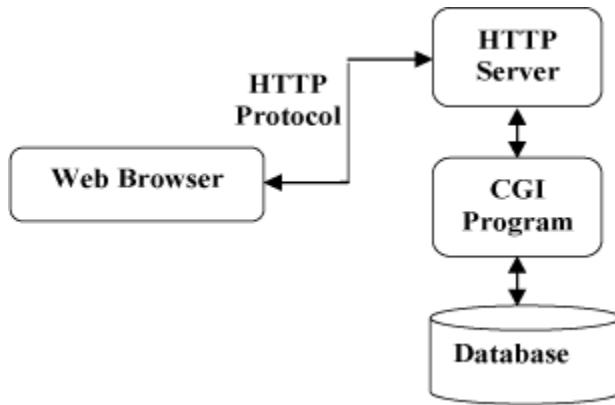

## Web Server Support & Configuration

Before you proceed with CGI Programming, make sure that your Web Server supports CGI and it is configured to handle CGI Programs. All the CGI Programs to be executed by the HTTP server are kept in a pre-configured directory. This directory is called CGI Directory and by convention it is named as /var/www/cgi-bin. By convention CGI files will have extension as .cgi but you can keep your files with python extension .py as well.

By default, the Linux server is configured to run only the scripts in the cgi-bin directory in /var/www. If you want to specify any other directory to run your CGI scripts, comment the following lines in the httpd.conf file:

```
<Directory "/var/www/cgi-bin">
    AllowOverride None
    Options ExecCGI
    Order allow,deny
    Allow from all
</Directory>

<Directory "/var/www/cgi-bin">
Options All
</Directory>
```

Here I assumed that you have Web Server up and running successfully and you are able to run any other CGI program like Perl or Shell etc.

## First CGI Program

Here is a simple link which is linked to a CGI script called [hello.py](#). This file is being kept in /var/www/cgi-bin directory and it has following content. Before running your CGI program make sure you have chage mode of file using **chmod 755 hello.py** UNIX command to make file executable.

```
#!/usr/bin/python

print "Content-type:text/html\r\n\r\n"
print '<html>'
print '<head>'
print '<title>Hello Word - First CGI Program</title>'
print '</head>'
print '<body>'
print '<h2>Hello Word! This is my first CGI program</h2>'
print '</body>'
print '</html>'
```

If you click [hello.py](#) then this produces following output:

**TUTORIALS POINT**

Simply Easy Learning

Content-type:text/html

## Hello Word! This is my first CGI program

This hello.py script is a simple Python script which is writing its output on STDOUT file ie. screen. There is one important and extra feature available which is first line to be printed Content-type:text/html\r\n\r\n. This line is sent back to the browser and specify the content type to be displayed on the browser screen.

Now you must have understood basic concept of CGI and you can write many complicated CGI programs using Python. This script can interact with any other external system also to exchange information such as RDBMS.

## HTTP Header

The line Content-type:text/html\r\n\r\n is part of HTTP header which is sent to the browser to understand the content. All the HTTP header will be in the following form

HTTP Field Name: Field Content

For Example

Content-type: text/html\r\n\r\n

There are few other important HTTP headers which you will use frequently in your CGI Programming.

Header	Description
Content-type:	A MIME string defining the format of the file being returned. Example is Content-type:text/html
Expires: Date	The date the information becomes invalid. This should be used by the browser to decide when a page needs to be refreshed. A valid date string should be in the format 01 Jan 1998 12:00:00 GMT.
Location: URL	The URL that should be returned instead of the URL requested. You can use this field to redirect a request to any file.
Last-modified: Date	The date of last modification of the resource.
Content-length: N	The length, in bytes, of the data being returned. The browser uses this value to report the estimated download time for a file.
Set-Cookie: String	Set the cookie passed through the <i>string</i>

## CGI Environment Variables

All the CGI program will have access to the following environment variables. These variables play an important role while writing any CGI program.

Variable Name	Description
CONTENT_TYPE	The data type of the content. Used when the client is sending attached content to the server. For example file upload etc.
CONTENT_LENGTH	The length of the query information. It's available only for POST requests
HTTP_COOKIE	Return the set cookies in the form of key & value pair.
HTTP_USER_AGENT	The User-Agent request-header field contains information about the user agent

	originating the request. Its name of the web browser.
PATH_INFO	The path for the CGI script.
QUERY_STRING	The URL-encoded information that is sent with GET method request.
REMOTE_ADDR	The IP address of the remote host making the request. This can be useful for logging or for authentication purpose.
REMOTE_HOST	The fully qualified name of the host making the request. If this information is not available then REMOTE_ADDR can be used to get IR address.
REQUEST_METHOD	The method used to make the request. The most common methods are GET and POST.
SCRIPT_FILENAME	The full path to the CGI script.
SCRIPT_NAME	The name of the CGI script.
SERVER_NAME	The server's hostname or IP Address
SERVER_SOFTWARE	The name and version of the software the server is running.

Here is small CGI program to list out all the CGI variables. Click this link to see the result [Get Environment](#)

```
#!/usr/bin/python

import os

print "Content-type: text/html\r\n\r\n";
print "<font size=+1>Environment</font><br>";
for param in os.environ.keys():
    print "<b>%20s</b>: %s<br>" % (param, os.environ[param])
```

## GET and POST Methods

You must have come across many situations when you need to pass some information from your browser to web server and ultimately to your CGI Program. Most frequently browser uses two methods to pass this information to web server. These methods are GET Method and POST Method.

### Passing Information using GET method:

The GET method sends the encoded user information appended to the page request. The page and the encoded information are separated by the ? character as follows:

```
http://www.test.com/cgi-bin/hello.py?key1=value1&key2=value2
```

The GET method is the default method to pass information from browser to web server and it produces a long string that appears in your browser's Location:box. Never use GET method if you have password or other sensitive information to pass to the server. The GET method has size limitation: only 1024 characters can be sent in a request string. The GET method sends information using QUERY\_STRING header and will be accessible in your CGI Program through QUERY\_STRING environment variable

You can pass information by simply concatenating key and value pairs alongwith any URL or you can use HTML <FORM> tags to pass information using GET method.

### Simple URL Example : Get Method

Here is a simple URL which will pass two values to hello\_get.py program using GET method.

**TUTORIALS POINT**

Simply Easy Learning

[/cgi-bin/hello\\_get.py?first\\_name=ZARA&last\\_name=ALI](/cgi-bin/hello_get.py?first_name=ZARA&last_name=ALI)

Below is **hello\_get.py** script to handle input given by web browser. We are going to use **cgi** module which makes it very easy to access passed information:

```
#!/usr/bin/python

# Import modules for CGI handling
import cgi, cgitb

# Create instance of FieldStorage
form = cgi.FieldStorage()

# Get data from fields
first_name = form.getvalue('first_name')
last_name = form.getvalue('last_name')

print "Content-type:text/html\r\n\r\n"
print "<html>"
print "<head>"
print "<title>Hello - Second CGI Program</title>"
print "</head>"
print "<body>"
print "<h2>Hello %s %s</h2>" % (first_name, last_name)
print "</body>"
print "</html>"
```

This would generate following result:

```
Content-type:text/html
```

**Hello ZARA ALI**

## Simple FORM Example: GET Method

Here is a simple example which passes two values using HTML FORM and submit button. We are going to use same CGI script **hello\_get.py** to handle this input.

```
<form action="/cgi-bin/hello_get.py" method="get">
First Name: <input type="text" name="first_name"> <br />

Last Name: <input type="text" name="last_name" />
<input type="submit" value="Submit" />
</form>
```

Here is the actual output of the above form, You enter First and Last Name and then click submit button to see the result.

First Name:

Last Name:

## Passing Information using POST method:

A generally more reliable method of passing information to a CGI program is the POST method. This packages the information in exactly the same way as GET methods, but instead of sending it as a text string after a ? in the URL it sends it as a separate message. This message comes into the CGI script in the form of the standard input.

Below is same hello\_get.py script which handles GET as well as POST method.

```
#!/usr/bin/python

# Import modules for CGI handling
import cgi, cgitb

# Create instance of FieldStorage
form = cgi.FieldStorage()

# Get data from fields
first_name = form.getvalue('first_name')
last_name = form.getvalue('last_name')

print "Content-type:text/html\r\n\r\n"
print "<html>"
print "<head>"
print "<title>Hello - Second CGI Program</title>"
print "</head>"
print "<body>"
print "<h2>Hello %s %s</h2>" % (first_name, last_name)
print "</body>"
print "</html>"
```

Let us take again same example as above, which passes two values using HTML FORM and submit button. We are going to use same CGI script hello\_get.py to handle this input.

```
<form action="/cgi-bin/hello_get.py" method="post">
First Name: <input type="text" name="first_name"><br />
Last Name: <input type="text" name="last_name" />

<input type="submit" value="Submit" />
</form>
```

Here is the actual output of the above form, You enter First and Last Name and then click submit button to see the result.

First Name:

Last Name:

## Passing Checkbox Data to CGI Program

Checkboxes are used when more than one option is required to be selected.

Here is example HTML code for a form with two checkboxes

```
<form action="/cgi-bin/checkbox.cgi" method="POST" target="_blank">
<input type="checkbox" name="maths" value="on" /> Maths
<input type="checkbox" name="physics" value="on" /> Physics
<input type="submit" value="Select Subject" />
</form>
```

The result of this code is the following form

Maths  Physics

Below is checkbox.cgi script to handle input given by web browser for checkbox button.

```
#!/usr/bin/python

# Import modules for CGI handling
import cgi, cgitb

# Create instance of FieldStorage
form = cgi.FieldStorage()

# Get data from fields
if form.getvalue('maths'):
    math_flag = "ON"
else:
    math_flag = "OFF"

if form.getvalue('physics'):
    physics_flag = "ON"
else:
    physics_flag = "OFF"

print "Content-type:text/html\r\n\r\n"
print "<html>"
print "<head>"
print "<title>Checkbox - Third CGI Program</title>"
print "</head>"
print "<body>"
print "<h2> CheckBox Maths is : %s</h2>" % math_flag
print "<h2> CheckBox Physics is : %s</h2>" % physics_flag
print "</body>"
print "</html>"
```

## Passing Radio Button Data to CGI Program

Radio Buttons are used when only one option is required to be selected.

Here is example HTML code for a form with two radio button:

```
<form action="/cgi-bin/radiobutton.py" method="post" target="_blank">
<input type="radio" name="subject" value="maths" /> Maths
<input type="radio" name="subject" value="physics" /> Physics
<input type="submit" value="Select Subject" />
</form>
```

The result of this code is the following form



Below is radiobutton.py script to handle input given by web browser for radio button?

```
#!/usr/bin/python

# Import modules for CGI handling
import cgi, cgitb

# Create instance of FieldStorage
form = cgi.FieldStorage()
```

```

# Get data from fields
if form.getvalue('subject'):
    subject = form.getvalue('subject')
else:
    subject = "Not set"

print "Content-type:text/html\r\n\r\n"
print "<html>"
print "<head>"
print "<title>Radio - Fourth CGI Program</title>"
print "</head>"
print "<body>"
print "<h2> Selected Subject is %s</h2>" % subject
print "</body>"
print "</html>"

```

## Passing Text Area Data to CGI Program

TEXTAREA element is used when multiline text has to be passed to the CGI Program.

Here is example HTML code for a form with a TEXTAREA box:

```

<form action="/cgi-bin/textarea.py" method="post" target="_blank">
<textarea name="textcontent" cols="40" rows="4">
Type your text here...
</textarea>
<input type="submit" value="Submit" />
</form>

```

The result of this code is the following form



Below is textarea.cgi script to handle input given by web browser?

```

#!/usr/bin/python

# Import modules for CGI handling
import cgi, cgitb

# Create instance of FieldStorage
form = cgi.FieldStorage()

# Get data from fields
if form.getvalue('textcontent'):
    text_content = form.getvalue('textcontent')
else:
    text_content = "Not entered"

print "Content-type:text/html\r\n\r\n"
print "<html>"
print "<head>";
print "<title>Text Area - Fifth CGI Program</title>"

```

```

print "</head>"  

print "<body>"  

print "<h2> Entered Text Content is %s</h2>" % text_content  

print "</body>"
```

## Passing Drop Down Box Data to CGI Program

Drop Down Box is used when we have many options available but only one or two will be selected.

Here is example HTML code for a form with one drop down box

```

<form action="/cgi-bin/dropdown.py" method="post" target="_blank">  

<select name="dropdown">  

<option value="Maths" selected>Maths</option>  

<option value="Physics">Physics</option>  

</select>  

<input type="submit" value="Submit"/>  

</form>
```

The result of this code is the following form

Below is dropdown.py script to handle input given by web browser.

```

#!/usr/bin/python  
  

# Import modules for CGI handling  

import cgi, cgitb  
  

# Create instance of FieldStorage  

form = cgi.FieldStorage()  
  

# Get data from fields  

if form.getvalue('dropdown'):  

    subject = form.getvalue('dropdown')  

else:  

    subject = "Not entered"  
  

print "Content-type:text/html\r\n\r\n"  

print "<html>"  

print "<head>"  

print "<title>Dropdown Box - Sixth CGI Program</title>"  

print "</head>"  

print "<body>"  

print "<h2> Selected Subject is %s</h2>" % subject  

print "</body>"  

print "</html>"
```

## Using Cookies in CGI

HTTP protocol is a stateless protocol. But for a commercial website it is required to maintain session information among different pages. For example one user registration ends after completing many pages. But how to maintain user's session information across all the web pages.

In many situations, using cookies is the most efficient method of remembering and tracking preferences, purchases, commissions, and other information required for better visitor experience or site statistics.

## How It Works

Your server sends some data to the visitor's browser in the form of a cookie. The browser may accept the cookie. If it does, it is stored as a plain text record on the visitor's hard drive. Now, when the visitor arrives at another page on your site, the cookie is available for retrieval. Once retrieved, your server knows/remembers what was stored.

Cookies are a plain text data record of 5 variable-length fields:

- **Expires** : The date the cookie will expire. If this is blank, the cookie will expire when the visitor quits the browser.
- **Domain** : The domain name of your site.
- **Path** : The path to the directory or web page that set the cookie. This may be blank if you want to retrieve the cookie from any directory or page.
- **Secure** : If this field contains the word "secure" then the cookie may only be retrieved with a secure server. If this field is blank, no such restriction exists.
- **Name=Value** : Cookies are set and retrieved in the form of key and value pairs.

## Setting up Cookies

This is very easy to send cookies to browser. These cookies will be sent along with HTTP Header before to Content-type filed. Assuming you want to set UserID and Password as cookies. So cookies setting will be done as follows

```
#!/usr/bin/python

print "Set-Cookie:UserID=XYZ;\r\n"
print "Set-Cookie:Password=XYZ123;\r\n"
print "Set-Cookie:Expires=Tuesday, 31-Dec-2007 23:12:40 GMT;\r\n"
print "Set-Cookie:Domain=www.tutorialspoint.com;\r\n"
print "Set-Cookie:Path=/perl;\r\n"
print "Content-type:text/html\r\n\r\n"
.....Rest of the HTML Content....
```

From this example you must have understood how to set cookies. We use **Set-Cookie** HTTP header to set cookies.

Here it is optional to set cookies attributes like Expires, Domain, and Path. It is notable that cookies are set before sending magic line "**Content-type:text/html\r\n\r\n**".

## Retrieving Cookies

This is very easy to retrieve all the set cookies. Cookies are stored in CGI environment variable **HTTP\_COOKIE** and they will have following form.

```
key1=value1;key2=value2;key3=value3....
```

Here is an example of how to retrieving cookies.

```
#!/usr/bin/python

# Import modules for CGI handling
from os import environ
import cgi, cgitb

if environ.has_key('HTTP_COOKIE'):
    for cookie in map(strip, split(environ['HTTP_COOKIE'], ';')):
        (key, value) = split(cookie, '=');
```

```

if key == "UserID":
    user_id = value

if key == "Password":
    password = value

print "User ID = %s" % user_id
print "Password = %s" % password

```

This will produce following result for the cookies set by above script:

```

User ID = XYZ
Password = XYZ123

```

## File Upload Example:

To upload a file the HTML form must have the enctype attribute set to **multipart/form-data**. The input tag with the file type will create a "Browse" button.

```

<html>
<body>
    <form enctype="multipart/form-data"
          action="save_file.py" method="post">
        <p>File: <input type="file" name="filename" /></p>
        <p><input type="submit" value="Upload" /></p>
    </form>
</body>
</html>

```

The result of this code is the following form:

File:

Above example has been disabled intentionally to save people uploading file on our server. But you can try above code with your server.

Here is the script **save\_file.py** to handle file upload:

```

#!/usr/bin/python

import cgi, os
import cgitb; cgitb.enable()

form = cgi.FieldStorage()

# Get filename here.
fileitem = form['filename']

# Test if the file was uploaded
if fileitem.filename:
    # strip leading path from file name to avoid
    # directory traversal attacks
    fn = os.path.basename(fileitem.filename)
    open('/tmp/' + fn, 'wb').write(fileitem.file.read())

    message = 'The file "' + fn + '" was uploaded successfully'

```

**TUTORIALS POINT**

Simply Easy Learning

```

else:
    message = 'No file was uploaded'

print """\
Content-Type: text/html\n
<html>
<body>
    <p>%s</p>
</body>
</html>
""" % (message,)

```

If you are running above script on Unix/Linux then you would have to take care of replacing file separator as follows, otherwise on your windows machine above open() statement should work fine.

```
fn = os.path.basename(fileitem.filename.replace("\\\\", "/"))
```

## How To Raise a "File Download" Dialog Box ?

Sometime it is desired that you want to give option where a user will click a link and it will pop up a "File Download" dialogue box to the user instead of displaying actual content. This is very easy and will be achieved through HTTP header. This HTTP header will be different from the header mentioned in previous section.

For example, if you want make a **FileName** file downloadable from a given link then its syntax will be as follows.

```

#!/usr/bin/python

# HTTP Header
print "Content-Type:application/octet-stream; name=\"FileName\"\r\n";
print "Content-Disposition: attachment; filename=\"FileName\"\r\n\r\n";


# Actual File Content will go here.
fo = open("foo.txt", "rb")

str = fo.read();
print str

# Close opened file
fo.close()

```

Hope you enjoyed this tutorial. If yes, please send me your feedback at: [Contact Us](#)



# Python Database Access

**T**

he Python standard for database interfaces is the Python DB-API. Most Python database interfaces adhere to this standard.

You can choose the right database for your application. Python Database API supports a wide range of database servers:

- GadFly
- mSQL
- MySQL
- PostgreSQL
- Microsoft SQL Server 2000
- Informix
- Interbase
- Oracle
- Sybase

Here is the list of available Python databases interfaces: [Python Database Interfaces and APIs](#). You must download a separate DB API module for each database you need to access. For example, if you need to access an Oracle database as well as a MySQL database, you must download both the Oracle and the MySQL database modules.

The DB API provides a minimal standard for working with databases, using Python structures and syntax wherever possible. This API includes the following:

- Importing the api module.
- Acquiring a connection with the database.
- Issuing SQL statements and stored procedures.

- Closing the connection

We would learn all the concepts using MySQL so let's talk about MySQLdb module only.

## What is MySQLdb?

MySQLdb is an interface for connecting to a MySQL database server from Python. It implements the Python Database API v2.0, and is built on top of the MySQL C API.

## How do I install the MySQLdb?

Before proceeding you make sure you have MySQLdb installed on your machine. Just type the following in your Python script and execute it:

```
#!/usr/bin/python

import MySQLdb
```

If it produces following result then it means MySQLdb module is not installed:

```
Traceback (most recent call last):
  File "test.py", line 3, in <module>
    import MySQLdb
ImportError: No module named MySQLdb
```

To install MySQLdb module, download it from [MySQLdb Download](#) page and proceed as follows:

```
$ gunzip MySQL-python-1.2.2.tar.gz
$ tar -xvf MySQL-python-1.2.2.tar
$ cd MySQL-python-1.2.2
$ python setup.py build
$ python setup.py install
```

**Note:** Make sure you have root privilege to install above module.

## Database Connection:

Before connecting to a MySQL database make sure followings:

- You have created a database TESTDB.
- You have created a table EMPLOYEE in TESTDB.
- This table is having fields FIRST\_NAME, LAST\_NAME, AGE, SEX and INCOME.
- User ID "testuser" and password "test123" are set to access TESTDB
- Python module MySQLdb is installed properly on your machine.
- You have gone through MySQL tutorial to understand [MySQL Basics](#).

## EXAMPLE:

Following is the example of connecting with MySQL database "TESTDB"

```

#!/usr/bin/python

import MySQLdb

# Open database connection
db = MySQLdb.connect("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# execute SQL query using execute() method.
cursor.execute("SELECT VERSION()")

# Fetch a single row using fetchone() method.
data = cursor.fetchone()

print "Database version : %s" % data

# disconnect from server
db.close()

```

While running this script, its producing following result at my Linux machine.

```
Database version : 5.0.45
```

If a connection is established with the datasource then a Connection Object is returned and saved into **db** for further use otherwise **db** is set to None. Next **db** object is used to create a **cursor** object which in turn is used to execute SQL queries. Finally before coming out it ensures that database connection is closed and resources are released.

## Creating Database Table:

Once a database connection is established, we are ready to create tables or records into the database tables using **execute** method of the created cursor.

### EXAMPLE:

First let's create Database table EMPLOYEE:

```

#!/usr/bin/python

import MySQLdb

# Open database connection
db = MySQLdb.connect("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# Drop table if it already exist using execute() method.
cursor.execute("DROP TABLE IF EXISTS EMPLOYEE")

# Create table as per requirement
sql = """CREATE TABLE EMPLOYEE (
      FIRST_NAME  CHAR(20) NOT NULL,
      LAST_NAME   CHAR(20),
      AGE INT,
      SEX CHAR(1),
      INCOME FLOAT )"""

```

```

cursor.execute(sql)

# disconnect from server
db.close()

```

## INSERT Operation:

INSERT operation is required when you want to create your records into a database table.

### EXAMPLE:

Following is the example which executes SQL `INSERT` statement to create a record into EMPLOYEE table.

```

#!/usr/bin/python

import MySQLdb

# Open database connection
db = MySQLdb.connect("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# Prepare SQL query to INSERT a record into the database.
sql = """INSERT INTO EMPLOYEE(FIRST_NAME,
      LAST_NAME, AGE, SEX, INCOME)
      VALUES ('Mac', 'Mohan', 20, 'M', 2000)"""
try:
    # Execute the SQL command
    cursor.execute(sql)
    # Commit your changes in the database
    db.commit()
except:
    # Rollback in case there is any error
    db.rollback()

# disconnect from server
db.close()

```

Above example can be written as follows to create SQL queries dynamically:

```

#!/usr/bin/python

import MySQLdb

# Open database connection
db = MySQLdb.connect("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# Prepare SQL query to INSERT a record into the database.
sql = "INSERT INTO EMPLOYEE(FIRST_NAME, \
      LAST_NAME, AGE, SEX, INCOME) \
      VALUES ('%s', '%s', '%d', '%c', '%d' )% \
      ('Mac', 'Mohan', 20, 'M', 2000)
try:
    # Execute the SQL command
    cursor.execute(sql)
    # Commit your changes in the database

```

**TUTORIALS POINT**

Simply Easy Learning

```

        db.commit()
    except:
        # Rollback in case there is any error
        db.rollback()

    # disconnect from server
    db.close()

```

## EXAMPLE:

Following code segment is another form of execute where you can pass parameters directly:

```

.....
user_id = "test123"
password = "password"

con.execute('insert into Login values("%s", "%s")' % \
            (user_id, password))
.....

```

## READ Operation:

READ Operation on any database means to fetch some useful information from the database.

Once our database connection is established, we are ready to make a query into this database. We can use either **fetchone()** method to fetch single record or **fetchall** method to fetch multiple values from a database table.

- **fetchone()**: This method fetches the next row of a query result set. A result set is an object that is returned when a cursor object is used to query a table.
- **fetchall()**: This method fetches all the rows in a result set. If some rows have already been extracted from the result set, the fetchall() method retrieves the remaining rows from the result set.
- **rowcount**: This is a read-only attribute and returns the number of rows that were affected by an execute() method.

## EXAMPLE:

Following is the procedure to query all the records from EMPLOYEE table having salary more than 1000.

```

#!/usr/bin/python

import MySQLdb

# Open database connection
db = MySQLdb.connect("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# Prepare SQL query to INSERT a record into the database.
sql = "SELECT * FROM EMPLOYEE \
       WHERE INCOME > '%d'" % (1000)
try:
    # Execute the SQL command
    cursor.execute(sql)
    # Fetch all the rows in a list of lists.
    results = cursor.fetchall()
    for row in results:
        fname = row[0]
        lname = row[1]

```

```

age = row[2]
sex = row[3]
income = row[4]
# Now print fetched result
print "fname=%s, lname=%s, age=%d, sex=%s, income=%d" % \
      (fname, lname, age, sex, income )
except:
    print "Error: unable to fetch data"

# disconnect from server
db.close()

```

This will produce following result:

```
fname=Mac, lname=Mohan, age=20, sex=M, income=2000
```

## Update Operation:

UPDATE Operation on any database means to update one or more records which are already available in the database. Following is the procedure to update all the records having SEX as 'M'. Here we will increase AGE of all the males by one year.

### EXAMPLE:

```

#!/usr/bin/python

import MySQLdb

# Open database connection
db = MySQLdb.connect ("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# Prepare SQL query to UPDATE required records
sql = "UPDATE EMPLOYEE SET AGE = AGE + 1
                  WHERE SEX = '%c'" % ('M')
try:
    # Execute the SQL command
    cursor.execute(sql)
    # Commit your changes in the database
    db.commit()
except:
    # Rollback in case there is any error
    db.rollback()

# disconnect from server
db.close()

```

## DELETE Operation:

DELETE operation is required when you want to delete some records from your database. Following is the procedure to delete all the records from EMPLOYEE where AGE is more than 20.

### EXAMPLE:

```
#!/usr/bin/python
```

**TUTORIALS POINT**

Simply Easy Learning

```

import MySQLdb

# Open database connection
db = MySQLdb.connect("localhost","testuser","test123","TESTDB" )

# prepare a cursor object using cursor() method
cursor = db.cursor()

# Prepare SQL query to DELETE required records
sql = "DELETE FROM EMPLOYEE WHERE AGE > '%d'" % (20)
try:
    # Execute the SQL command
    cursor.execute(sql)
    # Commit your changes in the database
    db.commit()
except:
    # Rollback in case there is any error
    db.rollback()

# disconnect from server
db.close()

```

## Performing Transactions:

Transactions are a mechanism that ensures data consistency. Transactions should have the following four properties:

- **Atomicity:** Either a transaction completes or nothing happens at all.
- **Consistency:** A transaction must start in a consistent state and leave the system in a consistent state.
- **Isolation:** Intermediate results of a transaction are not visible outside the current transaction.
- **Durability:** Once a transaction was committed, the effects are persistent, even after a system failure.

The Python DB API 2.0 provides two methods to either *commit* or *rollback* a transaction.

### EXAMPLE:

You already have seen how we have implemented transactions. Here is again similar example:

```

# Prepare SQL query to DELETE required records
sql = "DELETE FROM EMPLOYEE WHERE AGE > '%d'" % (20)
try:
    # Execute the SQL command
    cursor.execute(sql)
    # Commit your changes in the database
    db.commit()
except:
    # Rollback in case there is any error
    db.rollback()

```

## COMMIT Operation:

Commit is the operation which gives a green signal to database to finalize the changes and after this operation no change can be reverted back.

Here is a simple example to call **commit** method.

```
db.commit()
```

## ROLLBACK Operation:

If you are not satisfied with one or more of the changes and you want to revert back those changes completely then use **rollback** method.

Here is a simple example to call **rollback** metho.

```
db.rollback()
```

## Disconnecting Database:

To disconnect Database connection, use **close()** method.

```
db.close()
```

If the connection to a database is closed by the user with the **close()** method, any outstanding transactions are rolled back by the DB. However, instead of depending on any of DB lower level implementation details, your application would be better off calling **commit** or **rollback** explicitly.


## Handling Errors:

There are many sources of errors. A few examples are a syntax error in an executed SQL statement, a connection failure, or calling the **fetch** method for an already canceled or finished statement handle.

The DB API defines a number of errors that must exist in each database module. The following table lists these exceptions.

Exception	Description
Warning	Used for non-fatal issues. Must subclass <b>StandardError</b> .
Error	Base class for errors. Must subclass <b>StandardError</b> .
InterfaceError	Used for errors in the database module, not the database itself. Must subclass <b>Error</b> .
DatabaseError	Used for errors in the database. Must subclass <b>Error</b> .
DataError	Subclass of <b>DatabaseError</b> that refers to errors in the data.
OperationalError	Subclass of <b>DatabaseError</b> that refers to errors such as the loss of a connection to the database. These errors are generally outside of the control of the Python scripter.
IntegrityError	Subclass of <b>DatabaseError</b> for situations that would damage the relational integrity, such as uniqueness constraints or foreign keys.
InternalError	Subclass of <b>DatabaseError</b> that refers to errors internal to the database module, such as a cursor no longer being active.
ProgrammingError	Subclass of <b>DatabaseError</b> that refers to errors such as a bad table name and other things that can safely be blamed on you.
NotSupportedError	Subclass of <b>DatabaseError</b> that refers to trying to call unsupported functionality.

Your Python scripts should handle these errors but before using any of the above exceptions, make sure your MySQLdb has support for that exception. You can get more information about them by reading the DB API 2.0 specification.



# Python Networking

**P**ython provides two levels of access to network services. At a low level, you can access the basic socket support in the underlying operating system, which allows you to implement clients and servers for both connection-oriented and connectionless protocols.

Python also has libraries that provide higher-level access to specific application-level network protocols, such as FTP, HTTP, and so on.

This tutorial gives you understanding on most famous concept in Networking - Socket Programming

## What is Sockets?

Sockets are the endpoints of a bidirectional communications channel. Sockets may communicate within a process, between processes on the same machine, or between processes on different continents.

Sockets may be implemented over a number of different channel types: Unix domain sockets, TCP, UDP, and so on. The `socket` library provides specific classes for handling the common transports as well as a generic interface for handling the rest.

Sockets have their own vocabulary:

Term	Description
domain	The family of protocols that will be used as the transport mechanism. These values are constants such as AF_INET, PF_INET, PF_UNIX, PF_X25, and so on.
type	The type of communications between the two endpoints, typically SOCK_STREAM for connection-oriented protocols and SOCK_DGRAM for connectionless protocols.
protocol	Typically zero, this may be used to identify a variant of a protocol within a domain and type.
hostname	The identifier of a network interface: A string, which can be a host name, a dotted-quad address, or an IPV6 address in colon (and possibly dot) notation A string "<broadcast>", which specifies an INADDR_BROADCAST address. A zero-length string, which specifies INADDR_ANY, or An Integer, interpreted as a binary address in host byte order.
port	Each server listens for clients calling on one or more ports. A port may be a Fixnum port number, a string containing a port number, or the name of a service.

## The *socket* Module:

To create a socket, you must use the `socket.socket()` function available in `socket` module, which has the general syntax:

```
s = socket.socket (socket_family, socket_type, protocol=0)
```

Here is the description of the parameters:

- **socket\_family:** This is either AF\_UNIX or AF\_INET, as explained earlier.
- **socket\_type:** This is either SOCK\_STREAM or SOCK\_DGRAM.
- **protocol:** This is usually left out, defaulting to 0.

Once you have `socket` object, then you can use required functions to create your client or server program. Following is the list of functions required:

## Server Socket Methods:

Method	Description
<code>s.bind()</code>	This method binds address (hostname, port number pair) to socket.
<code>s.listen()</code>	This method sets up and start TCP listener.
<code>s.accept()</code>	This passively accept TCP client connection, waiting until connection arrives (blocking).

## Client Socket Methods:

Method	Description
<code>s.connect()</code>	This method actively initiates TCP server connection.

## General Socket Methods:

Method	Description
<code>s.recv()</code>	This method receives TCP message
<code>s.send()</code>	This method transmits TCP message
<code>s.recvfrom()</code>	This method receives UDP message
<code>s.sendto()</code>	This method transmits UDP message
<code>s.close()</code>	This method closes socket
<code>socket.gethostname()</code>	Returns the hostname.

## A Simple Server:

To write Internet servers, we use the `socket` function available in `socket` module to create a `socket` object. A `socket` object is then used to call other functions to setup a socket server.

Now call `bind(hostname, port)` function to specify a `port` for your service on the given host.

Next, call the `accept` method of the returned object. This method waits until a client connects to the port you specified, and then returns a `connection` object that represents the connection to that client.

```
#!/usr/bin/python          # This is server.py file

import socket             # Import socket module

s = socket.socket()       # Create a socket object
host = socket.gethostname() # Get local machine name
port = 12345               # Reserve a port for your service.
s.bind((host, port))      # Bind to the port

s.listen(5)                # Now wait for client connection.
while True:
    c, addr = s.accept()   # Establish connection with client.
    print 'Got connection from', addr
    c.send('Thank you for connecting')
    c.close()              # Close the connection
```

## A Simple Client:

Now we will write a very simple client program which will open a connection to a given port 12345 and given host. This is very simple to create a socket client using Python's `socket` module function.

The `socket.connect(hostname, port)` opens a TCP connection to `hostname` on the `port`. Once you have a socket open, you can read from it like any IO object. When done, remember to close it, as you would close a file.

The following code is a very simple client that connects to a given host and port, reads any available data from the socket, and then exits:

```
#!/usr/bin/python          # This is client.py file

import socket             # Import socket module

s = socket.socket()       # Create a socket object
host = socket.gethostname() # Get local machine name
port = 12345               # Reserve a port for your service.

s.connect((host, port))
print s.recv(1024)
s.close()                 # Close the socket when done
```

Now run this `server.py` in background and then run above `client.py` to see the result.

```
# Following would start a server in background.
$ python server.py &

# Once server is started run client as follows:

$ python client.py
```

This would produce following result:

```
Got connection from ('127.0.0.1', 48437)
Thank you for connecting
```

## Python Internet modules

A list of some important modules which could be used in Python Network/Internet programming.

Protocol	Common function	Port No	Python module
HTTP	Web pages	80	httplib, urllib, xmlrpclib
NNTP	Usenet news	119	nntplib
FTP	File transfers	20	ftplib, urllib
SMTP	Sending email	25	smtplib
POP3	Fetching email	110	poplib
IMAP4	Fetching email	143	imaplib
Telnet	Command lines	23	telnetlib
Gopher	Document transfers	70	gopherlib, urllib

Please check all the libraries mentioned above to work with FTP, SMTP, POP, and IMAP protocols.

## Further Readings:

I have given you a quick start with Socket Programming. It's a big subject so its recommended to go through the following link to find more detail on:

- [Unix Socket Programming.](#)
- [Python Socket Library and Modules.](#)

# Python Sending Email

S

imple Mail Transfer Protocol(SMTP) is a protocol which handles sending e-mail and routing e-mail between mail servers.

Python provides **smtplib** module which defines an SMTP client session object that can be used to send mail to any Internet machine with an SMTP or ESMTP listener daemon.

Here is a simple syntax to create one SMTP object which can later be used to send an email:

```
import smtplib  
  
smtpObj = smtplib.SMTP( [host [, port [, local_hostname]]] )
```

Here is the detail of the parameters:

- **host:** This is the host running your SMTP server. You can specify IP address of the host or a domain name like tutorialspoint.com. This is optional argument.
- **port:** If you are providing *host* argument then you need to specify a port where SMTP server is listening. Usually this port would be 25.
- **local\_hostname:** If your SMTP server is running on your local machine then you can specify just/localhost as of this option.

An SMTP object has an instance method called **sendmail**, which will typically be used to do the work of mailing a message. It takes three parameters:

- The *sender* - A string with the address of the sender.
- The *receivers* - A list of strings, one for each recipient.
- The *message* - A message as a string formatted as specified in the various RFCs.

## Example:

Here is a simple way to send one email using Python script. Try it once:

```
#!/usr/bin/python  
  
import smtplib  
  
sender = 'from@fromdomain.com'  
receivers = ['to@todomain.com']  
  
message = """From: From Person <from@fromdomain.com>  
To: To Person <to@todomain.com>
```

```

Subject: SMTP e-mail test

This is a test e-mail message.
"""

try:
    smtpObj = smtplib.SMTP('localhost')
    smtpObj.sendmail(sender, receivers, message)
    print "Successfully sent email"
except SMTPException:
    print "Error: unable to send email"

```

Here you have placed a basic e-mail in message, using a triple quote, taking care to format the headers correctly. An e-mails requires a **From**, **To**, and **Subject** header, separated from the body of the e-mail with a blank line.

To send the mail you use *smtpObj* to connect to the SMTP server on the local machine and then use the *sendmail* method along with the message, the from address, and the destination address as parameters (even though the from and to addresses are within the e-mail itself, these aren't always used to route mail).

If you're not running an SMTP server on your local machine, you can use *smtplib* client to communicate with a remote SMTP server. Unless you're using a webmail service (such as Hotmail or Yahoo! Mail), your e-mail provider will have provided you with outgoing mail server details that you can supply them, as follows:

```

smtplib.SMTP('mail.your-domain.com', 25)

```

## Sending an HTML email using Python:

When you send a text message using Python then all the content will be treated as simple text. Even if you will include HTML tags in a text message, it will be displayed as simple text and HTML tags will not be formatted according to HTML syntax. But Python provides option to send an HTML message as actual HTML message.

While sending an email message you can specify a Mime version, content type and character set to send an HTML email.

### EXAMPLE:

Following is the example to send HTML content as an email. Try it once:

```

#!/usr/bin/python

import smtplib

message = """From: From Person <from@fromdomain.com>
To: To Person <to@todomain.com>
MIME-Version: 1.0
Content-type: text/html
Subject: SMTP HTML e-mail test

This is an e-mail message to be sent in HTML format

<b>This is HTML message.</b>
<h1>This is headline.</h1>
"""

try:
    smtpObj = smtplib.SMTP('localhost')
    smtpObj.sendmail(sender, receivers, message)
    print "Successfully sent email"
except SMTPException:
    print "Error: unable to send email"

```

## Sending Attachments as an e-mail:

To send an email with mixed content requires to set **Content-type** header to **multipart/mixed**. Then text and attachment sections can be specified within **boundaries**.

A boundary is started with two hyphens followed by a unique number which can not appear in the message part of the email. A final boundary denoting the email's final section must also end with two hyphens.

Attached files should be encoded with the **pack("m")** function to have base64 encoding before transmission.

### EXAMPLE:

Following is the example which will send a file **/tmp/test.txt** as an attachment. Try it once:

```
#!/usr/bin/python

import smtplib
import base64

filename = "/tmp/test.txt"

# Read a file and encode it into base64 format
fo = open(filename, "rb")
filecontent = fo.read()
encodedcontent = base64.b64encode(filecontent) # base64

sender = 'webmaster@tutorialpoint.com'
reciever = 'amrood.admin@gmail.com'

marker = "AUNIQUEMARKER"

body ="""
This is a test email to send an attachment.
"""

# Define the main headers.
part1 = """From: From Person <me@fromdomain.net>
To: To Person <amrood.admin@gmail.com>
Subject: Sending Attachement
MIME-Version: 1.0
Content-Type: multipart/mixed; boundary=%s
--%s
""" % (marker, marker)


# Define the message action
part2 = """Content-Type: text/plain
Content-Transfer-Encoding:8bit

%s
--%s
""" % (body, marker)

# Define the attachment section
part3 = """Content-Type: multipart/mixed; name=\"%s\"
Content-Transfer-Encoding:base64
Content-Disposition: attachment; filename=%s

%s
--%s--
""" %(filename, filename, encodedcontent, marker)
message = part1 + part2 + part3
```

```
try:  
    smtpObj = smtplib.SMTP('localhost')  
    smtpObj.sendmail(sender, reciever, message)  
    print "Successfully sent email"  
except Exception:  
    print "Error: unable to send email"
```



# Python Multithreading

**R**unning several threads is similar to running several different programs concurrently, but with the following benefits:

- Multiple threads within a process share the same data space with the main thread and can therefore share information or communicate with each other more easily than if they were separate processes.
- Threads sometimes called light-weight processes and they do not require much memory overhead; they are cheaper than processes.

A thread has a beginning, an execution sequence, and a conclusion. It has an instruction pointer that keeps track of where within its context it is currently running.

- It can be pre-empted (interrupted)
- It can temporarily be put on hold (also known as sleeping) while other threads are running - this is called yielding.

## Starting a New Thread:

To spawn another thread, you need to call following method available in *thread* module:

```
thread.start_new_thread ( function, args[, kwargs] )
```

This method call enables a fast and efficient way to create new threads in both Linux and Windows.

The method call returns immediately and the child thread starts and calls function with the passed list of *args*. When function returns, the thread terminates.

Here *args* is a tuple of arguments; use an empty tuple to call function without passing any arguments. *kwargs* is an optional dictionary of keyword arguments.

## EXAMPLE:

```
#!/usr/bin/python

import thread
import time

# Define a function for the thread
def print_time( threadName, delay ):
```

```

count = 0
while count < 5:
    time.sleep(delay)
    count += 1
    print "%s: %s" % ( threadName, time.ctime(time.time()) )

# Create two threads as follows
try:
    thread.start_new_thread( print_time, ("Thread-1", 2, ) )
    thread.start_new_thread( print_time, ("Thread-2", 4, ) )
except:
    print "Error: unable to start thread"

while 1:
    pass

```

When the above code is executed, it produces following result:

```

Thread-1: Thu Jan 22 15:42:17 2009
Thread-1: Thu Jan 22 15:42:19 2009
Thread-2: Thu Jan 22 15:42:19 2009
Thread-1: Thu Jan 22 15:42:21 2009
Thread-2: Thu Jan 22 15:42:23 2009
Thread-1: Thu Jan 22 15:42:23 2009
Thread-1: Thu Jan 22 15:42:25 2009
Thread-2: Thu Jan 22 15:42:27 2009
Thread-2: Thu Jan 22 15:42:31 2009
Thread-2: Thu Jan 22 15:42:35 2009

```

Although it is very effective for low-level threading, but the *thread* module is very limited compared to the newer threading module.

## The *Threading* Module:

The newer threading module included with Python 2.4 provides much more powerful, high-level support for threads than the *thread* module discussed in the previous section.

The *threading* module exposes all the methods of the *thread* module and provides some additional methods:

- ***threading.activeCount()*:** Returns the number of thread objects that are active.
- ***threading.currentThread()*:** Returns the number of thread objects in the caller's thread control.
- ***threading.enumerate()*:** Returns a list of all thread objects that are currently active.  
In addition to the methods, the *threading* module has the *Thread* class that implements threading.

The methods provided by the *Thread* class are as follows:

- ***run()*:** The *run()* method is the entry point for a thread.
- ***start()*:** The *start()* method starts a thread by calling the *run* method.
- ***join([time])*:** The *join()* waits for threads to terminate.
- ***isAlive()*:** The *isAlive()* method checks whether a thread is still executing.
- ***getName()*:** The *getName()* method returns the name of a thread.
- ***setName()*:** The *setName()* method sets the name of a thread.

## Creating Thread using *Threading* Module:

To implement a new thread using the *threading* module, you have to do the following:

- Define a new subclass of the *Thread* class.
- Override the *\_\_init\_\_(self [,args])* method to add additional arguments.

- Then override the `run(self [,args])` method to implement what the thread should do when started.

Once you have created the new `Thread` subclass, you can create an instance of it and then start a new thread by invoking the `start()` which will in turn call `run()` method.

## EXAMPLE:

```
#!/usr/bin/python

import threading
import time

exitFlag = 0

class myThread (threading.Thread):
    def __init__(self, threadID, name, counter):
        threading.Thread.__init__(self)
        self.threadID = threadID
        self.name = name
        self.counter = counter
    def run(self):
        print "Starting " + self.name
        print_time(self.name, self.counter, 5)
        print "Exiting " + self.name

def print_time(threadName, delay, counter):
    while counter:
        if exitFlag:
            thread.exit()
        time.sleep(delay)
        print "%s: %s" % (threadName, time.ctime(time.time()))
        counter -= 1

# Create new threads
thread1 = myThread(1, "Thread-1", 1)
thread2 = myThread(2, "Thread-2", 2)

# Start new Threads
thread1.start()
thread2.start()

print "Exiting Main Thread"
```

When the above code is executed, it produces following result:

```
Starting Thread-1
Starting Thread-2
Exiting Main Thread
Thread-1: Thu Mar 21 09:10:03 2013
Thread-1: Thu Mar 21 09:10:04 2013
Thread-2: Thu Mar 21 09:10:04 2013
Thread-1: Thu Mar 21 09:10:05 2013
Thread-1: Thu Mar 21 09:10:06 2013
Thread-2: Thu Mar 21 09:10:06 2013
Thread-1: Thu Mar 21 09:10:07 2013
Exiting Thread-1
Thread-2: Thu Mar 21 09:10:08 2013
Thread-2: Thu Mar 21 09:10:10 2013
Thread-2: Thu Mar 21 09:10:12 2013
Exiting Thread-2
```

# Synchronizing Threads:

The threading module provided with Python includes a simple-to-implement locking mechanism that will allow you to synchronize threads. A new lock is created by calling the `Lock()` method, which returns the new lock.

The `acquire(blocking)` method the new lock object would be used to force threads to run synchronously. The optional `blocking` parameter enables you to control whether the thread will wait to acquire the lock.

If `blocking` is set to 0, the thread will return immediately with a 0 value if the lock cannot be acquired and with a 1 if the lock was acquired. If `blocking` is set to 1, the thread will block and wait for the lock to be released.

The `release()` method of the the new lock object would be used to release the lock when it is no longer required.

## EXAMPLE:

```
#!/usr/bin/python

import threading
import time

class myThread (threading.Thread):
    def __init__(self, threadID, name, counter):
        threading.Thread.__init__(self)
        self.threadID = threadID
        self.name = name
        self.counter = counter
    def run(self):
        print "Starting " + self.name
        # Get lock to synchronize threads
        threadLock.acquire()
        print_time(self.name, self.counter, 3)
        # Free lock to release next thread
        threadLock.release()

def print_time(threadName, delay, counter):
    while counter:
        time.sleep(delay)
        print "%s: %s" % (threadName, time.ctime(time.time()))
        counter -= 1

threadLock = threading.Lock()
threads = []

# Create new threads
thread1 = myThread(1, "Thread-1", 1)
thread2 = myThread(2, "Thread-2", 2)

# Start new Threads
thread1.start()
thread2.start()

# Add threads to thread list
threads.append(thread1)
threads.append(thread2)

# Wait for all threads to complete
for t in threads:
    t.join()
print "Exiting Main Thread"
```

When the above code is executed, it produces following result:

```
Starting Thread-1
Starting Thread-2
```

**TUTORIALS POINT**

Simply Easy Learning

```

Thread-1: Thu Mar 21 09:11:28 2013
Thread-1: Thu Mar 21 09:11:29 2013
Thread-1: Thu Mar 21 09:11:30 2013
Thread-2: Thu Mar 21 09:11:32 2013
Thread-2: Thu Mar 21 09:11:34 2013
Thread-2: Thu Mar 21 09:11:36 2013
Exiting Main Thread

```

## Multithreaded Priority Queue:

The `Queue` module allows you to create a new queue object that can hold a specific number of items. There are following methods to control the Queue:

- `get()`: The `get()` removes and returns an item from the queue.
- `put()`: The `put` adds item to a queue.
- `qsize()` : The `qsize()` returns the number of items that are currently in the queue.
- `empty()`: The `empty()` returns True if queue is empty; otherwise, False.
- `full()`: the `full()` returns True if queue is full; otherwise, False.

### EXAMPLE:

```

#!/usr/bin/python

import Queue
import threading
import time

exitFlag = 0

class myThread (threading.Thread):
    def __init__(self, threadID, name, q):
        threading.Thread.__init__(self)
        self.threadID = threadID
        self.name = name
        self.q = q
    def run(self):
        print "Starting " + self.name
        process_data(self.name, self.q)
        print "Exiting " + self.name

def process_data(threadName, q):
    while not exitFlag:
        queueLock.acquire()
        if not workQueue.empty():
            data = q.get()
            queueLock.release()
            print "%s processing %s" % (threadName, data)
        else:
            queueLock.release()
            time.sleep(1)

threadList = ["Thread-1", "Thread-2", "Thread-3"]
nameList = ["One", "Two", "Three", "Four", "Five"]
queueLock = threading.Lock()
workQueue = Queue.Queue(10)
threads = []
threadID = 1

# Create new threads
for tName in threadList:
    thread = myThread(threadID, tName, workQueue)
    thread.start()
    threads.append(thread)
    threadID += 1

```

**TUTORIALS POINT**

Simply Easy Learning

```

        thread.start()
        threads.append(thread)
        threadID += 1

# Fill the queue
queueLock.acquire()
for word in nameList:
    workQueue.put(word)
queueLock.release()

# Wait for queue to empty
while not workQueue.empty():
    pass

# Notify threads it's time to exit
exitFlag = 1

# Wait for all threads to complete
for t in threads:
    t.join()
print "Exiting Main Thread"

```

When the above code is executed, it produces following result:

```

Starting Thread-1
Starting Thread-2
Starting Thread-3
Thread-1 processing One
Thread-2 processing Two
Thread-3 processing Three
Thread-1 processing Four
Thread-2 processing Five
Exiting Thread-3
Exiting Thread-1
Exiting Thread-2
Exiting Main Thread

```

# Python XML Processing

## What is XML?

**T**

he Extensible Markup Language (XML) is a markup language much like HTML or SGML. This is recommended by the World Wide Web Consortium and available as an open standard.

XML is a portable, open source language that allows programmers to develop applications that can be read by other applications, regardless of operating system and/or developmental language.

XML is extremely useful for keeping track of small to medium amounts of data without requiring a SQL-based backbone.

## XML Parser Architectures and APIs:

The Python standard library provides a minimal but useful set of interfaces to work with XML.

The two most basic and broadly used APIs to XML data are the SAX and DOM interfaces.

- **Simple API for XML (SAX)** : Here you register callbacks for events of interest and then let the parser proceed through the document. This is useful when your documents are large or you have memory limitations, it parses the file as it reads it from disk, and the entire file is never stored in memory.
- **Document Object Model (DOM) API** : This is World Wide Web Consortium recommendation wherein the entire file is read into memory and stored in a hierarchical (tree-based) form to represent all the features of an XML document.

SAX obviously can't process information as fast as DOM can when working with large files. On the other hand, using DOM exclusively can really kill your resources, especially if used on a lot of small files.

SAX is read-only, while DOM allows changes to the XML file. Since these two different APIs literally complement each other there is no reason why you can't use them both for large projects.

For all our XML code examples, let's use a simple XML file *movies.xml* as an input:

```
<collection shelf="New Arrivals">
<movie title="Enemy Behind">
    <type>War, Thriller</type>
    <format>DVD</format>
    <year>2003</year>
    <rating>PG</rating>
    <stars>10</stars>
```

```

<description>Talk about a US-Japan war</description>
</movie>
<movie title="Transformers">
    <type>Anime, Science Fiction</type>
    <format>DVD</format>
    <year>1989</year>
    <rating>R</rating>
    <stars>8</stars>
    <description>A schientific fiction</description>
</movie>
<movie title="Trigun">
    <type>Anime, Action</type>
    <format>DVD</format>
    <episodes>4</episodes>
    <rating>PG</rating>
    <stars>10</stars>
    <description>Vash the Stampede!</description>
</movie>
<movie title="Ishtar">
    <type>Comedy</type>
    <format>VHS</format>
    <rating>PG</rating>
    <stars>2</stars>
    <description>Viewable boredom</description>
</movie>
</collection>

```

## Parsing XML with SAX APIs:

SAX is a standard interface for event-driven XML parsing. Parsing XML with SAX generally requires you to create your own ContentHandler, by subclassing `xml.sax.ContentHandler`.

Your `ContentHandler` handles the particular tags and attributes of your flavor(s) of XML. A `ContentHandler` object provides methods to handle various parsing events. Its owning parser calls `ContentHandler` methods as it parses the XML file.

The methods `startDocument` and `endDocument` are called at the start and the end of the XML file. The method `characters(text)` is passed character data of the XML file via the parameter `text`.

The `ContentHandler` is called at the start and end of each element. If the parser is not in namespace mode, the methods `startElement(tag, attributes)` and `endElement(tag)` are called; otherwise, the corresponding methods `startElementNS` and `endElementNS` are called. Here, `tag` is the element tag, and `attributes` is an `Attributes` object.

Here are other important methods to understand before proceeding:

### The `make_parser` Method:

Following method creates a new parser object and returns it. The parser object created will be of the first parser type the system finds.

```
xml.sax.make_parser( [parser_list] )
```

Here is the detail of the parameters:

- **`parser_list`:** The optional argument consisting of a list of parsers to use, which must all implement the `make_parser` method.

### The `parse` Method:

Following method creates a SAX parser and use it to parse a document.

```
xml.sax.parse( xmlfile, contenthandler[, errorhandler])
```

Here is the detail of the parameters:

- **xmlfile:** This is the name of the XML file to read from.
- **contenthandler:** This must be a ContentHandler object.
- **errorhandler:** If specified, errorhandler must be a SAX ErrorHandler object.

## The *parseString* Method:

There is one more method to create a SAX parser and to parse the specified **XML string**.

```
xml.sax.parseString(xmlstring, contenthandler[, errorhandler])
```

Here is the detail of the parameters:

- **xmlstring:** This is the name of the XML string to read from.
- **contenthandler:** This must be a ContentHandler object.
- **errorhandler:** If specified, errorhandler must be a SAX ErrorHandler object.

## EXAMPLE:

```
#!/usr/bin/python

import xml.sax

class MovieHandler( xml.sax.ContentHandler ):
    def __init__(self):
        self.CurrentData = ""
        self.type = ""
        self.format = ""
        self.year = ""
        self.rating = ""
        self.stars = ""
        self.description = ""

    # Call when an element starts
    def startElement(self, tag, attributes):
        self.CurrentData = tag
        if tag == "movie":
            print "*****Movie*****"
            title = attributes["title"]
            print "Title:", title

    # Call when an elements ends
    def endElement(self, tag):
        if self.CurrentData == "type":
            print "Type:", self.type
        elif self.CurrentData == "format":
            print "Format:", self.format
        elif self.CurrentData == "year":
            print "Year:", self.year
        elif self.CurrentData == "rating":
            print "Rating:", self.rating
        elif self.CurrentData == "stars":
            print "Stars:", self.stars
        elif self.CurrentData == "description":
            print "Description:", self.description
```

```

        self.CurrentData = ""

    # Call when a character is read
    def characters(self, content):
        if self.CurrentData == "type":
            self.type = content
        elif self.CurrentData == "format":
            self.format = content
        elif self.CurrentData == "year":
            self.year = content
        elif self.CurrentData == "rating":
            self.rating = content
        elif self.CurrentData == "stars":
            self.stars = content
        elif self.CurrentData == "description":
            self.description = content

    if ( __name__ == "__main__"):

        # create an XMLReader
        parser = xml.sax.make_parser()
        # turn off namespaces
        parser.setFeature(xml.sax.handler.feature_namespaces, 0)

        # override the default ContextHandler
        Handler = MovieHandler()
        parser.setContentHandler( Handler )

        parser.parse("movies.xml")

```

This would produce following result:

```

*****Movie*****
Title: Enemy Behind
Type: War, Thriller
Format: DVD
Year: 2003
Rating: PG
Stars: 10
Description: Talk about a US-Japan war
*****Movie*****
Title: Transformers
Type: Anime, Science Fiction
Format: DVD
Year: 1989
Rating: R
Stars: 8
Description: A schientific fiction
*****Movie*****
Title: Trigun
Type: Anime, Action
Format: DVD
Rating: PG
Stars: 10
Description: Vash the Stampede!
*****Movie*****
Title: Ishtar
Type: Comedy
Format: VHS
Rating: PG
Stars: 2

```

**TUTORIALS POINT**

Simply Easy Learning

Description: Viewable boredom

For a complete detail on SAX API documentation, please refer to standard [Python SAX APIs](#).

## Parsing XML with DOM APIs:

The Document Object Model, or "DOM," is a cross-language API from the World Wide Web Consortium (W3C) for accessing and modifying XML documents.

The DOM is extremely useful for random-access applications. SAX only allows you a view of one bit of the document at a time. If you are looking at one SAX element, you have no access to another.

Here is the easiest way to quickly load an XML document and to create a minidom object using the `xml.dom` module. The minidom object provides a simple parser method that will quickly create a DOM tree from the XML file.

The sample phrase calls the `parse( file [,parser] )` function of the minidom object to parse the XML file designated by file into a DOM tree object.

```
#!/usr/bin/python

from xml.dom.minidom import parse
import xml.dom.minidom

# Open XML document using minidom parser
DOMTree = xml.dom.minidom.parse("text.xml")
collection = DOMTree.documentElement
if collection.hasAttribute("shelf"):
    print "Root element : %s" % collection.getAttribute("shelf")

# Get all the movies in the collection
movies = collection.getElementsByTagName("movie")

# Print detail of each movie.
for movie in movies:
    print "*****Movie*****"
    if movie.hasAttribute("title"):
        print "Title: %s" % movie.getAttribute("title")

        type = movie.getElementsByTagName('type')[0]
        print "Type: %s" % type.childNodes[0].data
        format = movie.getElementsByTagName('format')[0]
        print "Format: %s" % format.childNodes[0].data
        rating = movie.getElementsByTagName('rating')[0]
        print "Rating: %s" % rating.childNodes[0].data
        description = movie.getElementsByTagName('description')[0]
        print "Description: %s" % description.childNodes[0].data
```

This would produce following result:

```
Root element : New Arrivals
*****Movie*****
Title: Enemy Behind
Type: War, Thriller
Format: DVD
Rating: PG
Description: Talk about a US-Japan war
*****Movie*****
Title: Transformers
```

```
Type: Anime, Science Fiction
Format: DVD
Rating: R
Description: A schientific fiction
*****Movie*****
Title: Trigun
Type: Anime, Action
Format: DVD
Rating: PG
Description: Vash the Stampede!
*****Movie*****
Title: Ishtar
Type: Comedy
Format: VHS
Rating: PG
Description: Viewable boredom
```

For a complete detail on DOM API documentation, please refer to standard [Python DOM APIs](#).

# Python GUI Programming

P

ython provides various options for developing graphical user interfaces (GUIs). Most important are listed below:

- **Tkinter:** Tkinter is the Python interface to the Tk GUI toolkit shipped with Python. We would look this option in this tutorial.
- **wxPython:** This is an open-source Python interface for wxWindows <http://wxpython.org>.
- **JPython:** JPython is a Python port for Java, which gives Python scripts seamless access to Java class libraries on the local machine <http://www.jython.org>.

There are many other interfaces available which I'm not listing here. You can find them over the net.

## Tkinter Programming

Tkinter is the standard GUI library for Python. Python when combined with Tkinter provides a fast and easy way to create GUI applications. Tkinter provides a powerful object-oriented interface to the Tk GUI toolkit.

Creating a GUI application using Tkinter is an easy task. All you need to do is perform the following steps:

- Import the *Tkinter* module.
- Create the GUI application main window.
- Add one or more of the above mentioned widgets to the GUI application.
- Enter the main event loop to take action against each event triggered by the user.

### Example:

```
#!/usr/bin/python

import Tkinter
top = Tkinter.Tk()
# Code to add widgets will go here...
top.mainloop()
```

This would create a following window:



## Tkinter Widgets

Tkinter provides various controls, such as buttons, labels, and text boxes, used in a GUI application. These controls are commonly called widgets.

There are currently 15 types of widgets in Tkinter. We present these widgets as well as a brief description in the following table:

Operator	Description
<b>Button</b>	The Button widget is used to display buttons in your application.
<b>Canvas</b>	The Canvas widget is used to draw shapes, such as lines, ovals, polygons, and rectangles, in your application.
<b>Checkbutton</b>	The Checkbutton widget is used to display a number of options as checkboxes. The user can select multiple options at a time.
<b>Entry</b>	The Entry widget is used to display a single-line text field for accepting values from a user.
<b>Frame</b>	The Frame widget is used as a container widget to organize other widgets.
<b>Label</b>	The Label widget is used to provide a single-line caption for other widgets. It can also contain images.
<b>Listbox</b>	The Listbox widget is used to provide a list of options to a user.
<b>Menubutton</b>	The Menubutton widget is used to display menus in your application.
<b>Menu</b>	The Menu widget is used to provide various commands to a user. These commands are contained inside Menubutton.
<b>Message</b>	The Message widget is used to display multiline text fields for accepting values from a user.
<b>Radiobutton</b>	The Radiobutton widget is used to display a number of options as radio buttons. The user can select only one option at a time.
<b>Scale</b>	The Scale widget is used to provide a slider widget.

<b>Scrollbar</b>	The Scrollbar widget is used to add scrolling capability to various widgets, such as list boxes.
<b>Text</b>	The Text widget is used to display text in multiple lines.
<b>Toplevel</b>	The Toplevel widget is used to provide a separate window container.
<b>Spinbox</b>	The Spinbox widget is a variant of the standard Tkinter Entry widget, which can be used to select from a fixed number of values.
<b>PanedWindow</b>	A PanedWindow is a container widget that may contain any number of panes, arranged horizontally or vertically.
<b>LabelFrame</b>	A labelframe is a simple container widget. Its primary purpose is to act as a spacer or container for complex window layouts.
<b>tkMessageBox</b>	This module is used to display message boxes in your applications.

## Button

The Button widget is used to add buttons in a Python application. These buttons can display text or images that convey the purpose of the buttons. You can attach a function or a method to a button, which is called automatically when you click the button.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Button ( master, option=value, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
activebackground	Background color when the button is under the cursor.
activeforeground	Foreground color when the button is under the cursor.
bd	Border width in pixels. Default is 2.
bg	Normal background color.
command	Function or method to be called when the button is clicked.

fg	Normal foreground (text) color.
font	Text font to be used for the button's label.
height	Height of the button in text lines (for textual buttons) or pixels (for images).
highlightcolor	The color of the focus highlight when the widget has focus.
image	Image to be displayed on the button (instead of text).
justify	How to show multiple text lines: LEFT to left-justify each line; CENTER to center them; or RIGHT to right-justify.
padx	Additional padding left and right of the text.
pady	Additional padding above and below the text.
relief	Relief specifies the type of the border. Some of the values are SUNKEN, RAISED, GROOVE, and RIDGE.
state	Set this option to DISABLED to gray out the button and make it unresponsive. Has the value ACTIVE when the mouse is over it. Default is NORMAL.
underline	Default is -1, meaning that no character of the text on the button will be underlined. If nonnegative, the corresponding text character will be underlined.
width	Width of the button in letters (if displaying text) or pixels (if displaying an image).
wraplength	If this value is set to a positive number, the text lines will be wrapped to fit within this length.

## Methods:

Following are commonly used methods for this widget:

Method	Description
flash()	Causes the button to flash several times between active and normal colors. Leaves the button in the state it was in originally. Ignored if the button is disabled.
invoke()	Calls the button's callback, and returns what that function returns. Has no effect if the button is disabled or there is no callback.

## Example:

Try following example yourself:

```
import Tkinter
import tkMessageBox


top = Tkinter.Tk()

def helloCallBack():
    tkMessageBox.showinfo( "Hello Python", "Hello World")

B = Tkinter.Button(top, text ="Hello", command = helloCallBack)

B.pack()
top.mainloop()
```

When the above code is executed, it produces following result:

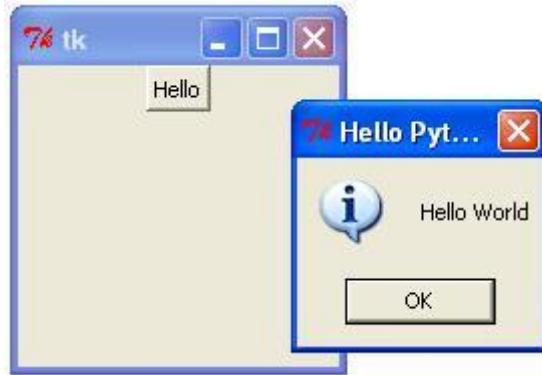

## Canvas

The Canvas is a rectangular area intended for drawing pictures or other complex layouts. You can place graphics, text, widgets, or frames on a Canvas.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Canvas ( master, option=value, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
Bd	Border width in pixels. Default is 2.
Bg	Normal background color.
Confine	If true (the default), the canvas cannot be scrolled outside of the scrollregion.
Cursor	Cursor used in the canvas like <i>arrow, circle, dot etc.</i>
Height	Size of the canvas in the Y dimension.
Highlightcolor	Color shown in the focus highlight.
Relief	Relief specifies the type of the border. Some of the values are SUNKEN, RAISED, GROOVE, and RIDGE.
Scrollregion	A tuple (w, n, e, s) that defines over how large an area the canvas can be scrolled, where w is the left side, n the top, e the right side, and s the bottom.
Width	Size of the canvas in the X dimension.

Xscrollincrement	If you set this option to some positive dimension, the canvas can be positioned only on multiples of that distance, and the value will be used for scrolling by scrolling units, such as when the user clicks on the arrows at the ends of a scrollbar.
Xscrollcommand	If the canvas is scrollable, this attribute should be the .set() method of the horizontal scrollbar.
Yscrollincrement	Works like xscrollincrement, but governs vertical movement.
Yscrollcommand	If the canvas is scrollable, this attribute should be the .set() method of the vertical scrollbar.

The Canvas widget can support the following standard items:

**arc** . Creates an arc item, which can be a chord, a pieslice, or a simple arc.

```
coord = 10, 50, 240, 210
arc = canvas.create_arc(coord, start=0, extent=150, fill="blue")
```

**image** . Creates an image item, which can be an instance of either the BitmapImage or the PhotoImage classes.

```
filename = PhotoImage(file = "sunshine.gif")
image = canvas.create_image(50, 50, anchor=NE, image=filename)
```

**line** . Creates a line item.

```
line = canvas.create_line(x0, y0, x1, y1, ..., xn, yn, options)
```

**oval** . Creates a circle or an ellipse at the given coordinates. It takes two pairs of coordinates.the top left and bottom right corners of the bounding rectangle for the oval.

```
oval = canvas.create_oval(x0, y0, x1, y1, options)
```

**polygon** . Creates a polygon item that must have at least three vertices.

```
oval = canvas.create_polygon(x0, y0, x1, y1,...xn, yn, options)
```

## Example:

Try following example yourself:

```
import Tkinter
import tkMessageBox


top = Tkinter.Tk()

C = Tkinter.Canvas (top, bg="blue", height=250, width=300)

coord = 10, 50, 240, 210
arc = C.create_arc(coord, start=0, extent=150, fill="red")

C.pack()
top.mainloop()
```

When the above code is executed, it produces following result:

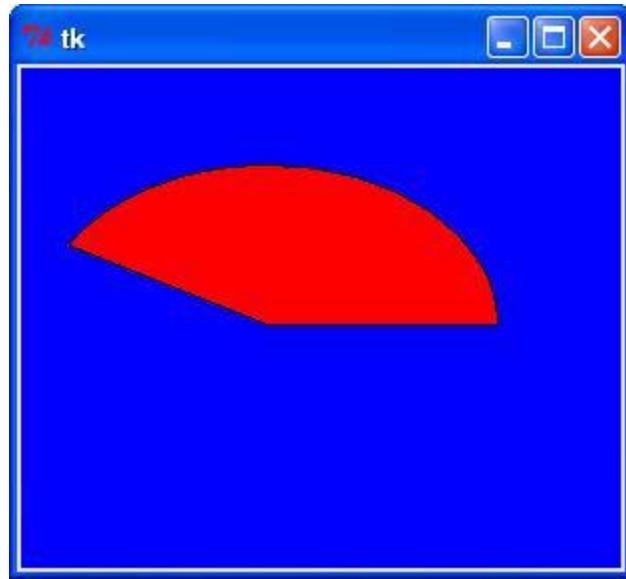

## Checkbutton

The Checkbutton widget is used to display a number of options to a user as toggle buttons. The user can then select one or more options by clicking the button corresponding to each option.

You can also display images in place of text.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Checkbutton ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
activebackground	Background color when the checkbutton is under the cursor.
activeforeground	Foreground color when the checkbutton is under the cursor.
bg	The normal background color displayed behind the label and indicator.
bitmap	To display a monochrome image on a button.
bd	The size of the border around the indicator. Default is 2 pixels.
command	A procedure to be called every time the user changes the state of this checkbutton.
cursor	If you set this option to a cursor name (arrow, dot etc.), the mouse cursor will change to that pattern when it is over the checkbutton.

disabledforeground	The foreground color used to render the text of a disabled checkbutton. The default is a stippled version of the default foreground color.
font	The font used for the text.
fg	The color used to render the text.
height	The number of lines of text on the checkbutton. Default is 1.
highlightcolor	The color of the focus highlight when the checkbutton has the focus.
image	To display a graphic image on the button.
justify	If the text contains multiple lines, this option controls how the text is justified: CENTER, LEFT, or RIGHT.
offvalue	Normally, a checkbutton's associated control variable will be set to 0 when it is cleared (off). You can supply an alternate value for the off state by setting offvalue to that value.
onvalue	Normally, a checkbutton's associated control variable will be set to 1 when it is set (on). You can supply an alternate value for the on state by setting onvalue to that value.
padx	How much space to leave to the left and right of the checkbutton and text. Default is 1 pixel.
pady	How much space to leave above and below the checkbutton and text. Default is 1 pixel.
relief	With the default value, relief=FLAT, the checkbutton does not stand out from its background. You may set this option to any of the other styles
selectcolor	The color of the checkbutton when it is set. Default is selectcolor="red".
selectimage	If you set this option to an image, that image will appear in the checkbutton when it is set.
state	The default is state=NORMAL, but you can use state=DISABLED to gray out the control and make it unresponsive. If the cursor is currently over the checkbutton, the state is ACTIVE.
text	The label displayed next to the checkbutton. Use newlines ("\n") to display multiple lines of text.
underline	With the default value of -1, none of the characters of the text label are underlined. Set this option to the index of a character in the text (counting from zero) to underline that character.
variable	The control variable that tracks the current state of the checkbutton. Normally this variable is an <i>IntVar</i> , and 0 means cleared and 1 means set, but see the offvalue and onvalue options above.
width	The default width of a checkbutton is determined by the size of the displayed image or text. You can set this option to a number of characters and the checkbutton will always have room for that many characters.
wraplength	Normally, lines are not wrapped. You can set this option to a number of characters and all lines will be broken into pieces no longer than that number.

## Methods:

Following are commonly used methods for this widget:

Method	Description
deselect()	Clears (turns off) the checkbutton.
flash()	Flashes the checkbutton a few times between its active and normal colors, but leaves it the way it started.
invoke()	You can call this method to get the same actions that would occur if the user clicked on the checkbutton to change its state.
select()	Sets (turns on) the checkbutton.
toggle()	Clears the checkbutton if set, sets it if cleared.

## Example:

Try following example yourself:

```
from Tkinter import *
import tkMessageBox
import Tkinter

top = Tkinter.Tk()
CheckVar1 = IntVar()
CheckVar2 = IntVar()
C1 = Checkbutton(top, text = "Music", variable = CheckVar1, \
                  onvalue = 1, offvalue = 0, height=5, \
                  width = 20)
C2 = Checkbutton(top, text = "Video", variable = CheckVar2, \
                  onvalue = 1, offvalue = 0, height=5, \
                  width = 20)
C1.pack()
C2.pack()
top.mainloop()
```

When the above code is executed, it produces following result:



## Entry

The Entry widget is used to accept single-line text strings from a user.

- If you want to display multiple lines of text that can be edited, then you should use the *Text* widget.
- If you want to display one or more lines of text that cannot be modified by the user then you should use the *Label* widget.

## Syntax:

Here is the simple syntax to create this widget:

```
w = Entry( master, option, ... )
```

## Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
bg	The normal background color displayed behind the label and indicator.
bd	The size of the border around the indicator. Default is 2 pixels.
command	A procedure to be called every time the user changes the state of this checkbutton.
cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the checkbutton.
font	The font used for the text.
exportselection	By default, if you select text within an Entry widget, it is automatically exported to the clipboard. To avoid this exportation, use exportselection=0.
fg	The color used to render the text.
highlightcolor	The color of the focus highlight when the checkbutton has the focus.
justify	If the text contains multiple lines, this option controls how the text is justified: CENTER, LEFT, or RIGHT.
relief	With the default value, relief=FLAT, the checkbutton does not stand out from its background. You may set this option to any of the other styles
selectbackground	The background color to use displaying selected text.
selectborderwidth	The width of the border to use around selected text. The default is one pixel.
selectforeground	The foreground (text) color of selected text.
show	Normally, the characters that the user types appear in the entry. To make a .password. entry that echoes each character as an asterisk, set show="*".
state	The default is state=NORMAL, but you can use state=DISABLED to gray out the control and make it unresponsive. If the cursor is currently over the checkbutton, the state is ACTIVE.
textvariable	In order to be able to retrieve the current text from your entry widget, you must set this option to an instance of the StringVar class.
width	The default width of a checkbutton is determined by the size of the displayed image or text. You can set this option to a number of characters and the checkbutton will always have room for that many characters.
xscrollcommand	If you expect that users will often enter more text than the onscreen size of the widget, you

can link your entry widget to a scrollbar.

## Methods:

Following are commonly used methods for this widget:

Method	Description
delete ( first, last=None )	Deletes characters from the widget, starting with the one at index first, up to but not including the character at position last. If the second argument is omitted, only the single character at position first is deleted.
get()	Returns the entry's current text as a string.
icursor ( index )	Set the insertion cursor just before the character at the given index.
index ( index )	Shift the contents of the entry so that the character at the given index is the leftmost visible character. Has no effect if the text fits entirely within the entry.
insert ( index, s )	Inserts string s before the character at the given index.
select_adjust ( index )	This method is used to make sure that the selection includes the character at the specified index.
select_clear()	Clears the selection. If there isn't currently a selection, has no effect.
select_from ( index )	Sets the ANCHOR index position to the character selected by index, and selects that character.
select_present()	If there is a selection, returns true, else returns false.
select_range ( start, end )	Sets the selection under program control. Selects the text starting at the start index, up to but not including the character at the end index. The start position must be before the end position.
select_to ( index )	Selects all the text from the ANCHOR position up to but not including the character at the given index.
xview ( index )	This method is useful in linking the Entry widget to a horizontal scrollbar.
xview_scroll ( number, what )	Used to scroll the entry horizontally. The what argument must be either UNITS, to scroll by character widths, or PAGES, to scroll by chunks the size of the entry widget. The number is positive to scroll left to right, negative to scroll right to left.

## Example:

Try following example yourself:

```
from Tkinter import *
top = Tk()
L1 = Label(top, text="User Name")
L1.pack( side = LEFT)
E1 = Entry(top, bd =5)
E1.pack(side = RIGHT)
top.mainloop()
```

When the above code is executed, it produces following result:



## Frame

The Frame widget is very important for the process of grouping and organizing other widgets in a somehow friendly way. It works like a container, which is responsible for arranging the position of other widgets.

It uses rectangular areas in the screen to organize the layout and to provide padding of these widgets. A frame can also be used as a foundation class to implement complex widgets.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Frame ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
Bg	The normal background color displayed behind the label and indicator.
Bd	The size of the border around the indicator. Default is 2 pixels.
Cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the checkbutton.
Height	The vertical dimension of the new frame.
highlightbackground	Color of the focus highlight when the frame does not have focus.
highlightcolor	Color shown in the focus highlight when the frame has the focus.
highlightthickness	Thickness of the focus highlight.
Relief	With the default value, relief=FLAT, the checkbutton does not stand out from its background. You may set this option to any of the other styles
Width	The default width of a checkbutton is determined by the size of the displayed image or text. You can set this option to a number of characters and the checkbutton will always have room for that many characters.

### Example:

Try following example yourself:

```
from Tkinter import *
```

**TUTORIALS POINT**

Simply Easy Learning

```

root = Tk()
frame = Frame(root)
frame.pack()

bottomframe = Frame(root)
bottomframe.pack( side = BOTTOM )

redbutton = Button(frame, text="Red", fg="red")
redbutton.pack( side = LEFT )

greenbutton = Button(frame, text="Brown", fg="brown")
greenbutton.pack( side = LEFT )

bluebutton = Button(frame, text="Blue", fg="blue")
bluebutton.pack( side = LEFT )

blackbutton = Button(bottomframe, text="Black", fg="black")
blackbutton.pack( side = BOTTOM)

root.mainloop()

```

When the above code is executed, it produces following result::



## Label

This widget implements a display box where you can place text or images. The text displayed by this widget can be updated at any time you want.

It is also possible to underline part of the text (like to identify a keyboard shortcut), and span the text across multiple lines.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Label ( master, option, ... )
```

### Parameters:

- master:** This represents the parent window.
- options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
anchor	This option controls where the text is positioned if the widget has more space than the text needs. The default is anchor= CENTER, which centers the text in the available space.
bg	The normal background color displayed behind the label and indicator.

bitmap	Set this option equal to a bitmap or image object and the label will display that graphic.
bd	The size of the border around the indicator. Default is 2 pixels.
cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the checkbutton.
font	If you are displaying text in this label (with the text or textvariable option, the font option specifies in what font that text will be displayed.
fg	If you are displaying text or a bitmap in this label, this option specifies the color of the text. If you are displaying a bitmap, this is the color that will appear at the position of the 1-bits in the bitmap.
height	The vertical dimension of the new frame.
image	To display a static image in the label widget, set this option to an image object.
justify	Specifies how multiple lines of text will be aligned with respect to each other: LEFT for flush left, CENTER for centered (the default), or RIGHT for right-justified.
padx	Extra space added to the left and right of the text within the widget. Default is 1.
pady	Extra space added above and below the text within the widget. Default is 1.
relief	Specifies the appearance of a decorative border around the label. The default is FLAT; for other values.
text	To display one or more lines of text in a label widget, set this option to a string containing the text. Internal newlines ("\\n") will force a line break.
textvariable	To slave the text displayed in a label widget to a control variable of class <i>StringVar</i> , set this option to that variable.
underline	You can display an underline (_) below the nth letter of the text, counting from 0, by setting this option to n. The default is underline=-1, which means no underlining.
width	Width of the label in characters (not pixels!). If this option is not set, the label will be sized to fit its contents.
wraplength	You can limit the number of characters in each line by setting this option to the desired number. The default value, 0, means that lines will be broken only at newlines.

## Example:

Try following example yourself:

```
from Tkinter import *
root = Tk()
var = StringVar()
label = Label( root, textvariable=var, relief=RAISED )
var.set("Hey!? How are you doing?")
label.pack()
root.mainloop()
```

When the above code is executed, it produces following result:



## Listbox

The Listbox widget is used to display a list of items from which a user can select a number of items

### Syntax:

Here is the simple syntax to create this widget:

```
w = Listbox ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
Bg	The normal background color displayed behind the label and indicator.
Bd	The size of the border around the indicator. Default is 2 pixels.
Cursor	The cursor that appears when the mouse is over the listbox.
font	The font used for the text in the listbox.
fg	The color used for the text in the listbox.
height	Number of lines (not pixels!) shown in the listbox. Default is 10.
highlightcolor	Color shown in the focus highlight when the widget has the focus.
highlightthickness	Thickness of the focus highlight.
relief	Selects three-dimensional border shading effects. The default is SUNKEN.
selectbackground	The background color to use displaying selected text.
selectmode	Determines how many items can be selected, and how mouse drags affect the selection: <b>BROWSE:</b> Normally, you can only select one line out of a listbox. If you click on an item and then drag to a different line, the selection will follow the mouse. This is the default. <b>SINGLE:</b> You can only select one line, and you can't drag the mouse wherever you click button 1, that line is selected. <b>MULTIPLE:</b> You can select any number of lines at once. Clicking on any line toggles whether or not it is selected. <b>EXTENDED:</b> You can select any adjacent group of lines at once by clicking on the first line and dragging to the last line.
width	The width of the widget in characters. The default is 20.

xscrollcommand	If you want to allow the user to scroll the listbox horizontally, you can link your listbox widget to a horizontal scrollbar.
yscrollcommand	If you want to allow the user to scroll the listbox vertically, you can link your listbox widget to a vertical scrollbar.

## Methods:

Methods on listbox objects include:

Option	Description
activate ( index )	Selects the line specified by the given index.
curselection()	Returns a tuple containing the line numbers of the selected element or elements, counting from 0. If nothing is selected, returns an empty tuple.
delete ( first, last=None )	Deletes the lines whose indices are in the range [first, last]. If the second argument is omitted, the single line with index first is deleted.
get ( first, last=None )	Returns a tuple containing the text of the lines with indices from first to last, inclusive. If the second argument is omitted, returns the text of the line closest to first.
index ( i )	If possible, positions the visible part of the listbox so that the line containing index i is at the top of the widget.
insert ( index, *elements )	Insert one or more new lines into the listbox before the line specified by index. Use END as the first argument if you want to add new lines to the end of the listbox.
nearest ( y )	Return the index of the visible line closest to the y-coordinate y relative to the listbox widget.
see ( index )	Adjust the position of the listbox so that the line referred to by index is visible.
size()	Returns the number of lines in the listbox.
xview()	To make the listbox horizontally scrollable, set the command option of the associated horizontal scrollbar to this method.
xview_moveto ( fraction )	Scroll the listbox so that the leftmost fraction of the width of its longest line is outside the left side of the listbox. Fraction is in the range [0,1].
xview_scroll ( number, what )	Scrolls the listbox horizontally. For the what argument, use either UNITS to scroll by characters, or PAGES to scroll by pages, that is, by the width of the listbox. The number argument tells how many to scroll.
yview()	To make the listbox vertically scrollable, set the command option of the associated vertical scrollbar to this method.
yview_moveto ( fraction )	Scroll the listbox so that the top fraction of the width of its longest line is outside the left side of the listbox. Fraction is in the range [0,1].
yview_scroll ( number, what )	Scrolls the listbox vertically. For the what argument, use either UNITS to scroll by lines, or PAGES to scroll by pages, that is, by the height of the listbox. The number argument tells how many to scroll.

## Example:

Try following example yourself:

```
from Tkinter import *
import tkMessageBox
import Tkinter

top = Tk()

Lb1 = Listbox(top)
Lb1.insert(1, "Python")
Lb1.insert(2, "Perl")
Lb1.insert(3, "C")
Lb1.insert(4, "PHP")
Lb1.insert(5, "JSP")
Lb1.insert(6, "Ruby")

Lb1.pack()
top.mainloop()
```

When the above code is executed, it produces following result:



## Menubutton

A menubutton is the part of a drop-down menu that stays on the screen all the time. Every menubutton is associated with a Menu widget that can display the choices for that menubutton when the user clicks on it.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Menubutton ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
--------	-------------

activebackground	The background color when the mouse is over the menubutton.
activeforeground	The foreground color when the mouse is over the menubutton.
Anchor	This option controls where the text is positioned if the widget has more space than the text needs. The default is anchor=CENTER, which centers the text.
Bg	The normal background color displayed behind the label and indicator.
Bitmap	To display a bitmap on the menubutton, set this option to a bitmap name.
Bd	The size of the border around the indicator. Default is 2 pixels.
Cursor	The cursor that appears when the mouse is over this menubutton.
direction	Set direction=LEFT to display the menu to the left of the button; use direction=RIGHT to display the menu to the right of the button; or use direction='above' to place the menu above the button.
disabledforeground	The foreground color shown on this menubutton when it is disabled.
fg	The foreground color when the mouse is not over the menubutton.
height	The height of the menubutton in lines of text (not pixels!). The default is to fit the menubutton's size to its contents.
highlightcolor	Color shown in the focus highlight when the widget has the focus.
image	To display an image on this menubutton,
justify	This option controls where the text is located when the text doesn't fill the menubutton: use justify=LEFT to left-justify the text (this is the default); use justify=CENTER to center it, or justify=RIGHT to right-justify.
menu	To associate the menubutton with a set of choices, set this option to the Menu object containing those choices. That menu object must have been created by passing the associated menubutton to the constructor as its first argument.
padx	How much space to leave to the left and right of the text of the menubutton. Default is 1.
pady	How much space to leave above and below the text of the menubutton. Default is 1.
relief	Selects three-dimensional border shading effects. The default is RAISED.
state	Normally, menubuttons respond to the mouse. Set state=DISABLED to gray out the menubutton and make it unresponsive.
text	To display text on the menubutton, set this option to the string containing the desired text. Newlines ("\n") within the string will cause line breaks.
textvariable	You can associate a control variable of class StringVar with this menubutton. Setting that control variable will change the displayed text.
underline	Normally, no underline appears under the text on the menubutton. To underline one of the characters, set this option to the index of that character.
width	The width of the widget in characters. The default is 20.

wraplength

Normally, lines are not wrapped. You can set this option to a number of characters and all lines will be broken into pieces no longer than that number.

## Example:

Try following example yourself:

```
from Tkinter import *
import tkMessageBox
import Tkinter

top = Tk()


mb= Menubutton ( top, text="condiments", relief=RAISED )
mb.grid()
mb.menu = Menu ( mb, tearoff = 0 )
mb["menu"] = mb.menu

mayoVar = IntVar()
ketchVar = IntVar()

mb.menu.add_checkbutton ( label="mayo",
                         variable=mayoVar )
mb.menu.add_checkbutton ( label="ketchup",
                         variable=ketchVar )

mb.pack()
top.mainloop()
```

When the above code is executed, it produces following result:

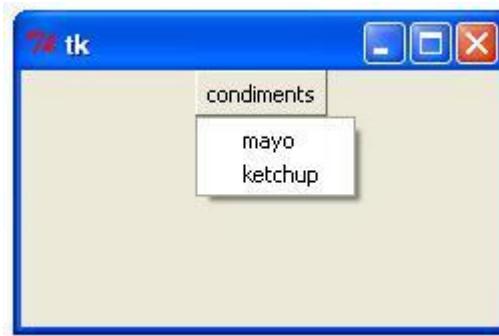

## Menu

The goal of this widget is to allow us to create all kinds of menus that can be used by our applications. The core functionality provides ways to create three menu types: pop-up, toplevel, and pull-down.

It is also possible to use other extended widgets to implement new types of menus, such as the *OptionMenu* widget, which implements a special type that generates a pop-up list of items within a selection.

## Syntax:

Here is the simple syntax to create this widget:

```
w = Menu ( master, option, ... )
```

**TUTORIALS POINT**

Simply Easy Learning

## Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
activebackground	The background color that will appear on a choice when it is under the mouse.
activeborderwidth	Specifies the width of a border drawn around a choice when it is under the mouse. Default is 1 pixel.
activeforeground	The foreground color that will appear on a choice when it is under the mouse.
bg	The background color for choices not under the mouse.
bd	The width of the border around all the choices. Default is 1.
cursor	The cursor that appears when the mouse is over the choices, but only when the menu has been torn off.
disabledforeground	The color of the text for items whose state is DISABLED.
font	The default font for textual choices.
fg	The foreground color used for choices not under the mouse.
postcommand	You can set this option to a procedure, and that procedure will be called every time someone brings up this menu.
relief	The default 3-D effect for menus is relief=RAISED.
image	To display an image on this menubutton.
selectcolor	Specifies the color displayed in checkbuttons and radiobuttons when they are selected.
tearoff	Normally, a menu can be torn off, the first position (position 0) in the list of choices is occupied by the tear-off element, and the additional choices are added starting at position 1. If you set tearoff=0, the menu will not have a tear-off feature, and choices will be added starting at position 0.
title	Normally, the title of a tear-off menu window will be the same as the text of the menubutton or cascade that lead to this menu. If you want to change the title of that window, set the title option to that string.

## Methods:

These methods are available on Menu objects:

Option	Description
add_command( options )	Adds a menu item to the menu.
add_radiobutton( options )	Creates a radio button menu item.
add_checkbutton( options )	Creates a check button menu item.

<code>add_cascade(options)</code>	Creates a new hierarchical menu by associating a given menu to a parent menu
<code>add_separator()</code>	Adds a separator line to the menu.
<code>add( type, options )</code>	Adds a specific type of menu item to the menu.
<code>delete( startindex [, endindex ])</code>	Deletes the menu items ranging from startindex to endindex.
<code>entryconfig( index, options )</code>	Allows you to modify a menu item, which is identified by the index, and change its options.
<code>index(item)</code>	Returns the index number of the given menu item label.
<code>insert_separator ( index )</code>	Insert a new separator at the position specified by index.
<code>invoke ( index )</code>	Calls the command callback associated with the choice at position index. If a checkbutton, its state is toggled between set and cleared; if a radiobutton, that choice is set.
<code>type ( index )</code>	Returns the type of the choice specified by index: either "cascade", "checkbutton", "command", "radiobutton", "separator", or "tearoff".

## Example:

Try following example yourself:

```
from Tkinter import *
def donothing():
    filewin = Toplevel(root)
    button = Button(filewin, text="Do nothing button")
    button.pack()

root = Tk()
menubar = Menu(root)
filemenu = Menu(menubar, tearoff=0)
filemenu.add_command(label="New", command=donothing)
filemenu.add_command(label="Open", command=donothing)
filemenu.add_command(label="Save", command=donothing)
filemenu.add_command(label="Save as...", command=donothing)
filemenu.add_command(label="Close", command=donothing)

filemenu.add_separator()

filemenu.add_command(label="Exit", command=root.quit)
menubar.add_cascade(label="File", menu=filemenu)
editmenu = Menu(menubar, tearoff=0)
editmenu.add_command(label="Undo", command=donothing)

editmenu.add_separator()

editmenu.add_command(label="Cut", command=donothing)
editmenu.add_command(label="Copy", command=donothing)
editmenu.add_command(label="Paste", command=donothing)
editmenu.add_command(label="Delete", command=donothing)
editmenu.add_command(label="Select All", command=donothing)

menubar.add_cascade(label="Edit", menu=editmenu)
helpmenu = Menu(menubar, tearoff=0)
helpmenu.add_command(label="Help Index", command=donothing)
helpmenu.add_command(label="About...", command=donothing)
```

**TUTORIALS POINT**

Simply Easy Learning

```
menubar.add_cascade(label="Help", menu=helpmenu)

root.config(menu=menubar)
root.mainloop()
```

When the above code is executed, it produces following result:



## Message

This widget provides a multiline and noneditable object that displays texts, automatically breaking lines and justifying their contents.

Its functionality is very similar to the one provided by the Label widget, except that it can also automatically wrap the text, maintaining a given width or aspect ratio.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Message ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
Anchor	This option controls where the text is positioned if the widget has more space than the text needs. The default is anchor=CENTER, which centers the text in the available space.
Bg	The normal background color displayed behind the label and indicator.
Bitmap	Set this option equal to a bitmap or image object and the label will display that graphic.
Bd	The size of the border around the indicator. Default is 2 pixels.

Cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the checkbutton.
Font	If you are displaying text in this label (with the text or textvariable option, the font option specifies in what font that text will be displayed.
Fg	If you are displaying text or a bitmap in this label, this option specifies the color of the text. If you are displaying a bitmap, this is the color that will appear at the position of the 1-bits in the bitmap.
Height	The vertical dimension of the new frame.
image	To display a static image in the label widget, set this option to an image object.
justify	Specifies how multiple lines of text will be aligned with respect to each other: LEFT for flush left, CENTER for centered (the default), or RIGHT for right-justified.
padx	Extra space added to the left and right of the text within the widget. Default is 1.
pady	Extra space added above and below the text within the widget. Default is 1.
relief	Specifies the appearance of a decorative border around the label. The default is FLAT; for other values.
text	To display one or more lines of text in a label widget, set this option to a string containing the text. Internal newlines ("\\n") will force a line break.
textvariable	To slave the text displayed in a label widget to a control variable of class <i>StringVar</i> , set this option to that variable.
underline	You can display an underline (_) below the nth letter of the text, counting from 0, by setting this option to n. The default is underline=-1, which means no underlining.
width	Width of the label in characters (not pixels!). If this option is not set, the label will be sized to fit its contents.
wraplength	You can limit the number of characters in each line by setting this option to the desired number. The default value, 0, means that lines will be broken only at newlines.

## Example:

Try following example yourself:

```
from Tkinter import *
root = Tk()
var = StringVar()
label = Message( root, textvariable=var, relief=RAISED )
var.set("Hey!? How are you doing?")
label.pack()
root.mainloop()
```

When the above code is executed, it produces following result:



## Radiobutton

This widget implements a multiple-choice button, which is a way to offer many possible selections to the user, and let user choose only one of them.

In order to implement this functionality, each group of radiobuttons must be associated to the same variable, and each one of the buttons must symbolize a single value. You can use the Tab key to switch from one radiobutton to another.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Radiobutton ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
activebackground	The background color when the mouse is over the radiobutton.
activeforeground	The foreground color when the mouse is over the radiobutton.
Anchor	If the widget inhabits a space larger than it needs, this option specifies where the radiobutton will sit in that space. The default is anchor=CENTER.
Bg	The normal background color behind the indicator and label.
Bitmap	To display a monochrome image on a radiobutton, set this option to a bitmap.
Borderwidth	The size of the border around the indicator part itself. Default is 2 pixels.
Command	A procedure to be called every time the user changes the state of this radiobutton.
Cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the radiobutton.
Font	The font used for the text.
Fg	The color used to render the text.
Height	The number of lines (not pixels) of text on the radiobutton. Default is 1.
highlightbackground	The color of the focus highlight when the radiobutton does not have focus.
Highlightcolor	The color of the focus highlight when the radiobutton has the focus.

Image	To display a graphic image instead of text for this radiobutton, set this option to an image object.
Justify	If the text contains multiple lines, this option controls how the text is justified: CENTER (the default), LEFT, or RIGHT.
Padx	How much space to leave to the left and right of the radiobutton and text. Default is 1.
Pady	How much space to leave above and below the radiobutton and text. Default is 1.
Relief	Specifies the appearance of a decorative border around the label. The default is FLAT; for other values.
Selectcolor	The color of the radiobutton when it is set. Default is red.
Selectimage	If you are using the image option to display a graphic instead of text when the radiobutton is cleared, you can set the selectimage option to a different image that will be displayed when the radiobutton is set.
State	The default is state=NORMAL, but you can set state=DISABLED to gray out the control and make it unresponsive. If the cursor is currently over the radiobutton, the state is ACTIVE.
Text	The label displayed next to the radiobutton. Use newlines ("\\n") to display multiple lines of text.
Textvariable	To slave the text displayed in a label widget to a control variable of class <i>StringVar</i> , set this option to that variable.
Underline	You can display an underline (_) below the nth letter of the text, counting from 0, by setting this option to n. The default is underline=-1, which means no underlining.
Value	When a radiobutton is turned on by the user, its control variable is set to its current value option. If the control variable is an <i>IntVar</i> , give each radiobutton in the group a different integer value option. If the control variable is a <i>StringVar</i> , give each radiobutton a different string value option.
Variable	The control variable that this radiobutton shares with the other radiobuttons in the group. This can be either an <i>IntVar</i> or a <i>StringVar</i> .
Width	Width of the label in characters (not pixels!). If this option is not set, the label will be sized to fit its contents.
Wraplength	You can limit the number of characters in each line by setting this option to the desired number. The default value, 0, means that lines will be broken only at newlines.

## Methods:

Methods	Description
deselect()	Clears (turns off) the radiobutton.
flash()	Flashes the radiobutton a few times between its active and normal colors, but leaves it the way it started.
invoke()	You can call this method to get the same actions that would occur if the user clicked on the radiobutton to change its state.
select()	Sets (turns on) the radiobutton.

## Example:

Try following example yourself:

```
from Tkinter import *

def sel():
    selection = "You selected the option " + str(var.get())
    label.config(text = selection)

root = Tk()
var = IntVar()
R1 = Radiobutton(root, text="Option 1", variable=var, value=1,
                  command=sel)
R1.pack( anchor = W )

R2 = Radiobutton(root, text="Option 2", variable=var, value=2,
                  command=sel)
R2.pack( anchor = W )

R3 = Radiobutton(root, text="Option 3", variable=var, value=3,
                  command=sel)
R3.pack( anchor = W )

label = Label(root)
label.pack()
root.mainloop()
```

When the above code is executed, it produces following result:



## Scale

The Scale widget provides a graphical slider object that allows you to select values from a specific scale.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Scale ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
--------	-------------

activebackground	The background color when the mouse is over the scale.
bg	The background color of the parts of the widget that are outside the trough.
bd	Width of the 3-d border around the trough and slider. Default is 2 pixels.
command	A procedure to be called every time the slider is moved. This procedure will be passed one argument, the new scale value. If the slider is moved rapidly, you may not get a callback for every possible position, but you'll certainly get a callback when it settles.
cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the scale.
digits	The way your program reads the current value shown in a scale widget is through a control variable. The control variable for a scale can be an IntVar, a DoubleVar (float), or a StringVar. If it is a string variable, the digits option controls how many digits to use when the numeric scale value is converted to a string.
font	The font used for the label and annotations.
fg	The color of the text used for the label and annotations.
from_	A float or integer value that defines one end of the scale's range.
highlightbackground	The color of the focus highlight when the scale does not have focus.
highlightcolor	The color of the focus highlight when the scale has the focus.
label	You can display a label within the scale widget by setting this option to the label's text. The label appears in the top left corner if the scale is horizontal, or the top right corner if vertical. The default is no label.
length	The length of the scale widget. This is the x dimension if the scale is horizontal, or the y dimension if vertical. The default is 100 pixels.
orient	Set orient=HORIZONTAL if you want the scale to run along the x dimension, or orient=VERTICAL to run parallel to the y-axis. Default is horizontal.
relief	Specifies the appearance of a decorative border around the label. The default is FLAT; for other values.
repeatdelay	This option controls how long button 1 has to be held down in the trough before the slider starts moving in that direction repeatedly. Default is repeatdelay=300, and the units are milliseconds.
resolution	Normally, the user will only be able to change the scale in whole units. Set this option to some other value to change the smallest increment of the scale's value. For example, if from_=-1.0 and to=1.0, and you set resolution=0.5, the scale will have 5 possible values: -1.0, -0.5, 0.0, +0.5, and +1.0.
showvalue	Normally, the current value of the scale is displayed in text form by the slider (above it for horizontal scales, to the left for vertical scales). Set this option to 0 to suppress that label.
sliderlength	Normally the slider is 30 pixels along the length of the scale. You can change that length by setting the sliderlength option to your desired length.
state	Normally, scale widgets respond to mouse events, and when they have the focus, also keyboard events. Set state=DISABLED to make the widget unresponsive.

<code>takefocus</code>	Normally, the focus will cycle through scale widgets. Set this option to 0 if you don't want this behavior.
<code>tickinterval</code>	To display periodic scale values, set this option to a number, and ticks will be displayed on multiples of that value. For example, if <code>from_=0.0</code> , <code>to=1.0</code> , and <code>tickinterval=0.25</code> , labels will be displayed along the scale at values 0.0, 0.25, 0.50, 0.75, and 1.00. These labels appear below the scale if horizontal, to its left if vertical. Default is 0, which suppresses display of ticks.
<code>to</code>	A float or integer value that defines one end of the scale's range; the other end is defined by the <code>from_</code> option, discussed above. The <code>to</code> value can be either greater than or less than the <code>from_</code> value. For vertical scales, the <code>to</code> value defines the bottom of the scale; for horizontal scales, the right end.
<code>troughcolor</code>	The color of the trough.
<code>variable</code>	The control variable for this scale, if any. Control variables may be from class <code>IntVar</code> , <code>DoubleVar</code> (float), or <code>StringVar</code> . In the latter case, the numerical value will be converted to a string.
<code>width</code>	The width of the trough part of the widget. This is the x dimension for vertical scales and the y dimension if the scale has <code>orient=HORIZONTAL</code> . Default is 15 pixels.

## Methods:

Scale objects have these methods:

Methods	Description
<code>get()</code>	This method returns the current value of the scale.
<code>set ( value )</code>	Sets the scale's value.

## Example:

Try following example yourself:

```
from Tkinter import *

def sel():
    selection = "Value = " + str(var.get())
    label.config(text = selection)


root = Tk()
var = DoubleVar()
scale = Scale( root, variable = var )
scale.pack(anchor=CENTER)

button = Button(root, text="Get Scale Value", command=sel)
button.pack(anchor=CENTER)

label = Label(root)
label.pack()

root.mainloop()
```

When the above code is executed, it produces following result:

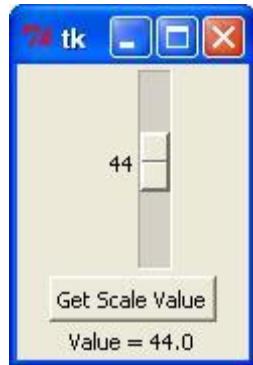

## Scrollbar

This widget provides a slide controller that is used to implement vertical scrolled widgets, such as Listbox, Text, and Canvas. Note that you can also create horizontal scrollbars on Entry widgets.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Scrollbar ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
activebackground	The color of the slider and arrowheads when the mouse is over them.
Bg	The color of the slider and arrowheads when the mouse is not over them.
Bd	The width of the 3-d borders around the entire perimeter of the trough, and also the width of the 3-d effects on the arrowheads and slider. Default is no border around the trough, and a 2-pixel border around the arrowheads and slider.
command	A procedure to be called whenever the scrollbar is moved.
Cursor	The cursor that appears when the mouse is over the scrollbar.
elementborderwidth	The width of the borders around the arrowheads and slider. The default is elementborderwidth=-1, which means to use the value of the borderwidth option.
highlightbackground	The color of the focus highlight when the scrollbar does not have focus.
highlightcolor	The color of the focus highlight when the scrollbar has the focus.
highlightthickness	The thickness of the focus highlight. Default is 1. Set to 0 to suppress display of the focus highlight.
jump	This option controls what happens when a user drags the slider. Normally (jump=0), every small drag of the slider causes the command callback to be called. If you set this option to 1, the callback isn't called until the user releases the mouse button.

orient	Set orient=HORIZONTAL for a horizontal scrollbar, orient=VERTICAL for a vertical one.
repeatdelay	This option controls how long button 1 has to be held down in the trough before the slider starts moving in that direction repeatedly. Default is repeatdelay=300, and the units are milliseconds.
repeatinterval	repeatinterval
takefocus	Normally, you can tab the focus through a scrollbar widget. Set takefocus=0 if you don't want this behavior.
troughcolor	The color of the trough.
width	Width of the scrollbar (its y dimension if horizontal, and its x dimension if vertical). Default is 16.

## Methods:

Scrollbar objects have these methods:

Methods	Description
get()	Returns two numbers (a, b) describing the current position of the slider. The a value gives the position of the left or top edge of the slider, for horizontal and vertical scrollbars respectively; the b value gives the position of the right or bottom edge.
set ( first, last )	To connect a scrollbar to another widget w, set w's xscrollcommand or yscrollcommand to the scrollbar's set() method. The arguments have the same meaning as the values returned by the get() method.

## Example:

Try following example yourself:


```
from Tkinter import *
root = Tk()
scrollbar = Scrollbar(root)
scrollbar.pack( side = RIGHT, fill=Y )

mylist = Listbox(root, yscrollcommand = scrollbar.set )
for line in range(100):
    mylist.insert(END, "This is line number " + str(line))

mylist.pack( side = LEFT, fill = BOTH )
scrollbar.config( command = mylist.yview )

mainloop()
```

When the above code is executed, it produces following result:

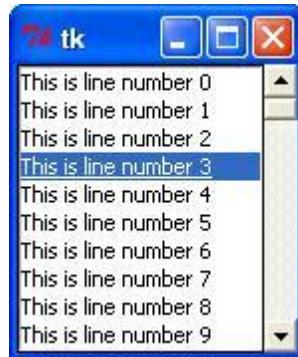

## Text

Text widgets provide advanced capabilities that allow you to edit a multiline text and format the way it has to be displayed, such as changing its color and font.

You can also use elegant structures like tabs and marks to locate specific sections of the text, and apply changes to those areas. Moreover, you can embed windows and images in the text because this widget was designed to handle both plain and formatted text.

### Syntax:

Here is the simple syntax to create this widget:

```
w = Text ( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
bg	The default background color of the text widget.
bd	The width of the border around the text widget. Default is 2 pixels.
cursor	The cursor that will appear when the mouse is over the text widget.
exportselection	Normally, text selected within a text widget is exported to be the selection in the window manager. Set exportselection=0 if you don't want that behavior.
font	The default font for text inserted into the widget.
fg	The color used for text (and bitmaps) within the widget. You can change the color for tagged regions; this option is just the default.
height	The height of the widget in lines (not pixels!), measured according to the current font size.
highlightbackground	The color of the focus highlight when the text widget does not have focus.
highlightcolor	The color of the focus highlight when the text widget has the focus.

highlightthickness	The thickness of the focus highlight. Default is 1. Set highlightthickness=0 to suppress display of the focus highlight.
insertbackground	The color of the insertion cursor. Default is black.
insertborderwidth	Size of the 3-D border around the insertion cursor. Default is 0.
insertofftime	The number of milliseconds the insertion cursor is off during its blink cycle. Set this option to zero to suppress blinking. Default is 300.
insertontime	The number of milliseconds the insertion cursor is on during its blink cycle. Default is 600.
insertwidth	Width of the insertion cursor (its height is determined by the tallest item in its line). Default is 2 pixels.
padx	The size of the internal padding added to the left and right of the text area. Default is one pixel.
pady	The size of the internal padding added above and below the text area. Default is one pixel.
relief	The 3-D appearance of the text widget. Default is relief=SUNKEN.
selectbackground	The background color to use displaying selected text.
selectborderwidth	The width of the border to use around selected text.
spacing1	This option specifies how much extra vertical space is put above each line of text. If a line wraps, this space is added only before the first line it occupies on the display. Default is 0.
spacing2	This option specifies how much extra vertical space to add between displayed lines of text when a logical line wraps. Default is 0.
spacing3	This option specifies how much extra vertical space is added below each line of text. If a line wraps, this space is added only after the last line it occupies on the display. Default is 0.
state	Normally, text widgets respond to keyboard and mouse events; set state=NORMAL to get this behavior. If you set state=DISABLED, the text widget will not respond, and you won't be able to modify its contents programmatically either.
tabs	This option controls how tab characters position text.
width	The width of the widget in characters (not pixels!), measured according to the current font size.
wrap	This option controls the display of lines that are too wide. Set wrap=WORD and it will break the line after the last word that will fit. With the default behavior, wrap=CHAR, any line that gets too long will be broken at any character.
xscrollcommand	To make the text widget horizontally scrollable, set this option to the set() method of the horizontal scrollbar.
yscrollcommand	To make the text widget vertically scrollable, set this option to the set() method of the vertical scrollbar.

## Methods:

Text objects have these methods:

## Methods & Description

### **delete(startindex [,endindex])**

This method deletes a specific character or a range of text.

### **get(startindex [,endindex])**

This method returns a specific character or a range of text.

### **index(index)**

Returns the absolute value of an index based on the given index.

### **insert(index [,string]...)**

This method inserts strings at the specified index location.

### **see(index)**

This method returns true if the text located at the index position is visible.

Text widgets support three distinct helper structures: Marks, Tabs, and Indexes:

Marks are used to bookmark positions between two characters within a given text. We have the following methods available when handling marks:

## Methods & Description

### **index(mark)**

Returns the line and column location of a specific mark.

### **mark\_gravity(mark [,gravity])**

Returns the gravity of the given mark. If the second argument is provided, the gravity is set for the given mark.

### **mark\_names()**

Returns all marks from the Text widget.

### **mark\_set(mark, index)**

Informs a new position to the given mark.

### **mark\_unset(mark)**

Removes the given mark from the Text widget.

Tags are used to associate names to regions of text, which makes easy the task of modifying the display settings of specific text areas. Tags are also used to bind event callbacks to specific ranges of text.

Following are the available methods for handling tabs:

## Methods & Description

### **tag\_add(tagname, startindex[,endindex] ...)**

This method tags either the position defined by startindex, or a range delimited by the positions startindex and endindex.

### **tag\_config**

You can use this method to configure the tag properties, which include, justify(center, left, or right), tabs(this property has the same functionality of the Text widget tabs's property), and underline(used to underline the tagged text).

### **tag\_delete(tagname)**

This method is used to delete and remove a given tag.

### **tag\_remove(tagname [,startIndex[,endIndex]] ...)**

After applying this method, the given tag is removed from the provided area without deleting the actual tag definition.

## Example:

Try following example yourself:


```
from Tkinter import *

def onclick():
    pass

root = Tk()
text = Text(root)
text.insert(INSERT, "Hello.....")
text.insert(END, "Bye Bye.....")
text.pack()

text.tag_add("here", "1.0", "1.4")
text.tag_add("start", "1.8", "1.13")
text.tag_config("here", background="yellow", foreground="blue")
text.tag_config("start", background="black", foreground="green")
root.mainloop()
```

When the above code is executed, it produces following result:

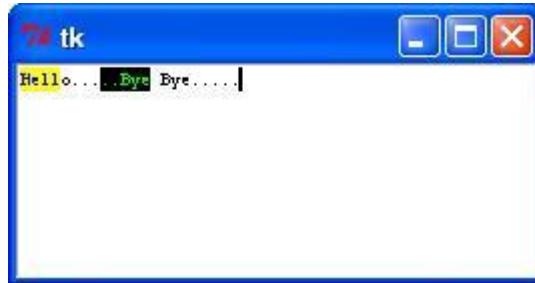

## Toplevel

Toplevel widgets work as windows that are directly managed by the window manager. They do not necessarily have a parent widget on top of them.

Your application can use any number of top-level windows.

## Syntax:

Here is the simple syntax to create this widget:

```
w = Toplevel ( option, ... )
```

## Parameters:

- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
bg	The background color of the window.
bd	Border width in pixels; default is 0.
cursor	The cursor that appears when the mouse is in this window.
class_	Normally, text selected within a text widget is exported to be the selection in the window manager. Set exportselection=0 if you don't want that behavior.
font	The default font for text inserted into the widget.
Fg	The color used for text (and bitmaps) within the widget. You can change the color for tagged regions; this option is just the default.
Height	Window height.
Relief	Normally, a top-level window will have no 3-d borders around it. To get a shaded border, set the bd option larger than its default value of zero, and set the relief option to one of the constants.
Width	The desired width of the window.

## Methods:

Scale objects have these methods:

Methods & Description
<b>deiconify()</b> Displays the window, after using either the iconify or the withdraw methods.
<b>frame()</b> Returns a system-specific window identifier.
<b>group(window)</b> Adds the window to the window group administered by the given window.
<b>iconify()</b> Turns the window into an icon, without destroying it.
<b>protocol(name, function)</b> Registers a function as a callback which will be called for the given protocol.
<b>iconify()</b> Turns the window into an icon, without destroying it.
<b>state()</b> Returns the current state of the window. Possible values are normal, iconic, withdrawn, and icon.
<b>transient([master])</b> Turns the window into a temporary(transient) window for the given master, or to the window's parent, when no argument is given.
<b>withdraw()</b> Removes the window from the screen, without destroying it.

**maxsize(width, height)**  
Defines the maximum size for this window.

**minsize(width, height)**  
Defines the minimum size for this window.

**positionfrom(who)**  
Defines the position controller.

**resizable(width, height)**  
Defines the resize flags, which control whether the window can be resized.

**sizefrom(who)**  
Defines the size controller.


**title(string)**  
Defines the window title.

## Example:

Try following example yourself:

```
from Tkinter import *
root = Tk()
top = Toplevel()
top.mainloop()
```

When the above code is executed, it produces following result:

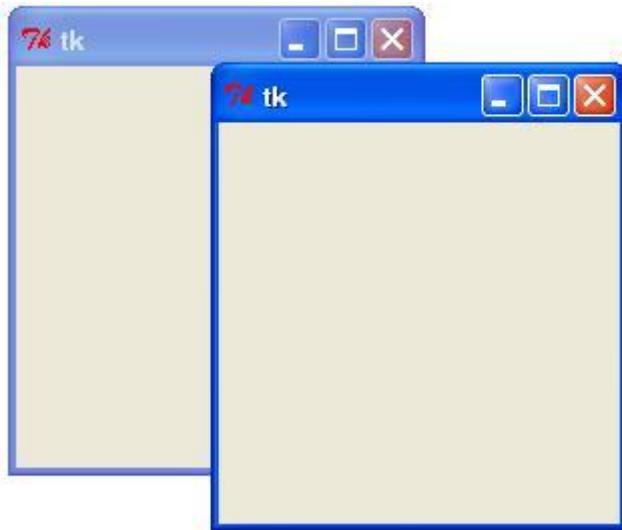

## Spinbox

The Spinbox widget is a variant of the standard Tkinter Entry widget, which can be used to select from a fixed number of values.

## Syntax:

Here is the simple syntax to create this widget:

```
w = Spinbox( master, option, ... )
```

## Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
activebackground	The color of the slider and arrowheads when the mouse is over them.
Bg	The color of the slider and arrowheads when the mouse is not over them.
Bd	The width of the 3-d borders around the entire perimeter of the trough, and also the width of the 3-d effects on the arrowheads and slider. Default is no border around the trough, and a 2-pixel border around the arrowheads and slider.
command	A procedure to be called whenever the scrollbar is moved.
Cursor	The cursor that appears when the mouse is over the scrollbar.
disabledbackground	The background color to use when the widget is disabled.
disabledforeground	The text color to use when the widget is disabled.
Fg	Text color.
Font	The font to use in this widget.
Format	Format string. No default value.
from_	The minimum value. Used together with to to limit the spinbox range.
Justify	Default is LEFT
Relief	Default is SUNKEN.
repeatdelay	Together with repeatinterval, this option controls button auto-repeat. Both values are given in milliseconds.
repeatinterval	See repeatdelay.
State	One of NORMAL, DISABLED, or "readonly". Default is NORMAL.
textvariable	No default value.
To	See from.
Validate	Validation mode. Default is NONE.
validatecommand	Validation callback. No default value.

Values	A tuple containing valid values for this widget. Overrides from/to/increment.
Vcmd	Same as validatecommand.
Width	Widget width, in character units. Default is 20.
Wrap	If true, the up and down buttons will wrap around.
xscrollcommand	Used to connect a spinbox field to a horizontal scrollbar. This option should be set to the set method of the corresponding scrollbar.

## Methods:

Spinbox objects have these methods:

Methods & Description
<b>delete(startindex [,endindex])</b> This method deletes a specific character or a range of text.
<b>get(startindex [,endindex])</b> This method returns a specific character or a range of text.
<b>identify(x, y)</b> Identifies the widget element at the given location.
<b>index(index)</b> Returns the absolute value of an index based on the given index.
<b>insert(index [,string]...)</b> This method inserts strings at the specified index location.
<b>invoke(element)</b> Invokes a spinbox button.

## Example:

Try following example yourself:

```
from Tkinter import *
master = Tk()
w = Spinbox(master, from_=0, to=10)
w.pack()
mainloop()
```

When the above code is executed, it produces following result:



## PanedWindow

A PanedWindow is a container widget that may contain any number of panes, arranged horizontally or vertically.

Each pane contains one widget, and each pair of panes is separated by a moveable (via mouse movements) sash. Moving a sash causes the widgets on either side of the sash to be resized.

### Syntax:

Here is the simple syntax to create this widget:

```
w = PanedWindow( master, option, ... )
```

### Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
bg	The color of the slider and arrowheads when the mouse is not over them.
bd	The width of the 3-d borders around the entire perimeter of the trough, and also the width of the 3-d effects on the arrowheads and slider. Default is no border around the trough, and a 2-pixel border around the arrowheads and slider.
borderwidth	Default is 2.
cursor	The cursor that appears when the mouse is over the window.
handlepad	Default is 8.
handlesize	Default is 8.
height	No default value.
orient	Default is HORIZONTAL.
relief	Default is FLAT.
sashcursor	No default value.
sashrelief	Default is RAISED.
sashwidth	Default is 2.

showhandle	No default value
width	No default value.

## Methods:

Spinbox objects have these methods:

Methods & Description
<b>add(child, options)</b> Adds a child window to the paned window.
<b>get(startindex [,endindex])</b> This method returns a specific character or a range of text.
<b>config(options)</b> Modifies one or more widget options. If no options are given, the method returns a dictionary containing all current option values.

## Example:

Try following example yourself. Here's how to create a 3-pane widget:

```
from Tkinter import *
m1 = PanedWindow()
m1.pack(fill=BOTH, expand=1)
left = Label(m1, text="left pane")
m1.add(left)
m2 = PanedWindow(m1, orient=VERTICAL)
m1.add(m2)
top = Label(m2, text="top pane")
m2.add(top)
bottom = Label(m2, text="bottom pane")
m2.add(bottom)
mainloop()
```

When the above code is executed, it produces following result:



# LabelFrame

A labelframe is a simple container widget. Its primary purpose is to act as a spacer or container for complex window layouts.

This widget has the features of a frame plus the ability to display a label.

## Syntax:

Here is the simple syntax to create this widget:

```
w = LabelFrame( master, option, ... )
```

## Parameters:

- **master:** This represents the parent window.
- **options:** Here is the list of most commonly used options for this widget. These options can be used as key-value pairs separated by commas.

Option	Description
bg	The normal background color displayed behind the label and indicator.
Bd	The size of the border around the indicator. Default is 2 pixels.
cursor	If you set this option to a cursor name ( <i>arrow, dot etc.</i> ), the mouse cursor will change to that pattern when it is over the checkbutton.
font	The vertical dimension of the new frame.
height	The vertical dimension of the new frame.
labelAnchor	Specifies where to place the label.
highlightbackground	Color of the focus highlight when the frame does not have focus.
highlightcolor	Color shown in the focus highlight when the frame has the focus.
highlightthickness	Thickness of the focus highlight.
relief	With the default value, relief=FLAT, the checkbutton does not stand out from its background. You may set this option to any of the other styles
text	Specifies a string to be displayed inside the widget.
width	Specifies the desired width for the window.

## Example:

Try following example yourself. Here's how to create a 3-pane widget:


```
from Tkinter import *
root = Tk()

labelframe = LabelFrame(root, text="This is a LabelFrame")
labelframe.pack(fill="both", expand="yes")
```

```
left = Label(labelframe, text="Inside the LabelFrame")
left.pack()

root.mainloop()
```

When the above code is executed, it produces following result:

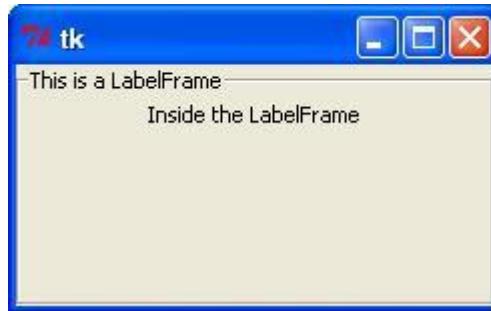

## tkMessageBox

The `tkMessageBox` module is used to display message boxes in your applications. This module provides a number of functions that you can use to display an appropriate message.

Some of these functions are `showinfo`, `showwarning`, `showerror`, `askquestion`, `askokcancel`, `askyesno`, and `askretryignore`.

### Syntax:

Here is the simple syntax to create this widget:

```
tkMessageBox.FunctionName(title, message [, options])
```

### Parameters:

- **FunctionName:** This is the name of the appropriate message box function.
- **title:** This is the text to be displayed in the title bar of a message box.
- **message:** This is the text to be displayed as a message.
- **options:** options are alternative choices that you may use to tailor a standard message box. Some of the options that you can use are default and parent. The default option is used to specify the default button, such as ABORT, RETRY, or IGNORE in the message box. The parent option is used to specify the window on top of which the message box is to be displayed.

You could use one of the following functions with dialogue box:

- `showinfo()`
- `showwarning()`
- `showerror()`
- `askquestion()`
- `askokcancel()`

- askyesno ()
- askretrycancel ()

## Example:

Try following example yourself:

```
import Tkinter
import tkMessageBox

top = Tkinter.Tk()
def hello():
    tkMessageBox.showinfo("Say Hello", "Hello World")

B1 = Tkinter.Button(top, text = "Say Hello", command = hello)
B1.pack()

top.mainloop()
```

When the above code is executed, it produces following result:



## Standard attributes:

Let's take a look at how some of their common attributes.such as sizes, colors and fonts are specified.

- Dimensions
- Colors
- Fonts
- Anchors
- Relief styles
- Bitmaps
- Cursors

Each attributes is explained below individually

## Dimensions

Various lengths, widths, and other dimensions of widgets can be described in many different units.

- If you set a dimension to an integer, it is assumed to be in pixels.

- You can specify units by setting a dimension to a string containing a number followed by.

Character	Description
C	Centimeters
I	Inches
M	Millimeters
P	Printer's points (about 1/72")

## Length options:

Tkinter expresses a length as an integer number of pixels. Here is the list of common length options:

- **borderwidth:** Width of the border which gives a three-dimensional look to the widget.
- **highlightthickness:** Width of the highlight rectangle when the widget has focus .
- **padX padY:** Extra space the widget requests from its layout manager beyond the minimum the widget needs to display its contents in the x and y directions.
- **selectborderwidth:** Width of the three-dimentional border around selected items of the widget.
- **wraplength:** Maximum line length for widgets that perform word wrapping.
- **height:** Desired height of the widget; must be greater than or equal to 1.
- **underline:** Index of the character to underline in the widget's text (0 is the first character, 1 the second one, and so on).
- **width:** Desired width of the widget.

## Colors

Tkinter represents colors with strings. There are two general ways to specify colors in Tkinter:

- You can use a string specifying the proportion of red, green, and blue in hexadecimal digits. For example, "#ffff" is white, "#000000" is black, "#000fff000" is pure green, and "#00ffff" is pure cyan (green plus blue).
- You can also use any locally defined standard color name. The colors "white", "black", "red", "green", "blue", "cyan", "yellow", and "magenta" will always be available.

## Color options:

The common color options are:

- **activebackground:** Background color for the widget when the widget is active.
- **activeforeground:** Foreground color for the widget when the widget is active.
- **background:** Background color for the widget. This can also be represented as *bg*.
- **disabledforeground:** Foreground color for the widget when the widget is disabled.
- **foreground:** Foreground color for the widget. This can also be represented as *fg*.
- **highlightbackground:** Background color of the highlight region when the widget has focus.
- **highlightcolor:** Foreground color of the highlight region when the widget has focus.
- **selectbackground:** Background color for the selected items of the widget.
- **selectforeground:** Foreground color for the selected items of the widget.

## Fonts

There may be up to three ways to specify type style.

## Simple Tuple Fonts:

As a tuple whose first element is the font family, followed by a size in points, optionally followed by a string containing one or more of the style modifiers bold, italic, underline, and overstrike.

## EXAMPLE:

- ("Helvetica", "16") for a 16-point Helvetica regular.
  - ("Times", "24", "bold italic") for a 24-point Times bold italic.

## Font object Fonts:

You can create a "font object" by importing the `tkFont` module and using its `Font` class constructor:

```
import tkFont  
  
font = tkFont.Font ( option, ... )
```

Here is the list of options:

- **family:** The font family name as a string.
  - **size:** The font height as an integer in points. To get a font n pixels high, use -n.
  - **weight:** "bold" for boldface, "normal" for regular weight.
  - **slant:** "italic" for italic, "roman" for unslanted.
  - **underline:** 1 for underlined text, 0 for normal.
  - **overstrike:** 1 for overstruck text, 0 for normal.

## EXAMPLE:

```
helv36 = tkFont.Font(family="Helvetica",size=36,weight="bold")
```

## X Window Fonts:

If you are running under the X Window System, you can use any of the X font names.

# Anchors

Anchors are used to define where text is positioned relative to a reference point.

Here is list of possible constants which can be used for Anchor attribute.

- NW
  - N
  - NE
  - W
  - CENTER

- E
- SW
- S
- SE

For example, if you use CENTER as a text anchor, the text will be centered horizontally and vertically around the reference point.


Anchor NW will position the text so that the reference point coincides with the northwest (top left) corner of the box containing the text.

Anchor W will center the text vertically around the reference point, with the left edge of the text box passing through that point, and so on.

If you create a small widget inside a large frame and use the anchor=SE option, the widget will be placed in the bottom right corner of the frame. If you used anchor=N instead, the widget would be centered along the top edge.

## Example:

The anchor constants are shown in this diagram:

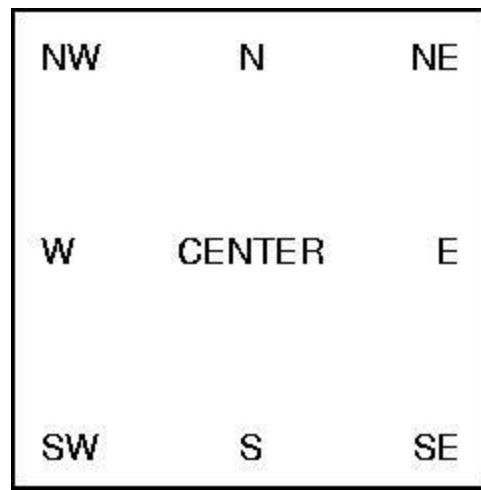

## Relief Styles

The relief style of a widget refers to certain simulated 3-D effects around the outside of the widget. Here is a screen shot of a row of buttons exhibiting all the possible relief styles:

Here is list of possible constants which can be used for relief attribute.

- FLAT
- RAISED
- SUNKEN

- GROOVE
- RIDGE

## Example:


```
from Tkinter import *
import Tkinter

top = Tkinter.Tk()

B1 = Tkinter.Button(top, text ="FLAT", relief=FLAT )
B2 = Tkinter.Button(top, text ="RAISED", relief=RAISED )
B3 = Tkinter.Button(top, text ="SUNKEN", relief=SUNKEN )
B4 = Tkinter.Button(top, text ="GROOVE", relief=GROOVE )
B5 = Tkinter.Button(top, text ="RIDGE", relief=RIDGE )

B1.pack()
B2.pack()
B3.pack()
B4.pack()
B5.pack()
top.mainloop()
```

When the above code is executed, it produces following result:

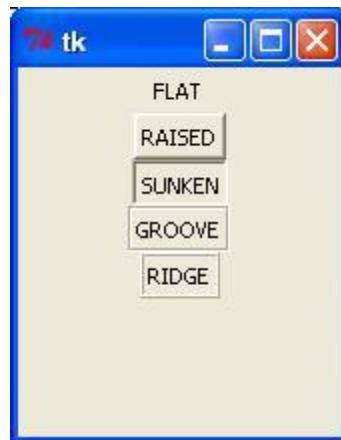

## Bitmaps

You would use this attribute to display a bitmap. There are following type of bitmaps available:

- "error"
- "gray75"
- "gray50"
- "gray25"
- "gray12"

- "hourglass"
- "info"
- "questhead"
- "question"
- "warning"

## Example:


```
from Tkinter import *
import Tkinter

top = Tkinter.Tk()

B1 = Tkinter.Button(top, text ="error", relief=RAISED,\n    bitmap="error")
B2 = Tkinter.Button(top, text ="hourglass", relief=RAISED,\n    bitmap="hourglass")
B3 = Tkinter.Button(top, text ="info", relief=RAISED,\n    bitmap="info")
B4 = Tkinter.Button(top, text ="question", relief=RAISED,\n    bitmap="question")
B5 = Tkinter.Button(top, text ="warning", relief=RAISED,\n    bitmap="warning")

B1.pack()
B2.pack()
B3.pack()
B4.pack()
B5.pack()
top.mainloop()
```

When the above code is executed, it produces following result:

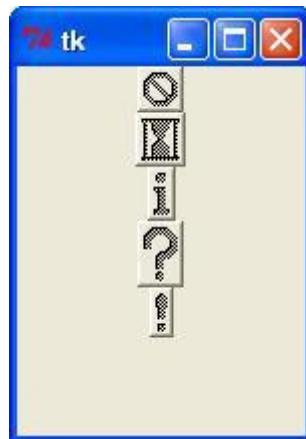

## Cursors

Python Tkinter supports quite a number of different mouse cursors available. The exact graphic may vary according to your operating system.

Here is the list of interesting ones:

- "arrow"
- "circle"
- "clock"
- "cross"
- "dotbox"
- "exchange"
- "fleur"
- "heart"
- "heart"
- "man"
- "mouse"
- "pirate"
- "plus"
- "shuttle"
- "sizing"
- "spider"
- "spraycan"
- "star"
- "target"
- "tcross"
- "trek"
- "watch"

## Example:

Try following example by moving cursor on different buttons:

```
from Tkinter import *
import Tkinter
```

```

top = Tkinter.Tk()

B1 = Tkinter.Button(top, text ="circle", relief=RAISED,\n
                    cursor="circle")
B2 = Tkinter.Button(top, text ="plus", relief=RAISED,\n
                    cursor="plus")

B1.pack()
B2.pack()
top.mainloop()

```

## Geometry Management:

All Tkinter widgets have access to specific geometry management methods, which have the purpose of organizing widgets throughout the parent widget area. Tkinter exposes the following geometry manager classes: pack, grid, and place.

- **The `pack()` Method** - This geometry manager organizes widgets in blocks before placing them in the parent widget.
- **The `grid()` Method** - This geometry manager organizes widgets in a table-like structure in the parent widget.
- **The `place()` Method** -This geometry manager organizes widgets by placing them in a specific position in the parent widget.

### The `pack()` Method

This geometry manager organizes widgets in blocks before placing them in the parent widget.

#### Syntax:

```
widget.pack( pack_options )
```

Here is the list of possible options:

- **`expand`:** When set to true, widget expands to fill any space not otherwise used in widget's parent.
- **`fill`:** Determines whether widget fills any extra space allocated to it by the packer, or keeps its own minimal dimensions: NONE (default), X (fill only horizontally), Y (fill only vertically), or BOTH (fill both horizontally and vertically).
- **`side`:** Determines which side of the parent widget packs against: TOP (default), BOTTOM, LEFT, or RIGHT.

#### Example:

Try following example by moving cursor on different buttons:

```

from Tkinter import *

root = Tk()
frame = Frame(root)
frame.pack()

bottomframe = Frame(root)
bottomframe.pack( side = BOTTOM )

redbutton = Button(frame, text="Red", fg="red")
redbutton.pack( side = LEFT )

greenbutton = Button(frame, text="Brown", fg="brown")
greenbutton.pack( side = LEFT )

bluebutton = Button(frame, text="Blue", fg="blue")
bluebutton.pack( side = LEFT )

```

```

blackbutton = Button(bottomframe, text="Black", fg="black")
blackbutton.pack( side = BOTTOM)

root.mainloop()

```

When the above code is executed, it produces following result:



## The grid() Method

This geometry manager organizes widgets in a table-like structure in the parent widget.

### Syntax:

```
widget.grid( grid_options )
```

Here is the list of possible options:

- **column** : The column to put widget in; default 0 (leftmost column).
- **columnspan**: How many columns widget occupies; default 1.
- **ipadx, ipady** :How many pixels to pad widget, horizontally and vertically, inside widget's borders.
- **padx, pady** : How many pixels to pad widget, horizontally and vertically, outside v's borders.
- **row**: The row to put widget in; default the first row that is still empty.
- **rowspan** : How many rows widget occupies; default 1.
- **sticky** : What to do if the cell is larger than widget. By default, with sticky="", widget is centered in its cell. sticky may be the string concatenation of zero or more of N, E, S, W, NE, NW, SE, and SW, compass directions indicating the sides and corners of the cell to which widget sticks.

### Example:

Try following example by moving cursor on different buttons:

```

import Tkinter
root = Tkinter.Tk( )
for r in range(3):
    for c in range(4):
        Tkinter.Label(root, text='R%s/C%s'%(r,c),
                      borderwidth=1 ).grid(row=r,column=c)
root.mainloop( )

```

This would produce following result displaying 12 labels arrayed in a 3 x 4 grid:



# The place() Method

This geometry manager organizes widgets by placing them in a specific position in the parent widget.

## Syntax:

```
widget.place( place_options )
```

Here is the list of possible options:

- **anchor** : The exact spot of widget other options refer to: may be N, E, S, W, NE, NW, SE, or SW, compass directions indicating the corners and sides of widget; default is NW (the upper left corner of widget)
- **bordermode** : INSIDE (the default) to indicate that other options refer to the parent's inside (ignoring the parent's border); OUTSIDE otherwise.
- **height, width** : Height and width in pixels.
- **relheight, relwidth** : Height and width as a float between 0.0 and 1.0, as a fraction of the height and width of the parent widget.
- **relx, rely** : Horizontal and vertical offset as a float between 0.0 and 1.0, as a fraction of the height and width of the parent widget.
- **x, y** : Horizontal and vertical offset in pixels.

## Example:

Try following example by moving cursor on different buttons:

```
from Tkinter import *
import tkMessageBox
import Tkinter


top = Tkinter.Tk()


def helloCallBack():
    tkMessageBox.showinfo( "Hello Python", "Hello World")

B = Tkinter.Button(top, text ="Hello", command = helloCallBack)

B.pack()
B.place(bordermode=OUTSIDE, height=100, width=100)
top.mainloop()
```

When the above code is executed, it produces following result:

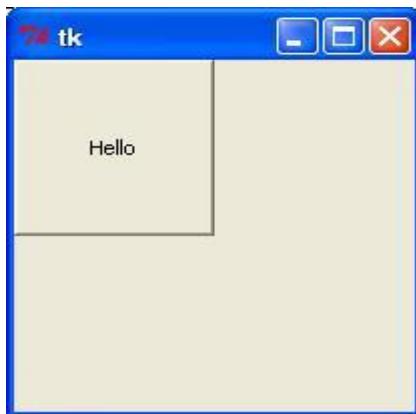



# Python Further Extensions

**A**ny code that you write using any compiled language like C, C++ or Java can be integrated or imported into another Python script. This code is considered as an "extension".

A Python extension module is nothing more than a normal C library. On Unix machines, these libraries usually end in **.so** (for shared object). On Windows machines, you typically see **.dll** (for dynamically linked library).

## Pre-Requisite:

To start writing your extension you are going to need the Python header files.

- On Unix machines, this usually requires installing a developer-specific package such as [python2.5-dev](#).
- Windows users get these headers as part of the package when they use the binary Python installer.

Additionally, it is assumed that you have good knowledge of C or C++ to write any Python Extension using C programming.

## First look at a Python extension:

For your first look at a Python extension module, you'll be grouping your code into four parts:

- The header file *Python.h*.
- The C functions you want to expose as the interface from your module.
- A table mapping the names of your functions as Python developers will see them to C functions inside the extension module.
- An initialization function.

### The header file *Python.h*

Start including *Python.h* header file in your C source file, which will give you access to the internal Python API used to hook your module into the interpreter.

Be sure to include *Python.h* before any other headers you might need. You'll follow the includes with the functions you want to call from Python.

## The C functions:

The signatures of the C implementations of your functions will always take one of the following three forms:

```
static PyObject *MyFunction( PyObject *self, PyObject *args );  
  
static PyObject *MyFunctionWithKeywords(PyObject *self,  
                                      PyObject *args,  
                                      PyObject *kw);  
  
static PyObject *MyFunctionWithNoArgs( PyObject *self );
```

Each one of the preceding declarations returns a Python object. There's no such thing as a `void` function in Python as there is in C. If you don't want your functions to return a value, return the C equivalent of Python's `None` value. The Python headers define a macro, `Py_RETURN_NONE`, that does this for us.

The names of your C functions can be whatever you like as they will never be seen outside of the extension module. So they would be defined as `static` function.

Your C functions usually are named by combining the Python module and function names together, as shown here:

```
static PyObject *module_func(PyObject *self, PyObject *args) {  
    /* Do your stuff here. */  
    Py_RETURN_NONE;  
}
```

This would be a Python function called `func` inside of the module `module`. You'll be putting pointers to your C functions into the method table for the module that usually comes next in your source code.

## The method mapping table:

This method table is a simple array of `PyMethodDef` structures. That structure looks something like this:

```
struct PyMethodDef {  
    char *ml_name;  
    PyCFunction ml_meth;  
    int ml_flags;  
    char *ml_doc;  
};
```

Here is the description of the members of this structure:

- **ml\_name:** This is the name of the function as the Python interpreter will present it when it is used in Python programs.
- **ml\_meth:** This must be the address to a function that has any one of the signatures described in previous section.
- **ml\_flags:** This tells the interpreter which of the three signatures `ml_meth` is using.
  - This flag will usually have a value of `METH_VARARGS`.
  - This flag can be bitwise or'ed with `METH_KEYWORDS` if you want to allow keyword arguments into your function.
  - This can also have a value of `METH_NOARGS` that indicates you don't want to accept any arguments.
- **ml\_doc:** This is the docstring for the function, which could be `NULL` if you don't feel like writing one

This table needs to be terminated with a sentinel that consists of NULL and 0 values for the appropriate members.

## EXAMPLE:

For the above defined function, we would have following method mapping table:

```
static PyMethodDef module_methods[] = {
    { "func", (PyCFunction)module_func, METH_NOARGS, NULL },
    { NULL, NULL, 0, NULL }
};
```

## The initialization function:

The last part of your extension module is the initialization function. This function is called by the Python interpreter when the module is loaded. It's required that the function be named **initModule**, where *Module* is the name of the module.

The initialization function needs to be exported from the library you'll be building. The Python headers define PyMODINIT\_FUNC to include the appropriate incantations for that to happen for the particular environment in which we're compiling. All you have to do is use it when defining the function.

Your C initialization function generally has the following overall structure:

```
PyMODINIT_FUNC initModule() {
    Py_Initialize3(func, module_methods, "docstring...");
}
```

Here is the description of *Py\_Initialize3* function:

- **func**: This is the function to be exported.
- **module\_methods**: This is the mapping table name defined above.
- **docstring**: This is the comment you want to give in your extension.

Putting this all together looks like the following:

```
#include <Python.h>

static PyObject *module_func(PyObject *self, PyObject *args) {
    /* Do your stuff here. */
    Py_RETURN_NONE;
}

static PyMethodDef module_methods[] = {
    { "func", (PyCFunction)module_func, METH_NOARGS, NULL },
    { NULL, NULL, 0, NULL }
};

PyMODINIT_FUNC initModule() {
    Py_Initialize3(func, module_methods, "docstring...");
}
```

## EXAMPLE:

A simple example that makes use of all the above concepts:

```
#include <Python.h>

static PyObject* helloworld(PyObject* self)
{
    return Py_BuildValue("s", "Hello, Python extensions!!");
```

## TUTORIALS POINT

Simply Easy Learning

```

}

static char helloworld_docs[] =
    "helloworld(): Any message you want to put here!!\n";

static PyMethodDef helloworld_funcs[] = {
    {"helloworld", (PyCFunction)helloworld,
     METH_NOARGS, helloworld_docs},
    {NULL}
};

void initelloworld(void)
{
    Py_InitModule3("helloworld", helloworld_funcs,
                  "Extension module example!");
}

```

Here the `Py_BuildValue` function is used to build a Python value. Save above code in `hello.c` file. We would see how to compile and install this module to be called from Python script.

## Building and Installing Extensions:

The `distutils` package makes it very easy to distribute Python modules, both pure Python and extension modules, in a standard way. Modules are distributed in source form and built and installed via a setup script usually called `setup.py` as follows.

For the above module, you would have to prepare following `setup.py` script:

```

from distutils.core import setup, Extension
setup(name='helloworld', version='1.0', \
      ext_modules=[Extension('helloworld', ['hello.c'])])

```

Now use the following command, which would perform all needed compilation and linking steps, with the right compiler and linker commands and flags, and copies the resulting dynamic library into an appropriate directory:

```
$ python setup.py install
```

On Unix-based systems, you'll most likely need to run this command as root in order to have permissions to write to the site-packages directory. This usually isn't a problem on Windows

## Import Extensions:

Once you installed your extension, you would be able to import and call that extension in your Python script as follows:

```

#!/usr/bin/python
import helloworld

print helloworld.helloworld()

```

This would produce following result:

```
Hello, Python extensions!!
```

## Passing Function Parameters:

Because you'll most likely want to define functions that do accept arguments, you can use one of the other signatures for your C functions. For example, following function, that accepts some number of parameters, would be defined like this:

```

static PyObject *module_func(PyObject *self, PyObject *args) {
    /* Parse args and do something interesting here. */
    Py_RETURN_NONE;
}

```

The method table containing an entry for the new function would look like this:

```

static PyMethodDef module_methods[] = {
    { "func", (PyCFunction)module_func, METH_NOARGS, NULL },
    { "func", module_func, METH_VARARGS, NULL },
    { NULL, NULL, 0, NULL }
};

```

You can use API `PyArg_ParseTuple` function to extract the arguments from the one `PyObject` pointer passed into your C function.

The first argument to `PyArg_ParseTuple` is the `args` argument. This is the object you'll be *parsing*. The second argument is a format string describing the arguments as you expect them to appear. Each argument is represented by one or more characters in the format string as follows.

```

static PyObject *module_func(PyObject *self, PyObject *args) {
    int i;
    double d;
    char *s;

    if (!PyArg_ParseTuple(args, "ids", &i, &d, &s)) {
        return NULL;
    }

    /* Do something interesting here. */
    Py_RETURN_NONE;
}

```

Compiling the new version of your module and importing it will enable you to invoke the new function with any number of arguments of any type:

```

module.func(1, s="three", d=2.0)
module.func(i=1, d=2.0, s="three")
module.func(s="three", d=2.0, i=1)

```

You can probably come up with even more variations.

## The `PyArg_ParseTuple` Function:

Here is the standard signature for `PyArg_ParseTuple` function:

```
int PyArg_ParseTuple(PyObject* tuple, char* format,...)
```

This function returns 0 for errors, and a value not equal to 0 for success. `tuple` is the `PyObject*` that was the C function's second argument. Here `format` is a C string that describes mandatory and optional arguments.

Here is a list of format codes for `PyArg_ParseTuple` function:

Code	C type	Meaning
c	Char	A Python string of length 1 becomes a C char.
d	Double	A Python float becomes a C double.
f	Float	A Python float becomes a C float.

i	Int	A Python int becomes a C int.
l	Long	A Python int becomes a C long.
L	long long	A Python int becomes a C long long
O	PyObject*	Gets non-NULL borrowed reference to Python argument.
s	char*	Python string without embedded nulls to C char*.
s#	char*+int	Any Python string to C address and length.
t#	char*+int	Read-only single-segment buffer to C address and length.
u	Py_UNICODE*	Python Unicode without embedded nulls to C.
u#	Py_UNICODE*+int	Any Python Unicode C address and length.
w#	char*+int	Read/write single-segment buffer to C address and length.
z	char*	Like s, also accepts None (sets C char* to NULL).
z#	char*+int	Like s#, also accepts None (sets C char* to NULL).
(...)	as per ...	A Python sequence is treated as one argument per item.
		The following arguments are optional.
:		Format end, followed by function name for error messages.
;		Format end, followed by entire error message text.

## Returning Values:

*Py\_BuildValue* takes in a format string much like *PyArg\_ParseTuple* does. Instead of passing in the addresses of the values you're building, you pass in the actual values. Here's an example showing how to implement an add function:

```
static PyObject *foo_add(PyObject *self, PyObject *args) {
    int a;
    int b;

    if (!PyArg_ParseTuple(args, "ii", &a, &b)) {
        return NULL;
    }
    return Py_BuildValue("i", a + b);
}
```

This is what it would look like if implemented in Python:

```
def add(a, b):
    return (a + b)
```

You can return two values from your function as follows, this would be captured using a list in Python.

```
static PyObject *foo_add_subtract(PyObject *self, PyObject *args) {
    int a;
    int b;

    if (!PyArg_ParseTuple(args, "ii", &a, &b)) {
```

**TUTORIALS POINT**

Simply Easy Learning

```

        return NULL;
    }
    return Py_BuildValue("ii", a + b, a - b);
}

```

This is what it would look like if implemented in Python:

```

def add_subtract(a, b):
    return (a + b, a - b)

```

## The `Py_BuildValue` Function:

Here is the standard signature for `Py_BuildValue` function:

```

PyObject* Py_BuildValue(char* format, ...)

```

Here `format` is a C string that describes the Python object to build. The following arguments of `Py_BuildValue` are C values from which the result is built. The `PyObject*` result is a new reference.

Following table lists the commonly used code strings, of which zero or more are joined into string format.

<b>Code</b>	<b>C type</b>	<b>Meaning</b>
c	char	A C char becomes a Python string of length 1.
d	double	A C double becomes a Python float.
f	float	A C float becomes a Python float.
i	Int	A C int becomes a Python int.
l	long	A C long becomes a Python int.
N	PyObject*	Passes a Python object and steals a reference.
O	PyObject*	Passes a Python object and INCREFs it as normal.
O&	convert+void*	Arbitrary conversion
s	char*	C 0-terminated char* to Python string, or NULL to None.
s#	char*+int	C char* and length to Python string, or NULL to None.
u	Py_UNICODE*	C-wide, null-terminated string to Python Unicode, or NULL to None.
u#	Py_UNICODE*+int	C-wide string and length to Python Unicode, or NULL to None.
w#	char*+int	Read/write single-segment buffer to C address and length.
z	char*	Like s, also accepts None (sets C char* to NULL).
z#	char*+int	Like s#, also accepts None (sets C char* to NULL).
(...)	as per ...	Builds Python tuple from C values.
[...]	as per ...	Builds Python list from C values.
{...}	as per ...	Builds Python dictionary from C values, alternating keys and values.

Code {...} builds dictionaries from an even number of C values, alternately keys and values. For example, `Py_BuildValue("{issi}",23,"zig","zag",42)` returns a dictionary like Python's `{23:'zig','zag':42}`.

# Python Tools/Utilities

**T**

he standard library comes with a number of modules that can be used both as modules and as command-line utilities.

## The *dis* Module:

The *dis* module is the Python disassembler. It converts byte codes to a format that is slightly more appropriate for human consumption.

You can run the disassembler from the command line. It compiles the given script and prints the disassembled byte codes to the STDOUT. You can also use *dis* as a module. The **dis** function takes a class, method, function, or code object as its single argument.

### EXAMPLE:

```
#!/usr/bin/python
import dis

def sum():
    vara = 10
    varb = 20

    sum = vara + varb
    print "vara + varb = %d" % sum

# Call dis function for the function.

dis.dis(sum)
```

This would produce following result:

6	0 LOAD_CONST 3 STORE_FAST	1 (10) 0 (vara)
7	6 LOAD_CONST 9 STORE_FAST	2 (20) 1 (varb)
9	12 LOAD_FAST 15 LOAD_FAST 18 BINARY_ADD 19 STORE_FAST	0 (vara) 1 (varb) 2 (sum)

```

10          22 LOAD_CONST      3 ('vara + varb = %d')
11          25 LOAD_FAST       2 (sum)
12          28 BINARY_MODULO
13          29 PRINT_ITEM
14          30 PRINT_NEWLINE
15          31 LOAD_CONST      0 (None)
16          34 RETURN_VALUE

```

## The *pdb* Module

The `pdb` module is the standard Python debugger. It is based on the `bdb` debugger framework.

You can run the debugger from the command line (type `n` [or `next`] to go to the next line and `help` to get a list of available commands):

### EXAMPLE:

Before you try to run `pdb.py`, set your path properly to Python lib directory. So let us try with above example `sum.py`:

```

$pdb.py sum.py
> /test/sum.py(3)<module>()
-> import dis
(Pdb) n
> /test/sum.py(5)<module>()
-> def sum():
(Pdb) n
>/test/sum.py(14)<module>()
-> dis.dis(sum)
(Pdb) n
   6          0 LOAD_CONST      1 (10)
   7          3 STORE_FAST       0 (vara)

   9          6 LOAD_CONST      2 (20)
   9          9 STORE_FAST       1 (varb)

  10         12 LOAD_FAST       0 (vara)
  10         15 LOAD_FAST       1 (varb)
  10         18 BINARY_ADD
  10         19 STORE_FAST       2 (sum)

  11         22 LOAD_CONST      3 ('vara + varb = %d')
  11         25 LOAD_FAST       2 (sum)
  12         28 BINARY_MODULO
  12         29 PRINT_ITEM
  12         30 PRINT_NEWLINE
  12         31 LOAD_CONST      0 (None)
  12         34 RETURN_VALUE

--Return--
> /test/sum.py(14)<module>() ->None
-v dis.dis(sum)
(Pdb) n
--Return--
> <string>(1)<module>() ->None
(Pdb)

```

## The *profile* Module:

The `profile` module is the standard Python profiler. You can run the profiler from the command line:

---

**TUTORIALS POINT**

Simply Easy Learning

## EXAMPLE:

Let us try to profile following program:

```
#!/usr/bin/python

vara = 10
varb = 20

sum = vara + varb
print "vara + varb = %d" % sum
```

Now try running **cProfile.py** over this file *sum.py* as follows:

```
$cProfile.py sum.py
vara + varb = 30
    4 function calls in 0.000 CPU seconds

    Ordered by: standard name

ncalls  tottime  percall  cumtime  percall filename:lineno
    1    0.000    0.000    0.000    0.000 <string>:1(<module>)
    1    0.000    0.000    0.000    0.000 sum.py:3(<module>)
    1    0.000    0.000    0.000    0.000 {execfile}
    1    0.000    0.000    0.000    0.000 {method .....}
```

## The *tabnanny* Module

The *tabnanny* module checks Python source files for ambiguous indentation. If a file mixes tabs and spaces in a way that throws off indentation, no matter what tab size you're using, the nanny complains:

## EXAMPLE:

Let us try to profile following program:

```
#!/usr/bin/python

vara = 10
varb = 20

sum = vara + varb
print "vara + varb = %d" % sum
```

If you would try a correct file with *tabnanny.py* then it won't complain as follows:

```
$tabnanny.py -v sum.py
'sum.py': Clean bill of health.
```