Practical: 4

Aim: To study about setting different properties of CSS.

a) Write HTML codes for setting different background properties using CSS.

i) Background color property

ii) Background image property

iii) Background attachment property

iv) Background position property

Background color.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
   background-color: purple;
}
</style>
</head>
<body>
<h2>Background Color Example</h2>
<p>This page has a light blue background.</p>
</body>
</html>
```

Output:

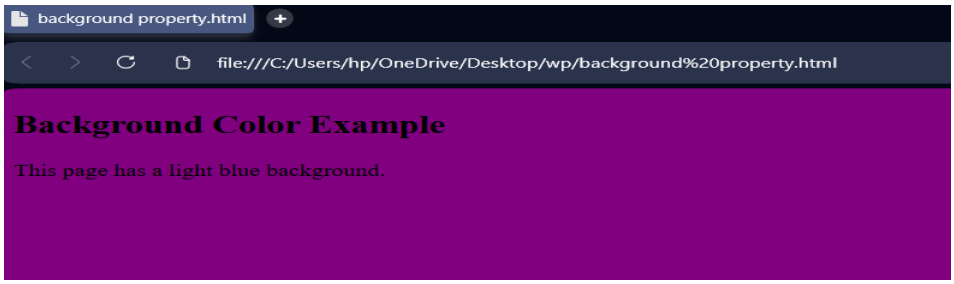

Background image.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
    margin: 0;
    height: 100vh;
    background-image: url("img.jpeg");  /* your image */
    background-repeat: no-repeat;
    background-size: cover;
    background-position: center;
}
</style>
</head>
<body>
<h2 style="color:white;">Background Image Example</h2>
<p style="color:white;">Image covers the full screen.</p>
</body>
</html>
```

Output:

Background attachment.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
   background-image: url("img.jpeg");
   background-attachment: fixed;
}
</style>
</head>
<body>
<h2 style="color:white;">Background Attachment Example</h2>
<p style="color:white;">Scroll the page to see the effect.</p>
<p style="height:1000px;"></p>
</body>
</html>
```

Output:

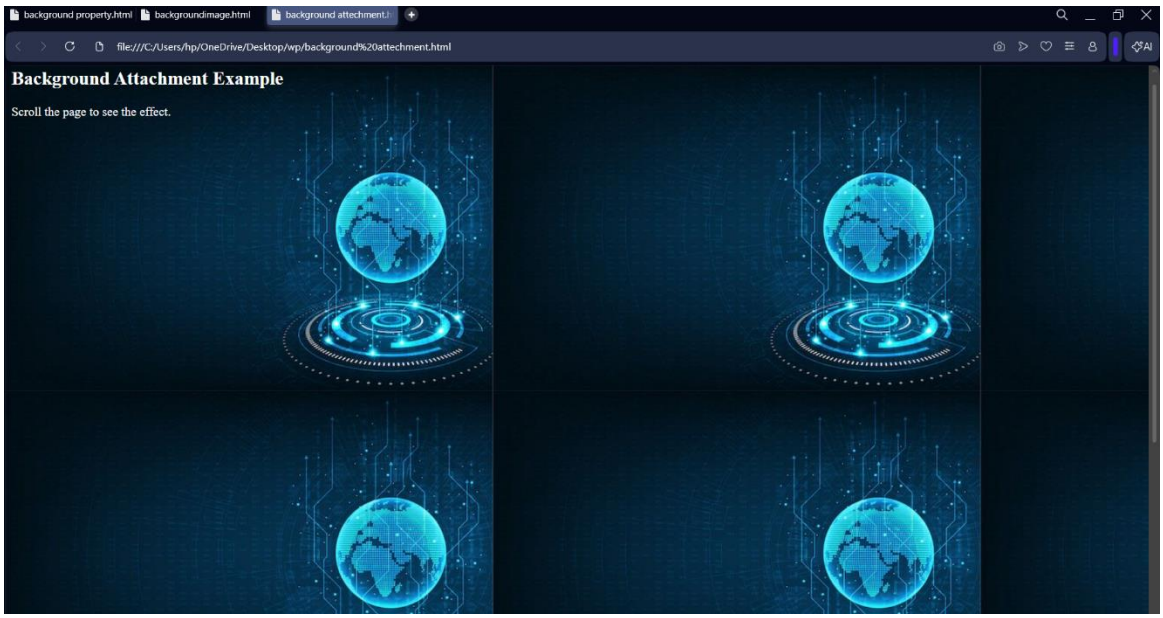

Background position.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
    background-image: url("img.jpeg");
    background-repeat: no-repeat;
    background-position: right;
}
</style>
</head>
<body>
<h2 style="color:black;">Background Position Example</h2>
<p style="color:black;">The background image is centered.</p>
</body>
</html>
```

Output:

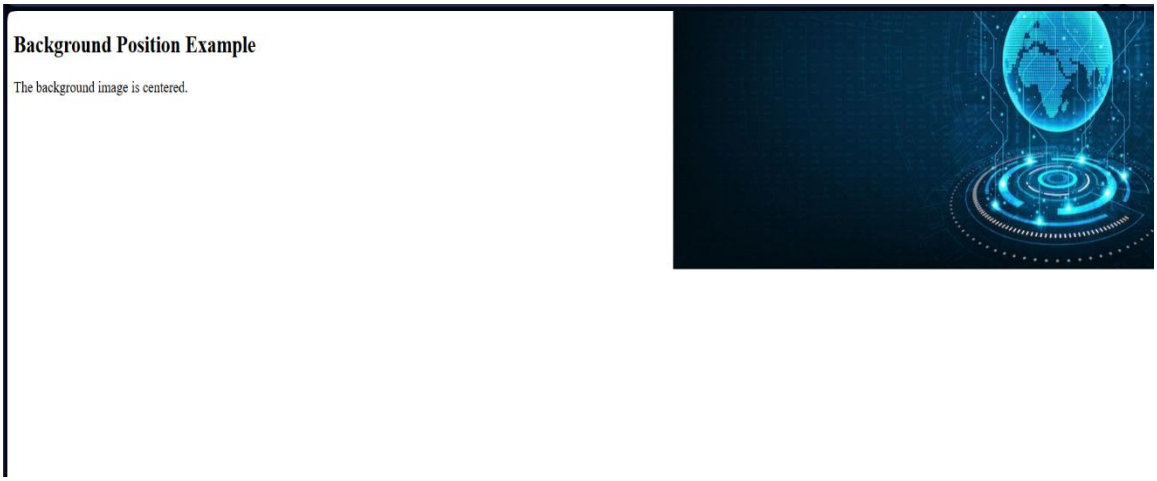

b) Write HTML codes for setting different border property using CSS.

i) Border Style

ii) Border width

iii) Border color

Border Style.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border style example</p>
</body>
</html>
```

Output:

Border width.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   border-width: 6px;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border width example</p>
</body>
</html>
```

Output:

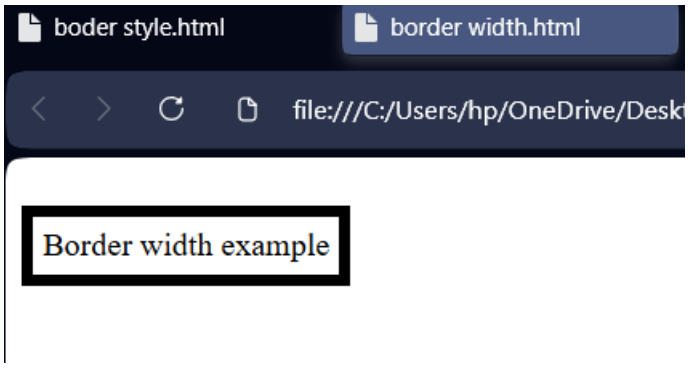

Border color.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   border-width: 3px;
   border-color: red;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border color example</p>
</body>
</html>
```

Output: