Practical: 1

Aim: To study about HTML Table and Basis HTML Formatting Tags.

a) Crate a table for your Class Time Table (Simple).

Code:

```
<!DOCTYPE html>
<html>
<head>
<title> my time table </title>
<style>
table, th, td {
  border: 2px solid black;
}
</style>
</head>
<body>
<table style="border: 3px solid black;">
<tr>
    <td>monday</td>
    <td>tuesday</td>
    <td>wednesday</td>
    <td>thrusday</td>
    <td>friday</td>
</tr>
<tr>
    <td>IOT</td>
    <td>CNS</td>
    <td>AJP</td>
```

```
    <td>DE</td>
    <td>WP</td>
</tr>
<tr>
    <td>WP</td>
    <td>DE</td>
    <td>CNS</td>
    <td>IOT</td>
    <td>AJP</td>
</tr>
<tr>
    <td>AJP</td>
    <td>CNS</td>
    <td>DE</td>
    <td>IOT</td>
    <td>WP</td>
</tr>
<tr>
    <td>CNS</td>
    <td>DE</td>
    <td>WP</td>
    <td>AJP</td>
    <td>IOT</td>
</tr>
<tr>
    <td>IPDC</td>
    <td>IOT</td>
```

```
    <td>WP</td>
    <td>CNS</td>
    <td>AJP</td>
</tr>
<tr>
    <td>CNS</td>
    <td>AJP</td>
    <td>WP</td>
    <td>DE</td>
    <td>IPDC</td>
</tr>
</table>
</body>
</html>
```

Output:

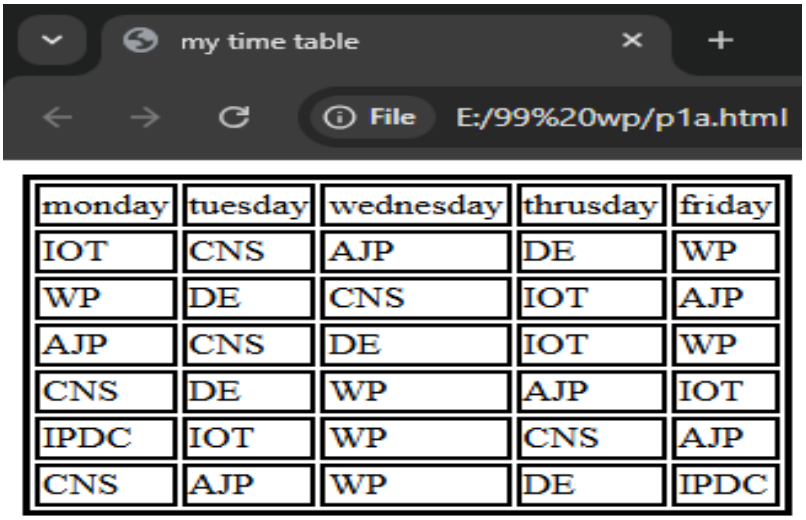

monday	tuesday	wednesday	thrusday	friday
IOT	CNS	AJP	DE	WP
WP	DE	CNS	IOT	AJP
AJP	CNS	DE	IOT	WP
CNS	DE	WP	AJP	IOT
IPDC	IOT	WP	CNS	AJP
CNS	AJP	WP	DE	IPDC

b) Create a following table using colspan and rowspan. Also write code to display texts shown in following table using various formatting tags.

Code:

```
<!doctype html>
<html>
<head>
<title> my time table</title>
<style>
table, th, td {
  border: 1px solid black;
 border-collapse: collapse;
}
</style>
</head>
<body>
<Table style="border: 2px solid black;">
<tr border: 1 >
<td colspan="2" rowspan="2" align= "center"><b>C1</b></td>
<td rowspan="2" align= "center"><b>C2</b></td>
<td colspan="2" align= "center"><b>C3</b></td>
</tr>
<tr>
<td><u>C3.1</u></td>
<td><u>C3.2</u></td>
</tr>
<tr>
<td rowspan="2" ><b>R1</b></td>
```

```
<td align= "center"><strike>R1a</strike></td>
<td>123</td>
<td>456</td>
<td>789</td>
</tr>
<tr>
<td>&lt; HTML &gt;</td>
<td colspan="3" align= "center">E=m*c<sup>2</sup></td>
</tr>
</body>
</html
```

Output:

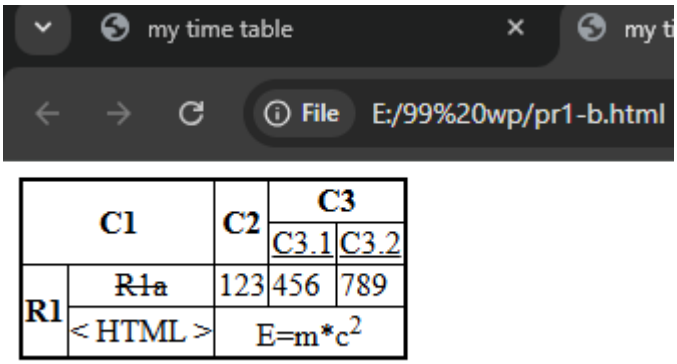

Practical: 2

Aim: To study about HTML Frame and Framesets.

a) Create a following layout with horizontal and vertical frames.

<table>
<tr><td rowspan="3">Page 1</td><td>Page 2</td></tr>
<tr><td>Page 3</td></tr>
<tr><td>Page 4</td></tr>
</table>

Code:

Code:

```
<html>
<head>
<title>Frameset Example</title>
</head>
<frameset cols="50%,50%">
<frame src="https://www.snpitrc.ac.in/" />
<frameset rows="33.3%,33.3%,33.3%">
<frame src="page1.html" />
<frame src="page2.html" />
<frame src="page3.html" />
</frameset>
</frameset>
</html>
```

page1.html:

```
<html>
<head>
<title>Frame 1 </title>
```

```
</head>
<body>
<h1>Welcome to </h1>
<p>HTML (HyperText Markup Language) is the standard, foundational markup
language used to structure and display content on the web, including text, images,
and links. It uses a system of tags and elements to define page structure—such as
headings, paragraphs, and lists—which web browsers interpret to render webpages.
</p>
</body>
</html>
```

Page2.html:

```
<html>
<head>
<title>Frame 2 </title>
</head>
<body>
<h1>Welcome to CSS</h1>
<p>CSS is the language we use to style a Web page.CSS stands for Cascading
Style Sheets CSS describes how HTML elements are to be displayed on screen,
paper, or in other media CSS saves a lot of work. It can control the layout of
multiple web pages all at once External stylesheets are stored in CSS files.</p>
</body>
</html>
```

Page3.html:

```
<html>
<head>
<title>Frame 3 </title>
```

```
</head>
<body>
<h1>Welcome to JAVASCRIPT</h1>
<p>JavaScript is the Programming Language for the Web. JavaScript can update
and change both HTML and CSS. JavaScript can calculate, manipulate and validate
data.</p>
</body>
</html>
```

Output:

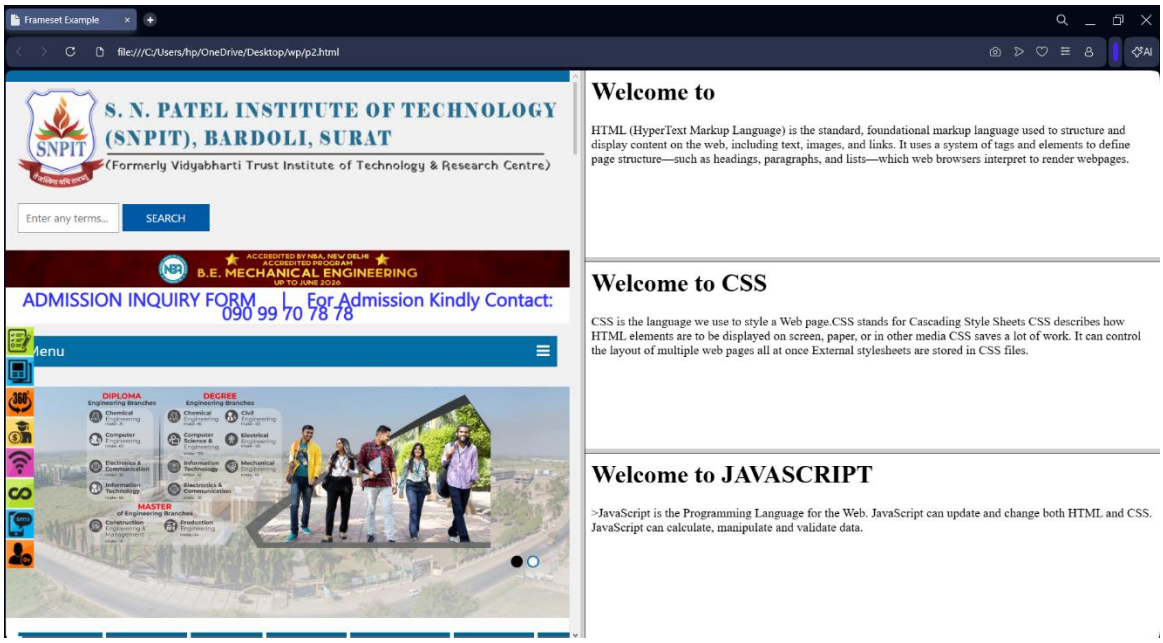

b) Create a vertical navogation bar using frames. When user click a hyperlinks in the navigation bar (left side of the page), the appropriate page is loaded into the hyperlinks target frame (right side of the page).

Page 1 Page 2 Page 3	Display page content here

navigation.html Code:

```
<!DOCTYPE html>
<html>
<head>
<title>Navigation Frames</title>
</head>
<frameset cols="25%,75%">
<frame src="nav.html" name="navigation">
<frame src="display.html" name="display">
</frameset>
</html>
```

nav.html Code:

```
<!DOCTYPE html>
<html>
<head>
<title>Navigation</title>
</head>
<body bgcolor="lightgray">
<h2 align="center">Navigation</h2>
<hr>
<p><a href="page1content.html" target="display">Page 1</a></p>
```

```
<p><a href="page2content.html" target="display">Page 2</a></p>
<p><a href="page3content.html" target="display">Page 3</a></p>
</body>
</html>
```

display.html Code:

```
<!DOCTYPE html>
<html>
<head>
   <title>Display</title>
</head>
<body>
   <h1 align="center">Display page content here</h1>
   <p align="center">Click links from left navigation to see content.</p>
</body>
</html>
```

page1content.html Code:

```
<html>
<head>
   <title>Page 1 Content</title>
</head>
<body bgcolor="lightblue">
   <h1>Page 1 Content</h1>
   <p>This is the content of Page 1.</p>
   <p>You clicked Page 1 link from navigation bar.</p>
</body>
</html>
```

page2content.html Code:

```
<html>
<head>
    <title>Page 2 Content</title>
</head>
<body bgcolor="lightgreen">
    <h1>Page 2 Content</h1>
    <p>This is the content of Page 2.</p>
    <p>You clicked Page 2 link from navigation bar.</p>
</body>
</html>
```

page3content.html Code:

```
<!DOCTYPE html>
<html>
<head>
<title>Page 3 Content</title>
</head>
<body bgcolor="lightyellow">
<h1>Page 3 Content</h1>
<p>This is the content of Page 3.</p>
<p>You clicked Page 3 link from navigation bar.</p>
</body>
</html>
```

Output:

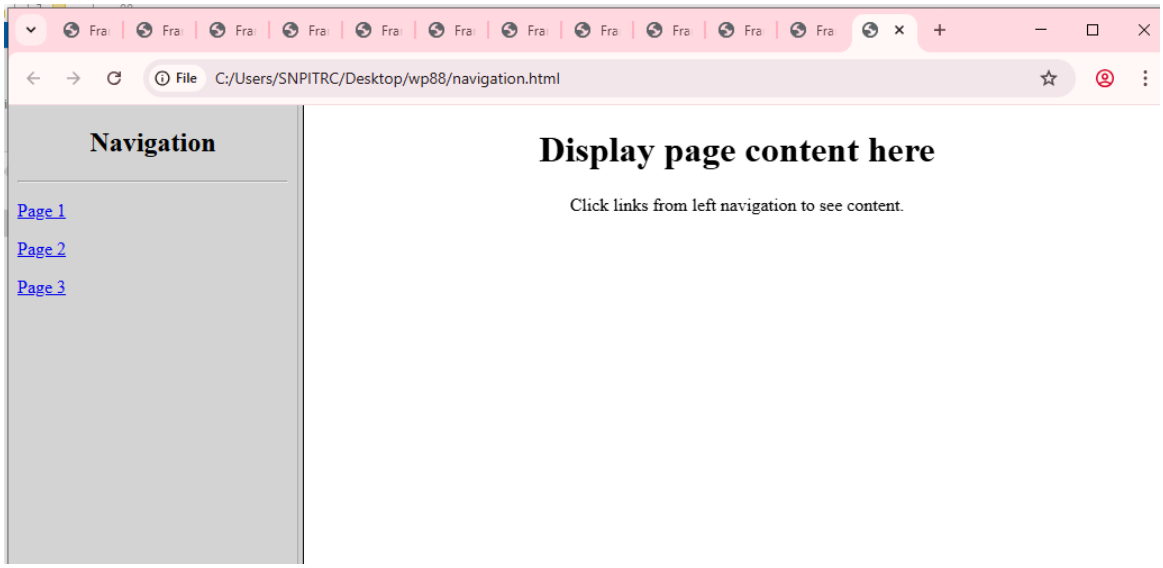
File C:/Users/SNPITRC/Desktop/wp88/navigation.html
Navigation
Page 1
Page 2
Page 3
Display page content here
Click links from left navigation to see content.

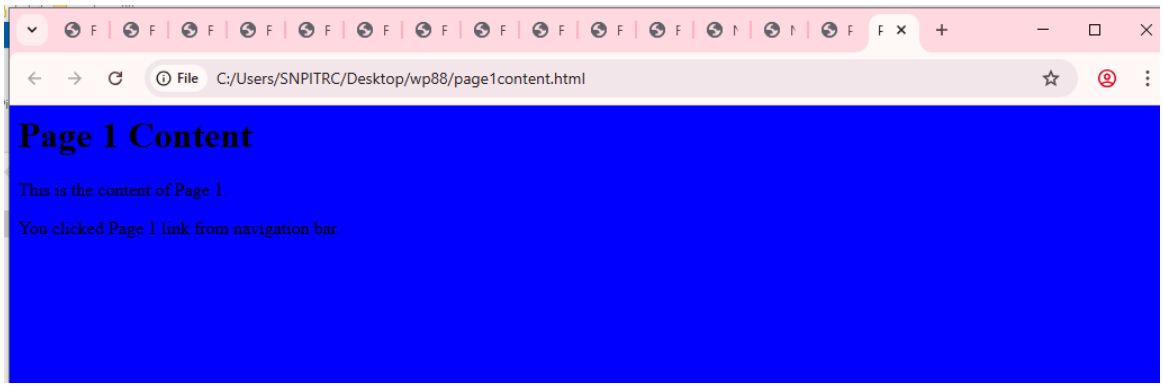
File C:/Users/SNPITRC/Desktop/wp88/page1content.html
Page 1 Content
This is the content of Page 1.
You clicked Page 1 link from navigation bar.

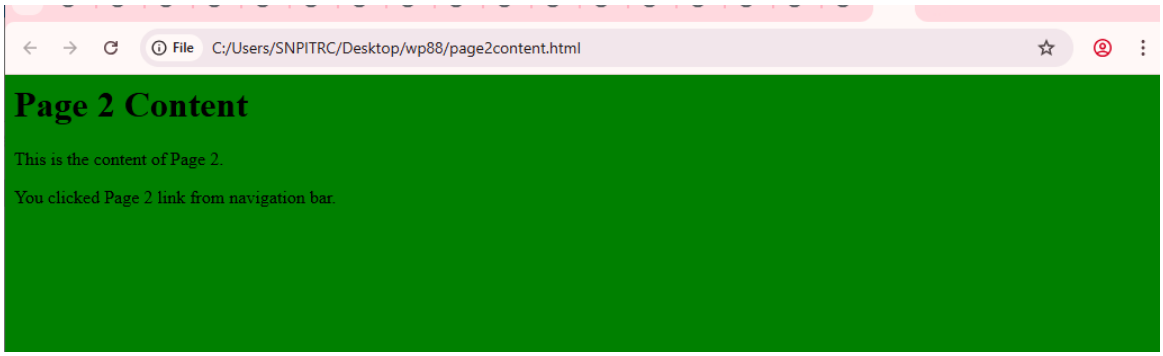
File C:/Users/SNPITRC/Desktop/wp88/page2content.html
Page 2 Content
This is the content of Page 2.
You clicked Page 2 link from navigation bar.

File C:/Users/SNPITRC/Desktop/wp88/page3content.html
Page 3 Content
This is the content of Page 3.
You clicked Page 3 link from navigation bar.

Practical: 3

Aim: To study about applying CSS in HTML Pages.

a) Write HTML code which describes following types of CSS.

i) Inline

ii) Internal

iii) External

Inline.html code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Inline CSS Example</title>
</head>
<body>
    <h1 style="color: blue;">This is a Blue Heading</h1>
    <p style="font-size: 18px; color: green;">
        This paragraph is styled using inline CSS.
    </p>
</body>
</html>
```

Output:

Internal.html code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Internal CSS Example</title>
    <style>
        body {
            background-color: lightgray;
        }
        h1 {
            color: red;
        }
        p {
            font-size: 18px;
            color: purple;
        }
    </style>
</head>
<body>
    <h1>This is a Red Heading</h1>
    <p>This paragraph is styled using internal CSS.</p>
</body>
</html>
```

Output:

External.html code:

```
<!DOCTYPE html>
<html>
<head>
    <title>External CSS Example</title>
    <link rel="stylesheet" type="text/css" href="style.css">
</head>
<body>
    <h1>This is a Styled Heading</h1>
    <p>This paragraph is styled using external CSS.</p>
</body>
</html>
```

Style.css code:

```
h1 {
    font-family: "Times New Roman", serif;
    font-size: 36px;
    font-weight: bold;
    color: black;
}
p {
    font-family: "Times New Roman", serif;
```

```
    font-size: 18px;
    color: black;
}
```

Output:

This is a Styled Heading

This paragraph is styled using external CSS.

b) Write HTML code which describes following types of selectors.

i) Class selector

ii) ID selector

iii) Universal selector

iv) Group selector

v) Wild Card Selector

Class selector.html code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Class Selector Example</title>
    <style>
        .highlight {
            color: blue;
            font-weight: bold;
        }
    </style>
</head>
<body>
    <h2 class="highlight">This is a Class Selector Example</h2>
    <p class="highlight">This paragraph is styled using class selector.</p>
</body>
</html>
```

Output:

ID selector.html code:

```
<!DOCTYPE html>
<html>
<head>
   <title>ID Selector Example</title>
   <style>
      #mainHeading {
         color: red;
         text-align: center;
      }
   </style>
</head>
<body>
   <h1 id="mainHeading">This is an ID Selector Example</h1>
</body>
</html>
```

Output:

Universal selector.html code:

```
<!DOCTYPE html>
<html>
<head>
   <title>Universal Selector Example</title>
   <style>
      * {
         font-family: Arial;
         color: green;
      }
   </style>
</head>
<body>
   <h1>Universal Selector</h1>
   <p>This affects all elements.</p>
</body>
</html>
```

Output:

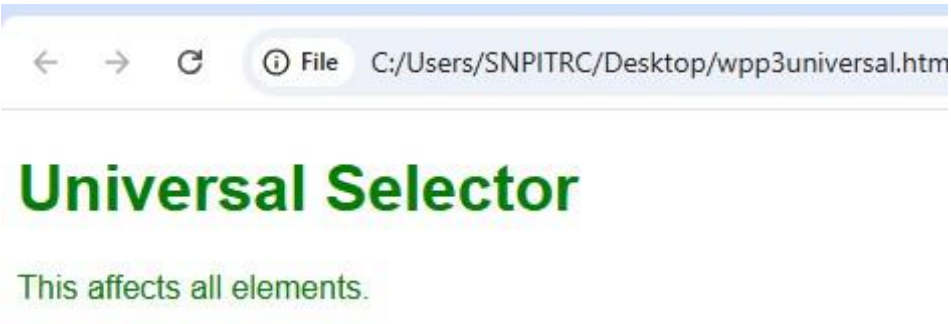

Group selector.html code:

```
<!DOCTYPE html>
<html>
<head>
```

```
    <title>Group Selector Example</title>
    <style>
        h1, p {
            color: purple;
        }
    </style>
</head>
<body>
    <h1>Heading styled using group selector</h1>
    <p>Paragraph styled using group selector</p>
</body>
</html>
```

Output:

Wild card selector.html code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Wild Card Selector Example</title>
    <style>
        * {
            background-color: lightgray;
        }
```

```
    </style>
</head>
<body>
    <h2>Wild Card Selector</h2>
    <p>All elements have light gray background.</p>
</body>
</html>
```

Output:

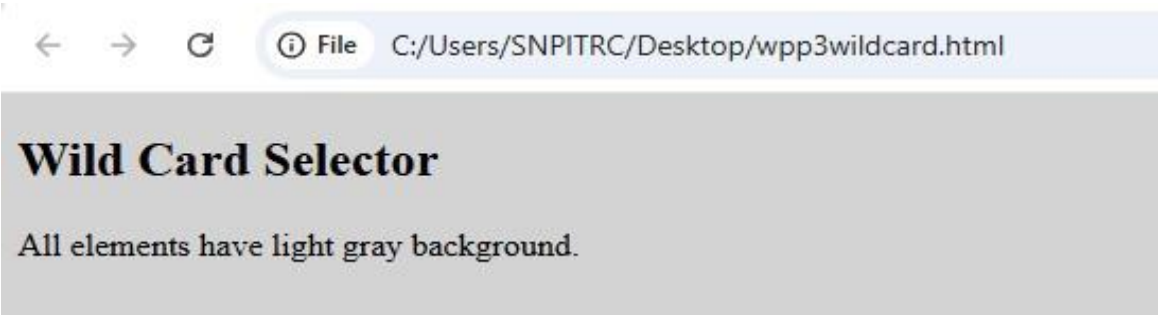

Practical: 4

Aim: To study about setting different properties of CSS.

a) Write HTML codes for setting different background properties using CSS.

i) Background color property

ii) Background image property

iii) Background attachment property

iv) Background position property

Background color.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
   background-color: purple;
}
</style>
</head>
<body>
<h2>Background Color Example</h2>
<p>This page has a light blue background.</p>
</body>
</html>
```

Output:

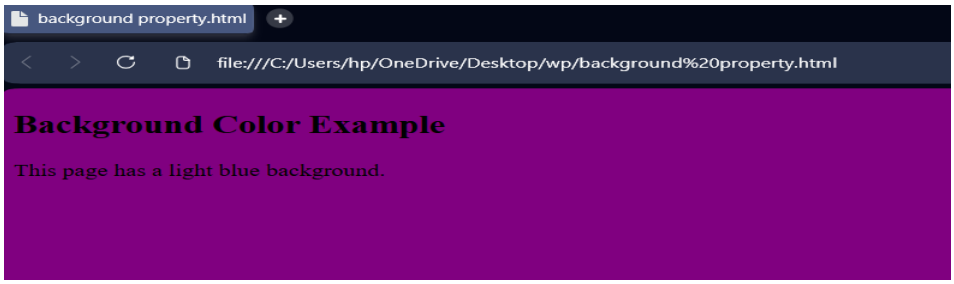

Background image.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
    margin: 0;
    height: 100vh;
    background-image: url("img.jpeg");  /* your image */
    background-repeat: no-repeat;
    background-size: cover;
    background-position: center;
}
</style>
</head>
<body>
<h2 style="color:white;">Background Image Example</h2>
<p style="color:white;">Image covers the full screen.</p>
</body>
</html>
```

Output:

Background attachment.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
   background-image: url("img.jpeg");
   background-attachment: fixed;
}
</style>
</head>
<body>
<h2 style="color:white;">Background Attachment Example</h2>
<p style="color:white;">Scroll the page to see the effect.</p>
<p style="height:1000px;"></p>
</body>
</html>
```

Output:

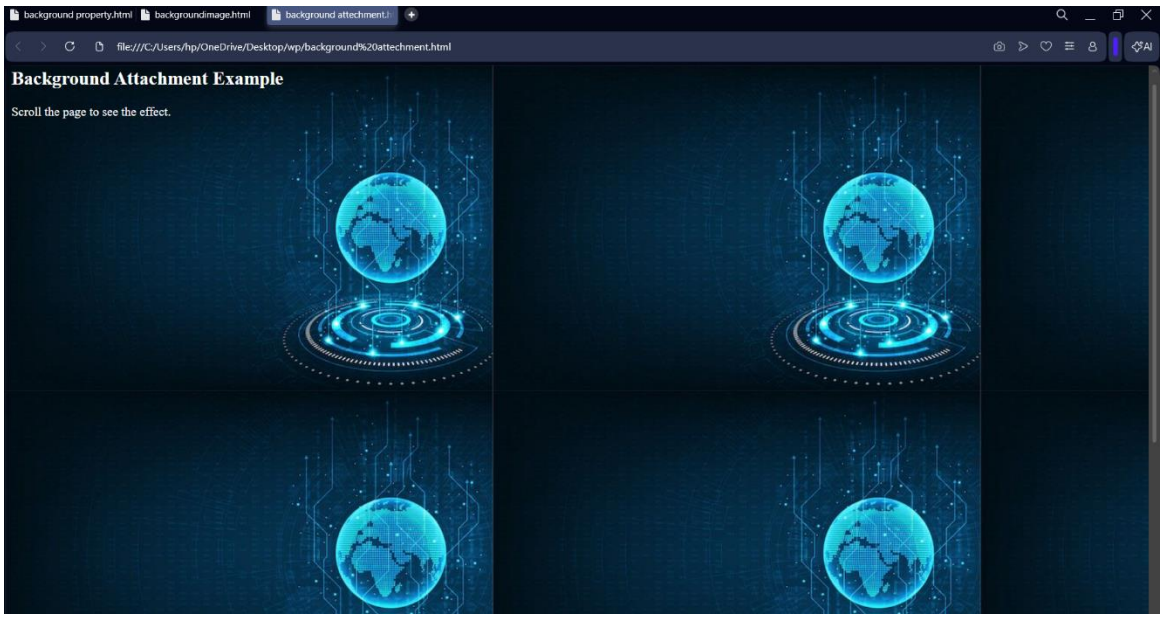

Background position.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
    background-image: url("img.jpeg");
    background-repeat: no-repeat;
    background-position: right;
}
</style>
</head>
<body>
<h2 style="color:black;">Background Position Example</h2>
<p style="color:black;">The background image is centered.</p>
</body>
</html>
```

Output:

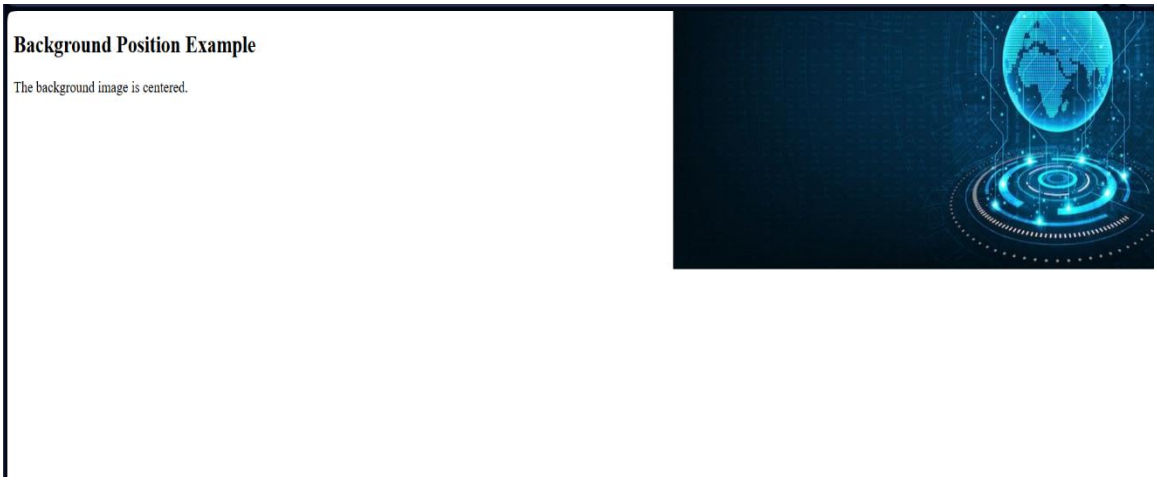

b) Write HTML codes for setting different border property using CSS.

i) Border Style

ii) Border width

iii) Border color

Border Style.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border style example</p>
</body>
</html>
```

Output:

Border width.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   border-width: 6px;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border width example</p>
</body>
</html>
```

Output:

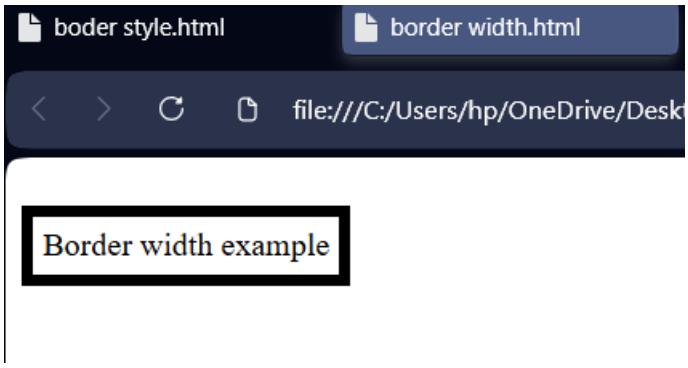

Border color.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   border-width: 3px;
   border-color: red;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border color example</p>
</body>
</html>
```

Output:

Practical: 4

Aim: To study about setting different properties of CSS.

a) Write HTML codes for setting different background properties using CSS.

i) Background color property

ii) Background image property

iii) Background attachment property

iv) Background position property

Background color.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
   background-color: purple;
}
</style>
</head>
<body>
<h2>Background Color Example</h2>
<p>This page has a light blue background.</p>
</body>
</html>
```

Output:

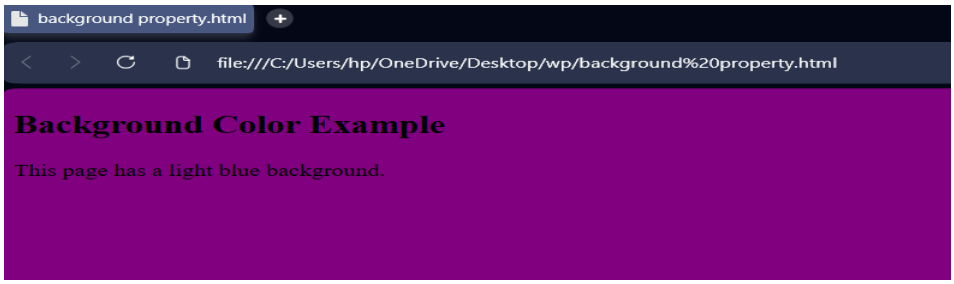

Background image.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
    margin: 0;
    height: 100vh;
    background-image: url("img.jpeg");  /* your image */
    background-repeat: no-repeat;
    background-size: cover;
    background-position: center;
}
</style>
</head>
<body>
<h2 style="color:white;">Background Image Example</h2>
<p style="color:white;">Image covers the full screen.</p>
</body>
</html>
```

Output:

Background attachment.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
   background-image: url("img.jpeg");
   background-attachment: fixed;
}
</style>
</head>
<body>
<h2 style="color:white;">Background Attachment Example</h2>
<p style="color:white;">Scroll the page to see the effect.</p>
<p style="height:1000px;"></p>
</body>
</html>
```

Output:

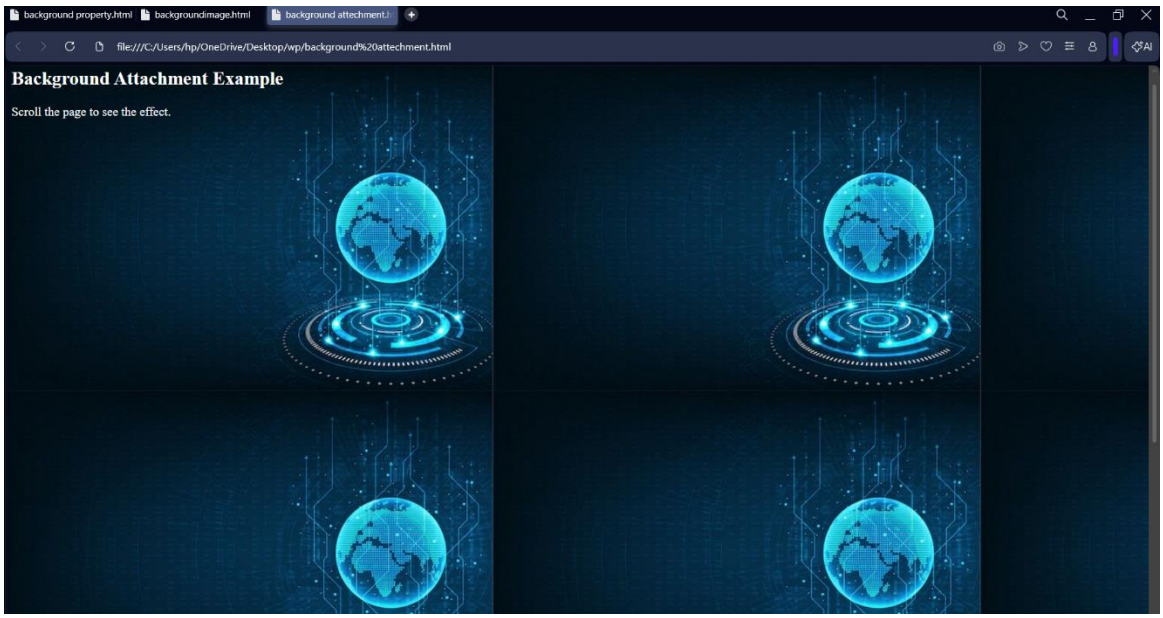

Background position.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
    background-image: url("img.jpeg");
    background-repeat: no-repeat;
    background-position: right;
}
</style>
</head>
<body>
<h2 style="color:black;">Background Position Example</h2>
<p style="color:black;">The background image is centered.</p>
</body>
</html>
```

Output:

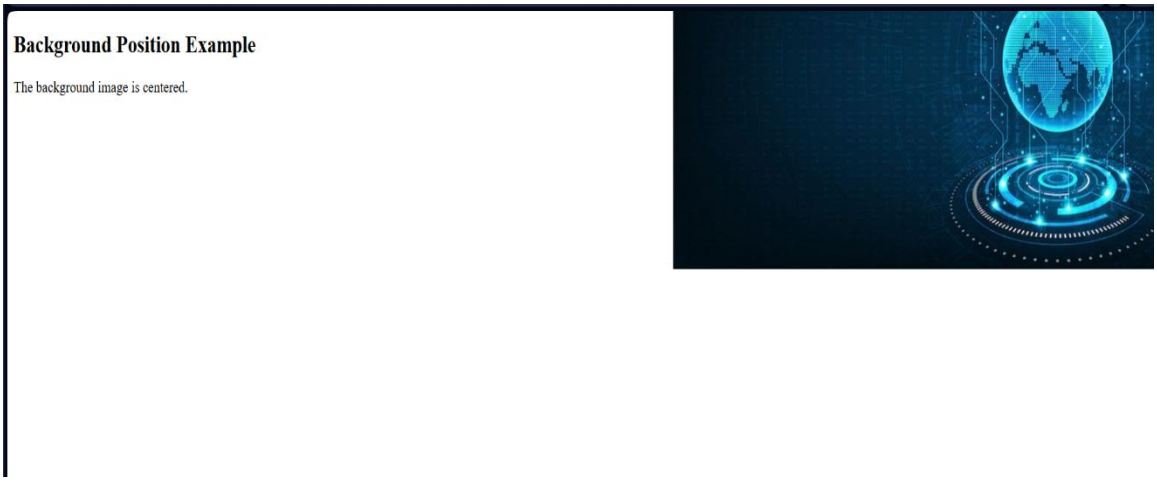

b) Write HTML codes for setting different border property using CSS.

i) Border Style

ii) Border width

iii) Border color

Border Style.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border style example</p>
</body>
</html>
```

Output:

Border width.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   border-width: 6px;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border width example</p>
</body>
</html>
```

Output:

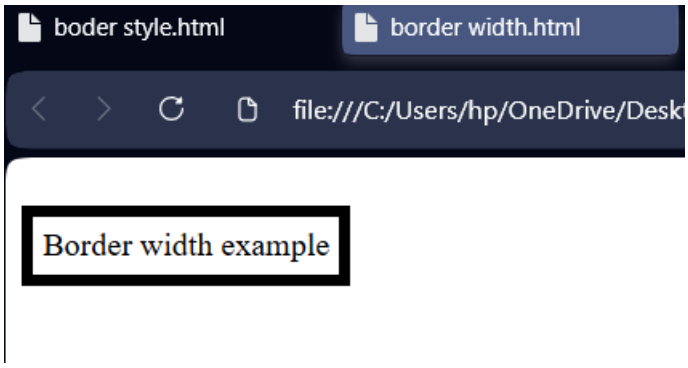

Border color.html code:

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
   border-style: solid;
   border-width: 3px;
   border-color: red;
   display: inline-block;
   padding: 5px;
}
</style>
</head>
<body>
<p>Border color example</p>
</body>
</html>
```

Output: