


INT-332 Practical-3


Docker-Compose: Wordpress

Example 1: Convert the given DockerFile to compose file


Step 1: Create a Folder

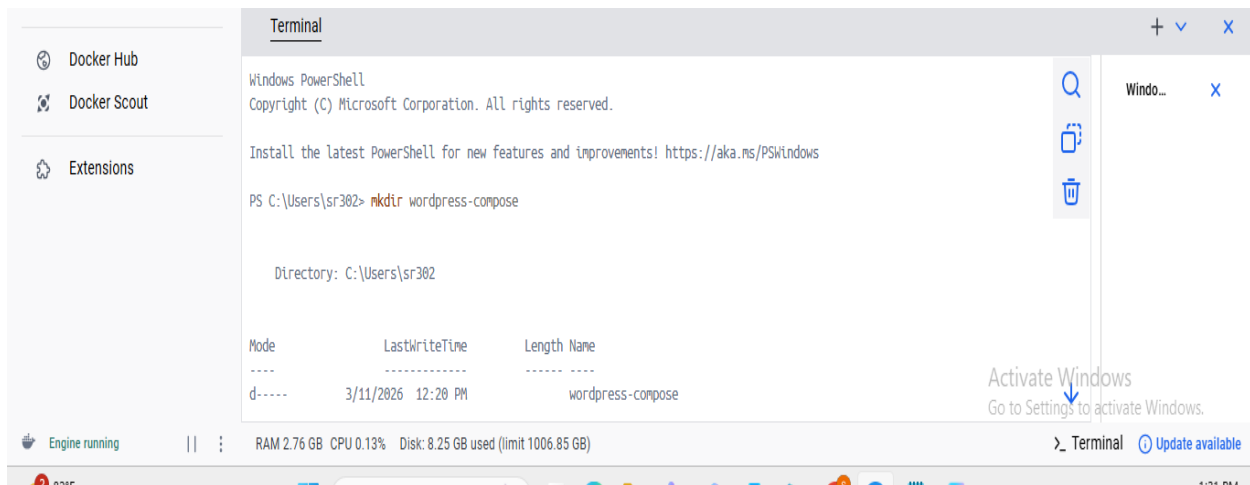

Step 2: Now Compose docker-compose.yml

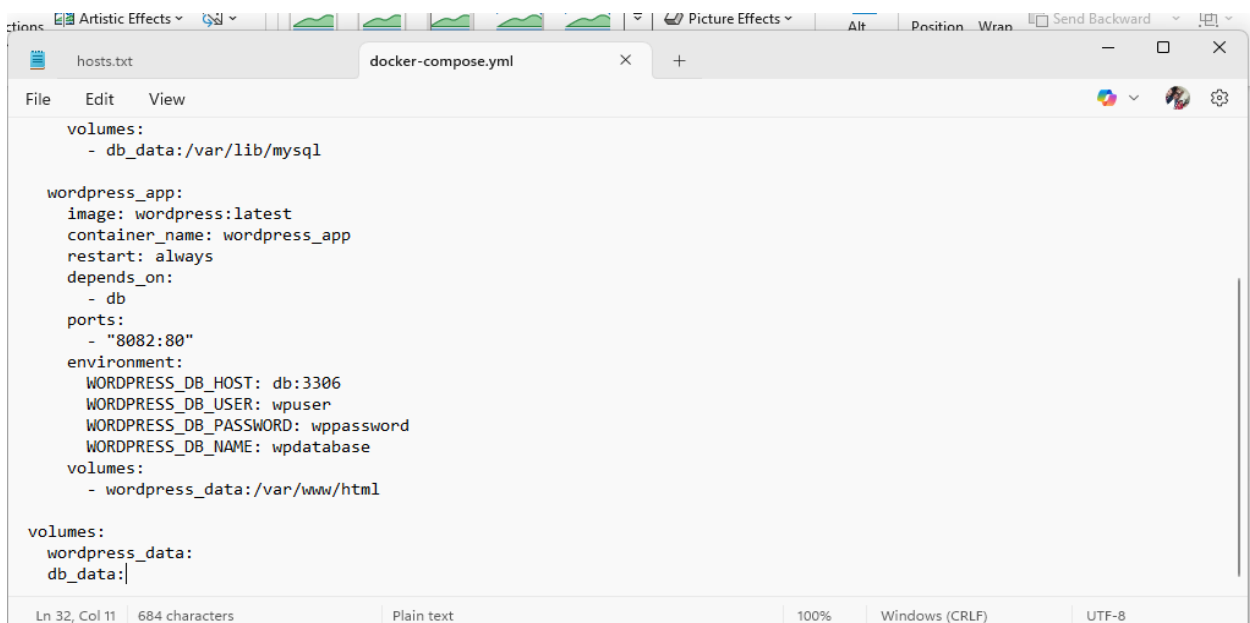


Step3: Now run command: **docker compose up -d**

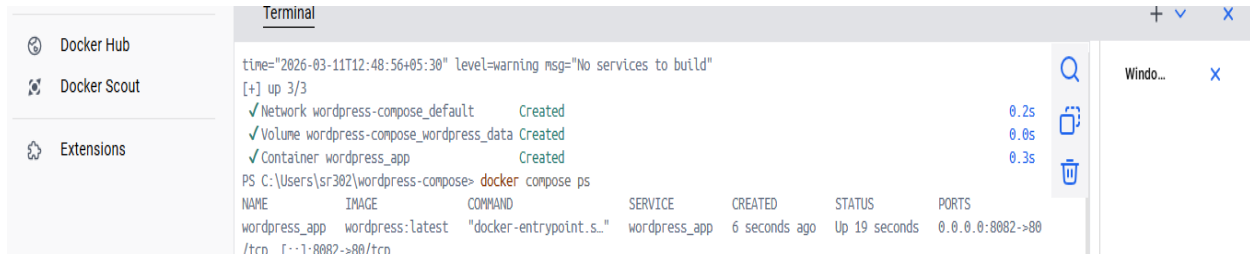

```
time="2026-03-11T12:48:56+05:30" level=warning msg="No services to build"
[+] up 3/3
✓ Network wordpress-compose_default Created 0.2s
✓ Volume wordpress-compose_wordpress_data Created 0.05s
✓ Container wordpress_app Created 0.3s
PS C:\Users\sr382\wordpress-compose> docker compose ps
NAME          IMAGE          COMMAND                  SERVICE    CREATED   STATUS    PORTS
wordpress_app wordpress:latest "docker-entrypoint.s..." wordpress_app 6 seconds ago Up 19 seconds 0.0.0.0:8082->80
/tcp, [::]:8082->80/tcp
```

Step4: Now on browser type : **localhost:8080**

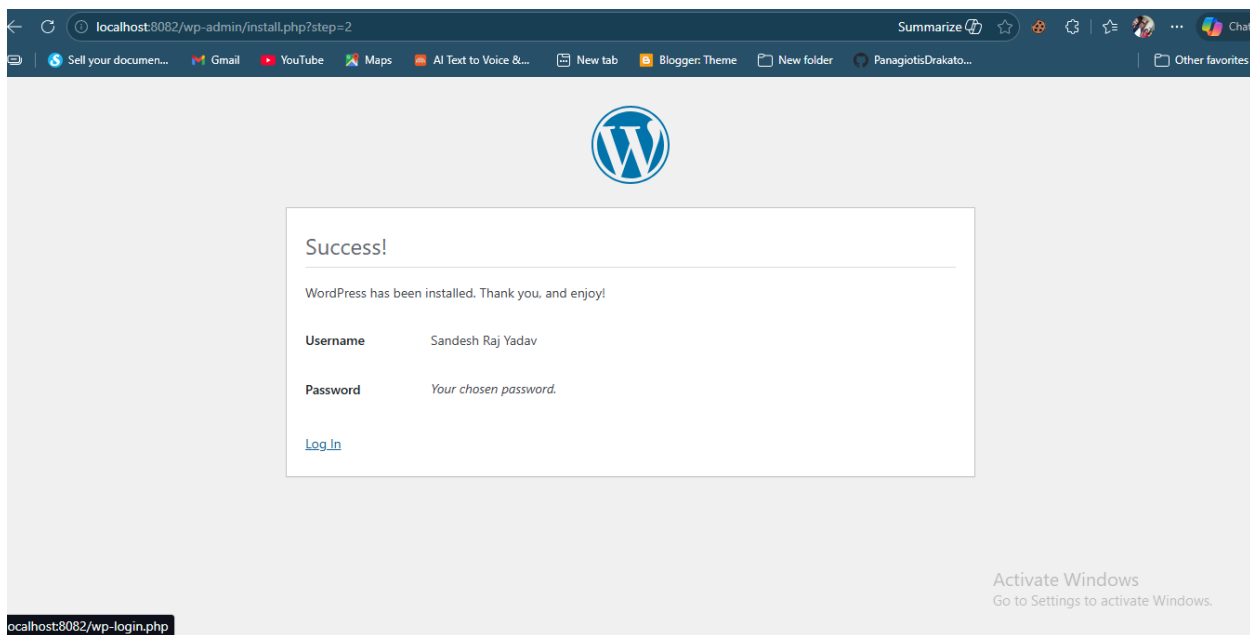

Code:

Windows PowerShell

Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! <https://aka.ms/PSWindows>

PS C:\Users\sr302> mkdir wordpress-compose

Directory: C:\Users\sr302

Mode	LastWriteTime	Length	Name
----	-----	-----	
d-----	3/11/2026 12:20 PM		wordpress-compose

PS C:\Users\sr302> cd wordpress-compose

PS C:\Users\sr302\wordpress-compose> notepad docker-compose.yml

PS C:\Users\sr302\wordpress-compose> docker compose up -d

time="2026-03-11T12:48:56+05:30" level=warning msg="No services to build"

[+] up 3/3

✓ Network wordpress-compose_default Created0.2s

✓ Volume wordpress-compose_wordpress_data Created0.0s

✓ Container wordpress_appCreated0.3s

PS C:\Users\sr302\wordpress-compose> docker compose ps

NAME	IMAGE	COMMAND	SERVICE	CREATED	STATUS	PORTS
wordpress_app	wordpress:latest	"docker-entrypoint.s..."	wordpress_app	Less than a second ago	Up 6 seconds	0.0.0.0:8082->80/tcp, [::]:8082->80/tcp
wordpress_db	mysql:8.0	"docker-entrypoint.s..."	db	Less than a second ago	Up 6 seconds	3306/tcp, 33060/tcp

PS C:\Users\sr302\wordpress-compose>