Injection Schema Guideline

HarmonyGames · Universe date: October 1, 2025 or February 14, 2026, 00:00 UTC · Updated October 22, 2026

How to add or change HarmonyGames records with a SQL file, then run `/injection` on that file. You do not need to be a database expert. Follow the six steps, then copy the table you need.

Change log

Date	Updates
Oct 22, 2026	New section 01: create an injection with the web portal and run it in the universe. Second universe date added: October 1, 2025. Sections renumbered.
Sep 29, 2026	Plain-language injection guide. 64 tables you can write, including Confluence. Snowflake is listed only so you do not write SQL for it.

01 · Create and run your injection

How to create an injection

The quickest way to start is to let the web portal draft the SQL from your scenario. You are still responsible for every line.

Step	What to do
1. Describe your scenario	In the Eval Portal chat, describe what has to exist in the universe for your task: who says what, where, and when. Ask it to write the injection SQL for that scenario.
2. Check every line	Copy real ids from the data files (section 04), use the column names from this guide (section 05), fill every Required column, and date anything that already happened on or before your universe date. Nothing in the SQL may state the answer the agent is supposed to find.
3. Save it	Save the file as `01_Universe_Inject.sql`.
4. Run /injection	Run `/injection` in the Eval Portal and fix the SQL until it passes.
5. Inject it	Run it in the universe and confirm it in `_changelog`, as shown below.


> **EXAMPLE REQUEST**
>
> Write the injection SQL for this scenario: on February 10, 2026, Leonard posts in the ua-spend Slack channel that the Adjoe test starts on February 12, and Robert replies in the same thread asking for the final numbers.

Inject it in the universe


Run your SQL in the universe's database, then open the change log to confirm that every change went in.

Step	What to do
1. Open the database	In the universe, open the **Database** tab.
2. Open the editor	Click the **Query** tab.
3. Paste your SQL	Paste the whole file into the editor.
4. Run it	Click **Run Query**.
5. Read the result	SQL that inserts or updates data usually returns **No records found**. That is the expected result. Only a statement that looks something up returns rows.
6. Open the change log	In the left panel, open **Tables** and click `_changelog`.
7. Confirm your changes	Every change you made to the universe has a row here, with its table, the operation (INSERT, UPDATE or DELETE) and the id of the row. If your change is not listed, it did not go in. Fix the SQL and run it again.


> **NO RECORDS FOUND IS NOT AN ERROR**
>
> An insert or an update changes data and returns no rows. To confirm the injection, check `_changelog`, not the result panel.

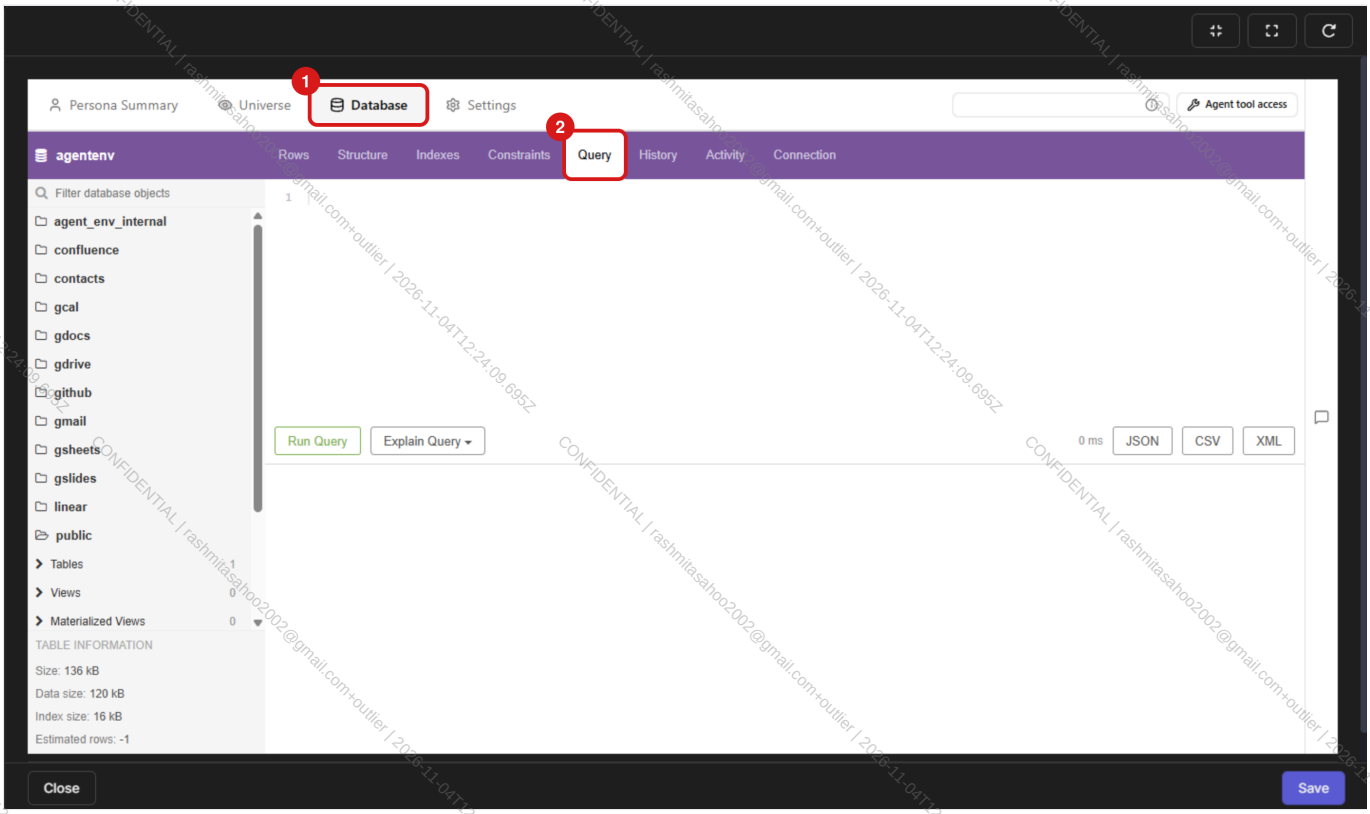


The **Database** tab (1) with the **Query** tab open (2).

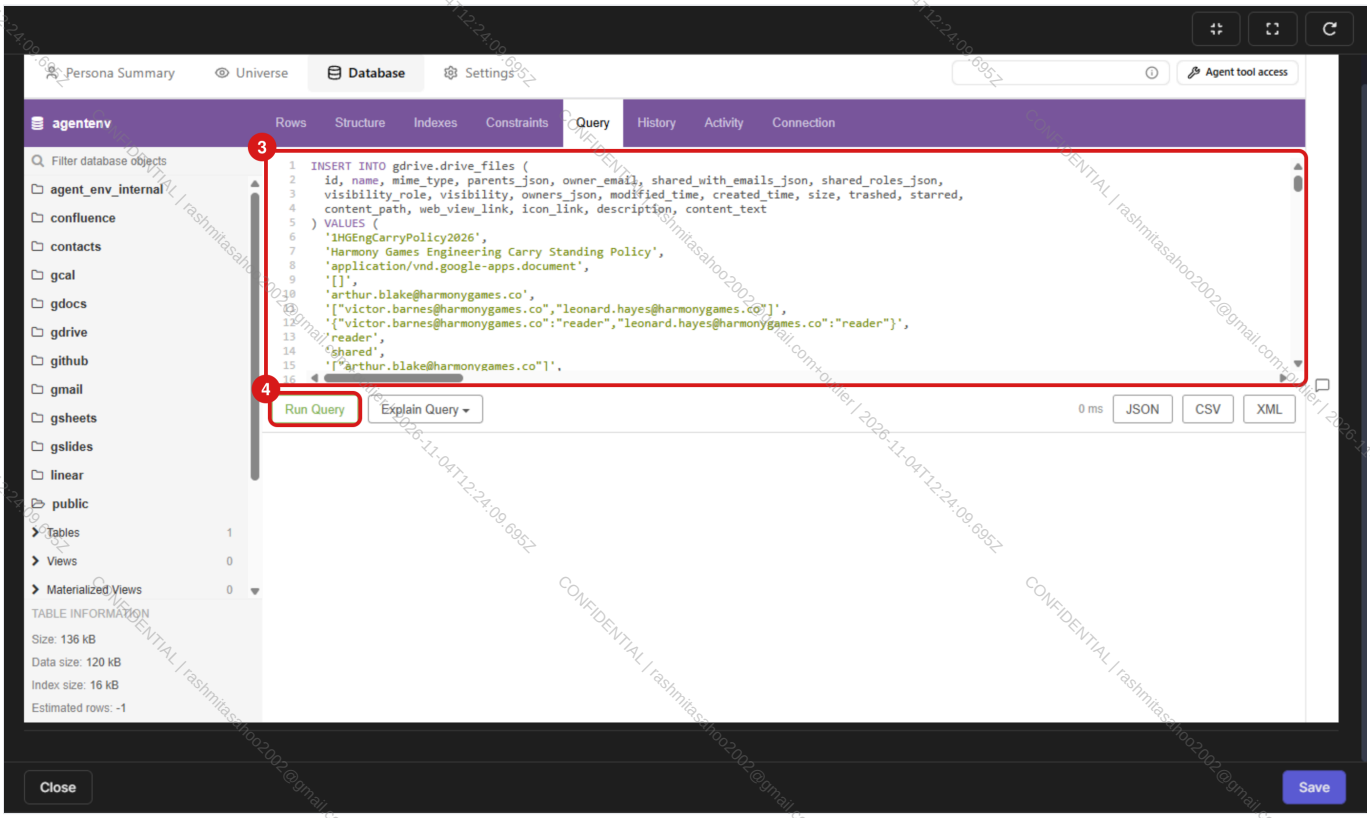

Your SQL pasted into the editor (3), ready to run with **Run Query** (4).

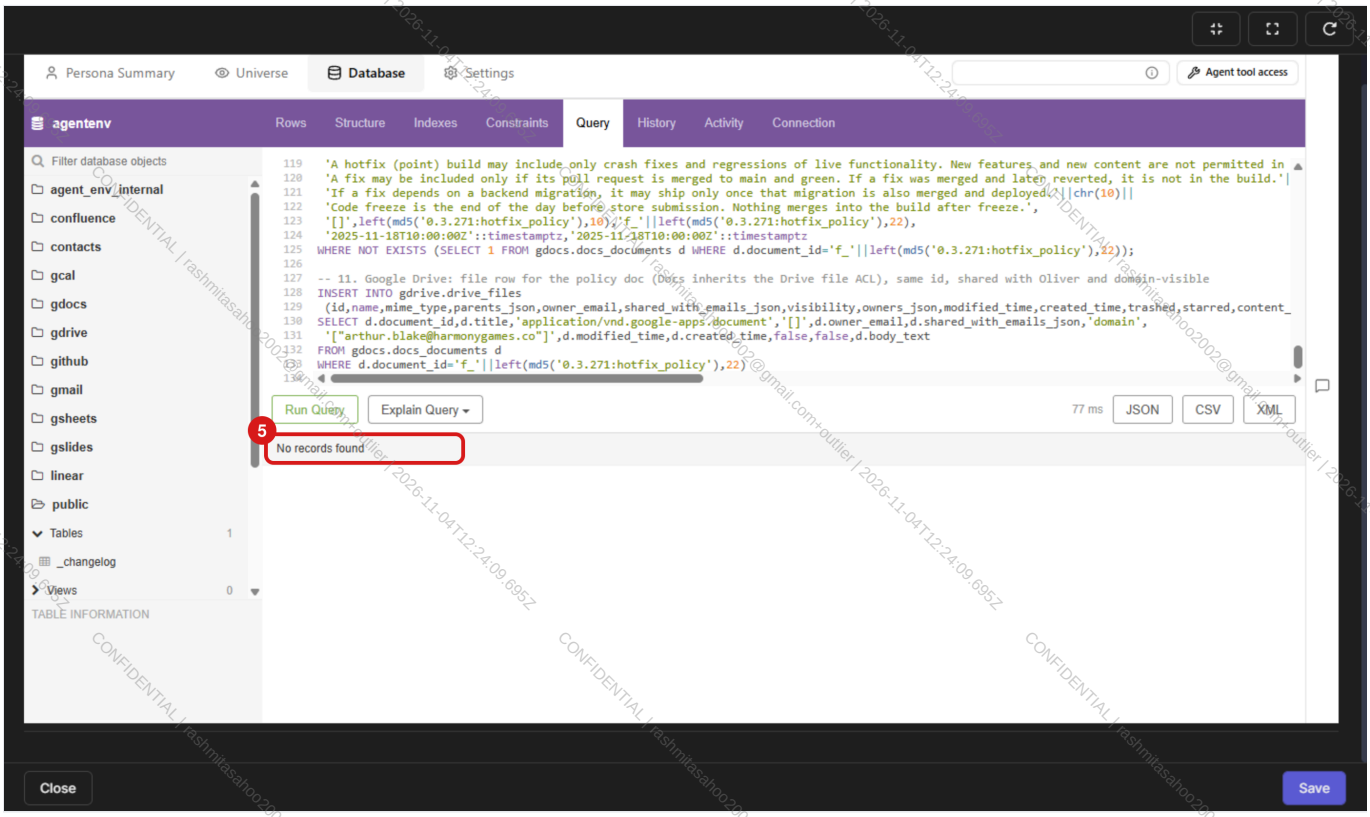

After **Run Query**, an insert or update shows **No records found** (5).

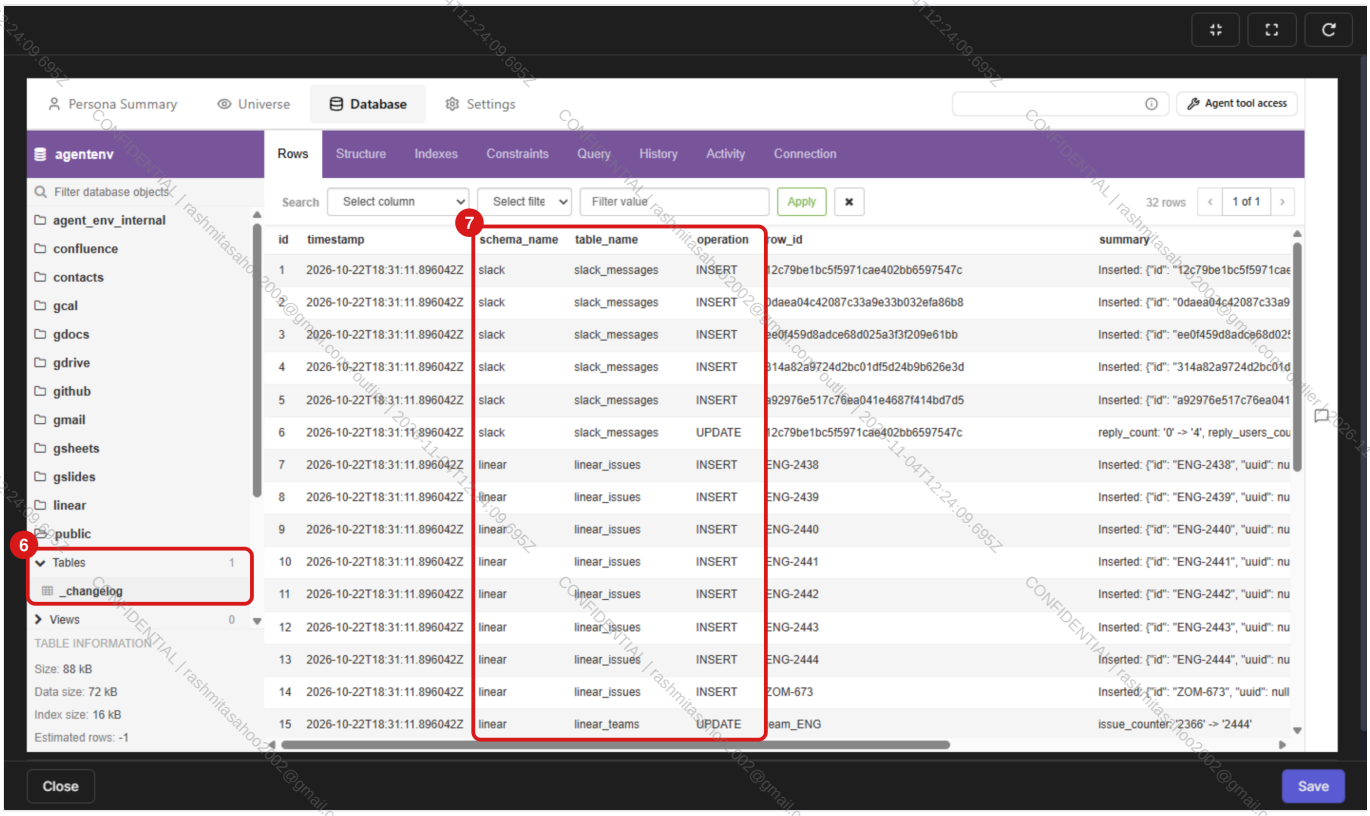

The `_changelog` table under **Tables** (6), with one row for each change you made (7).

02 · What you are doing

An injection is a text file of SQL statements. It adds a Slack message, an email, a ticket, or another record before the agent starts the task. You save it as `01_Universe_Inject.sql` and run `/injection` on it.

Each record lives in a table. The table name always has two parts: the service, then the table, with a dot between them. A GitHub issue is `github.github_issues`. An email is `gmail.gmail_messages`. A Slack message is `slack.slack_messages`.

What you have	What to do with it
The tables in section 06	Write your SQL from these. There are 64 tables you can use, including Confluence.
The data files in section 04	Open them to copy an id that already exists, such as a channel, a user, or a repository. Do not invent an id for something that should already be there.
Snowflake	Do not write injection SQL for Snowflake. It is a separate analytics database, and the injection file cannot change it.

> **HOW TO READ A COLUMN TABLE**
>
> **Required = Yes** means the copy-ready statement must include that column. **Required = No** means you can leave it out. Text goes in single quotes. Numbers, TRUE, and FALSE do not. A column ending in `_json` is text that holds a list or a group of fields, written as `'[]'` or `'{}'`.

03 · Write the SQL in six steps

Step	What to do
1. Pick the table	Find it in section 06. Use the full name, such as `slack.slack_messages` . The data file name is not the table name.
2. Copy real ids	Open the data file from section 04. If your new row points at a channel, user, thread, or repository, copy an id that is already there. For the new row itself, make an id that is not already used.

Step	What to do
3. Use the column names from this guide	The data file sometimes uses a different name. Section 05 lists those differences. If a name is not in the Column list, do not put it in the SQL.
4. Fill every Required = Yes column	The copy-ready statement under each table already includes those columns. Replace every `replace-me`. Add a Required = No column only when you need it, and add its value in the same position.
5. Keep the date in the past	Today is your universe date: October 1, 2025 or February 14, 2026, 00:00 UTC. Anything that already happened is dated on or before it; a deadline may come after it. Write a timestamp as `'2026-02-13 12:00:00+00'`. Use a date that fits your universe.
6. Save and check	Put `BEGIN;` before the statements and `COMMIT;` after them. Save the file as `01_Universe_Inject.sql`. Run `/injection` on it. To make a second run safe, delete only the new id first, then insert it again.

This example adds one email. The words after -- are notes. They are not part of the command.

```
BEGIN;

-- Running the file twice should not create two copies, so remove this id first.
DELETE FROM gmail.gmail_messages
WHERE id = 'new-message-id';

-- Add the email. The thread id must already exist in the data.
INSERT INTO gmail.gmail_messages (
  id,
  thread_id,
  user_email,
  subject,
  body_text
) VALUES (
  'new-message-id',
  'existing-thread-id',
  'person@harmonygames.co',
  'Subject line',
  'Body of the email'
);

COMMIT;
```

You type	It means
`'some text'`	Text. A quote inside the text is written twice: `'it''s fine'`.
`TRUE` or `FALSE`	Yes or no. No quotes.
`0` or `42`	A number. No quotes.
`'[]'`	An empty list. Use this for a `_json` column when there is nothing to put in it.
`NULL`	Leave the field empty. Only for a Required = No column.

To change a row that is already there, copy its id from the data file and use `UPDATE`. Do this only when the task is supposed to change that existing row.

```
UPDATE slack.slack_messages
SET text = 'Updated text'
WHERE id = 'existing-message-id';
```

04 · Where to look up an existing id

Open the data file for the service, find a record like the one you need, and copy its id. Paths start at `New_Evals/`. GitHub and Gmail also store attachments next to these files. An attachment is not an extra table.

Service	Folder	Open this file	Tables
GitHub	HarmonyGames_GitHub	HarmonyGames_GitHub/Services_Data/github/data.json	15
Gmail	HarmonyGames_Gmail	HarmonyGames_Gmail/Services_Data/gmail/users.json, labels.json, threads/*.json	6
Slack	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/slack/channels.json, users.json, files.json, emojis.json, messages/<channel>/<month>.json	7
Linear	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/linear/data.json	7
Google Calendar	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/gcal/data.json	2
Google Drive	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/gdrive/data.json	3
Google Docs	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/gdocs/data.json	1
Google Sheets	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/gsheets/data.json. The row file is not unpacked here; use the column list.	2
Google Slides	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/gslides/data.json	3
Trello	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/trello/data.json	10
Contacts	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/contacts/contacts.json	1
Confluence	HarmonyGames_Other_Services	HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json	7
Changelog — skip for a normal task	—	No service export	1

05 · When the data file uses a different name

A data file and the SQL column list usually use the same names. When they do not, use the name in the right column below. If a name from the file is not in that column and not in the Column list, leave it out.

> **THE USUAL PATTERN**
>
> A list in the file often becomes a column ending in `_json`. Write it in quotes: `'[]'` when it is empty, or `'["bug"]'` when it has one item. Gmail files use capitals, such as `emailAddress`. SQL uses underscores, such as `email_address`.

Table	Name in the data file	Name to write in SQL
`gcal.gcal_calendars`	`shared_with_emails`	`shared_with_emails_json`
`gcal.gcal_events`	`attendees`	`attendees_json`
`gcal.gcal_events`	`end`	`end_json`
`gcal.gcal_events`	`rrule`	`rrule_json`
`gcal.gcal_events`	`start`	`start_json`
`gdocs.docs_documents`	`shared_with_emails`	`shared_with_emails_json`
`gdocs.docs_documents`	`style_runs`	`style_runs_json`
`gdrive.drive_files`	`owners`	`owners_json`
`gdrive.drive_files`	`parents`	`parents_json`
`gdrive.drive_files`	`shared_with_emails`	`shared_with_emails_json`

Table	Name in the data file	Name to write in SQL
github.github_commits	parent_shas	parent_shas_json
github.github_pull_requests	assignee_logins	assignee_logins_json
github.github_pull_requests	labels	labels_json
github.github_pull_requests	requested_reviewer_logins	requested_reviewer_logins_json
github.github_repositories	topics	topics_json
github.github_timeline_events	data	data_json
gmail.gmail_labels	labelListVisibility	label_list_visibility
gmail.gmail_labels	messageListVisibility	message_list_visibility
gmail.gmail_labels	messagesTotal	messages_total
gmail.gmail_labels	messagesUnread	messages_unread
gmail.gmail_labels	threadsTotal	threads_total
gmail.gmail_labels	threadsUnread	threads_unread
gmail.gmail_messages	bcc	bcc_json
gmail.gmail_messages	cc	cc_json
gmail.gmail_messages	headers	headers_json
gmail.gmail_messages	labelIds	label_ids_json
gmail.gmail_messages	reply_to	reply_to_json
gmail.gmail_messages	to	to_json
gmail.gmail_users	emailAddress	email_address
gmail.gmail_users	historyId	history_id
gmail.gmail_users	messagesTotal	messages_total
gmail.gmail_users	threadsTotal	threads_total
gslides.slides_presentations	shared_with_emails	shared_with_emails_json
linear.linear_issues	labels	labels_json
linear.linear_issues	links	links_json
linear.linear_issues	relations	relations_json
linear.linear_projects	labels	labels_json
slack.slack_channels	created	created_ts
slack.slack_channels	creator	creator_id
slack.slack_channels	members	members_json
slack.slack_files	user	user_id
slack.slack_messages	attachments	attachments_json
slack.slack_messages	channel	channel_id
slack.slack_messages	files	files_json
slack.slack_messages	reactions	reactions_json
slack.slack_messages	user	user_id
trello.trello_actions	data	data_json

Table	Name in the data file	Name to write in SQL
trello.trello_boards	labelNames	labelNames_json
trello.trello_boards	prefs	prefs_json
trello.trello_cards	badges	badges_json
trello.trello_cards	cover	cover_json
trello.trello_cards	idLabels	idLabels_json
trello.trello_cards	idMembers	idMembers_json
trello.trello_organizations	boardIds	boardIds_json
trello.trello_organizations	memberIds	memberIds_json

06 · The tables you can write

Find the service, open its page, and copy the statement under the table. Confluence is written in the same file as the other services. Skip the changelog unless the task tells you to edit it.

Service	Tables	What the rows are
GitHub	15	Repositories, issues, pull requests, reviews, commits, and releases.
Gmail	6	Mailboxes, labels, threads, messages, and attachments.
Slack	7	Channels, users, messages, and files.
Linear	7	Teams, projects, issues, comments, and attachments.
Google Calendar	2	Calendars and events.
Google Drive	3	Drive users, files, and sheet files stored on Drive.
Google Docs	1	Document bodies.
Google Sheets	2	Spreadsheets and sheet grids.
Google Slides	3	Presentations, pages, and page elements.
Trello	10	Organizations, boards, lists, cards, checklists, and actions.
Contacts	1	Contact records.
Confluence	7	Spaces, pages, versions, comments, labels, and attachments.
Changelog — skip for a normal task	1	A log of changes. Skip it unless the task tells you to edit the changelog.

GitHub

SQL name: `github`. Repositories, issues, pull requests, reviews, commits, and releases.

github.github_branches

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under branches`. 6 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	repo_id	Text	Yes	—
3	name	Text	Yes	—
4	head_sha	Text	No	—
5	protected	Yes or no	No	—
6	is_default	Yes or no	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_branches (
  id,
  repo_id,
  name
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_commit_map

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under commit_map`. 3 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`repo_id`	Text	Yes	—
2	`old_sha`	Text	Yes	—
3	`new_sha`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_commit_map (
  repo_id,
  old_sha,
  new_sha
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_commits

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under commits`. 12 columns. 2 must be filled.

> The data file says `parent_shas`. Write `parent_shas_json`.

#	Column	Type	Required	Notes
1	`sha`	Text	Yes	—
2	`repo_id`	Text	Yes	—
3	`message`	Text	No	—
4	`authored_date`	Date and time	No	—
5	`committed_date`	Date and time	No	—
6	`author_login`	Text	No	—
7	`author_name`	Text	No	—
8	`author_email`	Text	No	—
9	`committer_login`	Text	No	—
10	`committer_name`	Text	No	—
11	`committer_email`	Text	No	—
12	`parent_shas_json`	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO github.github_commits (
  sha,
  repo_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_issues

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under issues`. 13 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`repo_id`	Text	Yes	—
3	`number`	Number	Yes	—
4	`title`	Text	No	—
5	`state`	Text	No	—
6	`author_login`	Text	No	—
7	`body`	Text	No	—
8	`labels_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
9	`assignee_logins_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
10	`pull_request_id`	Text	No	—
11	`created_at`	Date and time	No	—
12	`updated_at`	Date and time	No	—
13	`closed_at`	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_issues (
  id,
  repo_id,
  number
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0  -- required. A number, with no quotes
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_labels

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under labels`. 5 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`repo_id`	Text	Yes	—
3	`name`	Text	Yes	—
4	`color`	Text	No	—

#	Column	Type	Required	Notes
5	description	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_labels (
  id,
  repo_id,
  name
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_pr_comments

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under pull_request_comments`. 6 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	pr_id	Text	Yes	—
3	author_login	Text	No	—
4	body	Text	No	—
5	created_at	Date and time	No	—
6	updated_at	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_pr_comments (
  id,
  pr_id
) VALUES (
  'replace-me',  -- required. Replace this text


  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_pull_request_commits

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under pull_request_commits`. 4 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	pr_id	Text	Yes	—
3	commit_sha	Text	Yes	—
4	position	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_pull_request_commits (
  id,
```

```
  pr_id,
  commit_sha
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_pull_requests

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under pull_requests`. 27 columns. 3 must be filled.

> The data file says `assignee_logins`. Write `assignee_logins_json`.
> The data file says `labels`. Write `labels_json`.
> The data file says `requested_reviewer_logins`. Write `requested_reviewer_logins_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`repo_id`	Text	Yes	—
3	`number`	Number	Yes	—
4	`title`	Text	No	—
5	`state`	Text	No	—
6	`merged`	Yes or no	No	—
7	`draft`	Yes or no	No	—
8	`locked`	Yes or no	No	—
9	`author_login`	Text	No	—
10	`merged_by_login`	Text	No	—
11	`body`	Text	No	—
12	`base_ref`	Text	No	—
13	`head_ref`	Text	No	—
14	`base_sha`	Text	No	—
15	`head_sha`	Text	No	—
16	`merge_commit_sha`	Text	No	—
17	`additions`	Number	No	—
18	`deletions`	Number	No	—
19	`changed_files`	Number	No	—
20	`labels_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
21	`assignee_logins_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
22	`requested_reviewer_logins_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
23	`created_at`	Date and time	No	—
24	`updated_at`	Date and time	No	—
25	`merged_at`	Date and time	No	—
26	`closed_at`	Date and time	No	—

#	Column	Type	Required	Notes
27	html_url	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_pull_requests (
  id,
  repo_id,
  number
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0  -- required. A number, with no quotes
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_releases

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under releases`. 11 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	repo_id	Text	Yes	—
3	tag_name	Text	Yes	—
4	name	Text	No	—
5	body	Text	No	—
6	draft	Yes or no	No	—
7	prerelease	Yes or no	No	—
8	author_login	Text	No	—
9	created_at	Date and time	No	—
10	published_at	Date and time	No	—
11	target_commitish	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_releases (
  id,
  repo_id,
  tag_name
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_repositories

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under repositories`. 24 columns. 4 must be filled.

> The data file says `topics`. Write `topics_json`.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	name	Text	Yes	—
3	full_name	Text	Yes	—
4	owner_login	Text	Yes	—
5	description	Text	No	—
6	default_branch	Text	No	—
7	language	Text	No	—
8	topics_json	Text	No	Write this in quotes, such as '[]' or '{}'.
9	visibility	Text	No	—
10	license_key	Text	No	—
11	archived	Yes or no	No	—
12	disabled	Yes or no	No	—
13	is_template	Yes or no	No	—
14	fork	Yes or no	No	—
15	parent_full_name	Text	No	—
16	size	Number	No	—
17	stargazers_count	Number	No	—
18	watchers_count	Number	No	—
19	forks_count	Number	No	—
20	open_issues_count	Number	No	—
21	created_at	Date and time	No	—
22	updated_at	Date and time	No	—
23	pushed_at	Date and time	No	—
24	html_url	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_repositories (
  id,
  name,
  full_name,
  owner_login
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_review_comments

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under review_comments`. 11 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—

#	Column	Type	Required	Notes
2	pr_id	Text	Yes	—
3	author_login	Text	No	—
4	body	Text	No	—
5	path	Text	No	—
6	diff_hunk	Text	No	—
7	line	Number	No	—
8	position	Number	No	—
9	commit_id	Text	No	—
10	in_reply_to_id	Text	No	—
11	created_at	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_review_comments (
  id,
  pr_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_reviews

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under reviews`. 7 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	pr_id	Text	Yes	—
3	author_login	Text	No	—
4	state	Text	No	—
5	body	Text	No	—
6	submitted_at	Date and time	No	—
7	commit_id	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_reviews (
  id,
  pr_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_tags

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under tags`. 9 columns. 4 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`repo_id`	Text	Yes	—
3	`name`	Text	Yes	—
4	`sha`	Text	Yes	—
5	`tag_sha`	Text	No	—
6	`message`	Text	No	—
7	`tagger_name`	Text	No	—
8	`tagger_email`	Text	No	—
9	`tagger_date`	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_tags (
  id,
  repo_id,
  name,
  sha
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_timeline_events

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under timeline_events`. 6 columns. 3 must be filled.

> The data file says `data`. Write `data_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`pr_id`	Text	Yes	—
3	`event`	Text	Yes	—
4	`actor_login`	Text	No	—
5	`created_at`	Date and time	No	—
6	`data_json`	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO github.github_timeline_events (
  id,
  pr_id,
  event
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

github.github_users

Copy an existing id from `HarmonyGames_GitHub/Services_Data/github/data.json, under users`. 15 columns. 1 must be filled.

#	Column	Type	Required	Notes
1	`login`	Text	Yes	—
2	`github_id`	Text	No	—
3	`node_id`	Text	No	—
4	`type`	Text	No	—
5	`site_admin`	Yes or no	No	—
6	`name`	Text	No	—
7	`email`	Text	No	—
8	`public_repos`	Number	No	—
9	`public_gists`	Number	No	—
10	`followers`	Number	No	—
11	`following`	Number	No	—
12	`created_at`	Date and time	No	—
13	`updated_at`	Date and time	No	—
14	`avatar_url`	Text	No	—
15	`html_url`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO github.github_users (
  login
) VALUES (
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Gmail

SQL name: `gmail`. Mailboxes, labels, threads, messages, and attachments.

gmail.gmail_attachments

Copy an existing id from `HarmonyGames_Gmail/Services_Data/gmail/threads/*.json, under messages, then attachments`. 6 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`message_id`	Text	Yes	—
3	`filename`	Text	No	—
4	`mime_type`	Text	No	—
5	`size`	Number	No	—
6	`data_b64`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gmail.gmail_attachments (
  id,
  message_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gmail.gmail_label_user_counters

6 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	`label_id`	Text	Yes	—
2	`user_email`	Text	Yes	—
3	`messages_total`	Number	No	—
4	`messages_unread`	Number	No	—
5	`threads_total`	Number	No	—
6	`threads_unread`	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO gmail.gmail_label_user_counters (
  label_id,
  user_email
) VALUES (
  'replace-me',  -- required. Replace this text
  'name@harmonygames.co'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gmail.gmail_labels

Copy an existing id from `HarmonyGames_Gmail/Services_Data/gmail/labels.json`. 11 columns. 2 must be filled.

> The data file says `labelListVisibility`. Write `label_list_visibility`.
> The data file says `messageListVisibility`. Write `message_list_visibility`.
> The data file says `messagesTotal`. Write `messages_total`.
> The data file says `messagesUnread`. Write `messages_unread`.
> The data file says `threadsTotal`. Write `threads_total`.
> The data file says `threadsUnread`. Write `threads_unread`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`type`	Text	No	—
4	`message_list_visibility`	Text	No	—
5	`label_list_visibility`	Text	No	—
6	`messages_total`	Number	No	—
7	`messages_unread`	Number	No	—

#	Column	Type	Required	Notes
8	threads_total	Number	No	—
9	threads_unread	Number	No	—
10	color_text	Text	No	—
11	color_background	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gmail.gmail_labels (
  id,
  name
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gmail.gmail_messages

Copy an existing id from `HarmonyGames_Gmail/Services_Data/gmail/threads/*.json, under messages`. 27 columns. 3 must be filled.

> The data file says `bcc`. Write `bcc_json`.
> The data file says `cc`. Write `cc_json`.
> The data file says `headers`. Write `headers_json`.
> The data file says `labelIds`. Write `label_ids_json`.
> The data file says `reply_to`. Write `reply_to_json`.
> The data file says `to`. Write `to_json`.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	thread_id	Text	Yes	—
3	user_email	Text	Yes	—
4	label_ids_json	Text	No	Write this in quotes, such as '[]' or '{}'.
5	trash_removed_labels_json	Text	No	Write this in quotes, such as '[]' or '{}'.
6	snippet	Text	No	—
7	history_id	Text	No	—
8	internal_date	Number	No	—
9	date	Date and time	No	—
10	size_estimate	Number	No	—
11	subject	Text	No	—
12	from_email	Text	No	—
13	from_name	Text	No	—
14	to_json	Text	No	Write this in quotes, such as '[]' or '{}'.
15	cc_json	Text	No	Write this in quotes, such as '[]' or '{}'.
16	bcc_json	Text	No	Write this in quotes, such as '[]' or '{}'.
17	reply_to_json	Text	No	Write this in quotes, such as '[]' or '{}'.

#	Column	Type	Required	Notes
18	`body_text`	Text	No	—
19	`body_html`	Text	No	—
20	`headers_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
21	`payload_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
22	`in_reply_to`	Text	No	—
23	`references`	Text	No	—
24	`mbox_from`	Text	No	—
25	`date_parsed_source`	Text	No	—
26	`attachments_meta_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
27	`body_text_fts`	Leave blank	No	Leave this blank.

Copy this, then replace every replace-me

```
INSERT INTO gmail.gmail_messages (
  id,
  thread_id,
  user_email
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'name@harmonygames.co'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gmail.gmail_threads

Copy an existing id from `HarmonyGames_Gmail/Services_Data/gmail/threads/*.json, under (thread object)`. 4 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`user_email`	Text	Yes	—
3	`snippet`	Text	No	—
4	`history_id`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gmail.gmail_threads (
  id,
  user_email
) VALUES (
  'replace-me',  -- required. Replace this text
  'name@harmonygames.co'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gmail.gmail_users

Copy an existing id from `HarmonyGames_Gmail/Services_Data/gmail/users.json`. 6 columns. 1 must be filled.

> The data file says `emailAddress`. Write `email_address`.
> The data file says `historyId`. Write `history_id`.

> The data file says `messagesTotal`. Write `messages_total`.
> The data file says `threadsTotal`. Write `threads_total`.

#	Column	Type	Required	Notes
1	`email_address`	Text	Yes	—
2	`name`	Text	No	—
3	`messages_total`	Number	No	—
4	`threads_total`	Number	No	—
5	`history_id`	Text	No	—
6	`created_at`	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO gmail.gmail_users (
  email_address
) VALUES (
  'name@harmonygames.co'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Slack

SQL name: `slack`. Channels, users, messages, and files.

slack.slack_channels

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/slack/channels.json`. 14 columns. 10 must be filled.

> The data file says `created`. Write `created_ts`.
> The data file says `creator`. Write `creator_id`.
> The data file says `members`. Write `members_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	No	—
3	`is_channel`	Yes or no	Yes	—
4	`is_private`	Yes or no	Yes	—
5	`is_im`	Yes or no	Yes	—
6	`is_mpim`	Yes or no	Yes	—
7	`is_archived`	Yes or no	Yes	—
8	`is_general`	Yes or no	Yes	—
9	`num_members`	Number	Yes	—
10	`topic`	Text	No	—
11	`purpose`	Text	No	—
12	`created_ts`	Number	Yes	—
13	`creator_id`	Text	No	—
14	`members_json`	Text	Yes	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_channels (
  id,
  is_channel,
  is_private,
  is_im,
  is_mpim,
  is_archived,
  is_general,
  num_members,
  created_ts,
  members_json
) VALUES (
  'replace-me',  -- required. Replace this text
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  0,  -- required. A number, with no quotes
  0,  -- required. A number, with no quotes
  '[]'  -- required. Write this in quotes, such as '[]' or '{}'
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

slack.slack_drafts

7 columns. 5 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	user_id	Text	Yes	—
3	channel_id	Text	No	—
4	text	Text	Yes	—
5	thread_ts	Text	No	—
6	created	Number	Yes	—
7	updated	Number	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_drafts (
  id,
  user_id,
  text,
  created,
  updated
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  0  -- required. A number, with no quotes
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

slack.slack_emojis

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/slack/emojis.json`. 5 columns. 1 must be filled.

#	Column	Type	Required	Notes
1	`name`	Text	Yes	—
2	`url`	Text	No	—
3	`alias_for`	Text	No	—
4	`user_id`	Text	No	—
5	`created`	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_emojis (
  name
) VALUES (
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

slack.slack_files

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/slack/files.json`. 16 columns. 4 must be filled.

> The data file says `user`. Write `user_id`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`title`	Text	No	—
4	`mimetype`	Text	No	—
5	`filetype`	Text	No	—
6	`size`	Number	Yes	—
7	`user_id`	Text	No	—
8	`channel_id`	Text	No	—
9	`message_ts`	Text	No	—
10	`created`	Number	No	—
11	`is_public`	Yes or no	Yes	—
12	`url_private`	Text	No	—
13	`permalink`	Text	No	—
14	`preview`	Text	No	—
15	`content_path`	Text	No	—
16	`content_inline`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_files (
  id,
  name,
  size,
```

```
  is_public
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  FALSE  -- required. TRUE or FALSE, with no quotes
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

slack.slack_messages

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/slack/messages/<channel>/<month>.json`. 24 columns. 13 must be filled.

> The data file says `attachments`. Write `attachments_json`.
> The data file says `channel`. Write `channel_id`.
> The data file says `files`. Write `files_json`.
> The data file says `reactions`. Write `reactions_json`.
> The data file says `user`. Write `user_id`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`ts`	Text	Yes	—
3	`channel_id`	Text	Yes	—
4	`type`	Text	Yes	—
5	`user_id`	Text	No	—
6	`text`	Text	Yes	—
7	`thread_parent_id`	Text	No	—
8	`thread_ts_legacy`	Text	No	—
9	`reply_count`	Number	Yes	—
10	`reply_users_count`	Number	Yes	—
11	`latest_reply`	Text	No	—
12	`is_activity_message`	Yes or no	Yes	—
13	`subtype`	Text	No	—
14	`reactions_json`	Text	Yes	Write this in quotes, such as '[]' or '{}'.
15	`files_json`	Text	Yes	Write this in quotes, such as '[]' or '{}'.
16	`attachments_json`	Text	Yes	Write this in quotes, such as '[]' or '{}'.
17	`created_at`	Date and time	Yes	—
18	`edited_ts`	Text	No	—
19	`edited_user`	Text	No	—
20	`bot_id`	Text	No	—
21	`client_msg_id`	Text	No	—
22	`permalink`	Text	No	—
23	`metadata_json`	Text	Yes	Write this in quotes, such as '[]' or '{}'.
24	`text_fts`	Leave blank	No	Leave this blank.

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_messages (
  id,
  ts,
  channel_id,
  type,
  text,
  reply_count,
  reply_users_count,
  is_activity_message,
  reactions_json,
  files_json,
  attachments_json,
  created_at,
  metadata_json
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  0,  -- required. A number, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
  '2026-02-13 12:00:00+00',  -- required. Put the date in quotes
  '[]'  -- required. Write this in quotes, such as '[]' or '{}'
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

slack.slack_scheduled_messages

7 columns. 6 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	channel_id	Text	Yes	—
3	user_id	Text	Yes	—
4	text	Text	Yes	—
5	post_at	Number	Yes	—
6	created	Number	Yes	—
7	thread_ts	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_scheduled_messages (
  id,
  channel_id,
  user_id,
  text,
  post_at,
  created
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  0  -- required. A number, with no quotes
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

slack.slack_users

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/slack/users.json`. 10 columns. 5 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	No	—
3	`real_name`	Text	No	—
4	`display_name`	Text	No	—
5	`email`	Text	No	—
6	`avatar_url`	Text	No	—
7	`is_bot`	Yes or no	Yes	—
8	`is_admin`	Yes or no	Yes	—
9	`deleted`	Yes or no	Yes	—
10	`timezone`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO slack.slack_users (
  id,
  is_bot,
  is_admin,
  deleted,
  timezone
) VALUES (
  'replace-me',  -- required. Replace this text
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Linear

SQL name: `linear`. Teams, projects, issues, comments, and attachments.

linear.linear_attachments

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under attachments`. 8 columns. 4 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`issue_identifier`	Text	Yes	—
3	`kind`	Text	Yes	—
4	`filename`	Text	Yes	—
5	`mime_type`	Text	No	—
6	`size`	Number	No	—
7	`surface`	Text	No	—
8	`rel_path`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_attachments (
  id,
  issue_identifier,
  kind,
  filename
) VALUES (
  'replace-me', -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

linear.linear_comments

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under comments`. 8 columns. 7 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`issue_id`	Text	Yes	—
3	`author_id`	Text	Yes	—
4	`parent_id`	Text	No	—
5	`body`	Text	Yes	—
6	`is_edited`	Yes or no	Yes	—
7	`created_at`	Text	Yes	—
8	`updated_at`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_comments (
  id,
  issue_id,

  author_id,
  body,
  is_edited,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

linear.linear_issues

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under issues`. 26 columns. 9 must be filled.

> The data file says `labels`. Write `labels_json`.
> The data file says `links`. Write `links_json`.
> The data file says `relations`. Write `relations_json`.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	project_id	Text	No	—
3	team_id	Text	No	—
4	parent_id	Text	No	—
5	assignee_id	Text	No	—
6	creator_id	Text	No	—
7	state_id	Text	No	—
8	cycle_id	Text	No	—
9	identifier	Text	No	—
10	number	Number	No	—
11	title	Text	Yes	—
12	description	Text	No	—
13	priority	Number	Yes	—
14	estimate	Number	No	—
15	due_date	Text	No	—
16	started_at	Text	No	—
17	completed_at	Text	No	—
18	canceled_at	Text	No	—
19	archived_at	Text	No	—
20	time_in_status_minutes	Number	No	—
21	labels_json	Text	Yes	Write this in quotes, such as '[]' or '{}'.
22	links_json	Text	Yes	Write this in quotes, such as '[]' or '{}'.
23	relations_json	Text	Yes	Write this in quotes, such as '[]' or '{}'.
24	is_archived	Yes or no	Yes	—
25	created_at	Text	Yes	—
26	updated_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_issues (
  id,
  title,
  priority,
  labels_json,
  links_json,
  relations_json,
  is_archived,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
```

```
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

linear.linear_projects

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under projects`. 14 columns. 8 must be filled.

> The data file says `labels`. Write `labels_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`team_id`	Text	Yes	—
3	`name`	Text	Yes	—
4	`summary`	Text	No	—
5	`description`	Text	No	—
6	`lead_id`	Text	No	—
7	`priority`	Number	Yes	—
8	`state`	Text	No	—
9	`start_date`	Text	No	—
10	`target_date`	Text	No	—
11	`labels_json`	Text	Yes	Write this in quotes, such as '[]' or '{}'.
12	`is_archived`	Yes or no	Yes	—
13	`created_at`	Text	Yes	—
14	`updated_at`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_projects (
  id,
  team_id,
  name,
  priority,
  labels_json,
  is_archived,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  '[]',  -- required. Write this in quotes, such as '[]' or '{}'
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

linear.linear_team_memberships

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under team_memberships`. 4 columns. 4 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	team_id	Text	Yes	—
3	user_id	Text	Yes	—
4	created_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_team_memberships (
  id,
  team_id,
  user_id,
  created_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

linear.linear_teams

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under teams`. 7 columns. 6 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	name	Text	Yes	—
3	key	Text	Yes	—
4	description	Text	No	—
5	is_archived	Yes or no	Yes	—
6	created_at	Text	Yes	—
7	updated_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_teams (
  id,
  name,
  key,
  is_archived,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

linear.linear_users

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/linear/data.json, under users`. 8 columns. 6 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`email`	Text	Yes	—
3	`name`	Text	Yes	—
4	`display_name`	Text	No	—
5	`avatar_url`	Text	No	—
6	`is_active`	Yes or no	Yes	—
7	`created_at`	Text	Yes	—
8	`updated_at`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO linear.linear_users (
  id,
  email,
  name,
  is_active,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'name@harmonygames.co',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Google Calendar

SQL name: `gcal`. Calendars and events.

gcal.gcal_calendars

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gcal/data.json, under calendars`. 9 columns. 2 must be filled.

> The data file says `shared_with_emails`. Write `shared_with_emails_json`.

#	Column	Type	Required	Notes
1	`calendar_id`	Text	Yes	—
2	`summary`	Text	Yes	—
3	`owner_email`	Text	No	—
4	`shared_with_emails_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
5	`visibility`	Text	No	—
6	`description`	Text	No	—
7	`time_zone`	Text	No	—
8	`primary`	Yes or no	No	—

#	Column	Type	Required	Notes
9	access_role	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gcal.gcal_calendars (
  calendar_id,
  summary
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gcal.gcal_events

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gcal/data.json, under events`. 23 columns. 2 must be filled.

> The data file says `attendees`. Write `attendees_json`.
> The data file says `end`. Write `end_json`.
> The data file says `rrule`. Write `rrule_json`.
> The data file says `start`. Write `start_json`.

#	Column	Type	Required	Notes
1	event_id	Text	Yes	—
2	calendar_id	Text	Yes	—
3	summary	Text	No	—
4	description	Text	No	—
5	location	Text	No	—
6	start_ts	Date and time	No	—
7	end_ts	Date and time	No	—
8	start_json	Text	No	Write this in quotes, such as '[]' or '{}'.
9	end_json	Text	No	Write this in quotes, such as '[]' or '{}'.
10	organizer_email	Text	No	—
11	creator_email	Text	No	—
12	attendees_json	Text	No	Write this in quotes, such as '[]' or '{}'.
13	status	Text	No	—
14	visibility	Text	No	—
15	transparency	Text	No	—
16	rrule_json	Text	No	Write this in quotes, such as '[]' or '{}'.
17	recurring_event_id	Text	No	—
18	original_start_json	Text	No	Write this in quotes, such as '[]' or '{}'.
19	sequence	Number	No	—
20	created	Date and time	No	—
21	updated	Date and time	No	—
22	hangout_link	Text	No	—

#	Column	Type	Required	Notes
23	ical_uid	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gcal.gcal_events (
  event_id,
  calendar_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Google Drive

SQL name: `gdrive`. Drive users, files, and sheet files stored on Drive.

gdrive.drive_files

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gdrive/data.json, under drive_files`. 20 columns. 3 must be filled.

> The data file says `owners`. Write `owners_json`.
> The data file says `parents`. Write `parents_json`.
> The data file says `shared_with_emails`. Write `shared_with_emails_json`.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	name	Text	Yes	—
3	mime_type	Text	Yes	—
4	parents_json	Text	No	Write this in quotes, such as '[]' or '{}'.
5	owner_email	Text	No	—
6	shared_with_emails_json	Text	No	Write this in quotes, such as '[]' or '{}'.
7	shared_roles_json	Text	No	Write this in quotes, such as '[]' or '{}'.
8	visibility_role	Text	No	—
9	visibility	Text	No	—
10	owners_json	Text	No	Write this in quotes, such as '[]' or '{}'.
11	modified_time	Date and time	No	—
12	created_time	Date and time	No	—
13	size	Number	No	—
14	trashed	Yes or no	No	—
15	starred	Yes or no	No	—
16	content_path	Text	No	—
17	web_view_link	Text	No	—
18	icon_link	Text	No	—
19	description	Text	No	—

#	Column	Type	Required	Notes
20	content_text	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gdrive.drive_files (
  id,
  name,
  mime_type
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gdrive.drive_sheets

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gdrive/data.json, under drive_sheets`. 6 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	spreadsheet_id	Text	Yes	—
2	sheet_id	Text	Yes	—
3	title	Text	Yes	—
4	index	Number	No	—
5	row_count	Number	No	—
6	column_count	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO gdrive.drive_sheets (
  spreadsheet_id,
  sheet_id,
  title
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gdrive.drive_users

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gdrive/data.json, under drive_users`. 4 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	email	Text	Yes	—
3	display_name	Text	Yes	—
4	photo_link	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gdrive.drive_users (
  id,
  email,
  display_name
```

```
) VALUES (
  'replace-me',  -- required. Replace this text
  'name@harmonygames.co',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Google Docs

SQL name: `gdocs`. Document bodies.

gdocs.docs_documents

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gdocs/data.json, under docs_documents`. 11 columns. 2 must be filled.

> The data file says `shared_with_emails`. Write `shared_with_emails_json`.
> The data file says `style_runs`. Write `style_runs_json`.

#	Column	Type	Required	Notes
1	`document_id`	Text	Yes	—
2	`title`	Text	Yes	—
3	`owner_email`	Text	No	—
4	`shared_with_emails_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
5	`visibility`	Text	No	—
6	`body_text`	Text	No	—
7	`style_runs_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
8	`revision_id`	Text	No	—
9	`drive_file_id`	Text	No	—
10	`created_time`	Date and time	No	—
11	`modified_time`	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO gdocs.docs_documents (
  document_id,
  title
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Google Sheets

SQL name: `gsheets`. Spreadsheets and sheet grids.

gsheets.sheets_sheets

The file is `HarmonyGames_Other_Services/Services_Data/gsheets/data.json`. It is not unpacked here, so use the column list. 7 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`spreadsheet_id`	Text	Yes	—
2	`sheet_id`	Number	Yes	—
3	`title`	Text	Yes	—
4	`index`	Number	No	—
5	`row_count`	Number	No	—
6	`column_count`	Number	No	—
7	`grid_json`	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO gsheets.sheets_sheets (
  spreadsheet_id,
  sheet_id,
  title
) VALUES (
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gsheets.sheets_spreadsheets

The file is `HarmonyGames_Other_Services/Services_Data/gsheets/data.json`. It is not unpacked here, so use the column list. 8 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	`spreadsheet_id`	Text	Yes	—
2	`title`	Text	Yes	—
3	`owner_email`	Text	No	—
4	`shared_with_emails_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
5	`visibility`	Text	No	—
6	`drive_file_id`	Text	No	—
7	`created_time`	Date and time	No	—
8	`modified_time`	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO gsheets.sheets_spreadsheets (
  spreadsheet_id,
  title
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Google Slides

SQL name: `gslides`. Presentations, pages, and page elements.

gslides.slides_page_elements

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gslides/data.json, under slides_presentations, then pages, then elements`. 10 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`presentation_id`	Text	Yes	—
2	`page_object_id`	Text	Yes	—
3	`object_id`	Text	Yes	—
4	`kind`	Text	No	—
5	`text`	Text	No	—
6	`placeholder_type`	Text	No	—
7	`x_emu`	Number	No	—
8	`y_emu`	Number	No	—
9	`width_emu`	Number	No	—
10	`height_emu`	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO gslides.slides_page_elements (
  presentation_id,
  page_object_id,
  object_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gslides.slides_pages

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gslides/data.json, under slides_presentations, then pages`. 4 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	`presentation_id`	Text	Yes	—
2	`object_id`	Text	Yes	—
3	`index`	Number	No	—
4	`layout`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO gslides.slides_pages (
  presentation_id,
  object_id
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

gslides.slides_presentations

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/gslides/data.json, under slides_presentations`. 9 columns. 2 must be filled.

> The data file says `shared_with_emails`. Write `shared_with_emails_json`.

#	Column	Type	Required	Notes
1	`presentation_id`	Text	Yes	—
2	`title`	Text	Yes	—
3	`owner_email`	Text	No	—
4	`shared_with_emails_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
5	`visibility`	Text	No	—
6	`drive_file_id`	Text	No	—
7	`revision_id`	Text	No	—
8	`created_time`	Date and time	No	—
9	`modified_time`	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO gslides.slides_presentations (
  presentation_id,
  title
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Trello

SQL name: `trello`. Organizations, boards, lists, cards, checklists, and actions.

trello.trello_actions

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under actions`. 7 columns. 3 must be filled.

> The data file says `data`. Write `data_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`type`	Text	Yes	—
3	`date`	Date and time	Yes	—
4	`idMemberCreator`	Text	No	—
5	`idBoard`	Text	No	—
6	`idCard`	Text	No	—
7	`data_json`	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_actions (
  id,
  type,
  date
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  '2026-02-13 12:00:00+00'  -- required. Put the date in quotes
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_attachments

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under attachments`. 10 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`idCard`	Text	Yes	—
4	`url`	Text	No	—
5	`mimeType`	Text	No	—
6	`bytes`	Number	No	—
7	`date`	Date and time	No	—
8	`idMember`	Text	No	—
9	`isUpload`	Yes or no	No	—
10	`rel_path`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_attachments (
  id,
  name,
  idCard
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_boards

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under boards`. 13 columns. 2 must be filled.

> The data file says `labelNames`. Write `labelNames_json`.
> The data file says `prefs`. Write `prefs_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`desc`	Text	No	—
4	`closed`	Yes or no	No	—

#	Column	Type	Required	Notes
5	`idOrganization`	Text	No	—
6	`url`	Text	No	—
7	`shortUrl`	Text	No	—
8	`nodeId`	Text	No	—
9	`dateLastActivity`	Date and time	No	—
10	`dateLastView`	Date and time	No	—
11	`prefs_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
12	`labelNames_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
13	`memberIds_json`	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_boards (
  id,
  name
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_cards

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under cards`. 18 columns. 4 must be filled.

> The data file says `badges`. Write `badges_json`.
> The data file says `cover`. Write `cover_json`.
> The data file says `idLabels`. Write `idLabels_json`.
> The data file says `idMembers`. Write `idMembers_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`idBoard`	Text	Yes	—
4	`idList`	Text	Yes	—
5	`desc`	Text	No	—
6	`pos`	Number	No	—
7	`closed`	Yes or no	No	—
8	`due`	Date and time	No	—
9	`dueComplete`	Yes or no	No	—
10	`idMembers_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
11	`idLabels_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
12	`idShort`	Number	No	—
13	`shortLink`	Text	No	—
14	`shortUrl`	Text	No	—

#	Column	Type	Required	Notes
15	`url`	Text	No	—
16	`dateLastActivity`	Date and time	No	—
17	`cover_json`	Text	No	Write this in quotes, such as '[]' or '{}'.
18	`badges_json`	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_cards (
  id,
  name,
  idBoard,
  idList
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_check_items

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under check_items`. 7 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`state`	Text	No	—
4	`idChecklist`	Text	Yes	—
5	`pos`	Number	No	—
6	`due`	Date and time	No	—
7	`idMember`	Text	No	—

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_check_items (
  id,
  name,
  idChecklist
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_checklists

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under checklists`. 5 columns. 4 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—

#	Column	Type	Required	Notes
3	idCard	Text	Yes	—
4	idBoard	Text	Yes	—
5	pos	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_checklists (
  id,
  name,
  idCard,
  idBoard
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_labels

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under labels`. 4 columns. 2 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	name	Text	No	—
3	color	Text	No	—
4	idBoard	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_labels (
  id,
  idBoard
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_lists

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under lists`. 7 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	name	Text	Yes	—
3	idBoard	Text	Yes	—
4	pos	Number	No	—
5	closed	Yes or no	No	—
6	subscribed	Yes or no	No	—
7	softLimit	Number	No	—

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_lists (
  id,
  name,
  idBoard
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_members

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under members`. 9 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`username`	Text	Yes	—
3	`fullName`	Text	Yes	—
4	`initials`	Text	No	—
5	`avatarUrl`	Text	No	—
6	`bio`	Text	No	—
7	`url`	Text	No	—
8	`memberType`	Text	No	—
9	`confirmed`	Yes or no	No	—

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_members (
  id,
  username,
  fullName
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

trello.trello_organizations

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/trello/data.json, under organizations`. 7 columns. 3 must be filled.

> The data file says `boardIds`. Write `boardIds_json`.
> The data file says `memberIds`. Write `memberIds_json`.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`name`	Text	Yes	—
3	`displayName`	Text	Yes	—
4	`desc`	Text	No	—

#	Column	Type	Required	Notes
5	website	Text	No	—
6	memberIds_json	Text	No	Write this in quotes, such as '[]' or '{}'.
7	boardIds_json	Text	No	Write this in quotes, such as '[]' or '{}'.

Copy this, then replace every replace-me

```
INSERT INTO trello.trello_organizations (
  id,
  name,
  displayName
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Contacts

SQL name: `contacts`. Contact records.

contacts.contacts

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/contacts/contacts.json, under contacts`. 17 columns. 3 must be filled.

#	Column	Type	Required	Notes
1	contact_id	Text	Yes	—
2	first_name	Text	Yes	—
3	last_name	Text	Yes	—
4	is_user	Yes or no	No	—
5	gender	Text	No	—
6	age	Number	No	—
7	nationality	Text	No	—
8	city_living	Text	No	—
9	country	Text	No	—
10	status	Text	No	—
11	job	Text	No	—
12	description	Text	No	—
13	phone	Text	No	—
14	email	Text	No	—
15	address	Text	No	—
16	created_at	Date and time	No	—
17	updated_at	Date and time	No	—

Copy this, then replace every replace-me

```
INSERT INTO contacts.contacts (
  contact_id,
```

```
  first_name,
  last_name
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Confluence

SQL name: `confluence`. Spaces, pages, versions, comments, labels, and attachments.

> **SAME FILE AS THE OTHER SERVICES**
>
> A Confluence page, comment, or label goes in `01_Universe_Inject.sql` with the rest of your SQL. Copy the statement under the table and replace every replace-me.

confluence.confluence_attachments

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json, under attachments.` 9 columns. 8 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`page_id`	Text	Yes	—
3	`title`	Text	Yes	—
4	`media_type`	Text	Yes	—
5	`file_size`	Number	Yes	—
6	`version`	Number	Yes	—
7	`author_id`	Text	No	—
8	`created_at`	Text	Yes	—
9	`updated_at`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_attachments (
  id,
  page_id,
  title,
  media_type,
  file_size,
  version,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  0,  -- required. A number, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

confluence.confluence_comments

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json`, under `comments`. 7 columns. 6 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	page_id	Text	Yes	—
3	author_id	Text	Yes	—
4	parent_id	Text	No	—
5	body	Text	Yes	—
6	created_at	Text	Yes	—
7	updated_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_comments (
  id,
  page_id,
  author_id,
  body,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

confluence.confluence_labels

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json`, under `labels`. 5 columns. 5 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	page_id	Text	Yes	—
3	name	Text	Yes	—
4	prefix	Text	Yes	—
5	created_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_labels (
  id,
  page_id,
  name,
  prefix,
  created_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
```

```
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

confluence.confluence_page_versions

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json`, under `page_versions`. 8 columns. 6 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	page_id	Text	Yes	—
3	number	Number	Yes	—
4	title	Text	Yes	—
5	body	Text	Yes	—
6	author_id	Text	No	—
7	message	Text	No	—
8	created_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_page_versions (
  id,
  page_id,
  number,
  title,
  body,
  created_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

confluence.confluence_pages

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json`, under `pages`. 11 columns. 9 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	space_id	Text	Yes	—
3	parent_id	Text	No	—
4	title	Text	Yes	—
5	body	Text	Yes	—
6	body_format	Text	Yes	—
7	status	Text	Yes	—
8	version	Number	Yes	—

#	Column	Type	Required	Notes
9	author_id	Text	No	—
10	created_at	Text	Yes	—
11	updated_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_pages (
  id,
  space_id,
  title,
  body,
  body_format,
  status,
  version,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  0,  -- required. A number, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

confluence.confluence_spaces

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json, under spaces`. 9 columns. 7 must be filled.

#	Column	Type	Required	Notes
1	id	Text	Yes	—
2	key	Text	Yes	—
3	name	Text	Yes	—
4	type	Text	Yes	—
5	status	Text	Yes	—
6	description	Text	No	—
7	homepage_id	Text	No	—
8	created_at	Text	Yes	—
9	updated_at	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_spaces (
  id,
  key,
  name,
  type,
  status,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
```

```
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

confluence.confluence_users

Copy an existing id from `HarmonyGames_Other_Services/Services_Data/confluence/confluence_working.json, under users.` 7 columns. 6 must be filled.

#	Column	Type	Required	Notes
1	`id`	Text	Yes	—
2	`account_id`	Text	No	—
3	`email`	Text	Yes	—
4	`display_name`	Text	Yes	—
5	`is_active`	Yes or no	Yes	—
6	`created_at`	Text	Yes	—
7	`updated_at`	Text	Yes	—

Copy this, then replace every replace-me

```
INSERT INTO confluence.confluence_users (
  id,
  email,
  display_name,
  is_active,
  created_at,
  updated_at
) VALUES (
  'replace-me',  -- required. Replace this text
  'name@harmonygames.co',  -- required. Replace this text
  'replace-me',  -- required. Replace this text
  FALSE,  -- required. TRUE or FALSE, with no quotes
  'replace-me',  -- required. Replace this text
  'replace-me'  -- required. Replace this text
);
```

Add a Required = No column only when you need it. Put its name and its value in the same position.

Changelog — skip for a normal task

SQL name: `public`. A log of changes. Skip it unless the task tells you to edit the changelog.

public._changelog

8 columns. 4 must be filled.

> **SKIP THIS FOR A NORMAL TASK**
>
> This table records changes. Do not add a row here unless the task tells you to edit the changelog.

#	Column	Type	Required	Notes
1	`id`	Number	No	Filled in for you. Leave it out.
2	`timestamp`	Date and time	No	Filled in for you. Leave it out.

#	Column	Type	Required	Notes
3	schema_name	Text	Yes	—
4	table_name	Text	Yes	—
5	operation	Text	Yes	—
6	row_id	Text	No	—
7	summary	Text	Yes	—
8	changed_fields	Text	No	Write this in quotes, such as '[]' or '{}'.

06 · Snowflake — do not inject

> **DO NOT PUT THESE TABLES IN AN INJECTION FILE**
>
> Snowflake is the analytics database. A task may ask the agent to read it. Do not add, edit, or delete these rows in an injection file. The lists below are only so you can recognize a table name.

ANALYTICS.GAME_EVENTS

Daily active users, retention cohorts, level performance · 10 tables

ANALYTICS.GAME_EVENTS.PLAYER_DAILY_PROGRESS

Per-player daily snapshot: level reached, sessions, coins, boosters, levels attempted/completed, purchase flag. coins_earned is what play paid out; coins bought from the store arrive as iap_grant rows in RESOURCE_FLOW_EVENTS and are not counted here. coins_spent and boosters_used count purchases at each game's shipped booster prices, so a player-day with no affordable purchase reads zero, and boosters_used is zero throughout for Combo Fighter, which ships none. made_purchase is reconciled against IAP_TRANSACTIONS at the game-date grain. Holds 183,033 player-days over 31,210 distinct players, against 31,210 installs lifetime -- a player appears here only on days they actually played. Aggregated upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
2	date	Date and time	Yes	—
3	game_id	Text	Yes	—
4	platform	Text	Yes	—
5	country	Text	Yes	—
6	current_level	Number	No	Highest level unlocked
7	sessions_count	Number	Yes	—
8	total_session_minutes	Number	Yes	—
9	coins_earned	Number	Yes	—
10	coins_spent	Number	Yes	—
11	boosters_used	Number	Yes	—
12	levels_attempted	Number	Yes	—
13	levels_completed	Number	Yes	—
14	made_purchase	Yes or no	Yes	—

ANALYTICS.GAME_EVENTS.DAILY_ACTIVE_USERS

Daily aggregated user metrics per game and platform. Includes DAU, new/returning split, session counts, average session length, and D1/D7/D30

retention percentages. combo_fighter from 2025-12-27, domino_delights from 2023-11-01. Zombie Match 3D is ABSENT BY DESIGN and its absence is a fact about the company, not a gap: it never had a DAU instrument. Derive ZM3D volume from ANALYTICS.MARKETING.INSTALL_EVENTS and ANALYTICS.GAME_EVENTS.USER_COHORT_RETENTION instead. Do not synthesise a ZM3D DAU series. Aggregated upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	`date`	Date and time	Yes	Calendar date (UTC)
2	`game_id`	Text	Yes	combo_fighter | domino_delights -- zombie_match_3d is absent by design, see the table comment
3	`platform`	Text	Yes	ios | android
4	`dau`	Number	Yes	Daily active users. GRAIN: one row per game x platform x date -- SUM the platform rows to get a game's DAU for a day. AVG(dau) averages PLATFORM ROWS, not days, and halves the answer for any two-platform game.
5	`new_users`	Number	Yes	First-time users that day
6	`returning_users`	Number	Yes	—
7	`total_sessions`	Number	Yes	—
8	`avg_session_minutes`	Number	Yes	—
9	`d1_retention_pct`	Number	Yes	% of Day-0 cohort returning on Day 1
10	`d7_retention_pct`	Number	No	NULL until the 7-day window closes
11	`d30_retention_pct`	Number	No	NULL until the 30-day window closes

ANALYTICS.GAME_EVENTS.LEVEL_PERFORMANCE

Per-level aggregates, 5,497 rows. Level ranges present: combo_fighter 1-442, domino_delights 1-4755, zombie_match_3d 1-300. fail_reason_top is the modal failure for that level and uses each title's OWN fail vocabulary -- the three games do not share one. Aggregated upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	`game_id`	Text	Yes	—
2	`level_number`	Number	Yes	—
3	`level_type`	Text	Yes	tutorial | standard | hard | boss
4	`avg_attempts`	Number	No	Average attempts to complete (1.0 = first try always)
5	`completion_rate_pct`	Number	No	% of players who complete level on a given attempt
6	`avg_time_seconds`	Number	No	—
7	`boosters_used_per_attempt`	Number	No	—
8	`fail_reason_top`	Text	No	Most common failure reason
9	`created_date`	Date and time	Yes	—

ANALYTICS.GAME_EVENTS.USER_COHORT_RETENTION

Weekly install cohorts with Day 1 through Day 60 retention, 333 cohort rows. D1 across cohorts ranges 0.0%-75.0%, unweighted mean 24.4% over all 333 cohorts. Per-cohort scatter is wide. Aggregated upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	cohort_week	Date and time	Yes	Week of install (Monday)
2	game_id	Text	Yes	—
3	platform	Text	Yes	—
4	installs	Number	Yes	—
5	d1_ret	Number	Yes	% returning on Day 1
6	d7_ret	Number	No	NULL until the 7-day window closes
7	d14_ret	Number	No	NULL until the 14-day window closes
8	d30_ret	Number	No	NULL until the 30-day window closes
9	d60_ret	Number	No	NULL until the 60-day window closes
10	avg_iap_per_user	Number	Yes	Average IAP spend per install in the cohort
11	pct_ever_paid	Number	Yes	% of cohort who ever made an IAP

ANALYTICS.GAME_EVENTS.DIM_PLAYER

Player dimension for the install universe, 31,210 rows. Acquisition channels are derived from INSTALL_EVENTS and match AD_SPEND_DAILY. Channel mix: adjoe 8,730, applovin 699, google_uac 256, meta 1,455, organic 15,610, unity_ads 4,460.

#	Column	Type	Required	Comment
1	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
2	first_seen_date	Date and time	Yes	—
3	last_seen_date	Date and time	Yes	—
4	primary_game_id	Text	Yes	—
5	platform	Text	Yes	—
6	country_code	Text	Yes	—
7	acquisition_channel	Text	Yes	—
8	lifecycle_bucket	Text	Yes	—
9	is_payer	Yes or no	Yes	—
10	max_level_seen	Number	Yes	—
11	total_sessions_est	Number	Yes	—
12	player_traits	object	No	—

ANALYTICS.GAME_EVENTS.DAILY_METRICS_AGG

Daily metrics mart derived from the DAU and revenue tables. Aggregated upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	metric_date	Date and time	Yes	—
2	title_id	Text	Yes	—

#	Column	Type	Required	Comment
3	platform	Text	Yes	—
4	dau	Number	Yes	—
5	new_users	Number	Yes	—
6	total_sessions	Number	Yes	—
7	iap_revenue_usd	Number	Yes	—
8	ad_revenue_usd	Number	Yes	—
9	total_revenue_usd	Number	Yes	—
10	arpu_usd	Number	Yes	—
11	source_rows	Number	Yes	—
12	metric_flag	Text	Yes	—

ANALYTICS.GAME_EVENTS.SESSION_LEVEL_EVENTS

Derived from RAW_EVENTS and retained at a 1:16 session sample; sampling is by session, so every event of a retained session is present. Raw level attempt events (sampled). Each row = one player action: level_started, level_completed, level_failed, booster_used, or tutorial_step. LEVEL_PERFORMANCE is aggregated from the full upstream event stream before sampling, not from this table, so a recount here will not reproduce it.

#	Column	Type	Required	Comment
1	event_id	Text	Yes	—
2	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
3	game_id	Text	Yes	—
4	level_number	Number	Yes	—
5	event_type	Text	Yes	level_started | level_completed | level_failed | booster_used
6	event_timestamp	Date and time	Yes	—
7	platform	Text	Yes	—
8	country	Text	Yes	—
9	duration_seconds	Number	No	—
10	booster_type	Text	No	—
11	result	Text	No	win | out_of_moves | time_limit | board_stuck (domino_delights) | hp_depleted | out_of_space (zombie_match_3d) | knocked_out (combo_fighter)
12	attempt_number	Number	Yes	—

ANALYTICS.GAME_EVENTS.DIM_DATE

Calendar dimension over the active warehouse period.

#	Column	Type	Required	Comment
1	date_key	Number	Yes	—
2	date	Date and time	Yes	—
3	week_start	Date and time	Yes	—
4	month	Text	Yes	—
5	quarter	Text	Yes	—

#	Column	Type	Required	Comment
6	year	Number	Yes	—
7	day_of_week	Text	Yes	—
8	is_weekend	Yes or no	Yes	—
9	fiscal_month	Number	Yes	—
10	company_phase	Text	Yes	—

ANALYTICS.GAME_EVENTS.DIM_COUNTRY

Country dimension distinguishing revenue countries from UA-only countries.

#	Column	Type	Required	Comment
1	country_code	Text	Yes	—
2	country_name	Text	Yes	—
3	region	Text	Yes	—
4	is_revenue_country	Yes or no	Yes	—
5	is_ua_country	Yes or no	Yes	—
6	primary_market_tier	Number	Yes	—
7	currency_code	Text	Yes	—
8	gdpr_region	Yes or no	Yes	—
9	notes	Text	No	—
10	first_seen_date	Date and time	Yes	—

ANALYTICS.GAME_EVENTS.DIM_DEVICE

Device dimension: the phone/tablet models seen across HG4 titles with platform, OS version, form factor, and an estimated market value. Anchored to the device deep-dive device space (iPhone/iPad + Samsung/Pixel/Oppo/OnePlus). Domino Delights install sample skews ~77% iOS.

#	Column	Type	Required	Comment
1	device_id	Text	Yes	—
2	device_model	Text	Yes	Canonical hardware code, e.g. iPhone14,5 / Samsung Galaxy S23+ (joins RAW_GAME_EVENTS.device.model, CLIENT_ERROR_EVENTS.device_model)
3	device_model_generic	Text	No	Consumer marketing name for the hardware code, e.g. iPhone11,6 = iPhone XS Max; joins INSTALL_EVENTS.device_model. NULL for tablets (no install-table equivalent).
4	platform	Text	Yes	ios | android
5	os_version	Text	Yes	—
6	form_factor	Text	Yes	phone | tablet
7	is_tablet	Yes or no	Yes	—
8	first_seen_date	Date and time	Yes	—
9	est_market_value_usd	Number	Yes	Estimated retail value used for LTV/segmentation

ANALYTICS.MARKETING

Ad spend, install attribution, ROAS · 8 tables

ANALYTICS.MARKETING.AD_SPEND_DAILY

Daily marketing spend by game, channel, and country. Channels present: adjoe, applovin, google_uac, meta, unity_ads. By game -- combo_fighter: meta; domino_delights: adjoe, applovin, google_uac, meta, unity_ads; zombie_match_3d: applovin, meta, unity_ads. Spend runs 2024-09-01 to 2026-02-09 (attribution MMP = Singular). No blended CPI is quoted: compute it from these rows for the window you care about, because a single blended figure hides a 3x spread across channels and months.

#	Column	Type	Required	Comment
1	`date`	Date and time	Yes	—
2	`game_id`	Text	Yes	—
3	`channel`	Text	Yes	meta | google_uac | unity_ads | applovin | adjoe
4	`country`	Text	Yes	—
5	`spend_usd`	Number	Yes	—
6	`impressions`	Number	Yes	—
7	`clicks`	Number	Yes	—
8	`installs`	Number	Yes	—
9	`cpi_usd`	Number	Yes	—
10	`day1_roas`	Number	Yes	Revenue / spend ratio on Day 1 post-install

ANALYTICS.MARKETING.INSTALL_EVENTS

Individual install events, 31,210 rows: Domino Delights 22,980, Zombie Match 3D 7,329, Combo Fighter 901. Lifetime distinct players are in DIM_PLAYER. Combo Fighter runs 2025-12-27 to 2026-02-09 (615 paid / 286 organic); no IAP sales recorded for this title, though a store is present - see IAP_TRANSACTIONS. Domino Delights spans three phases: closed alpha from 2023-11-01 (internal testers, pre-launch), unannounced Google Play availability from ~2024-08, and the US soft launch 2025-04-11. 3,784 of its installs predate the US soft launch, so the earliest install date for this title is not its launch date.

#	Column	Type	Required	Comment
1	`install_id`	Text	Yes	—
2	`player_id`	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
3	`date`	Date and time	Yes	—
4	`game_id`	Text	Yes	—
5	`channel`	Text	Yes	—
6	`country`	Text	Yes	—
7	`platform`	Text	Yes	—
8	`device_model`	Text	Yes	—
9	`device_model_generic`	Text	No	marketing name; device_model holds the canonical hardware code
10	`os_version`	Text	Yes	—
11	`attributed_campaign`	Text	Yes	—
12	`cpi_usd`	Number	Yes	0.0 for organic
13	`is_organic`	Yes or no	Yes	—

ANALYTICS.MARKETING.SINGULAR_INSTALLS_RAW

Singular MMP landing table derived from INSTALL_EVENTS. singular_id equals INSTALL_EVENTS.install_id for joinability; install_meta and event_value are nested raw payloads. Singular was HG's operational MMP (AppsFlyer was historical/referenced only).

#	Column	Type	Required	Comment
1	singular_id	Text	Yes	—
2	install_time	Date and time	Yes	—
3	app_id	Text	Yes	—
4	media_source	Text	Yes	—
5	campaign_key	Text	Yes	—
6	country_code	Text	Yes	—
7	platform	Text	Yes	—
8	idfa	Text	No	—
9	gaid	Text	No	—
10	customer_user_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
11	cost_usd	Number	Yes	—
12	install_meta	object	No	—
13	event_value	variant	No	—

ANALYTICS.MARKETING.UA_SPEND_UNIFIED_V2

Versioned paid-UA spend mart for all titles (includes 152 combo_fighter rows), reconciled from AD_SPEND_DAILY and carrying source_meta for the versioned calculation.

#	Column	Type	Required	Comment
1	report_date	Date and time	Yes	—
2	title_id	Text	Yes	—
3	network_name	Text	Yes	—
4	campaign_key	Text	Yes	—
5	country_code	Text	Yes	—
6	spend_current	Number	Yes	—
7	impressions_current	Number	Yes	—
8	clicks_current	Number	Yes	—
9	installs_current	Number	Yes	—
10	cpi_current	Number	Yes	—
11	source_count	Number	Yes	—
12	source_meta	object	No	—

ANALYTICS.MARKETING.APP_STORE_REVIEWS

App-store review stream with one-star spikes aligned to incidents.

#	Column	Type	Required	Comment
1	review_id	Text	Yes	—
2	review_date	Date and time	Yes	—

#	Column	Type	Required	Comment
3	title_id	Text	Yes	—
4	platform	Text	Yes	—
5	country_code	Text	Yes	—
6	rating	Number	Yes	—
7	review_text	Text	Yes	—
8	app_version	Text	Yes	—
9	sentiment_score	Number	Yes	—
10	incident_related	Yes or no	Yes	—
11	topic_bucket	Text	Yes	—
12	review_meta	object	No	—

ANALYTICS.MARKETING.INSTALL_ATTRIBUTION

Installs, carrying player_id.

#	Column	Type	Required	Comment
1	install_id	Text	Yes	—
2	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
3	install_ts	Date and time	Yes	—
4	game_id	Text	Yes	—
5	platform	Text	Yes	—
6	country	Text	Yes	—
7	device_model	Text	Yes	canonical HARDWARE code, joins DIM_DEVICE.device_model (D6)
8	device_model_generic	Text	No	marketing name, joins DIM_DEVICE.device_model_generic
9	os_version	Text	Yes	—
10	media_source	Text	Yes	organic | meta | google_uac | unity_ads | applovin | adjoe
11	campaign_key	Text	Yes	—
12	cost_usd	Number	Yes	—
13	is_organic	Yes or no	Yes	—
14	mmp_reported_at	Date and time	Yes	—

ANALYTICS.MARKETING.AD_SPEND

What we paid the networks (as the MMP reported it).

#	Column	Type	Required	Comment
1	date	Date and time	Yes	—
2	game_id	Text	Yes	—
3	network	Text	Yes	—
4	campaign_key	Text	Yes	—
5	country	Text	Yes	—
6	spend_usd	Number	Yes	—

#	Column	Type	Required	Comment
7	impressions	Number	Yes	—
8	clicks	Number	Yes	—
9	installs_reported	Number	Yes	—

ANALYTICS.MARKETING.STORE_REVIEWS

Player-submitted review text from the app stores.

#	Column	Type	Required	Comment
1	review_id	Text	Yes	—
2	date	Date and time	Yes	—
3	game_id	Text	Yes	—
4	platform	Text	Yes	—
5	country	Text	Yes	—
6	rating	Number	Yes	—
7	title	Text	No	—
8	body	Text	Yes	—
9	app_version	Text	Yes	—
10	topic_bucket	Text	Yes	—

ANALYTICS.MONETIZATION

IAP transactions and daily revenue · 6 tables

ANALYTICS.MONETIZATION.IAP_TRANSACTIONS

Individual in-app purchase records, 977 rows (2024-02-23 to 2026-02-09). By game: domino_delights 976, zombie_match_3d 1. SKUs present: bundle.tier2.abandoned_backpack, dd_coins_large, dd_coins_medium, dd_coins_mega, dd_coins_small, dd_remove_ads, dd_starter_pack. Titles absent from this table recorded no purchases; absence here means no sales, not the absence of a store. NET of refunds: ANALYTICS.MONETIZATION.STORE_TRANSACTIONS holds 993 gross receipts = 977 completed + 16 refunded ($125.84); the refunded ones are excluded here. The two tables share transaction_id, so this is a strict subset - use that table for receipt counts and this one for revenue.

#	Column	Type	Required	Comment
1	transaction_id	Text	Yes	—
2	date	Date and time	Yes	—
3	game_id	Text	Yes	—
4	platform	Text	Yes	—
5	country	Text	Yes	—
6	product_sku	Text	Yes	—
7	product_name	Text	Yes	—
8	price_usd	Number	Yes	—
9	is_subscription	Yes or no	Yes	—
10	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id

ANALYTICS.MONETIZATION.REVENUE_DAILY

Daily revenue aggregated by game, platform, and top country. Includes both IAP and ad revenue. Best single day by game -- combo_fighter peaks at $0.73 on 2026-01-28; domino_delights peaks at $159.03 on 2025-06-28; zombie_match_3d peaks at $1.99 on 2025-07-31. Aggregated

upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	`date`	Date and time	Yes	—
2	`game_id`	Text	Yes	—
3	`platform`	Text	Yes	—
4	`country_top`	Text	No	—
5	`iap_revenue_usd`	Number	Yes	—
6	`ad_revenue_usd`	Number	Yes	—
7	`total_revenue_usd`	Number	Yes	Total revenue for the day. GRAIN: one row per game x platform x country_top -- SUM before comparing to any daily figure; an average over these rows is not a daily average.
8	`paying_users`	Number	Yes	—
9	`arpu_usd`	Number	No	Average revenue per user (total revenue / DAU)
10	`arppu_usd`	Number	Yes	Average revenue per paying user

ANALYTICS.MONETIZATION.REVENUE_DAILY_V2

Versioned all-title (includes 90 combo_fighter) revenue mart. Includes Combo Fighter (90 rows) and keeps a calc_metadata payload explaining the scope. Aggregated upstream of the retained event tables. RAW_GAME_EVENTS and STG_EVENTS_ENRICHED retain a 1:8 session sample, and PROGRESSION_EVENTS, SESSION_LEVEL_EVENTS and AD_IMPRESSION_EVENTS a 1:16 sample, so a recount from those tables will not match these totals.

#	Column	Type	Required	Comment
1	`report_date`	Date and time	Yes	—
2	`title_id`	Text	Yes	—
3	`platform`	Text	Yes	—
4	`country_code`	Text	Yes	—
5	`iap_revenue_current`	Number	Yes	—
6	`ad_revenue_current`	Number	Yes	—
7	`total_revenue_current`	Number	Yes	—
8	`paying_users_current`	Number	Yes	—
9	`arpu_current`	Number	No	—
10	`source_table`	Text	Yes	—
11	`calc_metadata`	object	No	—

ANALYTICS.MONETIZATION.VIRTUAL_CURRENCY_LEDGER

Virtual-currency ledger, a 1:1 projection of RESOURCE_FLOW_EVENTS keyed by ledger_meta.source_event_id, preserving the Apr 2025 coin-crisis economy version. Amounts and running balances are the source row's, not recomputed.

#	Column	Type	Required	Comment
1	`ledger_id`	Text	Yes	—
2	`event_date`	Date and time	Yes	—

#	Column	Type	Required	Comment
3	title_id	Text	Yes	—
4	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	currency	Text	Yes	—
6	amount	Number	Yes	—
7	sink_source	Text	Yes	—
8	item_id	Text	Yes	—
9	balance_after	Number	Yes	—
10	economy_version	Text	Yes	—
11	ledger_meta	object	No	—

ANALYTICS.MONETIZATION.AD_REVENUE

What the networks paid us, split accrued vs paid.

#	Column	Type	Required	Comment
1	date	Date and time	Yes	—
2	game_id	Text	Yes	—
3	platform	Text	Yes	—
4	country	Text	Yes	—
5	network	Text	Yes	—
6	placement	Text	Yes	—
7	impressions	Number	Yes	BILLABLE impressions as reported by the ad network - what the network paid on, not what the client fired. Legitimately much SMALLER than AD_IMPRESSION_EVENTS, which is the client-side impression stream (materialised at a 1-in-16 session sample): unfilled, no-fill and non-billable impressions never reach this column. The two tables reconcile on MONEY, not on counts - AD_IMPRESSION_EVENTS.revenue_usd scaled by the sample rate matches revenue_usd here. Do not compare the counts, and do not truncate either side to make them agree
8	revenue_usd	Number	Yes	—
9	accrued_vs_paid	Text	Yes	paid | accrued_unpaid

ANALYTICS.MONETIZATION.STORE_TRANSACTIONS

IAP receipts, 993 rows (2024-02-23 to 2026-02-09). GROSS: includes refunded receipts (is_refunded). 993 = 977 completed + 16 refunded ($125.84). ANALYTICS.MONETIZATION.IAP_TRANSACTIONS is this table NET of refunds and shares transaction_id, so it is a strict subset -- use this table for receipt counts and that one for revenue.

#	Column	Type	Required	Comment
1	transaction_id	Text	Yes	—
2	receipt_id	Text	Yes	—
3	date	Date and time	Yes	—
4	game_id	Text	Yes	—
5	platform	Text	Yes	—
6	country	Text	Yes	—

#	Column	Type	Required	Comment
7	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
8	product_sku	Text	Yes	—
9	product_name	Text	Yes	—
10	price_usd	Number	Yes	—
11	is_subscription	Yes or no	Yes	—
12	is_refunded	Yes or no	Yes	—

ANALYTICS.RAW_TELEMETRY

Raw event firehose. RAW_EVENTS is the single client telemetry stream; 6 of the other 8 tables here are deterministic session-sampled projections of it (marked [DERIVED VIEW]), and 1 further projection lives elsewhere (SESSION_LEVEL_EVENTS). CLIENT_ERROR_EVENTS and RESOURCE_FLOW_EVENTS are NOT sampled -- computed from the full stream. · 9 tables

ANALYTICS.RAW_TELEMETRY.RESOURCE_FLOW_EVENTS

Sink/source ledger for the in-game economy, 1,483,075 rows: one row-set per PLAYER_DAILY_PROGRESS player-day. Not a sample. Currency movements present: bones source 9,556, coins sink 31,882, coins source 1,441,637. Booster prices as transacted: draw_3 1200, draw_5 1800, dynamite 1000, glue 400, gust 2000, rewind 500, trampoline 200, wildcard 1600. Combo Fighter is absent by design -- its prototype economy is not modelled in this ledger, and PLAYER_DAILY_PROGRESS does not credit it either, so the two agree. SCOPE: this ledger records soft-currency flows (coins) and the ZM3D bones faucet only. Gem-denominated purchases are NOT recorded here: the gem catalogue is real and priced in the shipped client, but no gem economy is simulated in this warehouse, so the absence of gem rows is a modelling boundary and not evidence that gems were unused.

#	Column	Type	Required	Comment
1	resource_event_id	Text	Yes	—
2	event_ts	Date and time	Yes	—
3	app_id	Text	Yes	domino_delights | zombie_match_3d (renamed game key)
4	user_pseudo_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_id	Text	Yes	—
6	flow_type	Text	Yes	Sink | Source
7	currency	Text	Yes	coins | bones
8	amount	Number	Yes	—
9	item_type	Text	Yes	level_reward | booster | rewarded_video | hourly_collection | live_ops | mini_game | quest | chapter_reward | iap_grant
10	item_id	Text	Yes	—
11	level_index	Number	Yes	Level the flow occurred at (renamed level key)
12	balance_after	Number	Yes	—
13	event_params	object	No	Semi-structured params: spend_source, is_first_of_day, post_crisis

ANALYTICS.RAW_TELEMETRY.RAW_GAME_EVENTS

Derived from RAW_EVENTS and retained at a 1:8 session sample; sampling is by session, so every event of a retained session is present. Unprocessed client analytics firehose across all HG4 titles (GameAnalytics-style). One row per emitted event with device/geo/custom_fields as nested payloads. app_version tracks the seed release timeline; event volume dips on known incident dates. Combo Fighter appears only at prototype scale (~3%).

#	Column	Type	Required	Comment
1	event_id	Text	Yes	—
2	event_dt	Date and time	Yes	Event emission time (UTC), full timestamp; date-truncate for daily rollups
3	app_id	Text	Yes	domino_delights | zombie_match_3d | combo_fighter (renamed game key)
4	user_pseudo_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_id	Text	Yes	—
6	event_category	Text	Yes	session | progression | economy | ui | ad
7	event_name	Text	Yes	—
8	sdk_version	Text	Yes	—
9	app_version	Text	Yes	Release version from the seed release timeline
10	device	object	No	Semi-structured: model, platform, os_version, is_tablet
11	geo	object	No	Semi-structured: country, region
12	custom_fields	variant	No	Free-form per-event params (level_index, engagement_bucket, on_incident_day)
13	ingested_at	Date and time	Yes	—

ANALYTICS.RAW_TELEMETRY.STG_EVENTS_ENRICHED

Derived from RAW_EVENTS and retained at a 1:8 session sample; sampling is by session, so every event of a retained session is present. Enriched staging table over RAW_GAME_EVENTS with normalized country/device fields and event_attrs payload.

#	Column	Type	Required	Comment
1	event_date	Date and time	Yes	—
2	title_id	Text	Yes	—
3	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
4	session_key	Text	Yes	—
5	event_family	Text	Yes	—
6	event_name	Text	Yes	—
7	level_num	Number	No	—
8	platform	Text	No	—
9	country_code	Text	No	—
10	app_version	Text	Yes	—
11	device_model	Text	No	—
12	event_attrs	variant	No	—
13	ingest_source	Text	Yes	—

ANALYTICS.RAW_TELEMETRY.PROGRESSION_EVENTS

Derived from RAW_EVENTS and retained at a 1:16 session sample; sampling is by session, so every event of a retained session is present. Raw level lifecycle stream for all titles (includes 1,370 combo_fighter rows). Includes nested board_state and custom_fields payloads; includes Combo Fighter (1,370 rows).

#	Column	Type	Required	Comment
1	progression_event_id	Text	Yes	—
2	event_ts	Date and time	Yes	—
3	app_id	Text	Yes	—
4	user_pseudo_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_id	Text	Yes	—
6	level_index	Number	Yes	—
7	stage_name	Text	Yes	—
8	event_name	Text	Yes	—
9	attempt_number	Number	Yes	—
10	result	Text	No	—
11	duration_seconds	Number	Yes	—
12	move_count	Number	Yes	—
13	booster_count	Number	Yes	—
14	board_state	object	No	—
15	custom_fields	variant	No	—

ANALYTICS.RAW_TELEMETRY.STG_PROGRESSION_EVENTS

Derived from RAW_EVENTS and retained at a 1:16 session sample; sampling is by session, so every event of a retained session is present. Thin staging layer over PROGRESSION_EVENTS with renamed join keys and retained board_state payload.

#	Column	Type	Required	Comment
1	event_date	Date and time	Yes	—
2	game_key	Text	Yes	—
3	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
4	session_key	Text	Yes	—
5	level_num	Number	Yes	—
6	event_name	Text	Yes	—
7	result	Text	No	—
8	attempt_number	Number	Yes	—
9	duration_seconds	Number	Yes	—
10	source_event_id	Text	Yes	—
11	board_state	object	No	—
12	loaded_at	Date and time	Yes	—

ANALYTICS.RAW_TELEMETRY.CLIENT_ERROR_EVENTS

Client crash/error log. Volume spikes on the known incident windows (Baklava launch crash, ZM3D launch crash + font freeze, progression wipe, etc.). ZM3D crashes concentrate at levels 3-5 (~82% per the crashed-users funnel). stack_context is a semi-structured OBJECT.

#	Column	Type	Required	Comment
1	error_event_id	Text	Yes	—
2	logged_at	Date and time	Yes	—
3	app_id	Text	Yes	domino_delights | zombie_match_3d (renamed game key)
4	user_pseudo_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_id	Text	Yes	—
6	severity	Text	Yes	fatal | error | warning
7	error_kind	Text	Yes	—
8	message	Text	Yes	—
9	at_level	Number	Yes	Level index where the error was logged
10	app_version	Text	Yes	—
11	device_model	Text	Yes	—
12	os_version	Text	Yes	—
13	stack_context	object	No	Semi-structured: thread, frames, on_incident_day

ANALYTICS.RAW_TELEMETRY.AD_IMPRESSION_EVENTS

Derived from RAW_EVENTS and retained at a 1:16 session sample; sampling is by session, so every event of a retained session is present. One row per ad_impression event, priced at AD_REVENUE's daily eCPM for the same date, game, platform, country, network and placement; custom_fields.source_spend_date links each impression to AD_SPEND_DAILY. Network payloads are nested and incident windows reduce realized revenue.

#	Column	Type	Required	Comment
1	impression_id	Text	Yes	—
2	impression_ts	Date and time	Yes	—
3	app_id	Text	Yes	—
4	user_pseudo_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_id	Text	Yes	—
6	network_name	Text	Yes	—
7	placement	Text	Yes	—
8	ad_format	Text	Yes	—
9	country_code	Text	Yes	—
10	platform	Text	Yes	—
11	revenue_usd	Number	Yes	—
12	latency_ms	Number	Yes	—
13	mediation_meta	object	No	—
14	custom_fields	variant	No	—

ANALYTICS.RAW_TELEMETRY.DESIGN_EVENTS

Derived from RAW_EVENTS and retained at a 1:64 session sample; sampling is by session, so every event of a retained session is present. Product/design instrumentation events (A/B assignments, tuning knobs, funnel probes).

#	Column	Type	Required	Comment
1	design_event_key	Text	Yes	—
2	event_dt	Date and time	Yes	—
3	title_id	Text	Yes	—
4	player_id	Text	Yes	renamed player key; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_key	Text	Yes	—
6	event_name	Text	Yes	—
7	event_value	Number	Yes	—
8	value_1	Number	Yes	—
9	value_2	Number	Yes	—
10	metric_bucket	Text	Yes	—
11	payload	variant	No	—

ANALYTICS.RAW_TELEMETRY.RAW_EVENTS

Client telemetry, retained here at a deterministic 1-in-8 SESSION sample: 807,015 rows standing for an upstream stream of 6,463,483. Other tables in this schema are retained at different sample rates and some use a different session key name, so a session_id join against this table is not necessarily complete. Aggregate marts were computed before sampling.

#	Column	Type	Required	Comment
1	event_id	Text	Yes	Primary key
2	event_ts	Date and time	Yes	Client event time (UTC)
3	ingested_at	Date and time	Yes	Warehouse arrival; always >= event_ts
4	player_id	Text	Yes	ONE player key for the whole warehouse; joins to PLAYER_DAILY_PROGRESS.player_id
5	session_id	Text	Yes	Shared by every event of one session
6	game_id	Text	Yes	domino_delights | zombie_match_3d | combo_fighter
7	platform	Text	Yes	ios | android
8	country	Text	Yes	ISO-2
9	device_model	Text	Yes	—
10	app_version	Text	Yes	—
11	build_number	Number	Yes	—
12	event_name	Text	Yes	session_start | session_end | begin_level | left_level | oom_in_level | currency_grant | currency_spend | iap_purchase | ad_impression | ad_reward | client_error | experiment_assign
13	level_index	Number	No	—
14	level_difficulty	Text	No	regular | hard | boss
15	currency	Text	No	coins | gems | bones | usd
16	amount	Number	No	—

#	Column	Type	Required	Comment
17	balance_after	Number	No	—
18	flow_type	Text	No	Sink | Source
19	item_type	Text	No	—
20	item_id	Text	No	—
21	ad_network	Text	No	—
22	ad_placement	Text	No	—
23	error_code	Text	No	—
24	severity	Text	No	fatal | error | warning
25	experiment_id	Text	No	—
26	variant	Text	No	—

FINANCE.EXPENSES

Signed ledger, monthly burn by category, cash balance, headcount · 5 tables

FINANCE.EXPENSES.MONTHLY_BURN

Monthly cash burn by expense category, 239 rows across 35 months. 35 months here vs 34 in FINANCE.EXPENSES.CASH_BALANCE is not a disagreement: 2026-02 accrued $15,717.28 of burn but never reached a month-end close, so it has a burn row and no cash row. Peak monthly burn $158,557 (2024-09). From 2025-10 the post-downsizing run-rate is $15,717-$58,115/month; the wind-down decision was 2026-02-09.

#	Column	Type	Required	Comment
1	month	Date and time	Yes	First day of month
2	category	Text	Yes	salaries | contractor_fees | aws_hosting | marketing | legal | tools_software | art_outsourcing | other
3	amount_usd	Number	Yes	—
4	headcount_impacted	Number	No	salaries rows: NON-FOUNDER PAYEES active in that month (= CASH_BALANCE.headcount; company.headcount_peak_paid.scope). contractor_fees rows: non-founder CONTRACTORS active in that month. 0 for non-payroll categories. Founders are on the roster and are NOT in either count - see PAYROLL_ROSTER.is_founder

FINANCE.EXPENSES.CASH_BALANCE

Month-end cash position, 34 closed months 2023-04..2026-01. Key milestones: the seed round totals $3.00M across 8 entries, the largest a $2.70M wire from the lead investor; Jul 2025 month-end ($286K, 3.6 months runway); final closed month 2026-01 ($8K). The wind-down was initiated 2026-02-09 and no February close exists, so the series ends at the last month the company traded.

#	Column	Type	Required	Comment
1	month_end_date	Date and time	Yes	—
2	cash_usd	Number	Yes	—

#	Column	Type	Required	Comment
3	monthly_net_burn	Number	Yes	CASH delta month-over-month, NOT operating spend. Reconciles to MONTHLY_BURN only as sum(MONTHLY_BURN categories) - revenue = monthly_net_burn. A residual remains in most months, up to ~$47K in either direction. It is NOT severance: the termination letters record earned wages only (independent-contractor agreements) and Oct-2025 payroll was $32,172 across 9 people. Treat it as unexplained cash movement in a P&L that stopped being maintained in 2025 -- its UA row omits $46,201.50 of bank-confirmed wires.
4	runway_months	Number	Yes	—
5	headcount	Number	Yes	NON-FOUNDER PAYEES at that month end - the population company.headcount_peak_paid and company.headcount_actual_tail both count, and it reads 16 at the 2024-09 peak. COMPOSITION, because the total alone misleads: it is non-founder FULL-TIME staff PLUS non-founder CONTRACTORS, counted as distinct people - 2024-09 is 12 full-time + 4 contractors, and 2026-01's 4 is 2 + 2. Only the three co-founders are excluded, so ALL PEOPLE = this + 3, peaking at 19. That 19 is the warehouse's answer to company.headcount_peak_concurrent, whose quoted "21 people including contractors" is kind=REPORTED with a band of 19-21 - 21 is the top of that band, not a realised count
6	notes	Text	No	—

FINANCE.EXPENSES.HEADCOUNT

Employee roster with monthly cost, 371 rows (one per employee per cost regime; employee_id is NOT unique). 3 founders and 19 non-founder staff over the company's life. Non-founder payees peaked at 16, reached in 2024-09 and 2025-04 and fell to 8 in 2025-11. That payee count is non-founder FULL-TIME plus non-founder CONTRACTORS (13 and 6 distinct people over the company's life); only founders are outside it, so ALL PEOPLE peaked at 19; the tail runs 2025-09 12, 2025-10 13, 2025-11 8, 2025-12 7, 2026-01 4. Separately, one engineer was terminated 2025-10-20 for undisclosed dual employment (moonlighting) at a second company; that individual is anonymized and NOT identified in this roster.

#	Column	Type	Required	Comment
1	employee_id	Text	Yes	—
2	department	Text	Yes	—
3	employment_type	Text	Yes	—
4	start_month	Date and time	Yes	—
5	end_month	Date and time	No	NULL = still active
6	monthly_cost_usd	Number	Yes	—
7	roster_line_id	Text	Yes	surrogate key. One row per (employee_id, cost regime); employee_id repeats across a person's consecutive, non-overlapping month ranges
8	is_founder	Yes or no	Yes	TRUE for the three co-founders. CASH_BALANCE.headcount and MONTHLY_BURN.headcount_impacted count the rows where this is FALSE

FINANCE.EXPENSES.FINANCE_LEDGER

Signed cash movements including inflows.

#	Column	Type	Required	Comment
1	entry_id	Text	Yes	—
2	date	Date and time	Yes	—

#	Column	Type	Required	Comment
3	category	Text	Yes	—
4	counterparty	Text	Yes	—
5	amount_usd	Number	Yes	SIGNED: inflows positive
6	employee_id	Text	No	—

FINANCE.EXPENSES.PAYROLL_ROSTER

The payroll roster that FINANCE_LEDGER salaries key off.

#	Column	Type	Required	Comment
1	roster_line_id	Text	Yes	surrogate key. One row per (employee_id, cost regime); employee_id repeats
2	employee_id	Text	Yes	—
3	name	Text	Yes	—
4	role	Text	Yes	—
5	employment_type	Text	Yes	—
6	is_founder	Yes or no	Yes	TRUE for the three co-founders (Slack founders-only channel membership + three Founder's Stock Purchase Agreements). Excluded from CASH_BALANCE.headcount and MONTHLY_BURN.headcount_impacted
7	start_month	Date and time	Yes	—
8	end_month	Date and time	No	—
9	monthly_cost_usd	Number	Yes	flat over THIS row's month range; 0 = on the roster, not on the payroll (unpaid founders pre-seed, and everyone in 2026-02)

LIVE_OPS.EVENTS

Live-ops events and push campaigns · 2 tables

LIVE_OPS.EVENTS.PUSH_NOTIFICATION_STATS

Daily push-notification send/open/click stats for shipped games, with nested delivery metadata.

#	Column	Type	Required	Comment
1	push_id	Text	Yes	—
2	send_date	Date and time	Yes	—
3	title_id	Text	Yes	—
4	campaign_key	Text	Yes	—
5	message_type	Text	Yes	—
6	audience_segment	Text	Yes	—
7	sent_count	Number	Yes	—
8	open_count	Number	Yes	—
9	click_count	Number	Yes	—
10	conversion_count	Number	Yes	—
11	opt_out_count	Number	Yes	—
12	status	Text	Yes	—

#	Column	Type	Required	Comment
13	delivery_meta	object	No	—

LIVE_OPS.EVENTS.LIVE_EVENT_PERFORMANCE

Per-event metrics for all live-ops events, 827 runs. Event catalogue present in this table: Axe Arena, Plague Race, River Rush, Season Pass, Streak Fever, Weekly Leaderboards, Weekly Quests, Win & Collect. Recorded incidents against these events -- 2024-11-15 Weekly Quests: Quest-system auto-deploy incident (ENG-1892); 2025-07-12 River Rush: Scheduler outage; 2025-08-05 Plague Race: Plague Race algo bug (ZOM-459).

#	Column	Type	Required	Comment
1	event_id	Text	Yes	—
2	game_id	Text	Yes	—
3	event_name	Text	Yes	—
4	start_date	Date and time	Yes	—
5	end_date	Date and time	Yes	—
6	participants	Number	Yes	—
7	completions	Number	Yes	—
8	completion_rate_pct	Number	Yes	—
9	avg_score	Number	Yes	—
10	revenue_generated_usd	Number	Yes	—
11	status	Text	Yes	completed | failed | degraded
12	failure_note	Text	No	—

You do not need another file to write the SQL. Use the column lists in this guide. Snowflake is listed only so you do not write SQL for it.

CONFIDENTIAL | rashmitasahoo2002@gmail.com+outlier | 2026-11-04T12:24:09.695Z