

Unlock User

Overview

This API is used to unlock (reactivate) a specific user account that was previously locked. When unlocked, the user's IsActive status is set to true. This action can only be performed by an Administrator.

API Specification

API	URL
POST	/api/users/{id}/unlock
Permission	ADMIN (Requires Bearer Token)

Request sample

- URL Parameter:** The id of the user to unlock.
- Authorization Header:** The Admin's Bearer Token for authentication.

Field	Description	Data Type	Examples
id	The unique identifier of the user to unlock (reactivate).	Guid	a1b2c3d4-e5f6-7890-abcd-123456789abc
Authorization	The Admin's Bearer Token obtained from /api/auth/login	string	Bearer eyJhbGciOiJI

			UzI1Ni...
--	--	--	-----------

curl --location --request POST
'https://localhost:7123/api/users/a1b2c3d4-e5f6-7890-abcd-123456789abc/unlock' \
--header 'Authorization: Bearer eyJhbGciOiJIUzI1Ni...'

Response sample

```
{  
  "statusCode": 200,  
  "message": "User unlocked successfully.",  
  "data": null,  
  "respondedAt": "2025-10-22T09:05:00Z"  
}
```


Validation

Status code	Description	Examples
400	The user account is already active (unlocked).	<pre>{ "statusCode": 400, "message": "This user account is already active (unlocked).", "data": null, "respondedAt": "..." }</pre>

401	Authentication token is missing or invalid.	<pre>{ "statusCode": 401, "message": "Cannot determine performing administrator.", "data": null, "respondedAt": "..." }</pre>
-----	---	---

403	The user's role is not "ADMIN".	<pre>{ "statusCode": 403, "message": "Forbidden", "data": null, "respondedAt": "..." }</pre>
404	The user with the specified id was not found.	<pre>{ "statusCode": 404, "message": "The user with the specified ID was not found.", "data": null, "respondedAt": "..." }</pre>

Activity Diagram

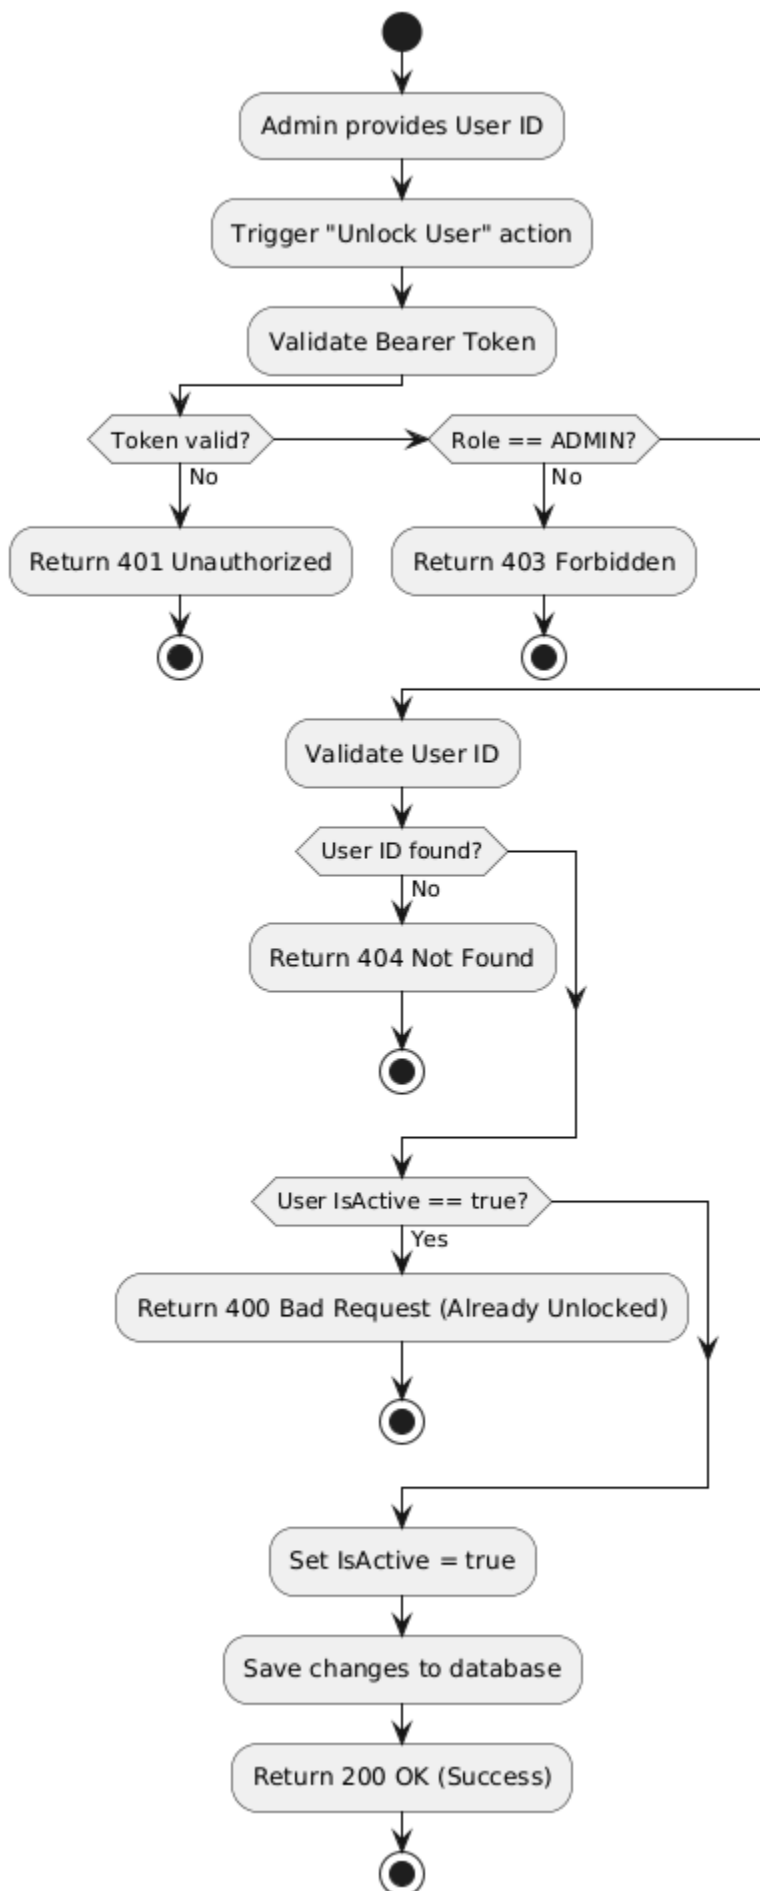

Sequence Diagram

