

Lock User

Overview

This API is used to lock (deactivate) a specific user account. When locked, the user's IsActive status is set to false, and all their active refresh tokens are revoked. This action can only be performed by an Administrator

API Specification

API	URL
POST	/api/users/{id}/lock
Permission	ADMIN (Requires Bearer Token)

Request sample

URL Parameter: id of the user to lock.

Authorization Header: Admin Bearer Token to authenticate permissions

POST /api/users/a1b2c3d4-e5f6-7890-abcd-123456789abc/lock HTTP/1.1

Host: localhost:7123

Authorization: Bearer

eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiJhZG1pbj11c2VyLWkiwiUm9sZUNvZGU0OjBRE1JTilsm5iZiI6MTc2NjM4MzQwMiwiZXhwIjoxNzY2Mzg0MzAyLCJpYXQiOiE3NjYzODMDImlzcyI6IlVzZXJTZXJ2aWNIIiwiaXVkljoiaXBdWRpZW5jZSJ9.SflKxwRJSMeKKF2QT4fwpMeJf36P0k6yJV_adQssw5c

Field	Description	Data Type	Examples
id	ID of the user to be locked (disabled).	Guid	a1b2c3d4-e5f6-7890-abcd-123456789abc

Authorization	Admin's Bearer Token after successful login.	string	Bearer eyJhbGciOiJI UzI1Ni...
---------------	--	--------	-------------------------------------

Response sample


```
{
  "statusCode": 200,
  "message": "User locked successfully.",
  "data": null,
  "respondedAt": "2025-10-22T09:00:00Z"
}
```

Validation

Status code	Description	Examples
400	The user account is already locked.	<pre>{ "statusCode": 400, "message": "This user account is already locked (deactivated).", "data": null, "respondedAt": "..."} </pre>
401	Authentication token is missing or invalid.	<pre>{ "statusCode": 401, "message": "Cannot determine performing administrator.", "data": null, "respondedAt": "..."} </pre>

403	The user's role is not "ADMIN".	<pre>{ "statusCode": 403, "message": "Forbidden", "data": null, "respondedAt": "..." }</pre>
404	The user with the specified id was not found.	<pre>{ "statusCode": 404, "message": "The user with the specified ID was not found.", "data": null, "respondedAt": "..." }</pre>

Activity Diagram

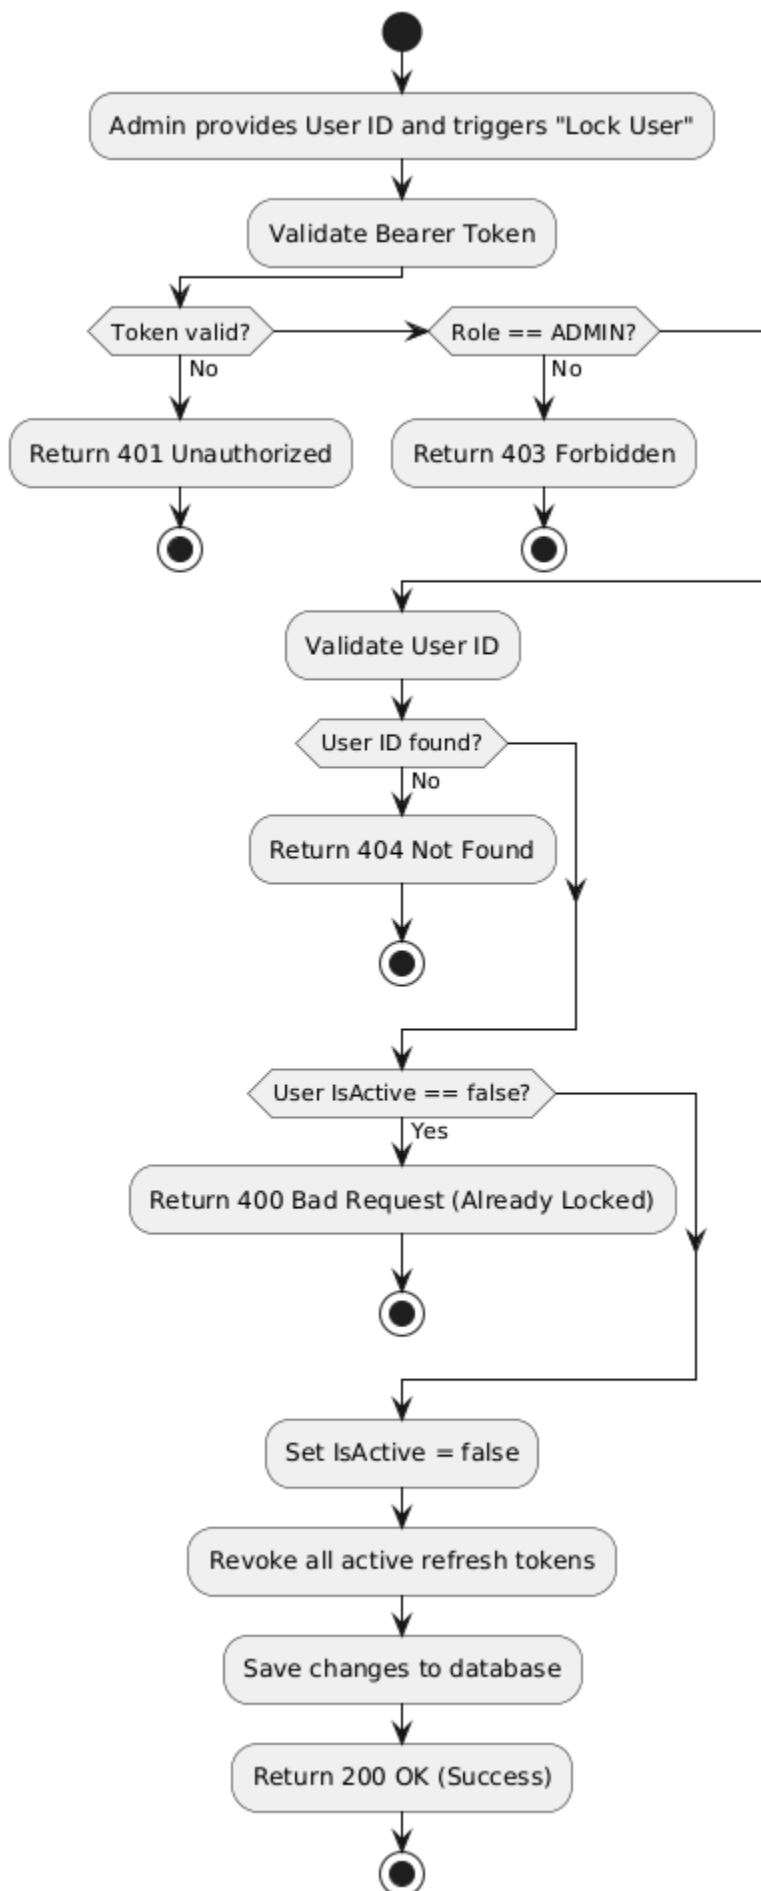

Sequence Diagram

