

Catch the Bad Study Before the Radiologist Does

Read-only QC and routing on imaging metadata — never a pixel, never a writeback.

READ-ONLY

— THE PROBLEM

A bad study wastes the radiologist twice


- Missing metadata lands a study in the wrong worklist.
- It's discovered late, sent back, and re-queued — pure friction.
- Anything that touches pixels or writes back drags in a regulatory burden.

The cheap fix is catching the incomplete study before a human opens it.

Triage the context, touch nothing else

- **It reads**
modality, body part, series count, study age — metadata only.
- **It sorts**
complete studies get a routing advisory; incomplete ones get a QC advisory.
- **It refrains**
no pixel diagnosis, no writeback to the archive.

Metadata in, advisory out

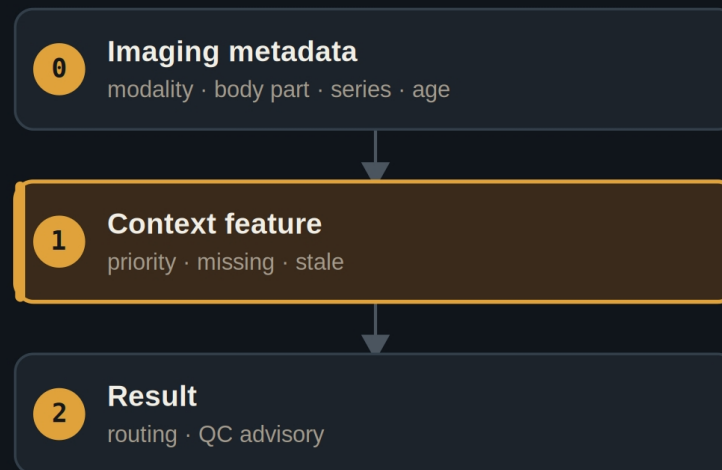

Three layers — the smallest stack that turns context into a QC or routing advisory.

Read-only, by construction

READ-ONLY Consumes and annotates metadata; writes nothing back.

No diagnosis Never reads pixels or infers a clinical finding.

Provable The test confirms no command or write result exists.

— THE EVIDENCE

60 deterministic ticks

QC

advisory on the missing-metadata study
caught early

Routing

advisory on the complete study

0

writes or pixel diagnoses — enforced

— GOING LIVE

Sit in front of the archive, safely

- **Swap the input edge**
the mock metadata becomes a real DICOM source.
- **Keep the contract**
same typed signals, same read-only ceiling.
- **Keep the boundary**
no writeback, no diagnosis — unchanged.

“

The most useful imaging assistant is sometimes the one that only reads the label — and refuses to touch the image.

The case for Demo 05

JNEOPALLIUM · DEMO 05

rakovpublic/jneopallium

Sort it before it's opened.

Read-only QC and routing advisories on study metadata.

github.com/rakovpublic/jneopallium

READ-ONLY · deterministic

