

BHAGAMANDALA HOUSE — COMPLETE CONSTRUCTION PLAN (v4)

Location: Bhagamandala–Talakaveri Road (Curve), Kodagu, Karnataka

3 km from Talakaveri Temple, Left side (heading to temple)

Plot: 60 ft (E-W) × 50 ft (N-S) | East-Facing | Highway on East

Date: April 2026


TABLE OF CONTENTS

- Site Layout Plan
- Ground Floor Plan (with dimensions, furniture, colors)
- First Floor Plan (with dimensions, furniture, colors)
- Front Elevation (East — Road Side)
- Back Elevation (West — Estate Side)
- Side Elevations (North & South)
- Section Drawing (Cross-Section)
- Roof Plan with Solar Layout
- Pooja Unit Detail
- Bathroom Details
- Door & Window Schedule
- Color Palette & Finishes
- External Works (Garden, Interlock, Compound Wall, Safety)
- Electrical Layout
- Plumbing Layout
- Area Statement

1. SITE LAYOUT PLAN (60 ft × 50 ft Plot)

NORTH
←----- 60 ft ----->

+-----+
| 7' SOLID COMPOUND WALL (crash protection from hwy) | ^
+-----+ +-----+ ||
OPEN	COFFEE DRYING	* Tulsi	
GARAGE	YARD 30×20 ft	Vrindavan	
15×25 ft	PCC + Retractable	(NE)	
2 Cars	Polycarbonate		
	Roof	CAM3	
CAM4			
+-----+ +-----+			
+-----+			
TOOL	GARDEN / LAWN		
SHED	50 ft		
10×8 ft	FF SITOUT (above)		
+-----+ 26×8 — West views			
+-----+			
SEPTIC			
TANK	MAIN HOUSE		
(NW)	G+1 BUILDING		

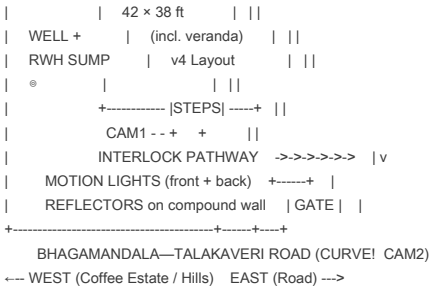

Site Layout Notes:

- Setbacks: Front (East) 5 ft, Rear (West) 3 ft, North 5 ft, South 3 ft
- Main Gate: SE area, 12 ft vehicle + 4 ft pedestrian, SET BACK from curve apex
- Compound wall: 7 ft solid laterite on road side (crash protection from highway curve); 6 ft solid on other sides. NO MS railing on top — solid throughout for security (isolated house).
- CCTV: 4 cameras — CAM1 (gate), CAM2 (road/curve), CAM3 (back), CAM4 (parking)
- Motion sensor LED floods: Front (gate area) + Back (estate side)
- Reflectors: On compound wall facing highway (night visibility for vehicles)
- Tulsi Vrindavan: NE corner (Vastu — most auspicious for sacred plants)
- Interlock tiles: Herringbone pattern grey for all pathways and driveway


2. GROUND FLOOR PLAN (v4 — Optimized)


Building: 42 ft (N-S) × 38 ft (E-W) total footprint

Interior: 42 ft (N-S) × 30 ft (E-W) behind veranda

Veranda: 42 ft × 8 ft (East, road side)

Plinth: 4 ft above ground (mandatory — 5,000mm rainfall)

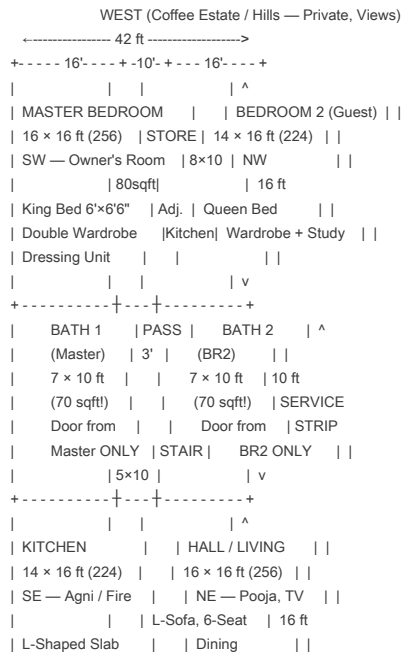

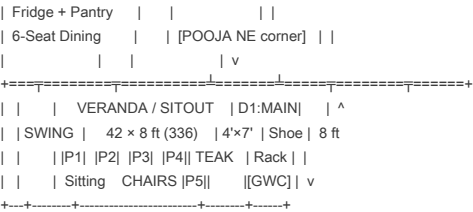

EAST (ROAD — Bhagamandala-Talakaveri Hwy)

KEY v4 FEATURES:

- BACK-TO-BACK BATH CORE: Bath1 + Bath2 share ONE plumbing stack
- BEDROOMS: Full 16×16 and 14×16 RECTANGLES (no L-shapes!)
- BATHS: 7×10 = 70 sqft each — separate shower, WC, basin, geyser
- Kitchen ADJACENT to Store — shared wall with door
- Passage 3 ft wide connects north row to south row
- 5 Chadara Kamba wooden pillars (wider building needs 5)
- GWC 4×4 in veranda NE corner

Ground Floor Room Schedule (v4)

Room	Size	Area	Position (Vastu)	Notes
HALL / LIVING (NE)	16 × 16 ft	256 sqft	NE — ಈಶಾನ್ಯ	L-sofa, TV unit, 6-seat dining, Pooja cabinet NE corner
MASTER BEDROOM (SW)	16 × 16 ft	256 sqft	SW — ನೈರುತ್ಯ	King bed, double wardrobe, dressing unit. FULL RECTANGLE
BEDROOM 2 (NW)	14 × 16 ft	224 sqft	NW — ಪಾಯುವು	Queen bed, wardrobe, study desk. FULL RECTANGLE
KITCHEN (SE)	14 × 16 ft	224 sqft	SE — ಅಗ್ನಿ	L-slab, fridge, 6-seat dining, pantry. Adj. to Store!
BATH 1 (Master)	7 × 10 ft	70 sqft	Center service strip	Shower 4×3, WC, basin counter, geyser. Door from Master ONLY
BATH 2 (BR2)	7 × 10 ft	70 sqft	Center service strip	Shower 4×3, WC, basin counter, geyser. Door from BR2 ONLY
STORE	8 × 10 ft	80 sqft	West, adj. kitchen	Floor-to-ceiling shelving. Kitchen access via internal door
STAIRCASE	5 × 10 ft	50 sqft	Center-East	U-turn granite steps, under-stair storage
PASSAGE	3 × 10 ft	30 sqft	Center	Connects north & south rows through service strip
GUEST WC	4 × 4 ft	16 sqft	NE veranda corner	For visitors. WC + wash basin. No house entry needed
VERANDA ()	42 × 8 ft	336 sqft	East (road)	5 wooden pillars, swing, sitting area, shoe rack

Vastu Compliance (v4 — Verified):

- Main door: East (facing road) — ideal
- NE corner: Hall + Pooja cabinet — (God's corner)
- SE corner: Kitchen — (Agni, fire element)
- SW corner: Master Bedroom — (earth, stability, owner's rest)
- NW corner: Guest Bedroom — (air, guest area)
- Baths: Central service strip, drains between rooms — correct
- Guest WC: NE veranda corner — acceptable (small, away from pooja)
- Staircase: Center-East — clockwise ascending

Bhagamandala Climate Design (Rainfall 5,000+ mm/year):

- 4 ft plinth: Mandatory. Prevents monsoon flooding. Kadappa cladding.
- 4-5 ft roof overhang: Keeps rain off walls and windows.
- Laterite walls (12"/9"): Natural humidity regulation.
- Cross ventilation: Every room has windows on 2 walls minimum.
- Bathroom waterproofing: PU membrane + Fosroc/Dr.Fixit on all wet areas.

- Anti-termite: Full treatment under foundation (essential in humid W. Ghats).
- PVC rain gutters: All roof edges → connected to RWH sump (5,000L).


3. FIRST FLOOR PLAN (v4 — Master Suite + Work Room)

FF sits above: South row (16 ft) + Service strip (10 ft) = 26 ft N-S

FF width: 30 ft E-W (same as GF interior)

Sitout: 26 × 8 ft on WEST side (plantation + hill views)

East side: SOLID WALL (privacy + safety from highway)

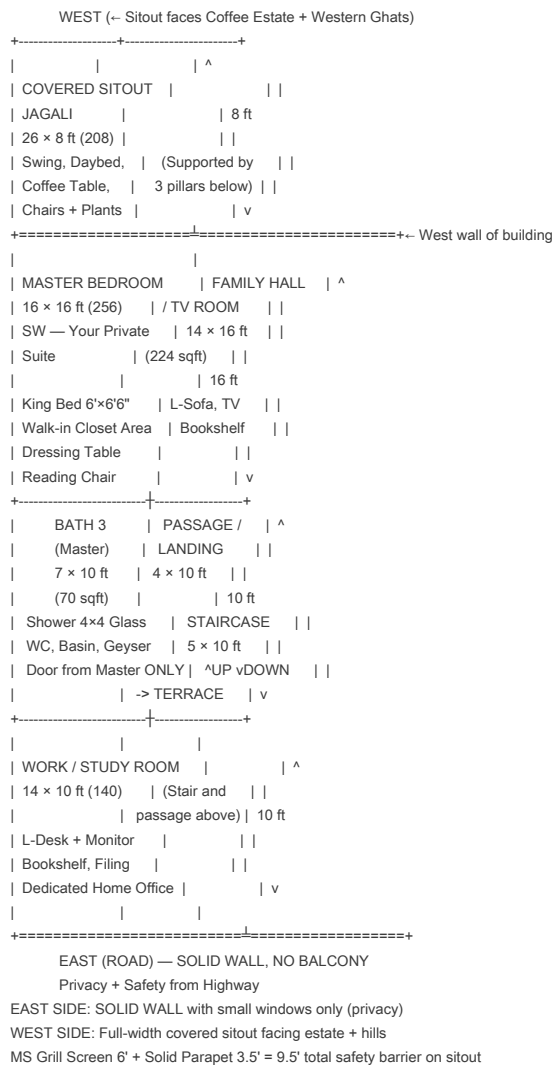

First Floor Room Schedule (v4)

Room	Size	Area	Position	Notes
------	------	------	----------	-------

FF MASTER BEDROOM (SV)	16 × 16 ft	256 sqft	SW — ವೈಶ್ವಾತೇಯ	King bed, walk-in closet, dressing table. Your private suite.
BATH 3 (Master)	7 × 10 ft	70 sqft	Inside service strip	Shower 4×4 glass encl., WC, basin counter, geyser. From Master ONLY
FAMILY HALL / TV	14 × 16 ft	224 sqft	SE area	L-sofa, TV unit, bookshelf. Solid east wall for road privacy.
WORK / STUDY	14 × 10 ft	140 sqft	NE area	Dedicated home office. L-desk, bookshelf, filing + printer.
STAIRCASE	5 × 10 ft	50 sqft	Center-East	Continues from GF + goes to terrace
PASSAGE / LANDING	4 × 10 ft	40 sqft	Center	Connects stair to all FF rooms
COVERED SITOUT	26 × 8 ft	208 sqft	WEST side	Swing, daybed, chairs. Plantation + hill views. 3 support pillars below.


FF Safety Features (Sitout):


- 3.5 ft solid parapet wall (base barrier)
- 6 ft MS grill screen above parapet (total 9.5 ft barrier)
- Vertical grill bars 12mm at 100mm spacing (child-safe)
- Matt black powder coating on all grills
- Roof overhang 5 ft covers sitout from rain

Vastu (First Floor):

- Master BR: SW — stability, earth element
- Family Hall: SE — light, open
- Work Room: NE — knowledge, concentration
- Bath 3: Central, drains towards center stack
- Staircase: Continues from GF position

4. FRONT ELEVATION (EAST — ROAD SIDE)

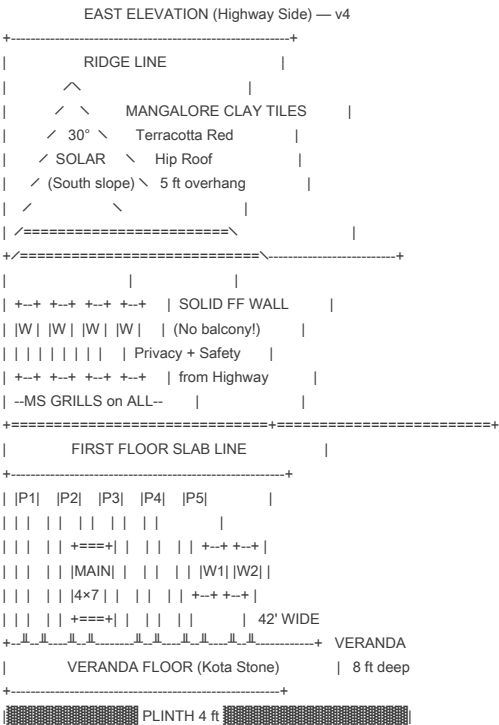

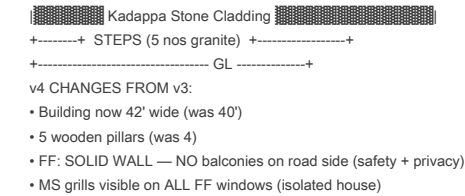

Front Elevation Notes:

- Ground floor: 5 Chadara Kamba style wooden pillars (wider building)
- First floor: SOLID WALL — no balcony on road side. Only windows with MS grills.
- Privacy: Highway traffic should NOT see into house
- Safety: MS grills 12mm bars on all windows. Solid wall deters intrusion.
- Plinth: 4 ft Kadappa stone cladding gives commanding presence
- Steps: 5 granite steps (each 8" rise × 10" tread)

5. BACK ELEVATION (WEST — ESTATE SIDE)




Back Elevation Notes (v4):

- v3 had: Two separate balconies (14x6 + 12x6)
- v4 replaces with: ONE continuous covered sitout (26x8 = 208 sqft)
- Why: More usable, traditional Kodagu jagali feel, better views
- Safety: 3.5 ft solid parapet + 6 ft MS grill screen = 9.5 ft total barrier
- Support: 3 reinforced concrete pillars below (GF level = covered outdoor area)
- Partial Terrace: 12x10 ft visible near roof, accessed via staircase

6. SECTION DRAWING (North-South Cross Section)


SECTION A-A' (Looking East)

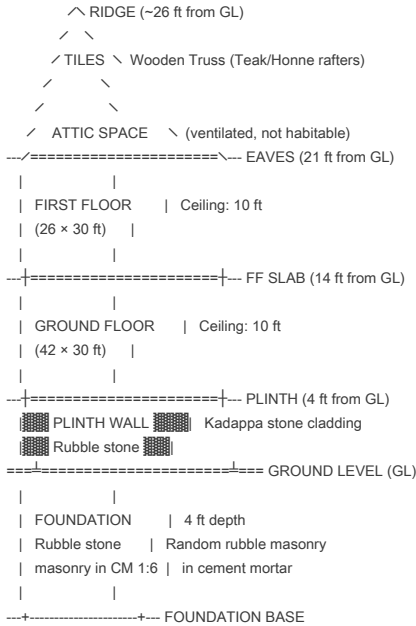

HEIGHTS:

GL to Plinth top: 4.0 ft (1.2 m)
Plinth to GF ceiling: 10.0 ft (3.0 m)
GF slab thickness: 0.5 ft (150 mm)
FF floor to ceiling: 10.0 ft (3.0 m)
FF slab thickness: 0.5 ft (150 mm)
Eaves height: 21.0 ft from GL
Ridge height: ~26.0 ft from GL (30° pitch)
Terrace floor: ~25.0 ft from GL

7. ROOF PLAN WITH SOLAR PANEL LAYOUT

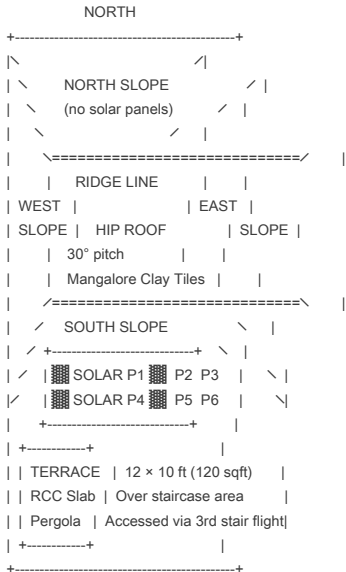

SOUTH

SOLAR: 3 kW | 6 × 500W Mono | South slope | Grid-tied
TERRACE: 12×10' partial | Waterproofed | Pergola | MS railing
GUTTERS: PVC all edges -> RWH sump 5,000L

Solar Specification:

- Capacity: 3 kW grid-tied (expandable to 5 kW)
- Panels: 6 × 500W monocrystalline (Tata/Adani/Loom Solar)
- Placement: South-facing slope (max sun)
- Inverter: 3 kW hybrid (Growatt/Havells), located in Store room
- Karnataka subsidy: Up to 40% for residential ≤ 3 kW
- Net metering: CESCO. Saves 15-20K/year.

Partial Terrace (12 × 10 ft):

- Slab: RCC M20, 5" thick, 5-layer waterproofing (PU membrane)
- Access: 3rd staircase flight (14 granite steps)
- Railing: 3.5 ft MS railing, matt black
- Canopy: Polycarbonate pergola (rain protection)
- Use: Views, coffee drying, solar panel access, dry-season yoga

8. POOJA UNIT DETAIL

Ready-made wall-mounted pooja cabinet on NE corner wall of Hall (GF).

- Type: Ready-made wooden pooja cabinet (wall-mounted or floor-standing)
- Size: ~3 ft wide × 1.5 ft deep × 5 ft tall
- Material: Solid sheesham or teak finish, carved border, brass fittings
- Position: NE corner of Hall — (most auspicious)
- Shelves: 3 tiers — top (deities), middle (lamp/incense), bottom (storage)
- Lighting: Brass hanging lamp hook + LED strip inside
- Cost: 8,000–15,000 (ready-made)

9. BATHROOM DETAILS (v4 — All 7 × 10 ft = 70 sqft)

All three bathrooms are now 7 × 10 ft = 70 sqft — spacious with separate shower enclosure, commode, basin counter, and geyser. Back-to-back layout on GF means single plumbing stack.

Bath Layout (applies to all 3 baths):



COMPARED TO v3:
v3: Bath1 = 8×6 (48sqft), Bath2 = 7×5 (35sqft!) — cramped
v4: ALL baths = 7×10 (70sqft) — LUXURY! Separate shower encl.

Bathroom Specifications (all 3):

Item	Specification
Commode	White, EWC, soft-close seat (Parryware/Hindware)
Basin	Counter-top oval basin, 5' granite counter
Shower	4×3' glass enclosure + rain shower + hand shower
Geyser	25L storage (Racold/AO Smith)
Tiles	Anti-skid floor + wall tiles to 7' height
Waterproofing	PU membrane (Dr.Fixit/Fosroc) under tiles
Ventilator	2×1.5 ft louver at 6' height
Door	WPC 2.5×6.5, SS tower bolt + indicator lock

10. DOOR SCHEDULE (v4)

#	Location	Size (W×H)	Material	Type	Hardware
D1	Main entrance (East)	4 × 7 ft	Burma Teak	Double leaf, carved	Brass mortise lock, brass handles
D2	Master Bedroom (GF)	3 × 7 ft	Country wood	Single leaf, panel	SS mortise lock, tower bolt
D3	Bedroom 2 (GF)	3 × 7 ft	Country wood	Single leaf, panel	SS mortise lock, tower bolt
D4	Kitchen (from veranda)	3 × 7 ft	Country wood	Single leaf, panel	SS handle, magnetic catch
D5	Kitchen rear door	2.5 × 6.5 ft	Country wood	Single leaf	SS handle, latch
D6	Bath 1 (inside Master)	2.5 × 6.5 ft	WPC	Single leaf, flush	SS tower bolt + indicator lock
D7	Bath 2 (inside BR2)	2.5 × 6.5 ft	WPC	Single leaf, flush	SS tower bolt + indicator lock
D8	Store (from kitchen)	2.5 × 6.5 ft	Country wood	Single leaf, flush	Pad bolt
D9	Guest WC (veranda)	2 × 6.5 ft	WPC	Single leaf, flush	SS tower bolt + indicator lock
D10	FF Master BR	3.5 × 7 ft	Country wood	Carved panel	SS mortise lock, tower bolt
D11	Bath 3 (inside FF Master)	2.5 × 6.5 ft	WPC	Single leaf, flush	SS tower bolt + indicator lock
D12	Family Hall (FF)	3 × 7 ft	Country wood	Single leaf, panel	SS mortise lock
D13	Work Room (FF)	3 × 7 ft	Country wood	Single leaf, panel	SS mortise lock
D14	Sitout French Door	4 × 7 ft	Country wood	Double leaf, glass	SS handle, tower bolt

11. WINDOW SCHEDULE (v4 — MS Grills on ALL windows)

#	Location	Size (W×H)	Sill Ht	Type	Notes
W1	Hall (East)	5 × 4 ft	3 ft	Double casement + ventilator	MS grill, mosquito mesh
W2	Hall (East)	5 × 4 ft	3 ft	Double casement + ventilator	MS grill, mosquito mesh
W3	Hall (North)	4 × 4 ft	3 ft	Double casement	MS grill, mosquito mesh

W4	Kitchen (East)	4 × 4 ft	3 ft	Double casement	MS grill, mosquito mesh
W5	Kitchen (South)	4 × 4 ft	3 ft	Single casement	MS grill
W6	Master BR (West)	5 × 4 ft	3 ft	Double casement + ventilator	MS grill, estate views
W7	Master BR (South)	5 × 4 ft	3 ft	Double casement	MS grill
W8	BR2 (West)	5 × 4 ft	3 ft	Double casement + ventilator	MS grill, estate views
W9	BR2 (North)	5 × 4 ft	3 ft	Double casement	MS grill
W10	Store (West)	3 × 3 ft	4 ft	Single casement	MS grill
W11-14	FF (East, various)	4 × 4 ft	3 ft	Double casement	MS grill, solid wall around
W15	FF Master (West → sitout)	5 × 4 ft	3 ft	Double casement	Views through sitout grill
W16	FF Master (South)	5 × 4 ft	3 ft	Double casement	MS grill
W17	FF Family Hall (East)	5 × 4 ft	3 ft	Double casement	MS grill, highway side
W18	FF Family Hall (South)	4 × 4 ft	3 ft	Single casement	MS grill
W19	FF Work Room (East)	4 × 4 ft	3 ft	Double casement	MS grill, daylight for work
W20	FF Work Room (North)	4 × 4 ft	3 ft	Single casement	MS grill
V1-V4	All bathrooms + GWC	2 × 1.5 ft	6 ft	Louver ventilator	MS grill

All windows: 12mm MS grill bars at 100mm spacing. Wooden frame, glass panes + wooden shutters. Mosquito mesh on bedrooms & hall.

SAFETY NOTE: MS grills on ALL windows are essential — isolated house on highway curve, no neighbors nearby.

12. COMPLETE COLOR PALETTE & FINISHES

Exterior

Element	Color	Code / Material	Finish
Walls	Warm Cream / Off-white	Asian Paints Ivory Tusk 8019	Exterior emulsion, weatherproof
Plinth	Natural Grey	Kadappa stone cladding	Unpolished, natural
Woodwork	Dark Teak Brown	Wood stain + PU marine varnish	Semi-gloss, UV resistant
Roof tiles	Terracotta Red	Mangalore clay tiles (natural)	Unglazed
MS Railings/Grills	Matt Black	Powder coating	Matte
Steps	Grey Granite	Sadarahalli granite	Flame-finished, non-slip
Compound wall	Cream	AP Ivory Tusk 8019	Exterior emulsion

Interior

Room	Wall Finish	Material / Code	Ceiling	Flooring
Hall / Living (GF)	Light Warm White (paint)	AP 8147 Marshmallow	Bright White	Beige wood-look vitrified 2×4

Kitchen	Butter Cream (paint)	AP 7958 Buttercup	Bright White	Anti-skid ceramic
Master Bedroom (GF)	Exposed Laterite + Linseed Oil	— NO plaster, NO paint	White Matte	Beige wood-look vitrified
Bedroom 2 (GF)	Exposed Laterite + Linseed Oil	— NO plaster, NO paint	White Matte	Beige wood-look vitrified
FF Master BR	Exposed Laterite + Linseed Oil	— NO plaster, NO paint	White Matte	Beige wood-look vitrified
Family Hall (FF)	Light Warm White (paint)	AP 8147 Marshmallow	White Matte	Beige wood-look vitrified
Work Room (FF)	Warm Orange tint (paint)	AP Ivory Spark 8013	White Matte	Beige wood-look vitrified
All Bathrooms	White tiles to 7'	—	White cement paint	Anti-skid ceramic
Passage / Staircase	White (paint)	AP Pure White	White Matte	Vitrified / Granite steps

Exposed Laterite Wall Treatment — Kodagu Ainmane Heritage

All three bedrooms (Master GF, BR2 GF, FF Master) feature exposed laterite stone walls () with linseed oil finish — a heritage design choice honoring the Kodagu Gowda Ainmane tradition.

Why Exposed Laterite in Bedrooms:

- Heritage: Traditional Kodagu Ainmane (ancestral homes) always used exposed laterite — warm, earthy, nostalgic
- Durability: No repainting every 3-5 years. Laterite lasts generations with minimal maintenance
- Climate: Laterite breathes — absorbs/releases humidity naturally (ideal for 5,000mm/year rainfall zone)
- Cost: Saves ~2.5–3L by eliminating plaster + paint on ~1,200 sqft of bedroom wall area
- Thermal: Natural insulation — cool in summer, warm in winter

Linseed Oil Treatment Process:

1. After masonry cures (28 days), brush clean all dust from laterite surface
2. Apply raw linseed oil (Alsi Tel / ಅಣ್ಣಸೆ ಎಣ್ಣೆ) with wide brush — 2 coats, 24hr gap
3. Final coat: boiled linseed oil for faster drying and richer sheen
4. Re-apply once every 3-5 years (vs repainting which costs 30-50K each time)
5. Result: Warm terracotta-red satin finish that deepens with age

Which walls are exposed laterite:

- All interior bedroom walls (4 walls per room × 3 rooms)
- Ceiling remains white matte paint (plastered RCC slab)
- Other rooms (hall, kitchen, baths, passage) remain plastered + painted as specified above

13. EXTERNAL WORKS

Garden & Landscaping

- Front (East): Interlock driveway, pathway to veranda, 2 coconut trees flanking gate, low Ixora hedge
- NE corner: Tulsi Vrindavan (raised stone platform)
- Sides: 3-5 ft gap with PCC drain along foundation. Arecanut palms (north).
- Back (West): Small lawn, jasmine creeper on wall, bougainvillea at corners
- Coffee Drying Yard (30×20 ft): PCC floor, retractable polycarbonate roof, behind parking

Compound Wall & Gate (v4 — SAFETY PRIORITY)

+----- COMPOUND WALL -----+

|
| ROAD SIDE (East): |
| 7 ft SOLID laterite masonry — NO railing on top |
| Crash protection from highway curve traffic |
| Reflectors embedded for night visibility |
| Plastered + cream paint |
|
| OTHER SIDES (N, W, S): |
| 6 ft SOLID laterite — NO railing (security) |
| Anti-climb (smooth plaster on top) |
|
| MAIN GATE (East): |
| 12 ft vehicle + 4 ft pedestrian |
| MS, matt black, SET BACK from curve apex |
| 2 laterite pillars with motion-sensor LED lights |
|
| CCTV: 4 cameras (gate, road curve, back, parking) |
| MOTION LIGHTS: 2 front + 2 back LED floods |
|
+-----+

14. ELECTRICAL LAYOUT (v4 — includes Work Room)

Room	Lights	Fans	5A	15A	Switches	Special
Hall/Living	2 (LED panel)	1	4	1 (AC)	6	TV point, USB charging
Kitchen	2 (LED panel)	1	4	2 (fridge, mixer)	6	Exhaust fan, chimney point
Master BR (GF)	1 (LED panel)	1	4	1 (AC)	4	Bedside USB (2 nos)
Bedroom 2	1 (LED panel)	1	4	1 (AC)	4	Study lamp point
Bath 1	1 (LED mirror)	1 exhaust	1	1 (geyser)	2	—
Bath 2	1 (LED mirror)	1 exhaust	1	1 (geyser)	2	—
Store	1 (LED tube)	—	1	1 (inverter)	1	Solar inverter + DB
Staircase	2 (LED wall)	—	—	—	2 (two-way)	Motion sensor
Veranda	2 (LED wall+ceil)	1	2	—	3	Gate bell, CCTV point
FF Master BR	1 (LED panel)	1	4	1 (AC)	4	Bedside USB (2 nos)
Bath 3	1 (LED mirror)	1 exhaust	1	1 (geyser)	2	—
Family Hall (FF)	2 (LED panel)	1	4	1 (AC)	6	TV point
Work Room (FF)	2 (LED panel)	1	6	2 (PC, printer)	6	LAN port, 2× USB-C, UPS point
Sitout	2 (LED wall)	—	1	—	2	Waterproof socket
External	4 (motion LED)	—	—	—	2	CCTV power (4 pts)
Ext. Taps	—	—	—	—	—	2 external bib cocks
Washing Machine	—	—	—	1 (15A)	1	Kitchen NE, cold water inlet + drain

Total Load: ~6 kW (no AC) / ~12 kW (with ACs)
Supply: 3-phase CESCO connection
Solar: 3 kW grid-tied via net meter
Work Room: Dedicated 15A circuit for computer equipment + UPS socket

15. PLUMBING LAYOUT (v4 — Single Stack Advantage)

v4 Plumbing Advantage: BACK-TO-BACK BATH CORE

Bath 1 and Bath 2 share a wall → single plumbing stack for both GF bathrooms:

- ONE main soil pipe (4" PVC)
- ONE common vent pipe
- Shared hot water riser from solar heater
- Saves 30-40K in plumbing cost vs separate stacks

Water Supply

- Source: Open/bore well (West side)
- Pump: 1 HP submersible
- Overhead tank: 2,000L syntax on MS stool above staircase
- Solar water heater: 200L on FF slab (South)
- Hot water: Solar to all 3 baths via single riser. Electric geyser backup each bath.
- RWH: Roof gutters → first flush → 5,000L sump (NW)

Drainage

- Greywater: PVC → Soak pit (NW)
- Blackwater: PVC → Septic tank (NW, 2-chamber, 15 ft from well)
- Kitchen waste: Grease trap → Grey water line
- Rainwater: Open drains → Recharge pit → Natural slope

External Water Taps (IMPORTANT — mark during plumbing rough-in)

- Tap 1 — Entrance (Right of main steps): 15mm GI pipe from main line. Chrome bib cock. Drain plate below → connects to front garden drain. Purpose: Wash feet before entering house (Kodagu tradition, also muddy monsoon months).
- Tap 2 — Parking/Garage (Left side, near garage): 15mm GI pipe from main line. Chrome bib cock + hose connector. Drain to garden slope. Purpose: Gardening watering, car wash, general outdoor cleaning.
- Both taps: Run pipes during wall construction stage itself. Embed in compound wall / plinth wall. Leave stub-out with cap until fixture stage.
- Note: Both external taps must have individual stop cocks (gate valve) inside the store room near the main line for isolation.

Washing Machine Point (Kitchen)

- Location: Kitchen NE corner, near washing area (x=14ft, z=20ft in plan)
- Water: Cold water inlet with wall-mounted bib cock (15mm)
- Drain: Floor drain 3" connected to greywater line
- Electrical: Dedicated 15A socket, 1.2m height from floor
- Note: Leave space for front-load washing machine 24"×24"×33"

16. AREA STATEMENT (v4 — FINAL)

House Only

Component	Sqft	Notes
-----------	------	-------

GROUND FLOOR		
Hall / Living (NE)	256	16 × 16, full rectangle
Master Bedroom (SW)	256	16 × 16, full rectangle
Bedroom 2 (NW)	224	14 × 16, full rectangle
Kitchen (SE)	224	14 × 16, full rectangle
Bath 1 (Master)	70	7 × 10, in service strip
Bath 2 (BR2)	70	7 × 10, in service strip
Store	80	8 × 10, adj. kitchen
Staircase	50	5 × 10
Passage	30	3 × 10
Guest WC	16	4 × 4, veranda corner
Walls (~10%)	~130	
GF Enclosed Total	~1,406 sqft	
Veranda (42 × 8, net after GWC)	320	Covered
GF Total Built-up	~1,726 sqft	
FIRST FLOOR		
FF Master Bedroom (SW)	256	16 × 16
Bath 3 (Master)	70	7 × 10
Family Hall / TV	224	14 × 16
Work / Study Room	140	14 × 10
Staircase	50	5 × 10
Passage / Landing	40	4 × 10
Walls (~10%)	~75	
FF Enclosed Total	~855 sqft	
Covered Sitout (26 × 8)	208	West side
FF Total Built-up	~1,063 sqft	
Partial Terrace	120	12 × 10, RCC slab
HOUSE TOTAL BUILT-UP	~2,909 sqft	incl. veranda + sitout + terrace
HOUSE CARPET AREA	~2,261 sqft	enclosed rooms only (GF+FF)

External Structures

Structure	Sqft
Open Garage (15 × 25)	375
Tool Shed (10 × 8)	80
Coffee Drying Yard (30 × 20)	600
External Total	1,055 sqft

v4 vs v3 Comparison:

Metric	v3	v4	Change
Building footprint	40×32	42×38	+216 sqft
GF enclosed	~1,192	~1,406	+214 sqft
FF enclosed	~570	~855	+285 sqft
Total built-up	~2,222	~2,909	+687 sqft
Bedrooms	3 (L-shaped)	3 (RECTANGLES)	Better layout

Bath sizes	48/35/48 sqft	70/70/70 sqft	+75% avg
Balconies	2 small (156 sqft)	1 full sitout (208 sqft)	+33%
Work room	None	140 sqft	NEW
Plumbing stacks	3 separate	1 shared (GF)	Saves 30-40K

17. COST ESTIMATE

Cost details are maintained in a separate private document.

Contact the owner for cost-related discussions.

18. IMPORTANT NOTES FOR WORKERS / CONTRACTORS

Kannada Summary ()

ಮನಃ ನೌರ್ಮಾಣ ವರದಿ (v4):

- ಒಟ್ಟು ಮನಃ ವಿಸ್ತೀರ್ಣ: ~2,900+ ಚ.ಅ. (G+1)
- ಕಟ್ಟಡ ಅಳತೆ: 42 x 38 ಅಡ್ಡ (ಒಳಗಡೆ ಸೇರಿಸಿ)
- ಅಡ್ಡವಾಲು: 4 ಅಡ್ಡ ಅಳ, ರಬ್ಬರ್ ಕಲ್ಲು ಗೋಡೆ
- ಪಾಲಿಂಗ್: 4 ಅಡ್ಡ ಏಕತರ (ಮಳೆ ಪರದಾಳ - ಆತ್ಮೀಯ ಮುಖ)
- ಗೋಡೆ: 12" ಲೇಟರೈಟ್ (ಹೊರಗಡೆ), 9" ಲೇಟರೈಟ್ (ಒಳಗಡೆ)
- ಮಾಡು: ಮರದ ಟ್ರಸಸ್ (ಹೊನ್ನೆ/ತೇಕ), ಮಂಗಳೂರು ಹಂಚು, 30° ಇಳಿಜಾರು
- RCC ಸ್ಲಾಬ್: FF + ಸ್ಲಾಬ್ + ಟೆರೇಸ್ (5" ದಪ್ಪ)
- ಸೇವಾನ್ವಯ: ಎಲೆಕ್ಟ್ರಿಕ್ 3 = 7x10 ಅಡ್ಡ (70 ಚ.ಅ. — ವಾತಾವರಣ)
- ಎಲೆಕ್ಟ್ರಿಕ್ ಕ್ಯಾಬಲ್: MS ಗೆರಾಲ್ಡ್ (ಫೈರ್ ರೇಟ್ — ಮುಖ್ಯಯಂತ್ರಣ ಬಳಸಿ)
- ಕಾಂಪೌಂಡ್: 7 ಅಡ್ಡ ಗೋಡೆ (ರೇಟ್ ಕಡೆ), CCTV 4 ಕೇಯಾಮರಾ

Critical Construction Sequence

- Foundation: Excavate 4 ft → PCC bed → Rubble stone masonry → Anti-termite treatment
- Plinth: 4 ft height MANDATORY. Kadappa cladding.
- GF walls: 12" laterite external, 9" internal. Build service strip walls carefully — back-to-back baths need precise alignment for plumbing stack.
- RCC slab: M20 grade, 5" thick, Fe500 steel. CURE MINIMUM 14 DAYS. Note: Sitout cantilever/pillars need structural engineer's calculations.
- FF walls: Same as ground floor.
- Roof truss: Honne/Teak, 30° pitch. Extended 5 ft to cover sitout on west.
- Mangalore tiles: Hip roof with ridge tiles. 5 ft overhang all sides.
- Waterproofing: Critical for Bhagamandala. All baths, sitout, terrace, FF slab.
- Plastering → Electrical → Plumbing → Flooring → Painting → Woodwork

Waterproofing (CRITICAL — 5,000+ mm/year rainfall)

- ALL bathroom floors: PU membrane + waterproof tile adhesive
- FF slab top: Bituminous waterproofing before screeding
- Sitout floor: Waterproof membrane + 1.5% slope towards drain
- Terrace: 5-layer waterproofing (primer, PU, screed, tiles, sealant)
- External walls: 2 coats waterproof cement paint
- Plinth: DPC bitumen layer at plinth level

Safety Features (ISOLATED HIGHWAY LOCATION)

- 7 ft solid compound wall on road side (crash + security)
- 6 ft solid walls on all other sides (no MS railing — full solid)
- MS grills on ALL windows (12mm bars, 100mm spacing)
- CCTV 4 cameras with DVR in work room
- Motion sensor LED lights (front gate area + back)
- Reflectors on compound wall (highway curve — night safety)
- Gate set back from curve apex (vehicle turning clearance)
- **Sitout: 3.5ft parapet + 6ft MS grill = 9.5ft barrier**
- **Main door: Double deadbolt + latch**

Prepared by: Owner with AI assistance

Date: April 2026 (v4 — Optimized Layout)

Location: Bhagamandala–Talakaveri Road, Kodagu

Note: This plan requires structural engineer's approval and Gram Panchayat building permission before construction.