

Model Based Experimentation on UI Prototypes

Using Task Based Usability Testing

Rakshit Bhat

Supervisor: Dr. Enes Yigitbas

Prof. Dr. Gregor Engels

Advisor: Mr. Sebastian Gottschalk

Department of Computer Science
Universität Paderborn / Paderborn University

Master of Science

October 2022

I would like to *dedicate* this **thesis** to ...

Official Declaration

Eidesstattliche Erklärung

I hereby declare that I prepared this thesis entirely on my own and have not used outside sources without declaration in the text. Any concepts or quotations applicable to these sources are clearly attributed to them. This thesis has not been submitted in the same or a substantially similar version, not even in part, to any other authority for grading and has not been published elsewhere.

Ich versichere, dass ich die Arbeit ohne fremde Hilfe und ohne Benutzung anderer als der angegebenen Quellen angefertigt habe und dass die Arbeit in gleicher oder ähnlicher Form noch keiner anderen Prüfungsbehörde vorgelegen hat und von dieser als Teil einer Prüfungsleistung angenommen worden ist. Alle Ausführungen, die wörtlich oder sinngemäß übernommen worden sind, sind als solche gekennzeichnet.

Date

Rakshit Bhat

Acknowledgements

And I would like to acknowledge . . .

Abstract

For interactive applications, the usability and convenience of the User Interface (UI) are essential factors for achieving user acceptability. Therefore, the software is successful from the end user's perspective if it facilitates good interaction between users and the system.

Table of contents

| | |
|--|-------------|
| List of figures | viii |
| List of tables | ix |
| 1 Introduction | 1 |
| 1.1 Motivation | 1 |
| 1.2 Problem Statement | 2 |
| 1.3 Research Approach | 3 |
| 1.4 Solution Approach | 4 |
| 2 Background | 6 |
| 2.1 Crowdsourcing of Software Products | 6 |
| 2.2 UI Prototyping | 7 |
| 2.3 Low Code / No Code | 7 |
| 2.4 Model-based Software Engineering | 7 |
| 2.5 Task-based Usability Testing | 9 |
| 2.6 Experimental Product Design | 9 |
| 2.7 Landscape | 10 |
| 3 Related Work | 11 |
| 3.1 State of the Art Research | 11 |
| 3.2 Comparison | 11 |
| 4 Design | 13 |
| 4.1 Design Principles | 13 |
| 4.2 Build | 13 |
| 4.3 Measure | 13 |
| 4.4 Learn | 13 |

| | | |
|----------|--|-----------|
| 5 | Solution Implementation | 14 |
| 5.1 | Design Features | 14 |
| 6 | Evaluation | 15 |
| 6.1 | User Case Study | 15 |
| 6.2 | Limitations and Risks | 15 |
| 7 | Conclusion | 16 |
| 7.1 | Conclusion | 16 |
| 7.2 | Future Work | 16 |
| | References | 17 |
| | Appendix A How to install L^AT_EX | 20 |
| | Appendix B Installing the CUED class file | 24 |

List of figures

| | | |
|-----|-----------------------------------|----|
| 1.1 | Design Science Research Cycle [1] | 3 |
| 1.2 | LEAN Development technique | 4 |
| 2.1 | Minion | 8 |
| 2.2 | Best Animations | 10 |

List of tables

| | | |
|-----|--|----|
| 3.1 | A badly formatted table | 12 |
| 3.2 | Even better looking table using booktabs | 12 |

Chapter 1

Introduction

This chapter motivates the readers about the topic (see section 1.1), explains the problems faced by the companies during software development (see section 1.2), our research approach (see section 1.3), and finally, our solution approach (see section 1.4).

1.1 Motivation

Over the last decade, software development had a tremendous impact with increasing customer demand and requirements [2], which increases product complexity and ambiguity, significantly impacting software development. Therefore, the developers have come up with different techniques to meet this requirement criteria. Early user feedback from potential customers in the industry is crucial for creating successful software products because of the growing market uncertainties, and consumers' desire to receive integrated solutions to their issues rather than unique software developments [3]. With the increasing complexity of products, it becomes challenging to determine user requirements making it more difficult for developers to assess their opinions. As a result, the developers of these products are biased toward some requirements and can ignore what the user wants. So, the developers must detect the user's needs and requirements to reduce these risks early. Giving users a "partially functioning" system is the most excellent method to determine their requirements and suggestions [4]. This ensures that the developers with high uncertainties in the early product development phase can improve the product by testing the underlying assumptions [5]. Developers can use this feedback to validate the most critical assumptions about the software product. This validation can decide whether to add, remove or update a feature [6]. This process of determining the best fit for the product through user feedback is called experimentation. There has been an increase in interest in the types of experimentation that can take place in product development. Software products have shown the benefits

of conducting experiments in many use cases with incremental product improvement [7]. In experimentation, the product designers design different UI variants (e.g., buttons with different colors), and the developer integrates these variants and assigns them to a distinct group of users. As per some evaluation criteria (e.g., more clicks on the button), the variant with better results is deployed for the entire set of users. So, an experiment can be valuable when it improves the software products. Hence, for experiments to be successful, they should offer one or more solutions that will benefit users.

1.2 Problem Statement

The motivation section shows some gaps in software development between the developers and the designers. This section explains the problems and determines their research and solution approach.

Problem 1: Product designers create many UI prototypes, and the developers implement them. To determine the best variant, the developers create experiments with the users [6]. This concrete implementation of designs uses a lot of resources and time for the developers. Therefore, the product designers need to be integrated into the development process so that they would be able to create experiments independent of the developers.

Problem 2: When the product designers develop the prototypes, testing them with many users is difficult as the product is still not developed. Therefore, it is not easy to conclude a “winner” variant with a small amount of data as it is statistically difficult to prove one of the variants outperforms the others [8]. Therefore, it is necessary to develop an idea that the designers can use to determine the best prototype or variant with a small group of users.

Problem 3: Most often, the software application collects data from the experiments. Some data is used in qualitative analysis, while others are in quantitative analysis. Many companies fail to reap the benefits of using both qualitative and quantitative analysis. Similarly, not all the data is used in the analysis phase reducing the software applications to improve based on customer feedback [9]. Therefore, finding a solution that combines qualitative and quantitative data analysis is necessary.

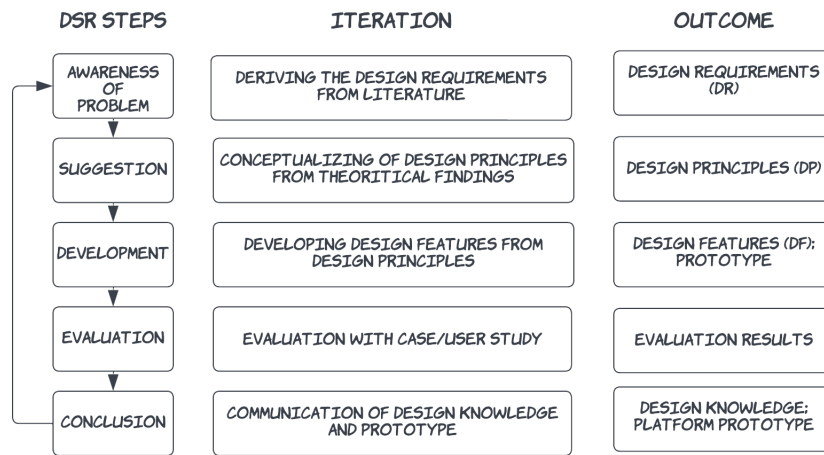


Fig. 1.1 Design Science Research Cycle [1]

1.3 Research Approach

The process of creating experiments and testing their variants is usually not systematically arranged, creating anomalies, and leading to unsuccessful experiments. Therefore, this section identifies the research question (RQ) and defines an approach to answer the question.

RQ: *How to develop a platform suitable for product designers to conduct experiments on UI prototypes, increasing its usability and, simultaneously, independent of developers?*

We will conduct a design science research (DSR) study to answer our research question and obtain abstract design knowledge and an implementation tool. From the abstracted knowledge, we will obtain some Design Principles (DPs) defined for the whole process of experimentation [1]. In this design, the product designers will iteratively validate their prototypes with the users (or the crowds). Here, DPs capture and codify that knowledge by focussing on the implementer, the aim, the user, the context, the mechanism, the enactors, and the rationale [10]. The DPs explain the design information that develops features for software applications. We propose to use the variation of the cycle of Kuechler and Vaishnavi [1] consisting of five iteratively conducted steps (see figure 1.1). Therefore through the use of DSR, a group of issues is resolved by concentrating on a single issue and abstracting the consequences of the resolution.

1.4 Solution Approach

To solve the problems mentioned above, the designers should be able to create UI prototypes and experiments on their own on a set of users. Since we do not have a large set of users for testing the prototypes, we use supervised task-based usability testing [11]. The fundamental principle of task-based usability testing is to have the users attempt to use the prototypes to do certain activities or tasks (e.g., Locate a movie M1) and get feedback (e.g., the time required for the task to be completed by the user). We propose to use Low-code or No-Code approach to achieve this. This approach helps to have a UI for the designers to understand, develop, and create experiments and tasks with the software prototypes [12]. So, the designers would be able to create the UI prototypes and their variants, assign them to the users in an experiment, get feedback from the users and decide on the best prototype. At the same time, the low-code has become more accessible for Model-driven development [13]. Therefore, we plan to create models for the UI prototypes and have the feasibility for creating experiments and tasks. Because of using the models, it is easier to store the prototypes in the database and conduct experiments with the users.

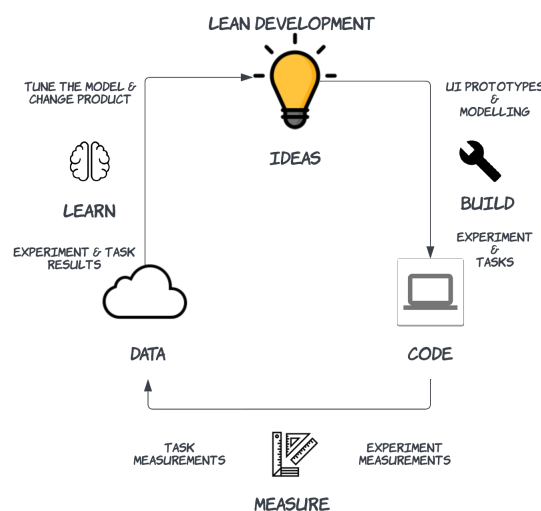


Fig. 1.2 LEAN Development technique

In our solution, we use the LEAN development technique (see figure 1.2) for development as it is used to develop customers friendly products [14]. Using LEAN, the company creates a Minimum Viable Product (MVP) throughout development, tests it with potential customers, and leverages their input to make incremental changes. While this technique can be used for every product, there are also approaches specific to software products. LEAN development

technique can be divided into a Build, Measure, and Learn cycle. In the (1) Build phase, we plan to create the UI Prototypes, Models, Experiments, and Tasks for the users. In the (2) Measure phase, we plan to assign the Experiments and Tasks to the users and measure the Task and the Experiment measurements and perform some analysis on the data received. And finally, in the (3) Learn phase, we display the Analyses results, Tune our models to decide the better variant among the others, and Modify the prototype. As per the figure 1.2, we complete one cycle of iteration and start a new one with the updated prototype.

Chapter 2

Background

To build the foundation of our approach, we present the usage of crowdsourcing in software development (see section 2.1), UI Prototyping (see section 2.2), Low and No code (see section 2.3), Model Based Software Engineering (MBSE) (see section 2.4), Task Based Usability Testing (see section 2.5), and Experimental Product Design and define Design Principles (DP) (see section 2.6).

2.1 Crowdsourcing of Software Products

Iterative feedback from potential customers can help improve the development of software products [15]. To do that, we can use crowdsourcing. Crowdsourcing refers to outsourcing value-creating activities from a company by an open call to a large, undefined group of users to get feedback [16]. The word crowdsourcing is a combination of crowd and outsourcing. Crowdsourcing often involves less specialized and more generalized groups of participants than outsourcing [17]. Some advantages of crowdsourcing include lowered costs, improved speed, quality, flexibility, and scalability [18]. Researchers have used crowdsourcing in many research approaches, including *crowd testing*, *crowd funding*, *crowd ideation*, *crowd logistic*, *crowd production*, *crowd promotion*, and *crowd support* over the last few years [19]. In our approach to finding a solution, we would focus more on crowd-testing and crowd-ideation.

Crowd Testing: The companies use crowd-testing to evaluate different running software products with the users. A growing trend in software testing is crowd testing, which utilizes the benefits, effectiveness, and efficiency of crowdsourcing and cloud platforms [20]. Crowd testing is considered when the software is more user-centric: i.e., software with a broad user base whose success is evaluated by user input. CrowdStudy [21] is a method that enables developers to assess the usability of their web interfaces using crowd workers from Amazon

Mechanical Turk¹. CrowdCrit [22] is another tool that uses Amazon Mechanical Turk to support designers in validating created posters in the form of uploaded images. Similarly, *Interactive event-flow graphs* and *GUI-level (Graphical User Interface) guidance* [23] are the two techniques to increase crowd testers' coverage for GUI using crowd-testing.

Crowd Ideation: Design can be infused with creativity by online crowds, but using traditional strategies to harness them, such as large-scale ideation platforms, requires organization and time [24]. Hence, crowd ideation is used to build new and improved versions of existing software product ideas with the consumers. Under manipulations of task complexity, idea representation, and procedural guidance, Shixuan Fu et al. [25] examine how cognitive load is altered during idea generation and convergence with crowds. ERICA [26] is a tool that uses expert knowledge to validate diverse crowd answers. Crowdboard [24] is a tool used to engage crowds in real-time brainstorming, concept mapping, and other design processes at an early stage of the design process. There were, however, no approaches that directly addressed prototype application areas.

2.2 UI Prototyping

User Interface prototyping is an evaluation and testing technique according to User-Centred Design (UCD) methodology since the 1990s [27]. The evaluation of prototypes by users is a fundamental part of all iterative approaches for IT project management, especially agile methodologies [28]. Therefore, designing UI prototypes enables designers and stakeholders to communicate more effectively. An interactive prototype helps visualize design concepts and communicate new requirements and expectations about a prospective system. Thus, usability testing to validate user requirements and prototype functionality is part of the evaluation process for UI prototypes.

2.3 Low Code / No Code

2.4 Model-based Software Engineering

1. The first topic is dull
2. The second topic is duller

¹Amazon Mechanical Turk: <https://www.mturk.com>

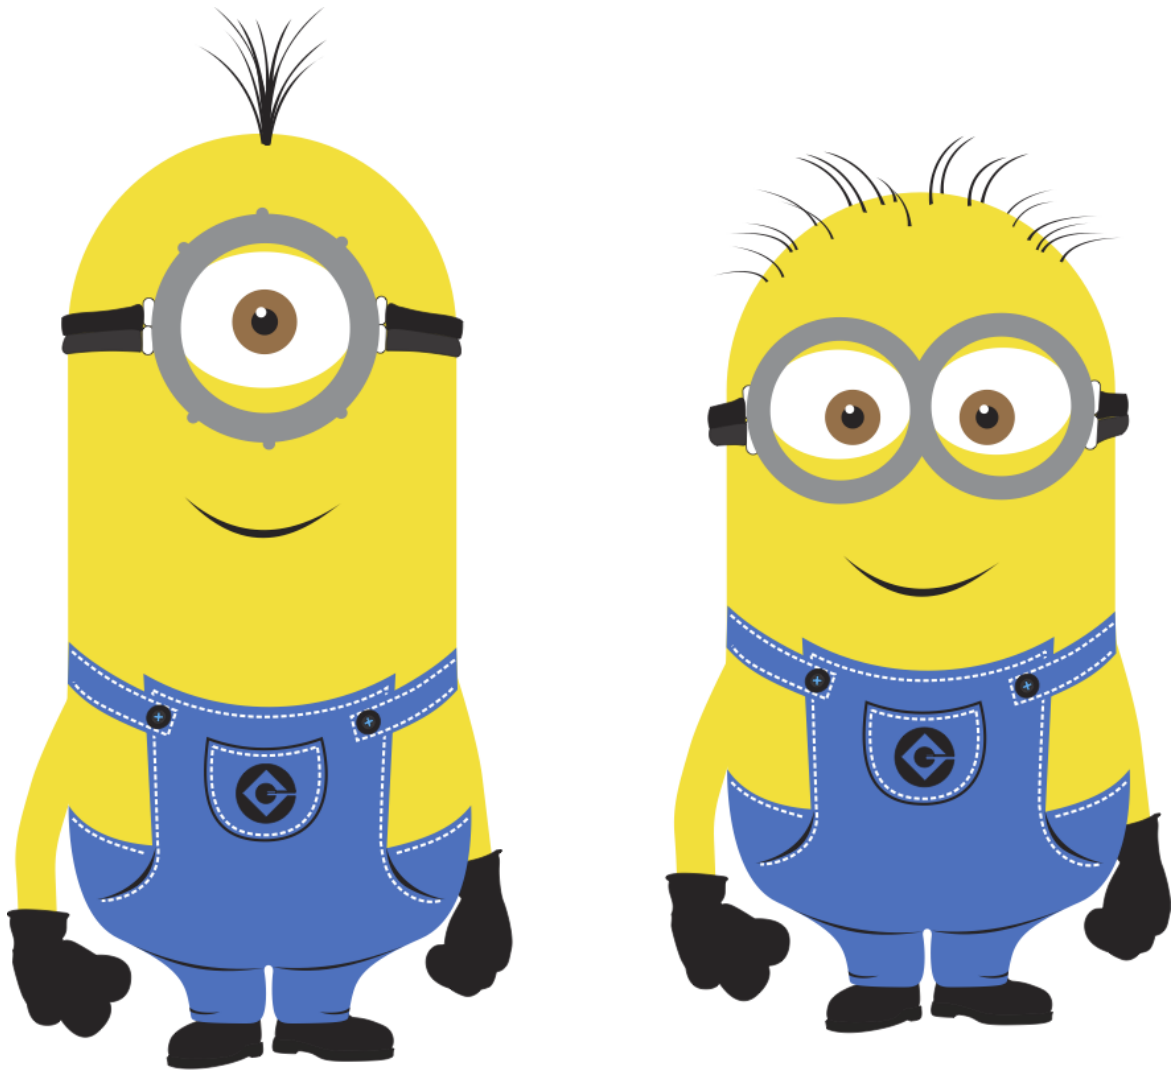


Fig. 2.1 This is just a long figure caption for the minion in Despicable Me from Pixar

- (a) The first subtopic is silly
 - (b) The second subtopic is stupid
3. The third topic is the dullest

2.5 Task-based Usability Testing

2.6 Experimental Product Design

- The first topic is dull
- The second topic is duller
 - The first subtopic is silly
 - The second subtopic is stupid
- The third topic is the dullest

Description

The first topic is dull

The second topic is duller

The first subtopic is silly

The second subtopic is stupid

The third topic is the dullest

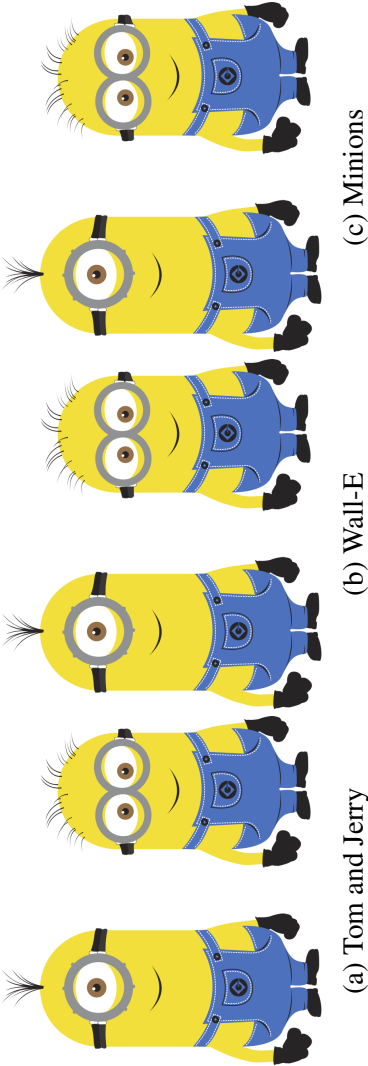


Fig. 2.2 Best Animations

2.7 Landscape

I can cite Wall-E (see Fig. 2.2b) and Minions in despicable me (Fig. 2.2c) or I can cite the whole figure as Fig. 2.2

Chapter 3

Related Work

3.1 State of the Art Research

3.2 Comparison

3. Do not use ‘ditto’ signs or any other such convention to repeat a previous value. In many circumstances a blank will serve just as well. If it won’t, then repeat the value.

Table 3.1 A badly formatted table

| Dental measurement | Species I | | Species II | |
|--------------------|-----------|------|------------|------|
| | mean | SD | mean | SD |
| I1MD | 6.23 | 0.91 | 5.2 | 0.7 |
| I1LL | 7.48 | 0.56 | 8.7 | 0.71 |
| I2MD | 3.99 | 0.63 | 4.22 | 0.54 |
| I2LL | 6.81 | 0.02 | 6.66 | 0.01 |
| CMD | 13.47 | 0.09 | 10.55 | 0.05 |
| CBL | 11.88 | 0.05 | 13.11 | 0.04 |

Table 3.2 Even better looking table using booktabs

| Dental measurement | Species I | | Species II | |
|--------------------|-----------|------|------------|------|
| | mean | SD | mean | SD |
| I1MD | 6.23 | 0.91 | 5.2 | 0.7 |
| I1LL | 7.48 | 0.56 | 8.7 | 0.71 |
| I2MD | 3.99 | 0.63 | 4.22 | 0.54 |
| I2LL | 6.81 | 0.02 | 6.66 | 0.01 |
| CMD | 13.47 | 0.09 | 10.55 | 0.05 |
| CBL | 11.88 | 0.05 | 13.11 | 0.04 |

Chapter 4

Design

4.1 Design Principles

4.2 Build

4.3 Measure

4.4 Learn

Chapter 5

Solution Implementation

5.1 Design Features

Chapter 6

Evaluation

6.1 User Case Study

6.2 Limitations and Risks

Chapter 7

Conclusion

7.1 Conclusion

7.2 Future Work

References

- [1] William L. Kuechler and Vijay K. Vaishnavi. On theory development in design science research: anatomy of a research project. *European Journal of Information Systems*, 17:489–504, 2008.
- [2] Faheem Ahmed, Luiz Fernando Capretz, and Piers Campbell. Evaluating the demand for soft skills in software development. *IT Professional*, 14(1):44–49, 2012.
- [3] David J Teece. Business models, business strategy and innovation. *Long range planning*, 43(2-3):172–194, 2010.
- [4] Alan M. Davis. Software prototyping. volume 40 of *Advances in Computers*, pages 39–63. Elsevier, 1995.
- [5] Steve Blank. Why the lean start-up changes everything. <https://hbr.org/2013/05/why-the-lean-start-up-changes-everything>, May 2013.
- [6] Eveliina Lindgren and Jürgen Münch. Raising the odds of success: the current state of experimentation in product development. *Information and Software Technology*, 77:80–91, September 2016.
- [7] Aleksander Fabijan, Pavel Dmitriev, Helena Holmström Olsson, and Jan Bosch. The benefits of controlled experimentation at scale. In *2017 43rd Euromicro Conference on Software Engineering and Advanced Applications (SEAA)*, pages 18–26, 2017.
- [8] Kathryn Whitenton. But you tested with only 5 users!: Responding to skepticism about findings from small studies. <https://www.nngroup.com/articles/responding-skepticism-small-usability-tests/>, 2019.
- [9] Brian L. Smith, William T. Scherer, Trisha A. Hauser, and Byungkyu Brian Park. Data-driven methodology for signal timing plan development: A computational approach. *Computer-Aided Civil and Infrastructure Engineering*, 17, 2002.
- [10] Shirley Gregor, David Jones, et al. The anatomy of a design theory. Association for Information Systems, 2007.
- [11] Jasmin Jahić, Thomas Kuhn, Matthias Jung, and Norbert Wehn. Supervised testing of concurrent software in embedded systems. In *2017 International Conference on Embedded Computer Systems: Architectures, Modeling, and Simulation (SAMOS)*, pages 233–238, 2017.

- [12] Faezeh Khorram, Jean-Marie Mottu, and Gerson Sunyé. Challenges and opportunities in low-code testing. In *Proceedings of the 23rd ACM/IEEE International Conference on Model Driven Engineering Languages and Systems: Companion Proceedings*, MODELS '20, New York, NY, USA, 2020. Association for Computing Machinery.
- [13] Jordi Cabot. Positioning of the low-code movement within the field of model-driven engineering. In *Proceedings of the 23rd ACM/IEEE International Conference on Model Driven Engineering Languages and Systems: Companion Proceedings*, MODELS '20, New York, NY, USA, 2020. Association for Computing Machinery.
- [14] Mark A Hart. The lean startup: How today's entrepreneurs use continuous innovation to create radically successful businesses eric ries. new york: Crown business, 2011. 320 pages. us\$26.00. *Journal of Product Innovation Management*, 29(3):508–509, 2012.
- [15] Eric Ries. *The lean startup: How today's entrepreneurs use continuous innovation to create radically successful businesses*. Currency, 2011.
- [16] Jan Marco Leimeister. Crowdsourcing. *Controlling & Management*, 56(6):388–392, 2012.
- [17] Enrique Estellés-Arolas and Fernando González-Ladrón-de Guevara. Towards an integrated crowdsourcing definition. *Journal of Information science*, 38(2):189–200, 2012.
- [18] John Prpić, Araz Taeihagh, and James Melton. The fundamentals of policy crowdsourcing. *Policy & Internet*, 7(3):340–361, 2015.
- [19] D Durward, I Blohm, and JM Leimeister. Crowd work. *business & information systems engineering*, 58 (4), 281–286, 2016.
- [20] Thomas D. LaToza, W. Ben Towne, André van der Hoek, and James D. Herbsleb. Crowd development. In *2013 6th International Workshop on Cooperative and Human Aspects of Software Engineering (CHASE)*, pages 85–88, 2013.
- [21] Michael Nebeling, Maximilian Speicher, and Moira C Norrie. Crowdstudy: General toolkit for crowdsourced evaluation of web interfaces. In *Proceedings of the 5th ACM SIGCHI symposium on Engineering interactive computing systems*, pages 255–264, 2013.
- [22] Kurt Luther, Jari-Lee Tolentino, Wei Wu, Amy Pavel, Brian P Bailey, Maneesh Agrawala, Björn Hartmann, and Steven P Dow. Structuring, aggregating, and evaluating crowdsourced design critique. In *Proceedings of the 18th ACM conference on computer supported cooperative work & social computing*, pages 473–485, 2015.
- [23] Yan Chen, Maulishree Pandey, Jean Y Song, Walter S Lasecki, and Steve Oney. Improving crowd-supported gui testing with structural guidance. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*, pages 1–13, 2020.
- [24] Salvatore Andolina, Hendrik Schneider, Joel Chan, Khalil Klouche, Giulio Jacucci, and Steven Dow. Crowdbord: augmenting in-person idea generation with real-time crowds. In *Proceedings of the 2017 ACM SIGCHI Conference on Creativity and Cognition*, pages 106–118, 2017.

-
- [25] Shixuan Fu, Xusen Cheng, Triparna de Vreede, Gert-Jan de Vreede, Isabella Seiber, Ronald Maier, and Barbara Weber. Exploring idea convergence and conceptual combination in open innovative crowdsourcing from a cognitive load perspective. In *Proceedings of the 52nd Hawaii International Conference on System Sciences*, 2019.
 - [26] Nguyen Quoc Viet Hung, Duong Chi Thang, Matthias Weidlich, and Karl Aberer. Erica: Expert guidance in validating crowd answers. In *Proceedings of the 38th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 1037–1038, 2015.
 - [27] Jenny Preece, Yvonne Rogers, Helen Sharp, David Benyon, Simon Holland, and Tom Carey. *Human-computer interaction*. Addison-Wesley Longman Ltd., 1994.
 - [28] Ken Schwaber. *Agile project management with Scrum*. Microsoft press, 2004.

Appendix A

How to install L^AT_EX

Windows OS

TeXLive package - full version

1. Download the TeXLive ISO (2.2GB) from
<https://www.tug.org/texlive/>
2. Download WinCDEmu (if you don't have a virtual drive) from
<http://wincdemu.sysprogs.org/download/>
3. To install Windows CD Emulator follow the instructions at
<http://wincdemu.sysprogs.org/tutorials/install/>
4. Right click the iso and mount it using the WinCDEmu as shown in
<http://wincdemu.sysprogs.org/tutorials/mount/>
5. Open your virtual drive and run setup.pl

or

Basic MikTeX - T_EX distribution

1. Download Basic-MiK_TE_X(32bit or 64bit) from
<http://miktex.org/download>
2. Run the installer
3. To add a new package go to Start » All Programs » MikTeX » Maintenance (Admin)
and choose Package Manager

4. Select or search for packages to install

TexStudio - T_EX editor

1. Download TexStudio from
<http://texstudio.sourceforge.net/#downloads>
2. Run the installer

Mac OS X

MacTeX - T_EX distribution

1. Download the file from
<https://www.tug.org/mactex/>
2. Extract and double click to run the installer. It does the entire configuration, sit back and relax.

TexStudio - T_EX editor

1. Download TexStudio from
<http://texstudio.sourceforge.net/#downloads>
2. Extract and Start

Unix/Linux

TeXLive - T_EX distribution

Getting the distribution:

1. TeXLive can be downloaded from
<http://www.tug.org/texlive/acquire-netinstall.html>.
2. TeXLive is provided by most operating system you can use (rpm,apt-get or yum) to get TeXLive distributions

Installation

1. Mount the ISO file in the mnt directory

```
mount -t iso9660 -o ro,loop,noauto /your/texlive####.iso /mnt
```

2. Install wget on your OS (use rpm, apt-get or yum install)
3. Run the installer script install-tl.

```
cd /your/download/directory
./install-tl
```

4. Enter command 'i' for installation
5. Post-Installation configuration:
<http://www.tug.org/texlive/doc/texlive-en/texlive-en.html#x1-320003.4.1>
6. Set the path for the directory of TexLive binaries in your .bashrc file

For 32bit OS

For Bourne-compatible shells such as bash, and using Intel x86 GNU/Linux and a default directory setup as an example, the file to edit might be

```
edit ~/.bashrc file and add following lines
PATH=/usr/local/texlive/2011/bin/i386-linux:$PATH;
export PATH
MANPATH=/usr/local/texlive/2011/texmf/doc/man:$MANPATH;
export MANPATH
INFOPATH=/usr/local/texlive/2011/texmf/doc/info:$INFOPATH;
export INFOPATH
```

For 64bit OS

```
edit ~/.bashrc file and add following lines
PATH=/usr/local/texlive/2011/bin/x86_64-linux:$PATH;
export PATH
MANPATH=/usr/local/texlive/2011/texmf/doc/man:$MANPATH;
export MANPATH
```

```
INFOPATH=/usr/local/texlive/2011/texmf/doc/info:$INFOPATH;  
export INFOPATH
```

Fedora/RedHat/CentOS:

```
sudo yum install texlive  
sudo yum install psutils
```

SUSE:

```
sudo zypper install texlive
```

Debian/Ubuntu:

```
sudo apt-get install texlive texlive-latex-extra  
sudo apt-get install psutils
```


Appendix B

Installing the CUED class file

\LaTeX .cls files can be accessed system-wide when they are placed in the $\langle\text{texmf}\rangle/\text{tex}/\text{latex}$ directory, where $\langle\text{texmf}\rangle$ is the root directory of the user's \TeX installation. On systems that have a local texmf tree ($\langle\text{texmflocal}\rangle$), which may be named “ texmf-local ” or “ localtexmf ”, it may be advisable to install packages in $\langle\text{texmflocal}\rangle$, rather than $\langle\text{texmf}\rangle$ as the contents of the former, unlike that of the latter, are preserved after the \LaTeX system is reinstalled and/or upgraded.

It is recommended that the user create a subdirectory $\langle\text{texmf}\rangle/\text{tex}/\text{latex}/\text{CUED}$ for all CUED related \LaTeX class and package files. On some \LaTeX systems, the directory look-up tables will need to be refreshed after making additions or deletions to the system files. For \TeX Live systems this is accomplished via executing “ texhash ” as root. MikTeX users can run “ initexmf -u ” to accomplish the same thing.

Users not willing or able to install the files system-wide can install them in their personal directories, but will then have to provide the path (full or relative) in addition to the filename when referring to them in \LaTeX .