

# Project Analysis Report

**t2mpoc**

Comprehensive analysis and documentation of Mule project configuration, flows, and resources

Generated: December 20, 2025 22:37:04 CST

# Table of Contents

1. Project Information .....	3
1.1 Project Details .....	3
1.2 POM Details .....	3
1.3 Mule-artifact.json .....	4
1.4 Release-info.json .....	4
2. Flow Diagrams .....	5
2.1 Mule Project Flow Integration .....	5
2.1.1 AddException .....	5
2.1.2 PLTFlow .....	5
2.1.3 PLTFlow1 .....	6
2.1.4 PLTFlow2 .....	6
2.1.5 PLTFlow3 .....	7
2.1.6 PLTFlow4 .....	8
2.1.7 PLTFlow5 .....	8
2.1.8 PLTFlow6 .....	9
2.1.9 PLTFlow7 .....	10
2.1.10 PLTLive .....	11
2.1.11 PLTLiveStart .....	11
2.1.12 PLTUpdate .....	12
2.1.13 ReviewSummary .....	12
2.1.14 apireviewexceptionsFlow .....	13
2.1.15 apireviewexceptionsFlow1 .....	13
2.1.16 apireviewexceptionsFlow2 .....	13
2.1.17 apireviewexceptionsFlow3 .....	14
2.1.18 devtrackerreadFlow .....	14
2.1.19 devtrackerreadFlow1 .....	15
2.1.20 devtrackerreadFlow2 .....	15
2.1.21 devtrackerreadFlow3 .....	16
2.1.22 interceptcicscallsFlow .....	16
2.1.23 interceptcicscallsFlow1 .....	17
2.1.24 interceptcicscallsFlow2 .....	18
2.1.25 mulemqtriggerFlow .....	18
2.1.26 mulemqtriggerFlow1 .....	20
2.1.27 mulemqtriggerFlow2 .....	20
2.1.28 mulemqtriggerFlow3 .....	22

2.1.29 mulemqtriggerhome .....	23
2.1.30 parentpomconversionFlow .....	23
2.1.31 parentpomconversionFlow1 .....	24
2.1.32 responsevalidatorFlow .....	24
2.1.33 responsevalidatorFlow1 .....	25
2.1.34 t2m_pocFlow .....	26
2.1.35 t2m_pocFlow1 .....	26
2.1.36 t2mdbexportFlow .....	26
2.1.37 t2mdbexportFlow1 .....	27
2.1.38 t2mdbexportFlow2 .....	27
2.1.39 t2mpocFlow .....	27
2.2 Mule Project Flow Diagram .....	29
2.2.1 AddException .....	29
2.2.2 PLTFlow .....	30
2.2.3 PLTFlow1 .....	31
2.2.4 PLTFlow2 .....	31
2.2.5 PLTFlow3 .....	32
2.2.6 PLTFlow4 .....	34
2.2.7 PLTFlow5 .....	34
2.2.8 PLTFlow6 .....	36
2.2.9 PLTFlow7 .....	36
2.2.10 PLTLive .....	38
2.2.11 PLTLiveStart .....	39
2.2.12 PLTUpdate .....	39
2.2.13 ReviewSummary .....	41
2.2.14 apireviewexceptionsFlow .....	42
2.2.15 apireviewexceptionsFlow1 .....	42
2.2.16 apireviewexceptionsFlow2 .....	43
2.2.17 apireviewexceptionsFlow3 .....	44
2.2.18 devtrackerreadFlow .....	44
2.2.19 devtrackerreadFlow1 .....	46
2.2.20 devtrackerreadFlow2 .....	46
2.2.21 devtrackerreadFlow3 .....	47
2.2.22 interceptcicscallsFlow .....	47
2.2.23 interceptcicscallsFlow1 .....	49
2.2.24 interceptcicscallsFlow2 .....	49
2.2.25 mulemqtriggerFlow .....	50

2.2.26 mulemqtriggerFlow1 .....	52
2.2.27 mulemqtriggerFlow2 .....	52
2.2.28 mulemqtriggerFlow3 .....	54
2.2.29 mulemqtriggerhome .....	54
2.2.30 parentpomconversionFlow .....	54
2.2.31 parentpomconversionFlow1 .....	55
2.2.32 responsevalidatorFlow .....	56
2.2.33 responsevalidatorFlow1 .....	57
2.2.34 t2m_pocFlow .....	57
2.2.35 t2m_pocFlow1 .....	57
2.2.36 t2mdbexportFlow .....	58
2.2.37 t2mdbexportFlow1 .....	60
2.2.38 t2mdbexportFlow2 .....	61
2.2.39 t2mpocFlow .....	61
3. Global Configuration .....	62
3.1 src\main\resources\mule-app.properties .....	62
3.2 src\main\resources\secure.properties .....	65
4. Connector Configurations .....	66
4.1. ATDV (ibm-mq:config) .....	66
4.1.1 ibm-mq:connection .....	66
4.2. Batch (ibm-mq:config) .....	66
4.2.1 ibm-mq:connection .....	66
4.3. DRL (ibm-mq:config) .....	66
4.3.1 ibm-mq:connection .....	67
4.4. Database-Connection (db:config) .....	67
4.4.1 db:generic-connection .....	67
4.5. Email_SMTP (email:smtp-config) .....	67
4.5.1 email:smtp-connection .....	67
4.6. File_Config (file:config) .....	68
4.7. GetCredential (http:request-config) .....	68
4.7.1 http:request-connection .....	68
4.8. HTTPRVMule (http:request-config) .....	68
4.8.1 http:request-connection .....	68
4.9. HTTPResponseCompare (http:request-config) .....	69
4.9.1 http:request-connection .....	69
4.10. HTTP_Listener_config (http:listener-config) .....	69
4.10.1 http:listener-connection .....	69

4.11. HTTP_Request_configuration (http:request-config) .....	70
4.11.1 http:request-connection .....	71
4.12. IBF (ibm-mq:config) .....	71
4.12.1 ibm-mq:connection .....	71
4.13. ITE (ibm-mq:config) .....	71
4.13.1 ibm-mq:connection .....	71
4.14. MNE (ibm-mq:config) .....	71
4.14.1 ibm-mq:connection .....	72
4.15. ObjectStore_Config (os:config) .....	72
4.16. PITE (ibm-mq:config) .....	72
4.16.1 ibm-mq:connection .....	72
4.17. PLTChecklistupload (http:request-config) .....	72
4.17.1 http:request-connection .....	73
4.18. Policy_TLS_Context (tls:context) .....	73
4.18.1 tls:trust-store .....	73
4.18.2 tls:key-store .....	73
4.19. Secure_Properties_Config (secure-properties:config) .....	73
4.20. TDV (ibm-mq:config) .....	74
4.20.1 ibm-mq:connection .....	74
4.21. TLS_Context (tls:context) .....	74
4.21.1 tls:key-store .....	74
4.22. TLS_ContextRV (tls:context) .....	74
4.22.1 tls:trust-store .....	75
4.23. TPP (ibm-mq:config) .....	75
4.23.1 ibm-mq:connection .....	75
4.24. TRN (ibm-mq:config) .....	75
4.24.1 ibm-mq:connection .....	75
4.25. api-gateway:autodiscovery (api-gateway:autodiscovery) .....	75
4.26. bbtnetconnection (http:request-config) .....	76
4.26.1 http:request-connection .....	76
5. Mule Flows .....	77
5.1 apireviewexceptionsFlow .....	77
5.1.1 http:listener .....	77
5.1.2 ee:transform .....	77
5.1.3 try .....	77
5.1.4 parse-template .....	77
5.2 AddException .....	77

5.2.1 http:listener .....	79
5.2.2 ee:transform .....	79
5.2.3 try .....	79
5.2.4 try .....	79
5.2.5 parse-template .....	79
5.3 apireviewexceptionsFlow1 .....	79
5.3.1 http:listener .....	79
5.3.2 parse-template .....	80
5.4 apireviewexceptionsFlow3 .....	80
5.4.1 http:listener .....	80
5.4.2 ee:transform .....	80
5.4.3 try .....	80
5.4.4 parse-template .....	80
5.5 apireviewexceptionsFlow2 .....	81
5.5.1 http:listener .....	81
5.5.2 ee:transform .....	81
5.5.3 db:select .....	81
5.5.4 ee:transform .....	81
5.5.5 ee:transform .....	81
5.5.6 parse-template .....	81
5.6 devtrackerreadFlow .....	82
5.6.1 http:listener .....	82
5.6.2 ee:transform .....	82
5.6.3 os:retrieve .....	82
5.6.4 ee:transform .....	82
5.6.5 ee:transform .....	82
5.6.6 foreach .....	83
5.6.7 choice .....	83
5.7 devtrackerreadFlow1 .....	83
5.7.1 http:listener .....	83
5.7.2 parse-template .....	83
5.8 devtrackerreadFlow2 .....	83
5.8.1 http:listener .....	83
5.8.2 file:read .....	84
5.8.3 ee:transform .....	84
5.8.4 os:store .....	84
5.8.5 parse-template .....	84

5.9 devtrackerreadFlow3 .....	85
5.9.1 http:listener .....	85
5.9.2 parse-template .....	86
5.10 interceptcicscallsFlow .....	86
5.10.1 http:listener .....	86
5.10.2 set-payload .....	86
5.10.3 ee:transform .....	86
5.10.4 logger .....	86
5.10.5 ee:transform .....	87
5.10.6 try .....	87
5.10.7 db:insert .....	87
5.10.8 logger .....	87
5.10.9 ee:transform .....	88
5.11 interceptcicscallsFlow1 .....	88
5.11.1 http:listener .....	88
5.11.2 ee:transform .....	89
5.11.3 db:select .....	89
5.11.4 ee:transform .....	89
5.11.5 parse-template .....	89
5.12 interceptcicscallsFlow2 .....	89
5.12.1 http:listener .....	89
5.12.2 parse-template .....	90
5.13 mulemqtriggerFlow .....	90
5.13.1 http:listener .....	90
5.13.2 ee:transform .....	90
5.13.3 try .....	90
5.14 mulemqtriggerhome .....	90
5.14.1 http:listener .....	90
5.14.2 parse-template .....	91
5.15 mulemqtriggerFlow1 .....	91
5.15.1 http:listener .....	91
5.15.2 set-variable .....	91
5.15.3 ibm-mq:consume .....	91
5.15.4 logger .....	91
5.16 mulemqtriggerFlow2 .....	92
5.16.1 http:listener .....	92
5.16.2 ee:transform .....	92

5.16.3 try .....	93
5.17 mulemqtriggerFlow3 .....	93
5.17.1 http:listener .....	93
5.17.2 parse-template .....	94
5.18 parentpomconversionFlow .....	94
5.18.1 http:listener .....	94
5.18.2 ee:transform .....	94
5.18.3 ee:transform .....	94
5.18.4 foreach .....	94
5.18.5 set-payload .....	95
5.18.6 ee:transform .....	95
5.18.7 parse-template .....	95
5.19 parentpomconversionFlow1 .....	95
5.19.1 http:listener .....	95
5.19.2 parse-template .....	95
5.20 PLTFlow .....	96
5.20.1 http:listener .....	96
5.20.2 choice .....	96
5.20.3 ee:transform .....	96
5.20.4 ee:transform .....	96
5.20.5 ee:transform .....	96
5.20.6 parse-template .....	96
5.21 PLTUpdate .....	97
5.21.1 http:listener .....	97
5.21.2 ee:transform .....	97
5.21.3 db:select .....	97
5.21.4 ee:transform .....	97
5.21.5 db:update .....	97
5.21.6 db:select .....	98
5.21.7 ee:transform .....	98
5.21.8 ee:transform .....	98
5.21.9 ee:transform .....	98
5.21.10 parse-template .....	98
5.22 PLTFlow2 .....	98
5.22.1 http:listener .....	98
5.22.2 ee:transform .....	99
5.22.3 db:select .....	99



5.22.4 ee:transform .....	100
5.22.5 ee:transform .....	100
5.22.6 ee:transform .....	100
5.22.7 parse-template .....	100
5.23 PLTFlow1 .....	101
5.23.1 http:listener .....	101
5.23.2 parse-template .....	101
5.24 PLTFlow3 .....	101
5.24.1 http:listener .....	101
5.24.2 ee:transform .....	101
5.24.3 db:insert .....	101
5.24.4 db:select .....	102
5.24.5 ee:transform .....	102
5.24.6 ee:transform .....	102
5.24.7 ee:transform .....	102
5.24.8 parse-template .....	102
5.24.9 error-handler .....	102
5.25 PLTFlow4 .....	102
5.25.1 http:listener .....	102
5.25.2 file:read .....	103
5.25.3 ee:transform .....	103
5.25.4 foreach .....	103
5.26 PLTFlow5 .....	103
5.26.1 http:listener .....	103
5.26.2 ee:transform .....	103
5.26.3 choice .....	104
5.27 PLTFlow6 .....	104
5.27.1 http:listener .....	104
5.27.2 parse-template .....	104
5.28 PLTFlow7 .....	104
5.28.1 http:listener .....	104
5.28.2 ee:transform .....	105
5.28.3 db:select .....	105
5.28.4 ee:transform .....	105
5.28.5 try .....	105
5.28.6 ee:transform .....	105
5.28.7 try .....	105

5.28.8 try .....	106
5.28.9 ee:transform .....	107
5.28.10 ee:transform .....	107
5.28.11 http:request .....	107
5.28.12 ee:transform .....	107
5.28.13 ee:transform .....	107
5.28.14 http:request .....	107
5.28.15 ee:transform .....	107
5.28.16 parse-template .....	108
5.29 PLTLive .....	108
5.29.1 http:listener .....	108
5.29.2 choice .....	108
5.29.3 choice .....	108
5.29.4 db:select .....	108
5.29.5 ee:transform .....	108
5.29.6 ee:transform .....	109
5.29.7 foreach .....	109
5.29.8 parse-template .....	109
5.30 PLTLiveStart .....	109
5.30.1 http:listener .....	109
5.30.2 parse-template .....	109
5.31 responsevalidatorFlow .....	110
5.31.1 http:listener .....	110
5.31.2 ee:transform .....	110
5.31.3 ee:transform .....	110
5.31.4 ee:transform .....	110
5.31.5 foreach .....	110
5.31.6 ee:transform .....	110
5.31.7 foreach .....	111
5.31.8 ee:transform .....	111
5.31.9 try .....	111
5.31.10 try .....	111
5.31.11 parse-template .....	111
5.32 responsevalidatorFlow1 .....	111
5.32.1 http:listener .....	111
5.32.2 parse-template .....	112
5.33 t2mdbexportFlow .....	112

5.33.1 scheduler .....	113
5.33.2 logger .....	113
5.33.3 db:select .....	113
5.33.4 ee:transform .....	113
5.33.5 ee:transform .....	114
5.33.6 set-payload .....	114
5.33.7 ee:transform .....	114
5.33.8 foreach .....	114
5.33.9 ee:transform .....	114
5.33.10 ee:transform .....	114
5.33.11 ee:transform .....	114
5.33.12 ee:transform .....	115
5.33.13 ee:transform .....	115
5.33.14 ee:transform .....	115
5.33.15 email:send .....	115
5.34 t2mdbexportFlow1 .....	115
5.34.1 http:listener .....	115
5.34.2 db:select .....	116
5.34.3 ee:transform .....	116
5.34.4 ee:transform .....	116
5.34.5 set-payload .....	116
5.34.6 ee:transform .....	116
5.34.7 foreach .....	116
5.34.8 ee:transform .....	116
5.34.9 ee:transform .....	117
5.34.10 ee:transform .....	117
5.34.11 ee:transform .....	117
5.34.12 ee:transform .....	117
5.34.13 ee:transform .....	117
5.34.14 email:send .....	117
5.34.15 parse-template .....	117
5.35 ReviewSummary .....	118
5.35.1 http:listener .....	118
5.35.2 ee:transform .....	118
5.35.3 db:select .....	118
5.35.4 choice .....	118
5.35.5 ee:transform .....	118

5.35.6 set-variable .....	119
5.35.7 ee:transform .....	120
5.35.8 ee:transform .....	120
5.35.9 ee:transform .....	120
5.35.10 ee:transform .....	120
5.35.11 ee:transform .....	120
5.35.12 ee:transform .....	120
5.35.13 ee:transform .....	120
5.35.14 ee:transform .....	121
5.35.15 ee:transform .....	121
5.35.16 parse-template .....	121
5.36 t2mdbexportFlow2 .....	121
5.36.1 http:listener .....	121
5.36.2 parse-template .....	121
5.37 t2m_pocFlow .....	122
5.37.1 http:listener .....	122
5.37.2 ee:cache .....	122
5.38 t2m_pocFlow1 .....	122
5.38.1 http:listener .....	122
5.38.2 os:retrieve .....	122
5.38.3 ee:transform .....	123
5.39 t2mpocFlow .....	123
5.39.1 http:listener .....	123
5.39.2 ee:transform .....	123
6. Mule Sub-Flows .....	124
7. DataWeave Files .....	125
8. Other Resources .....	126
9. References .....	127

# 1. Project Information

## 1.1 Project Details

Property	Value
Project Name	t2mpoc
Version	1.0.0
Project Path	C:\raks\apiguard\raksanalyzer\.\testdata\t2mpoc

## 1.2 POM Details

Path: pom.xml

### 1.2.1 Basic Information

Property	Value
Model Version	4.0.0
Group ID	com.truist.eapi01
Artifact ID	t2mpoc
Version	1.0.0
Packaging	mule-application
Name	t2mpoc-1.0.0-mule-application
Description	t2mpoc api is created for t2m related POCs.

### 1.2.2 Properties

Key	Value
mule.maven.plugin.version	4.0.0
munit.version	3.0.0
project.build.sourceEncoding	UTF-8
app.runtime	4.4.0-20240219
project.reporting.outputEncoding	UTF-8
cicd.mule.version	4.4.0

### 1.2.3 Plugins

Group ID	Artifact ID	Version
org.apache.maven.plugins	maven-clean-plugin	3.0.0
org.mule.tools.maven	mule-maven-plugin	\${mule.maven.plugin.version}
com.mulesoft.munit.tools	munit-maven-plugin	3.0.0

## 1.2.4 Dependencies

Group ID	Artifact ID	Version
com.enterprisemath	em-utils	4.1.1
org.apache.poi	poi	5.2.4
org.apache.poi	poi-ooxml	5.2.4
org.apache.poi	poi-ooxml-schemas	4.1.2
org.eclipse.jgit	org.eclipse.jgit	6.8.0.202311291450-r
org.mule.connectors	mule-http-connector	1.9.0
org.mule.connectors	mule-sockets-connector	1.2.4
org.mule.connectors	mule-objectstore-connector	1.2.2
org.mule.connectors	mule-file-connector	1.5.2
org.mule.connectors	mule-email-connector	1.7.2
org.mule.module	mule-java-module	1.2.12
org.mule.modules	mule-xml-module	1.4.2
org.mule.modules	mule-compression-module	2.2.3
com.mulesoft.modules	mule-secure-configuration-property-module	1.2.7
org.mule.connectors	mule-db-connector	1.14.7
com.microsoft.sqlserver	mssql-jdbc	12.6.0.jre8
org.antlr	antlr4-runtime	4.9.3
com.mulesoft.connectors	mule-ibm-mq-connector	1.6.23
com.ibm.mq	com.ibm.mq.allclient	9.3.5.1
org.json	json	20240205

## 1.3 Mule-artifact.json

Path: mule-artifact.json

```
{
  "minMuleVersion": "4.4.0"
}
```

## 1.4 Release-info.json

Path: releaseinfo.json


```
{
  "API CI Name": "YourAPIServiceName",
  "Release Value": "YourReleaseValueHere",
  "Release Number": "RLSEXXXXXXX",
  "Project Name": "YourProjectNameHere",
  "Implementation Date": "mm/dd/ccyy HH:MM - mm/dd/ccyy HH:MM",
  "Project ID": "YourProjectIdHere",
  "RFC": "YourServiceNowChangeRequestIdHere"
}
```

## 2. Flow Diagrams

### 2.1 Mule Project Flow Integration


#### 2.1.1 AddException

Path: src\main\mule\apireviewexceptions.xml

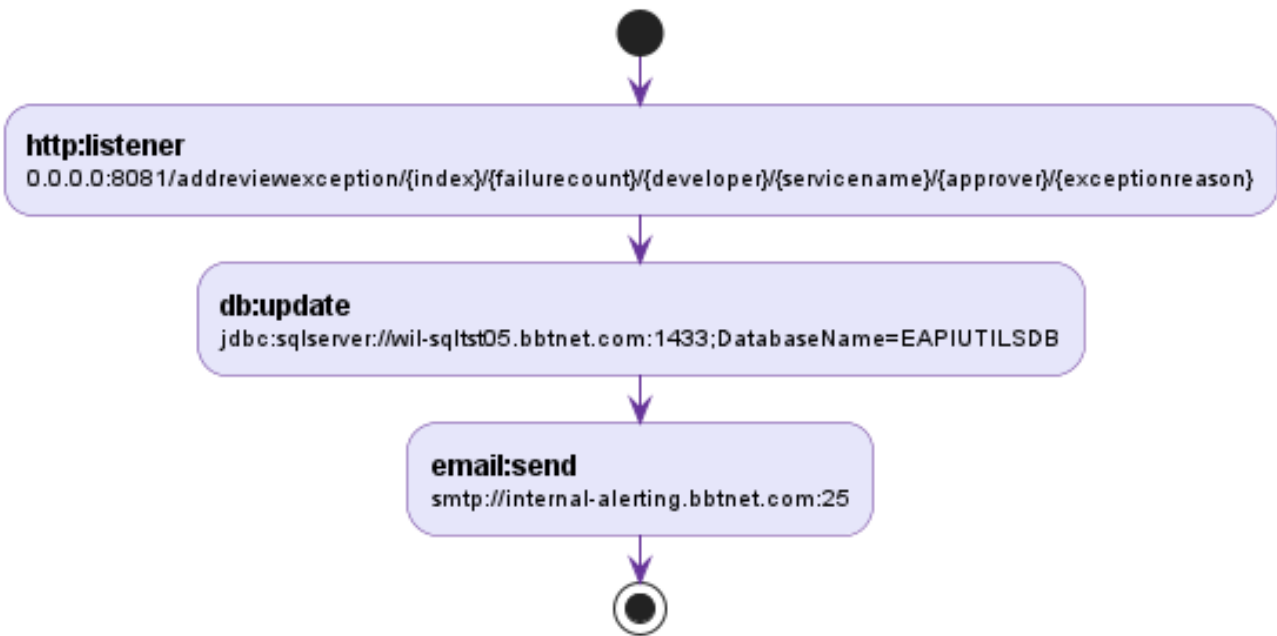


#### 2.1.2 PLTFlow

Path: src\main\mule\PLT.xml

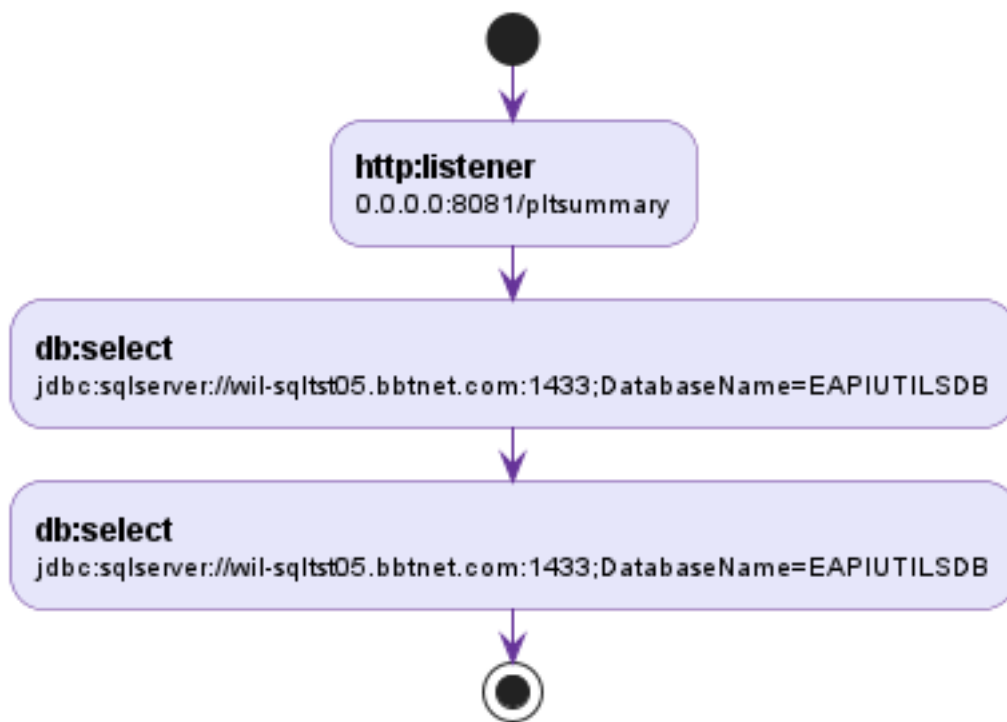

### 2.1.3 PLTFlow1


*Path: src\main\mule\PLT.xml*

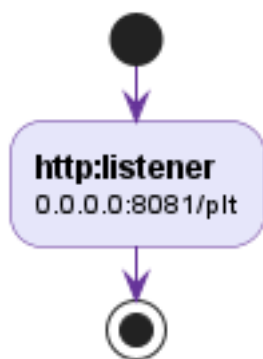

### 2.1.4 PLTFlow2


*Path: src\main\mule\PLT.xml*



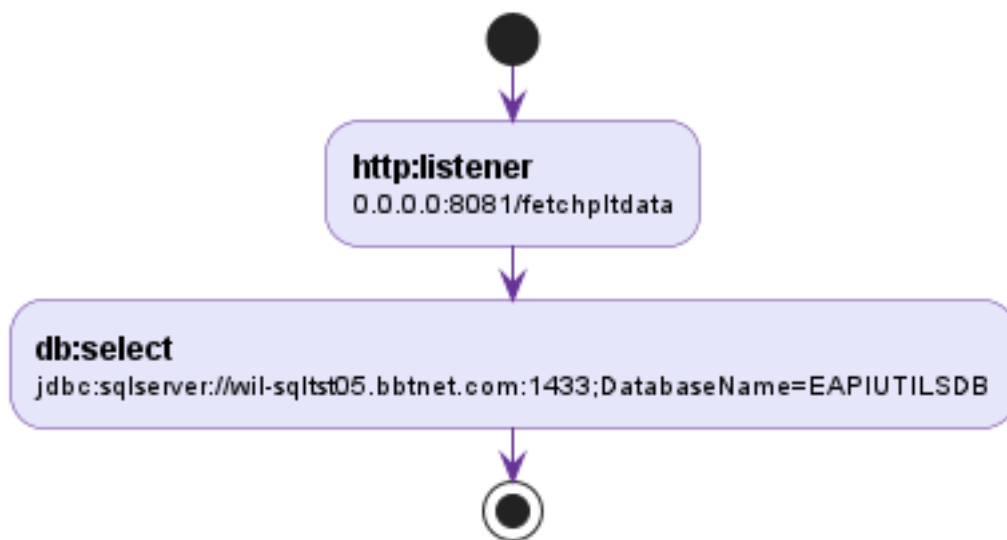


### 2.1.5 PLTFlow3

Path: src\main\mule\PLT.xml

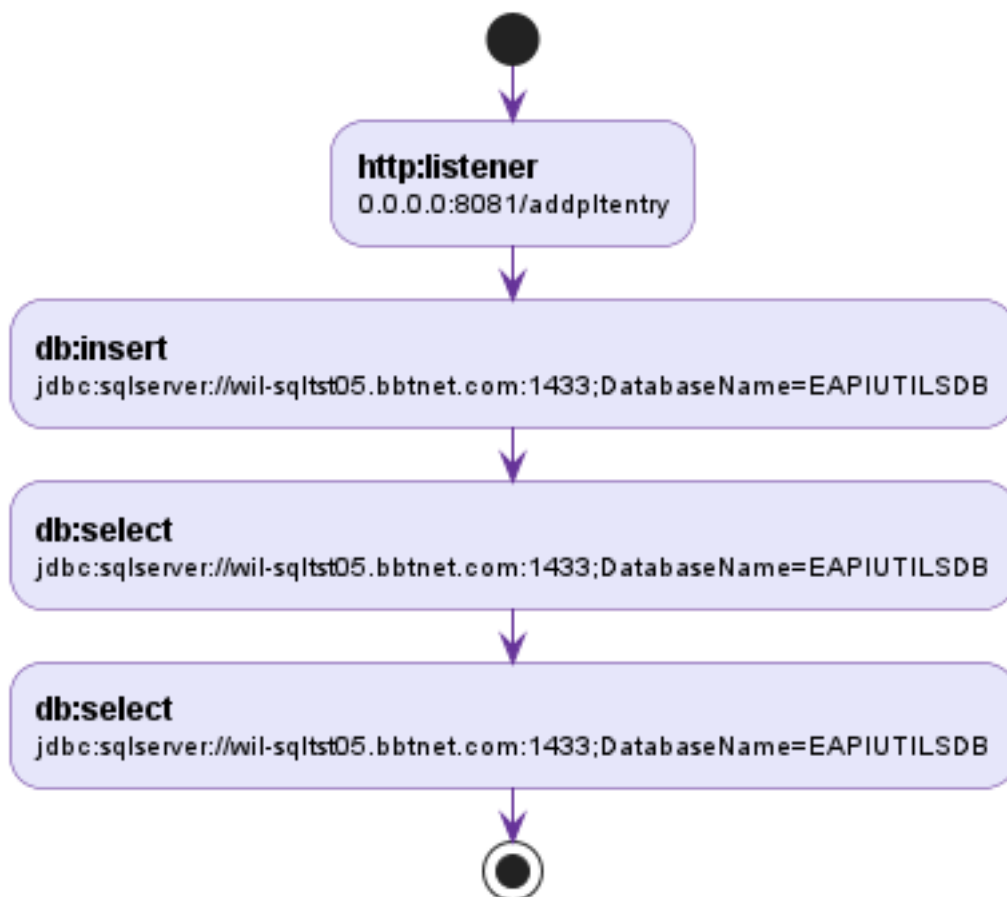


2.1.6 PLTFlow4

Path: src\main\mule\PLT.xml

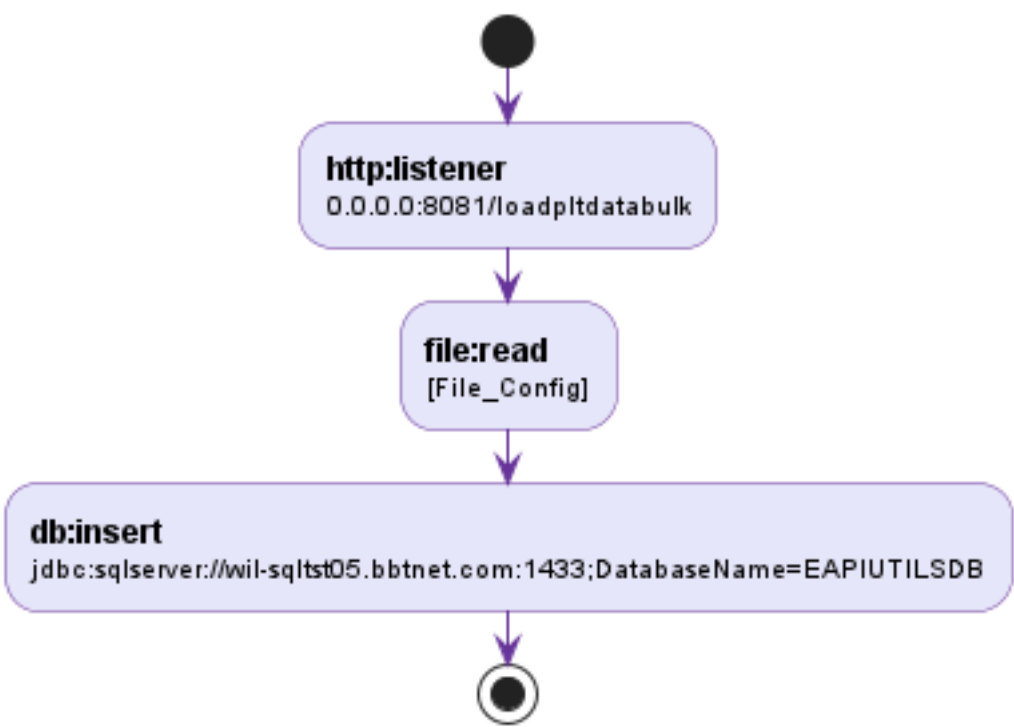


2.1.7 PLTFlow5

Path: src\main\mule\PLT.xml

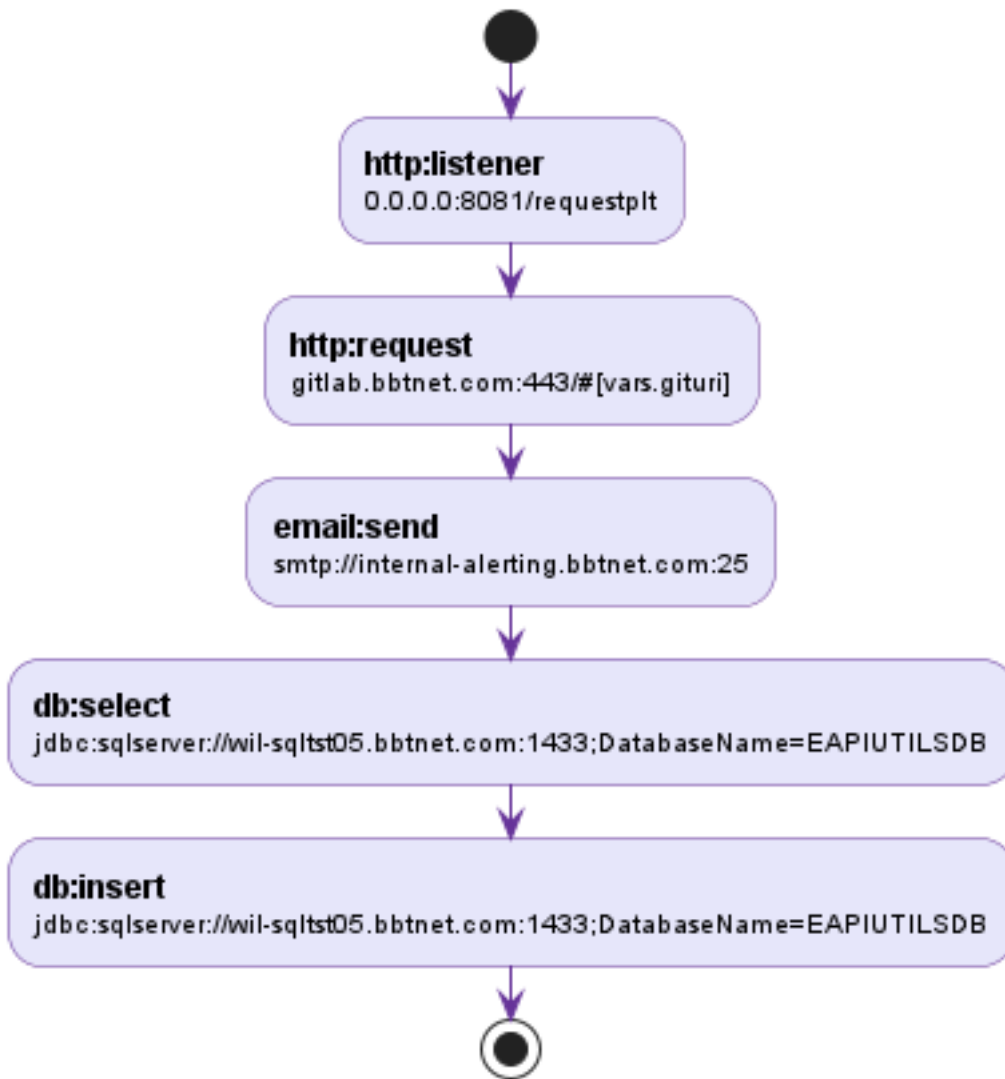


## 2.1.8 PLTFlow6

Path: src\main\mule\PLT.xml

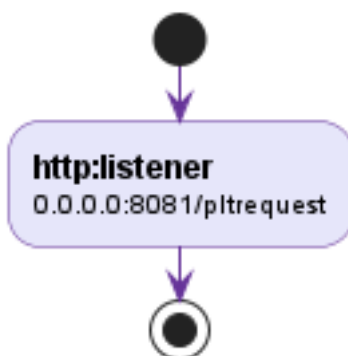


## 2.1.9 PLTFlow7

Path: src\main\mule\PLT.xml

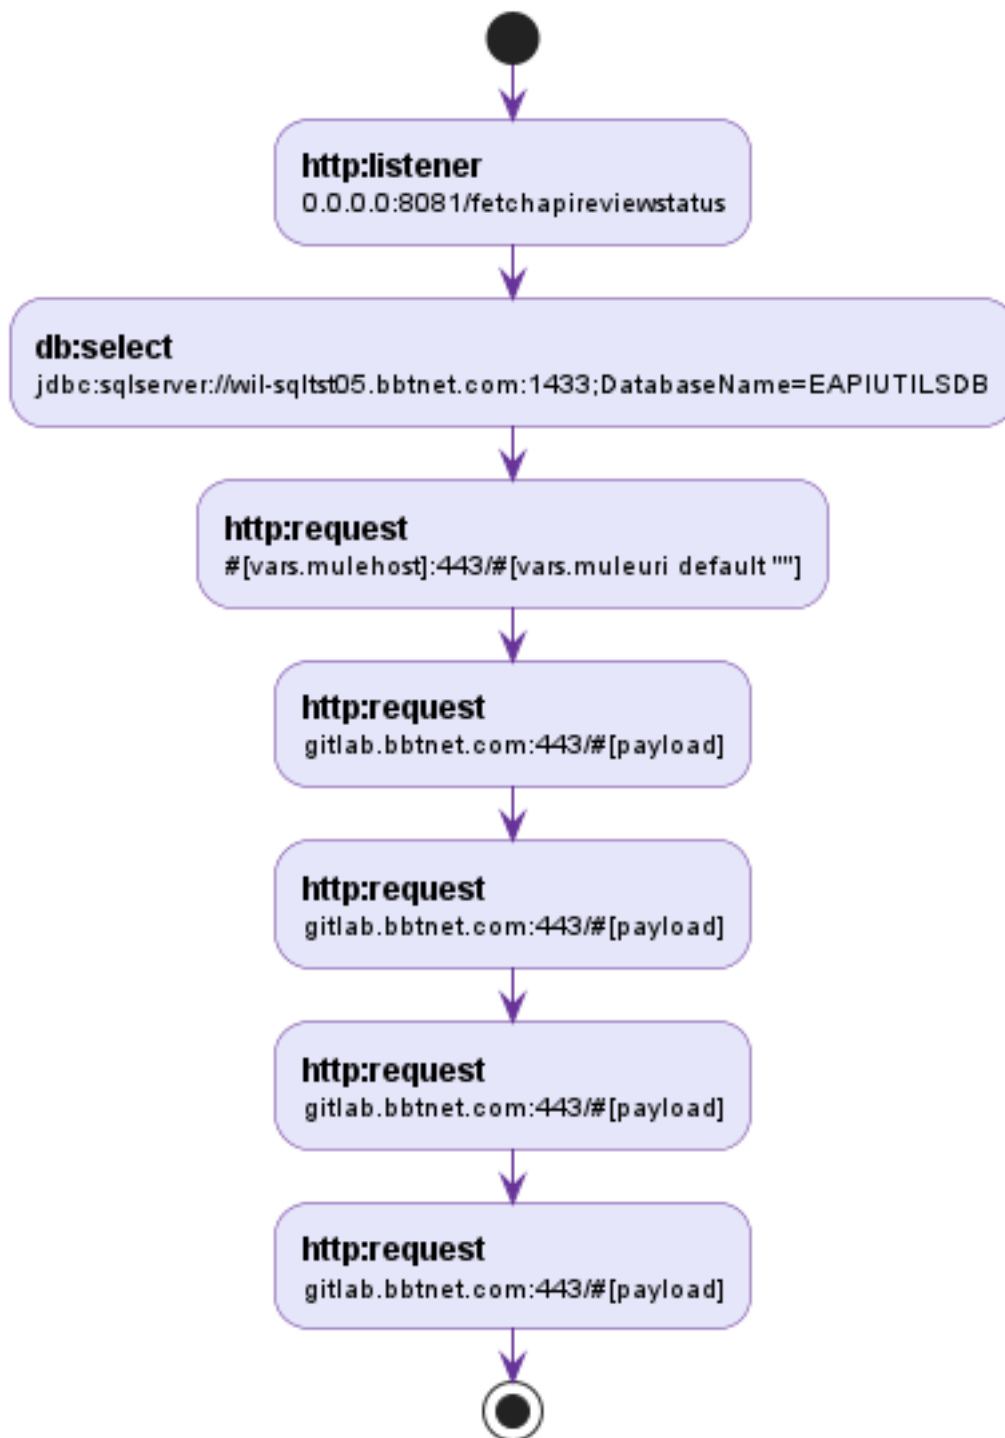


### 2.1.10 PLTLive

Path: src\main\mule\PLT.xml

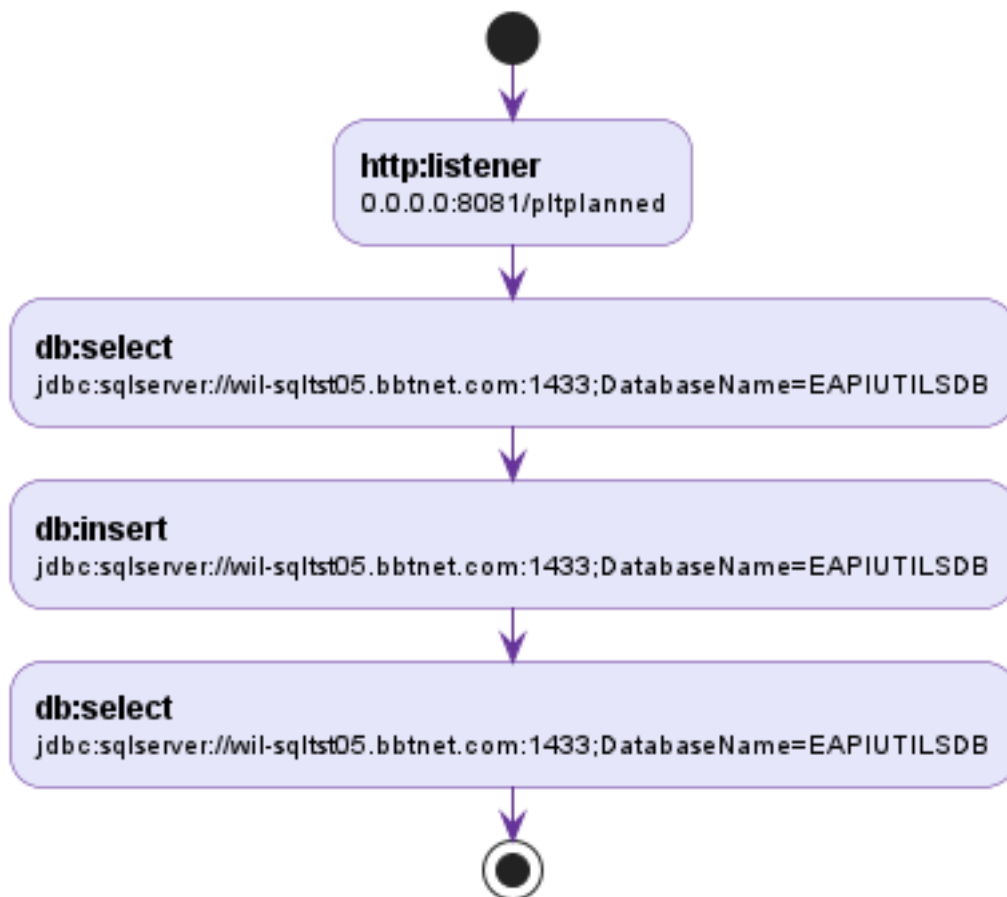


### 2.1.11 PLTLiveStart

Path: src\main\mule\PLT.xml

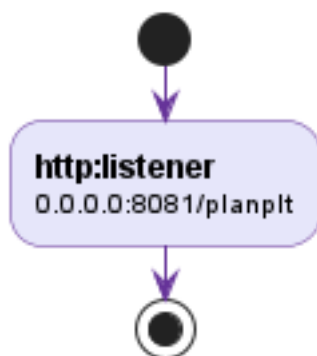


## 2.1.12 PLTUpdate

Path: src\main\mule\PLT.xml

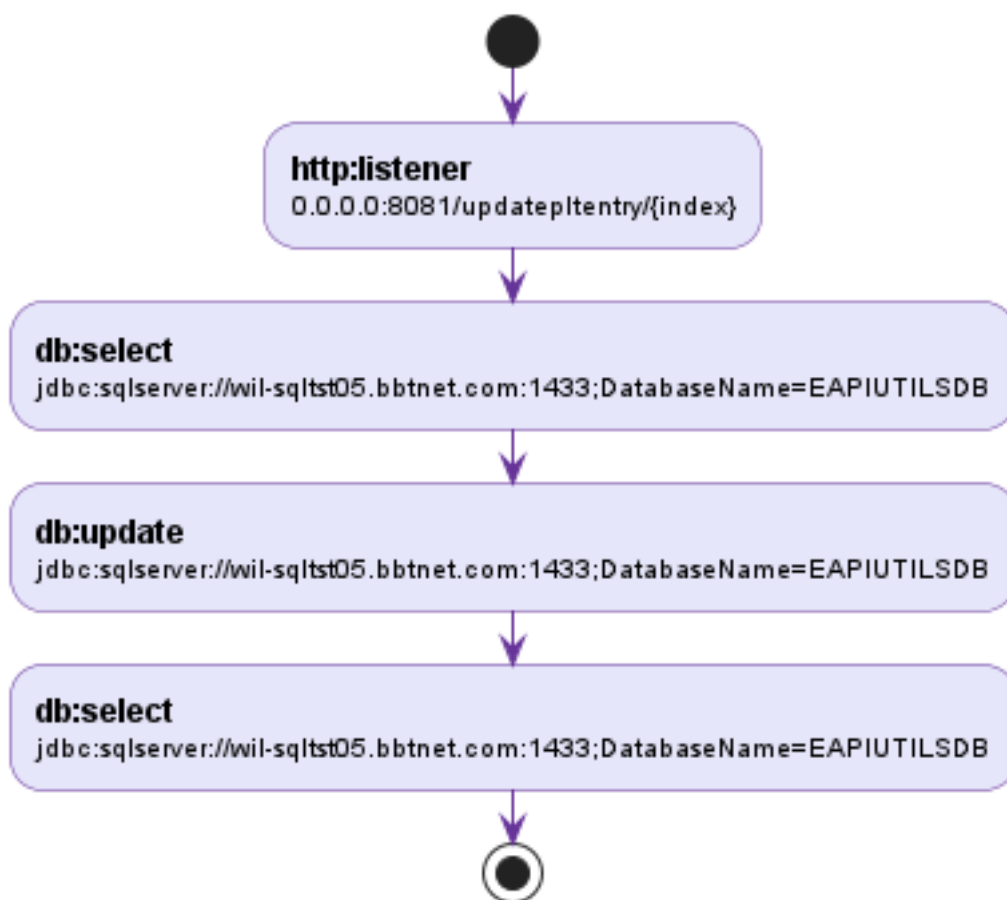


## 2.1.13 ReviewSummary

Path: src\main\mule\t2mdbexport.xml

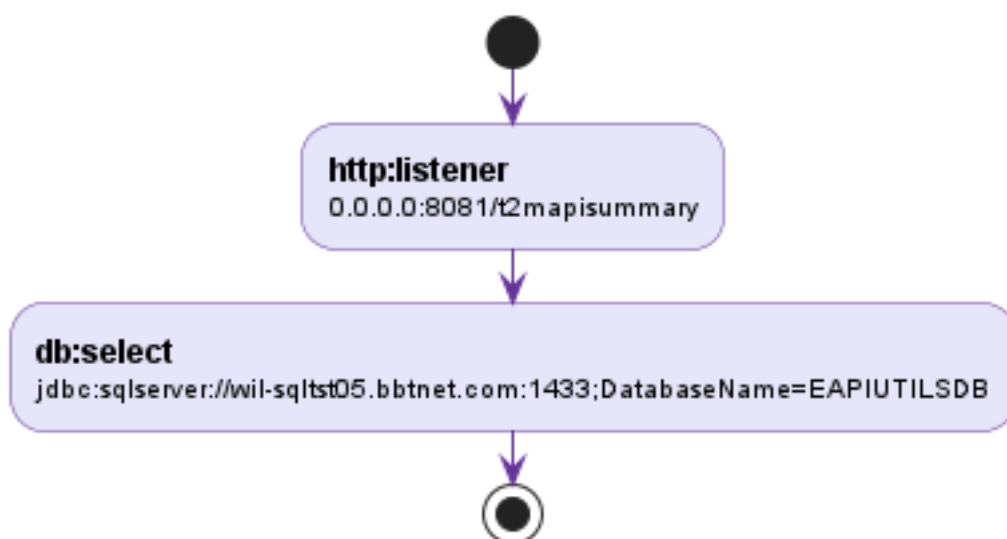


### 2.1.14 apireviewexceptionsFlow

Path: src\main\mule\apireviewexceptions.xml

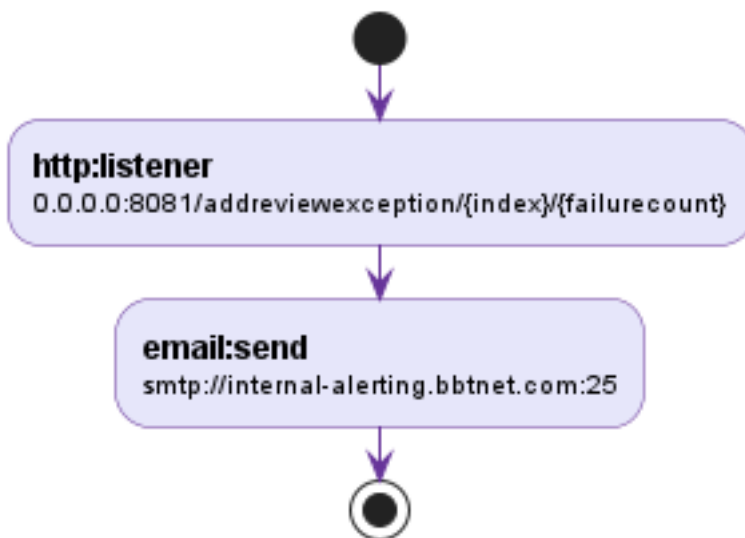


### 2.1.15 apireviewexceptionsFlow1

Path: src\main\mule\apireviewexceptions.xml

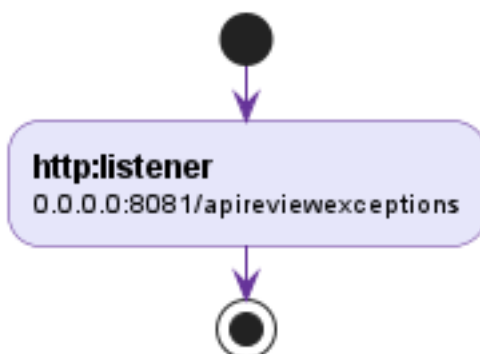


### 2.1.16 apireviewexceptionsFlow2

Path: src\main\mule\apireviewexceptions.xml

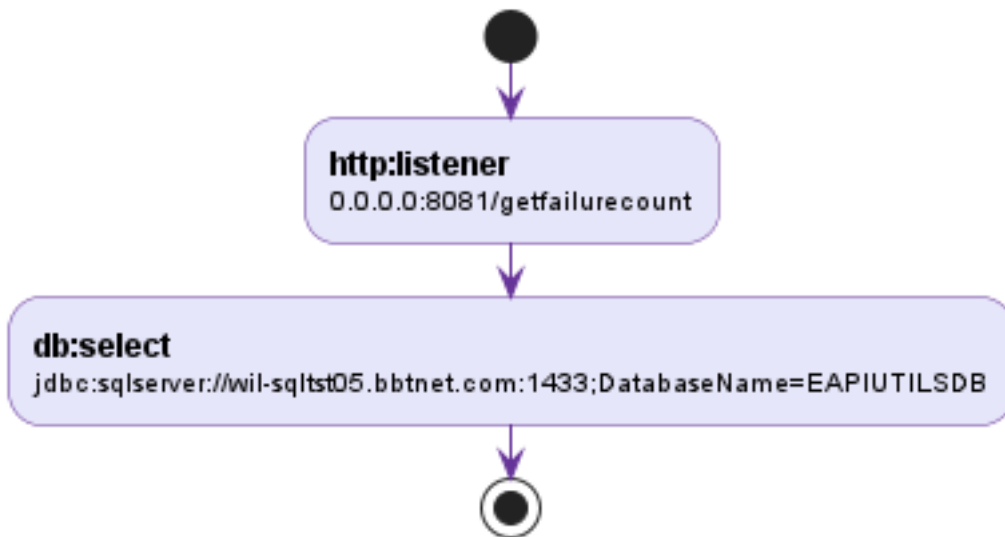

### 2.1.17 apireviewexceptionsFlow3


*Path: src\main\mule\apireviewexceptions.xml*

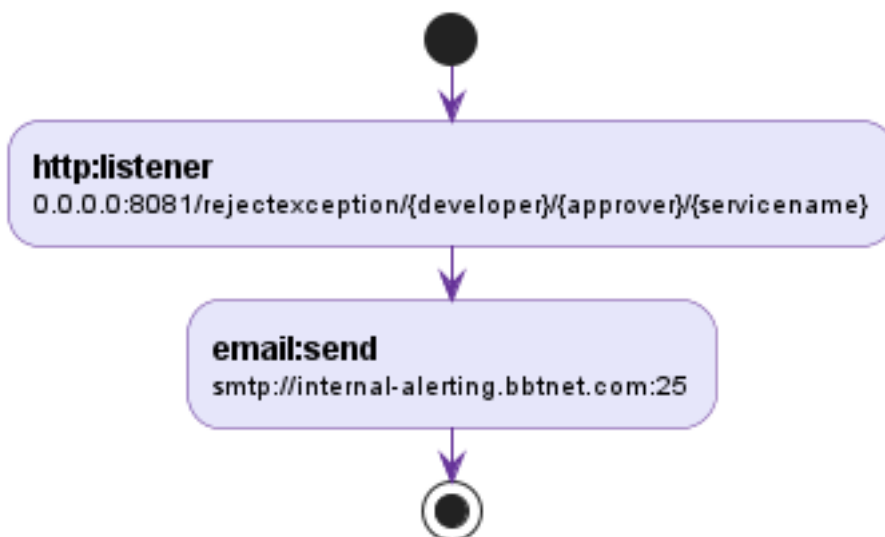

### 2.1.18 devtrackerreadFlow


*Path: src\main\mule\devtrackerread.xml*



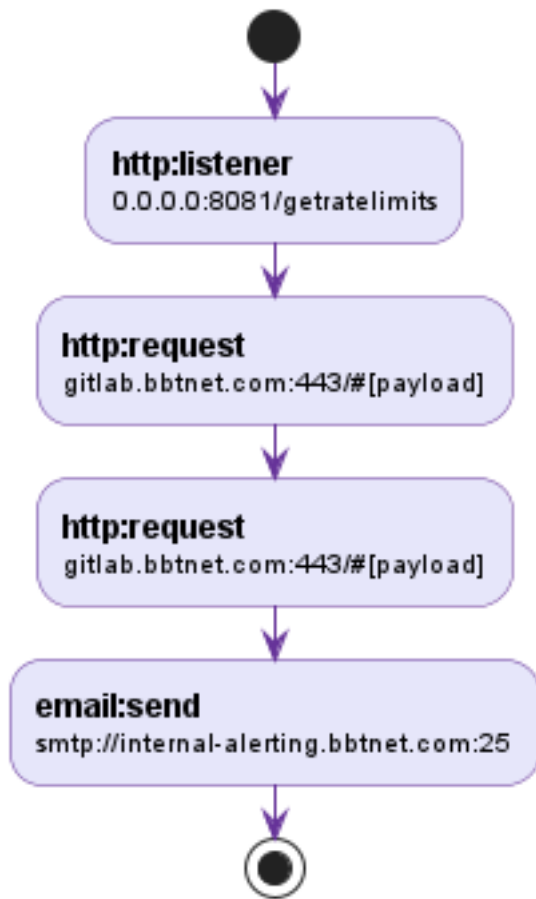


#### 2.1.19 devtrackerreadFlow1

Path: src\main\mule\devtrackerread.xml

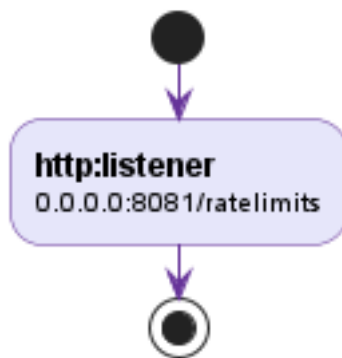


#### 2.1.20 devtrackerreadFlow2

Path: src\main\mule\devtrackerread.xml

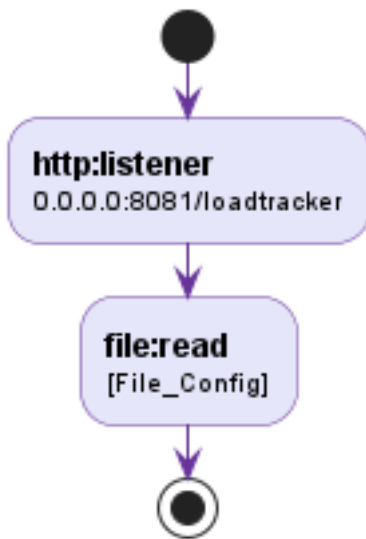


### 2.1.21 devtrackerreadFlow3

*Path: src\main\mule\devtrackerread.xml*

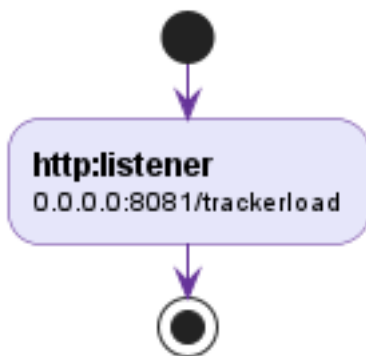


### 2.1.22 interceptcicscallsFlow

*Path: src\main\mule\interceptcicscalls.xml*

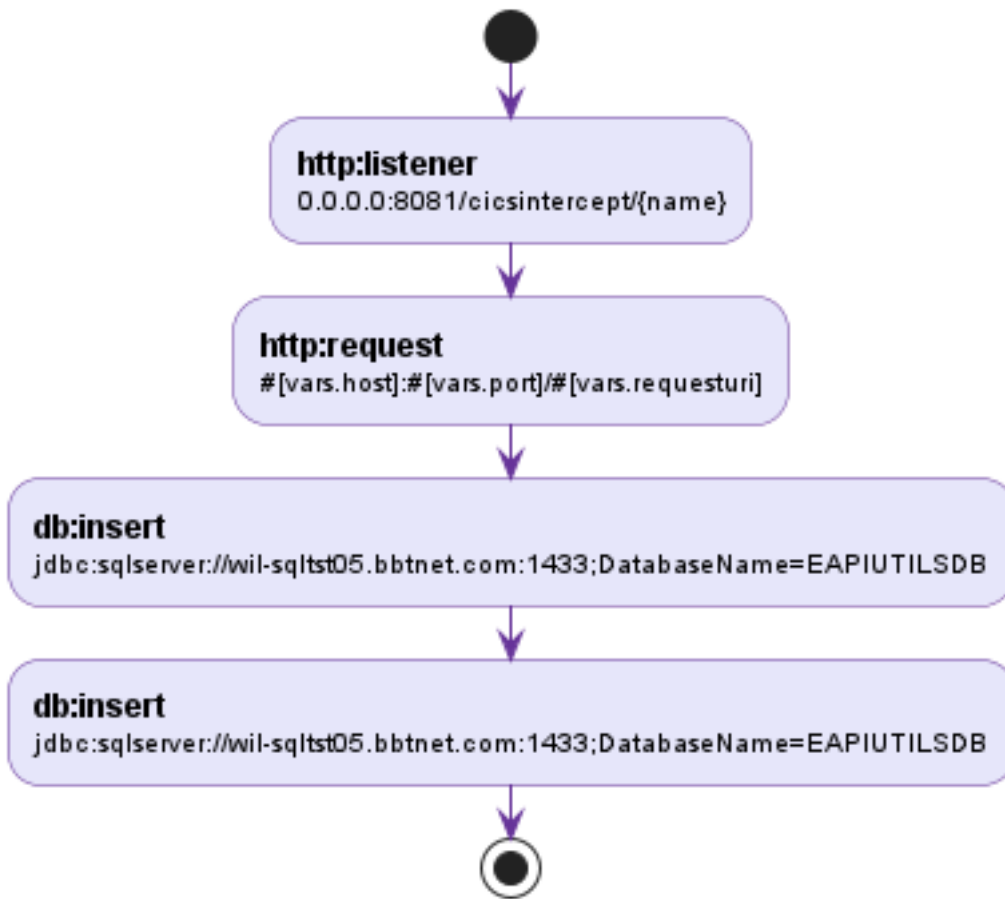

### 2.1.23 interceptcicscallsFlow1

Path: src\main\mule\interceptcicscalls.xml

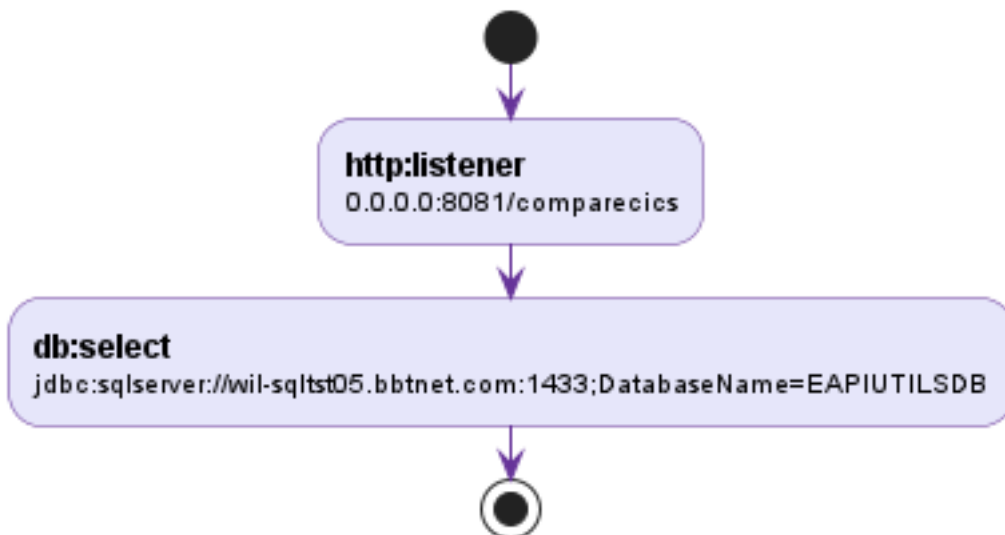


### 2.1.24 interceptcicscallsFlow2

Path: src\main\mule\interceptcicscalls.xml




### 2.1.25 mulemqtriggerFlow

Path: src\main\mule\mulemqtrigger.xml

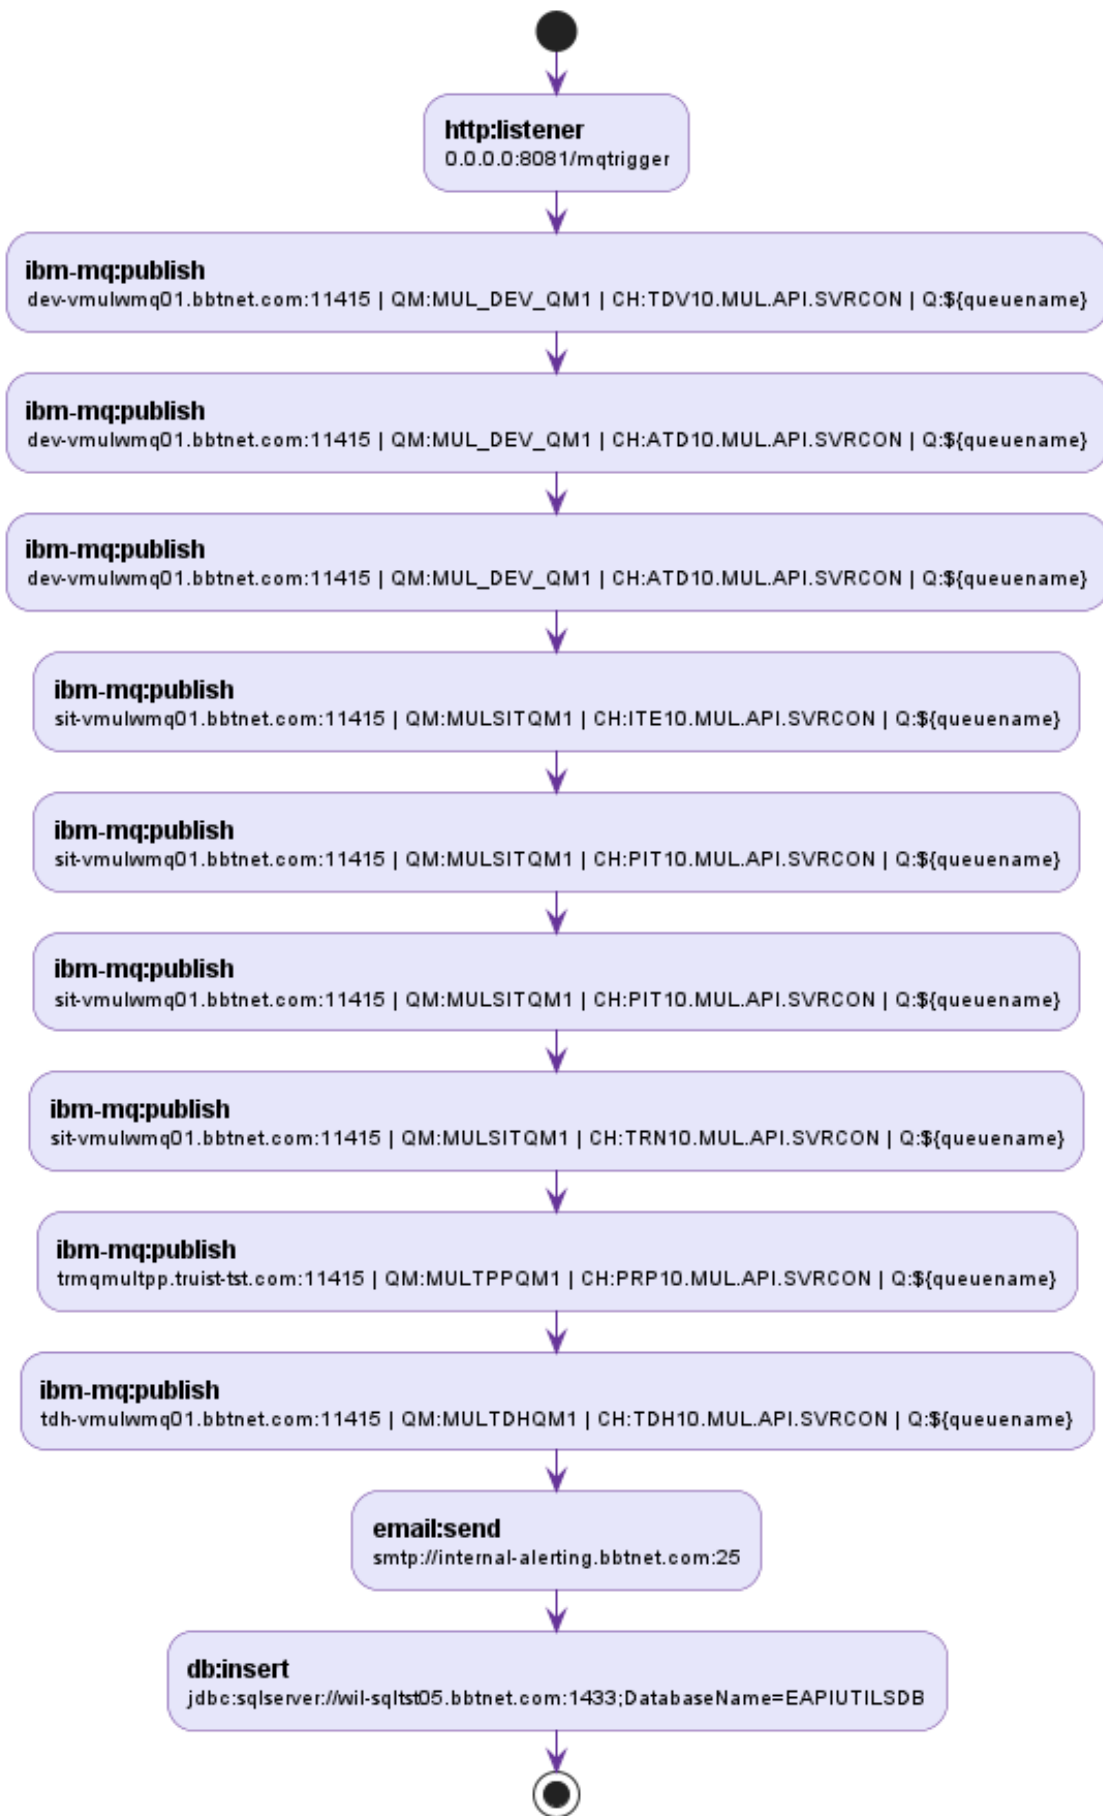


2.1.26 mulemqtriggerFlow1

Path: src\main\mule\mulemqtrigger.xml

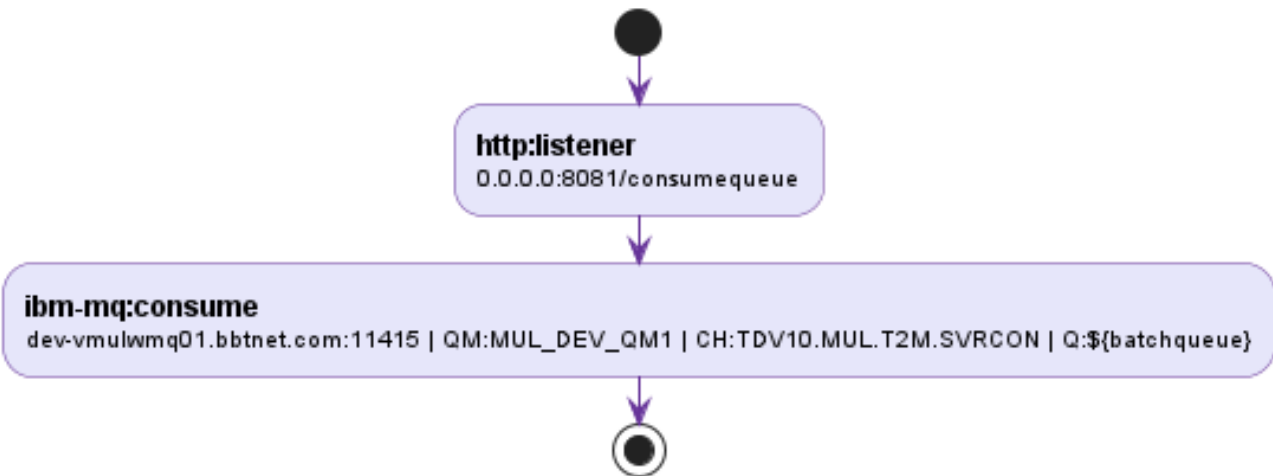


2.1.27 mulemqtriggerFlow2

Path: src\main\mule\mulemqtrigger.xml

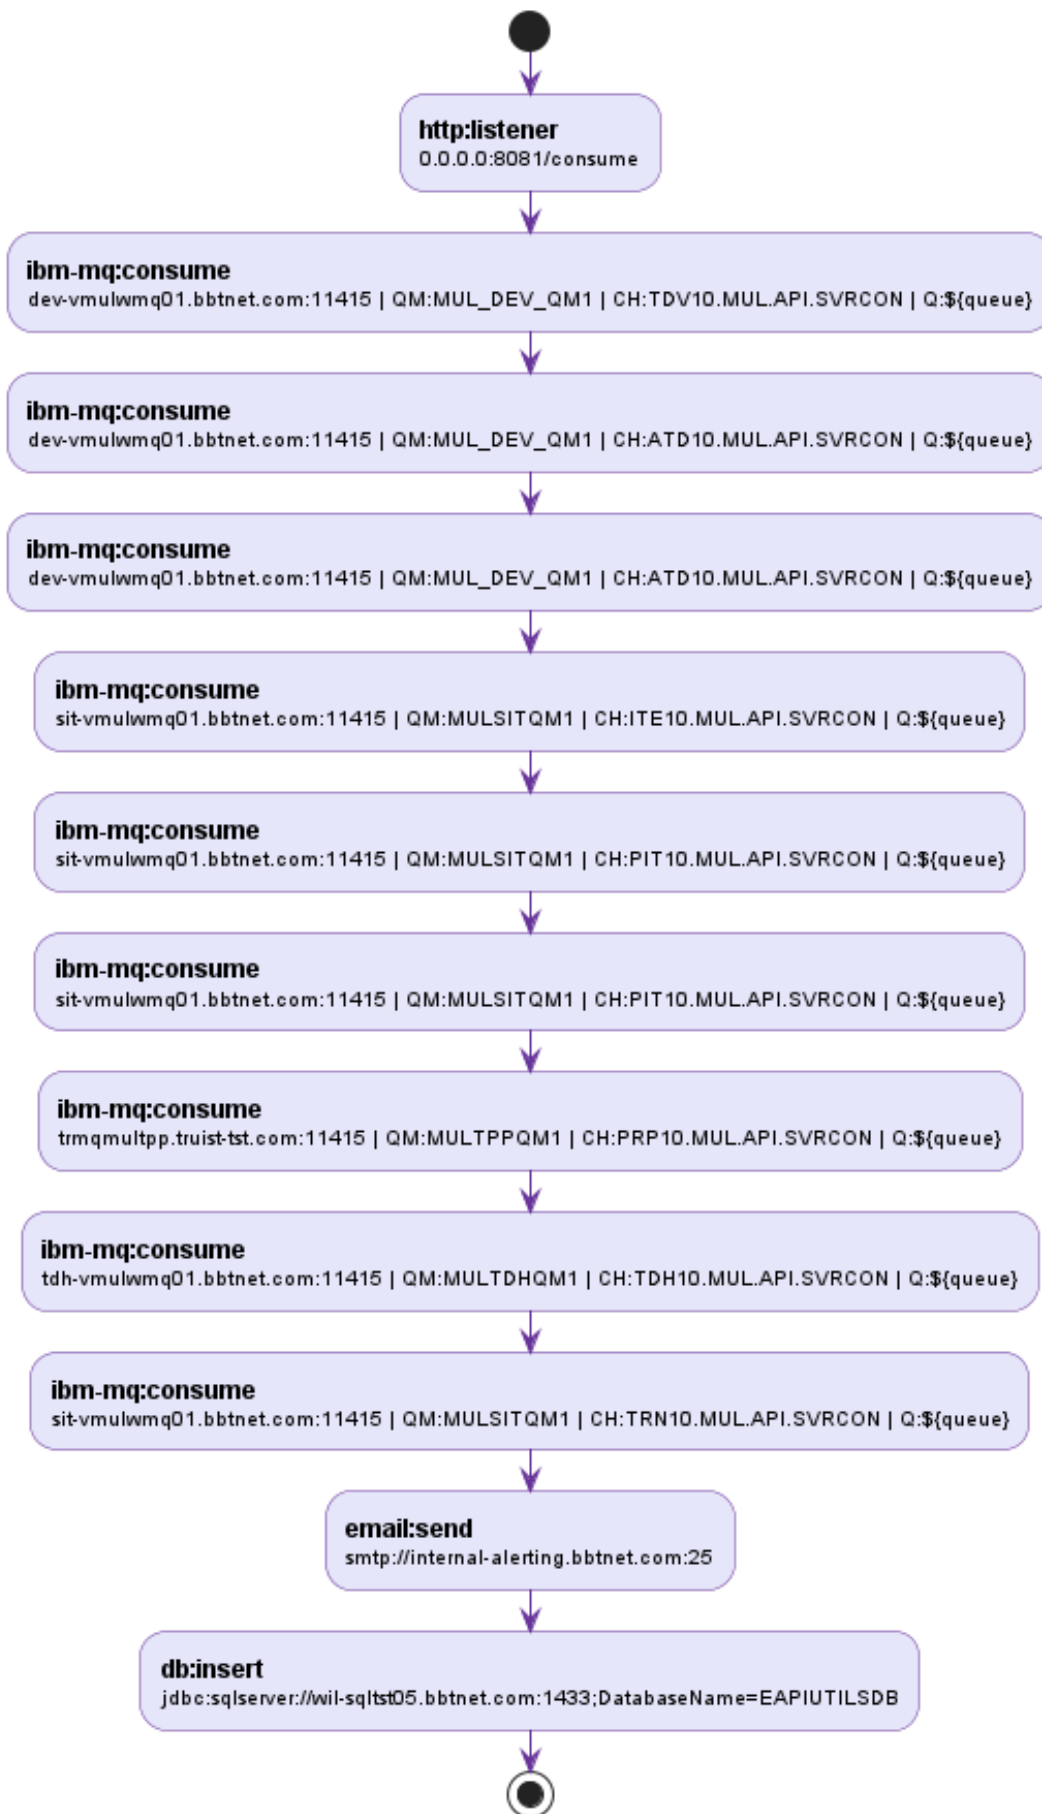


### 2.1.28 mulemqtriggerFlow3

Path: src\main\mule\mulemqtrigger.xml

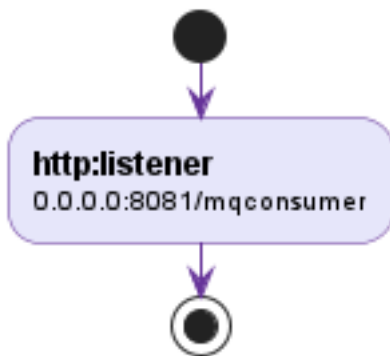


### 2.1.29 mulemqtriggerhome

Path: src\main\mule\mulemqtrigger.xml

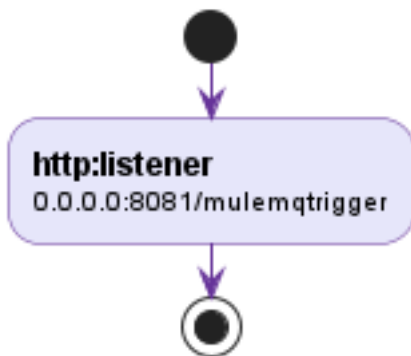

### 2.1.30 parentpomconversionFlow


Path: src\main\mule\parentpomconversion.xml

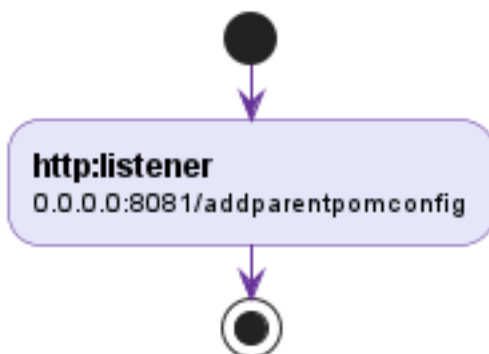




### 2.1.31 parentpomconversionFlow1

Path: src\main\mule\parentpomconversion.xml

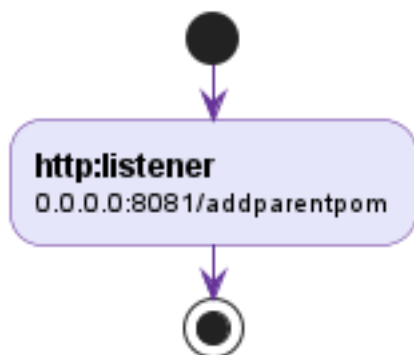


### 2.1.32 responsevalidatorFlow

Path: src\main\mule\responsevalidator.xml

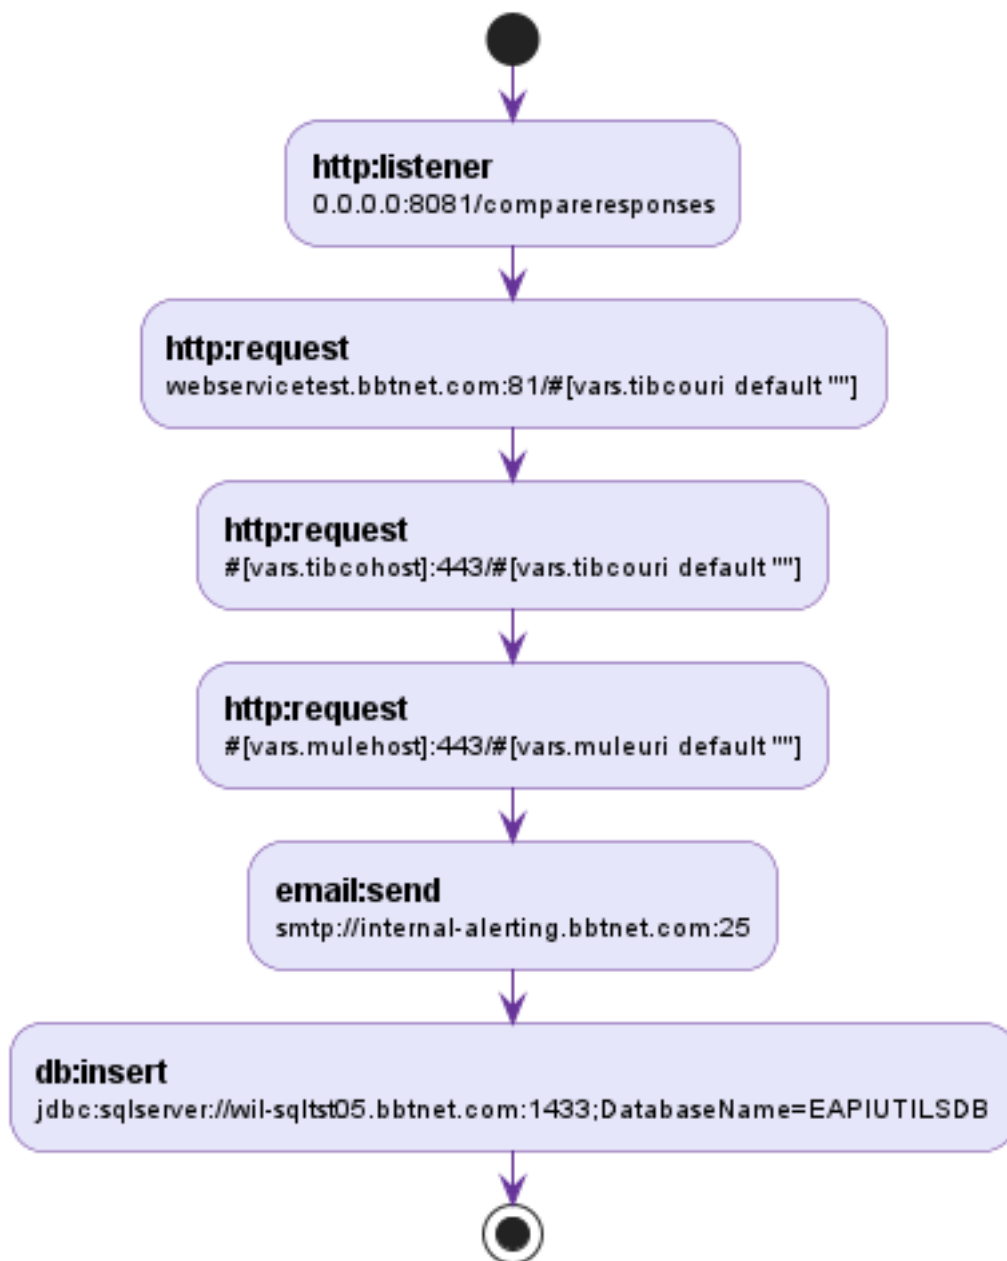


### 2.1.33 responsevalidatorFlow1

Path: src\main\mule\responsevalidator.xml

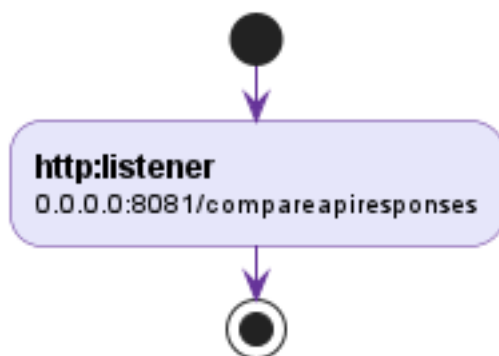


2.1.34 t2m\_pocFlow

Path: src\main\mule\t2mpoc.xml

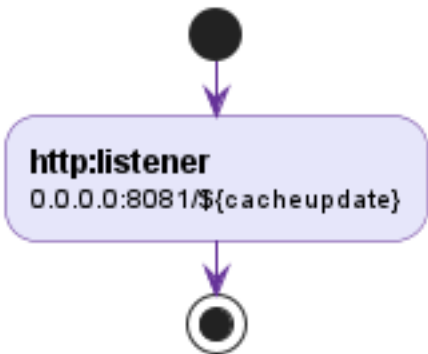


2.1.35 t2m\_pocFlow1

Path: src\main\mule\t2mpoc.xml

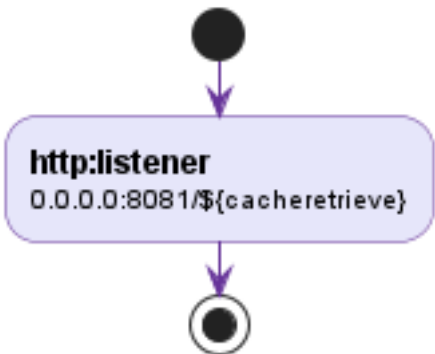


2.1.36 t2mdbexportFlow

Path: src\main\mule\t2mdbexport.xml

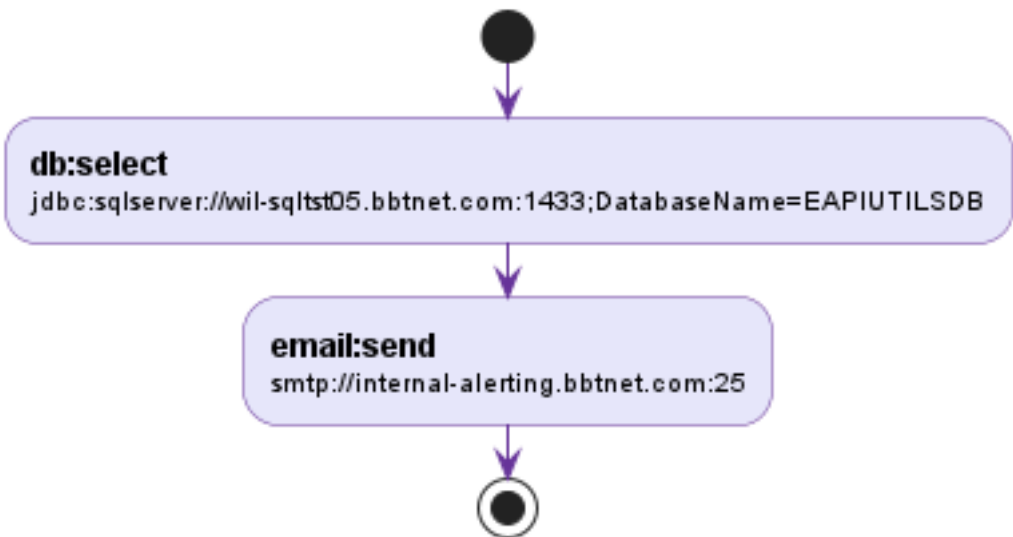


2.1.37 t2mdbexportFlow1

Path: src\main\mule\t2mdbexport.xml

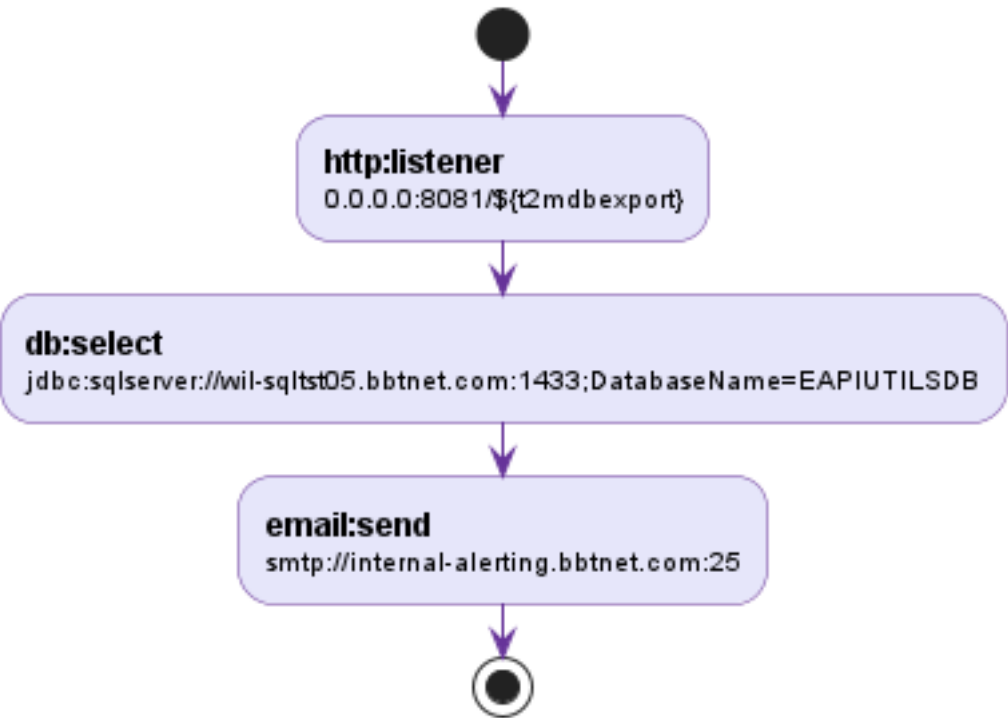


2.1.38 t2mdbexportFlow2

Path: src\main\mule\t2mdbexport.xml



2.1.39 t2mpocFlow


Path: src\main\mule\t2mpoc.xml

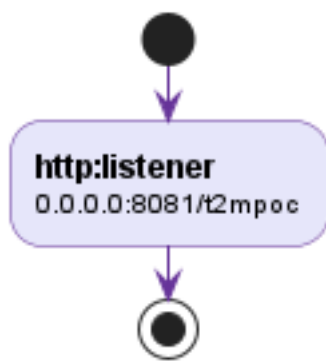

# 2.2 Mule Project Flow Diagram


## 2.2.1 AddException

Path: src\main\mule\apireviewexceptions.xml

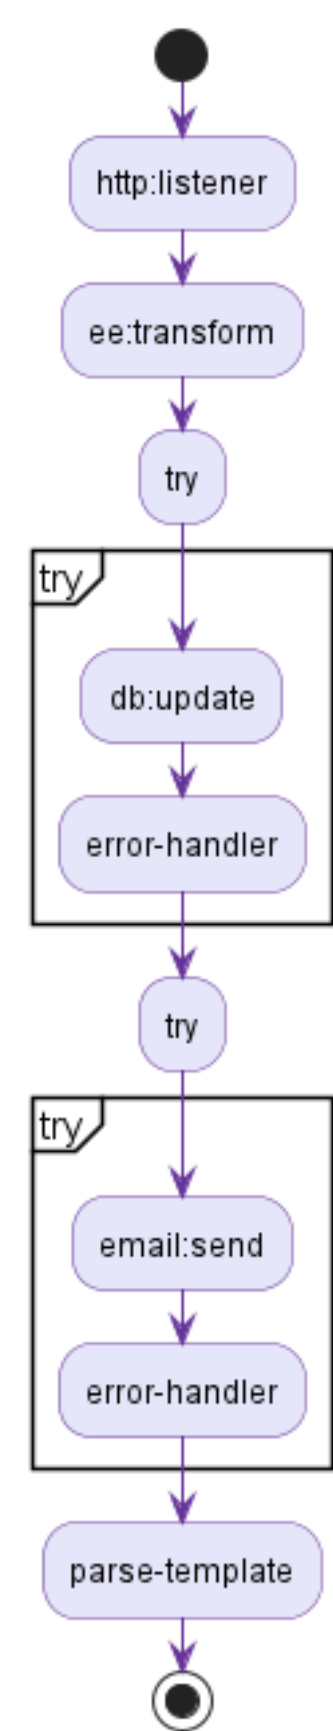


## 2.2.2 PLTFlow

Path: src\main\mule\PLT.xml

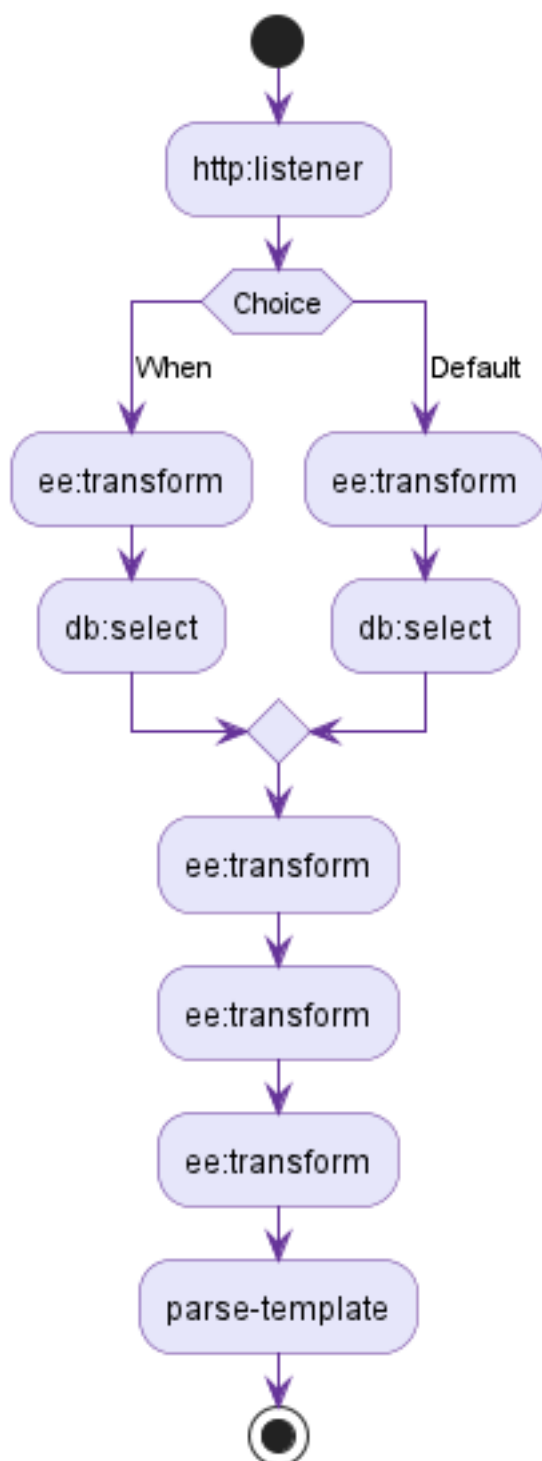

### 2.2.3 PLTFlow1


Path: src\main\mule\PLT.xml

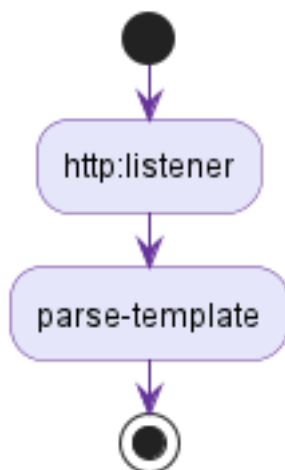

### 2.2.4 PLTFlow2


Path: src\main\mule\PLT.xml



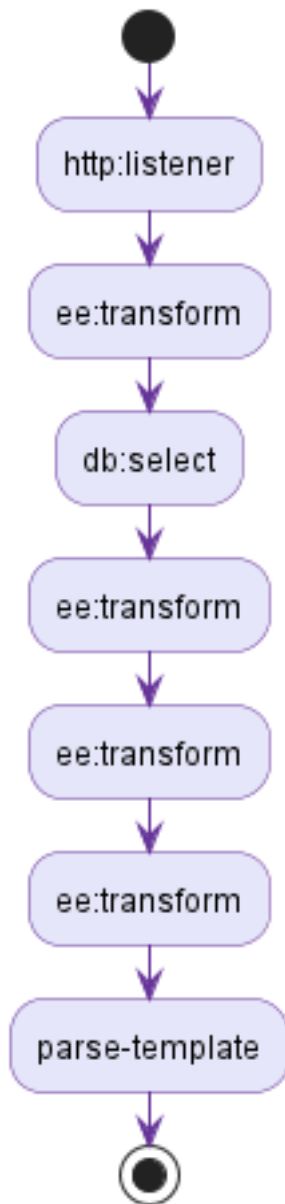


### 2.2.5 PLTFlow3

*Path: src\main\mule\PLT.xml*

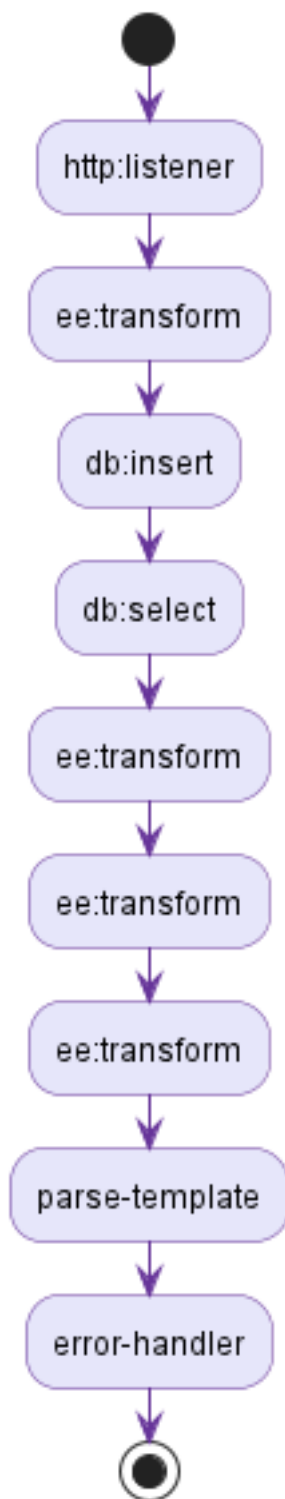


### 2.2.6 PLTFlow4

Path: src\main\mule\PLT.xml

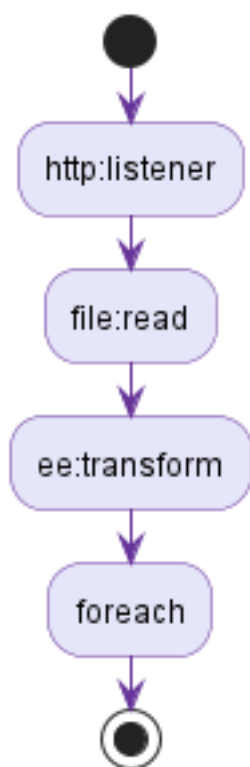


### 2.2.7 PLTFlow5

Path: src\main\mule\PLT.xml

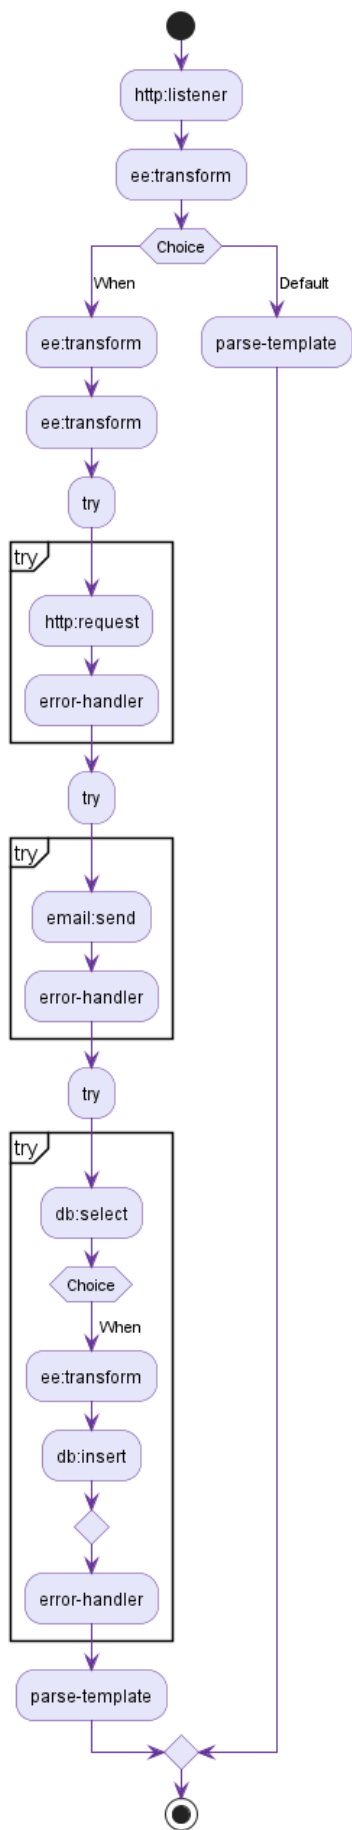


### 2.2.8 PLTFlow6

Path: src\main\mule\PLT.xml

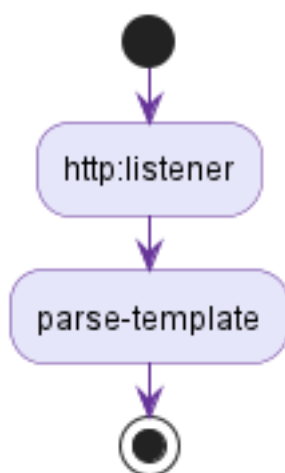

### 2.2.9 PLTFlow7


Path: src\main\mule\PLT.xml



(Diagram scaled to fit page)


## 2.2.10 PLTLive

Path: src\main\mule\PLT.xml

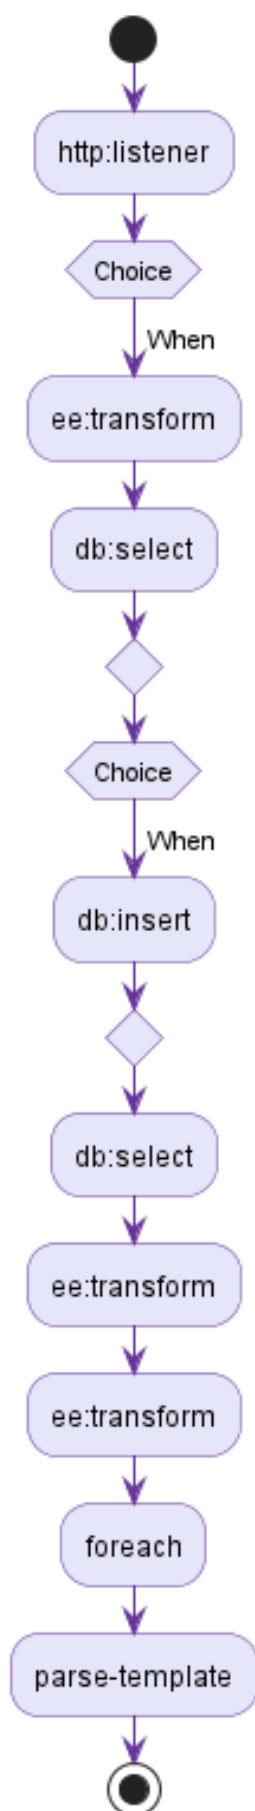

### 2.2.11 PLTLiveStart


Path: src\main\mule\PLT.xml

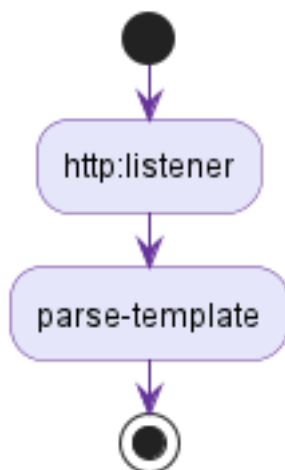

### 2.2.12 PLTUpdate


Path: src\main\mule\PLT.xml



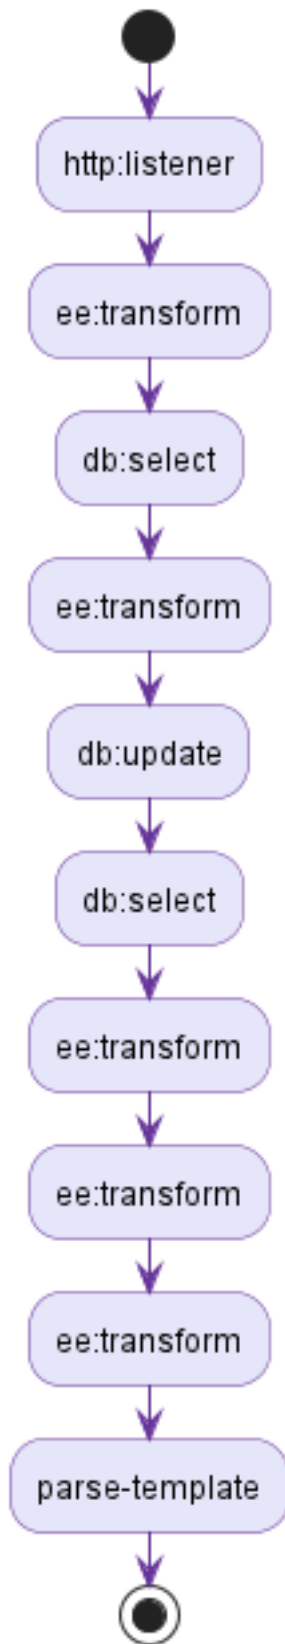


2.2.13 ReviewSummary

Path: src\main\mule\lt2mdbexport.xml

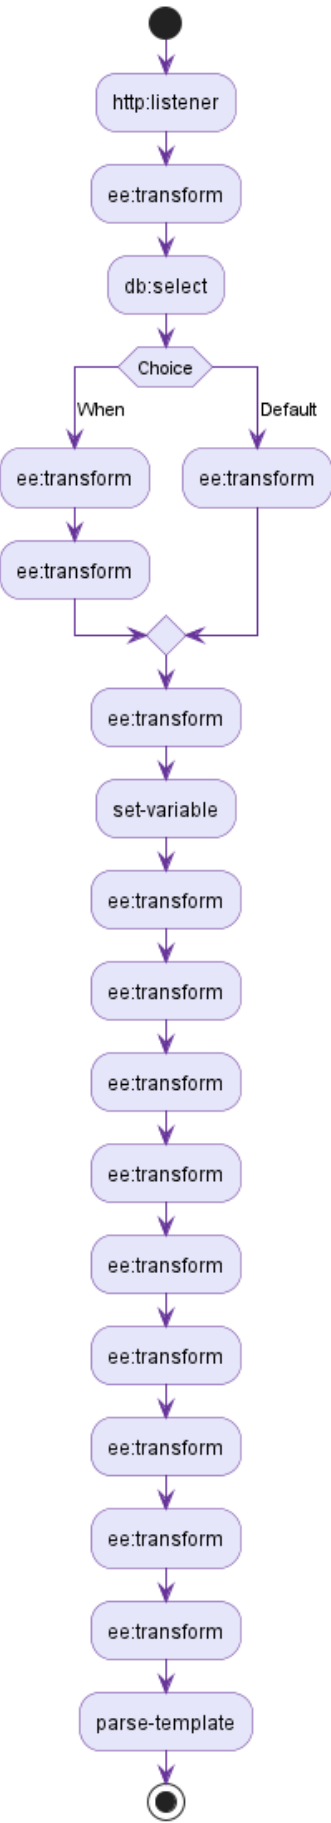


## 2.2.14 apireviewexceptionsFlow

Path: src\main\mule\apireviewexceptions.xml

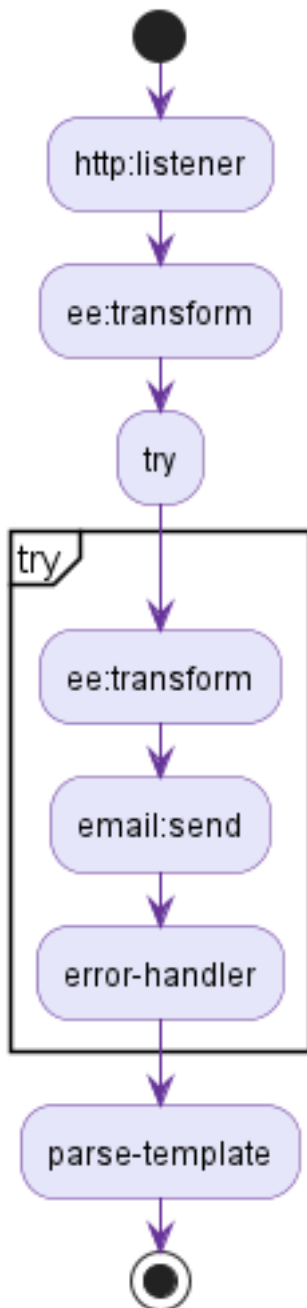


## 2.2.15 apireviewexceptionsFlow1

Path: src\main\mule\apireviewexceptions.xml

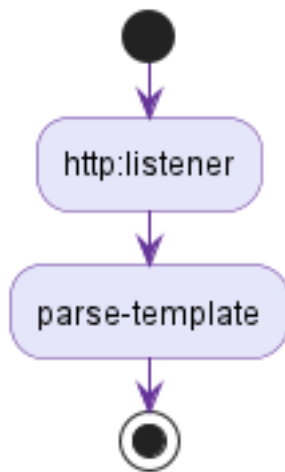


## 2.2.16 apireviewexceptionsFlow2

Path: src\main\mule\apireviewexceptions.xml

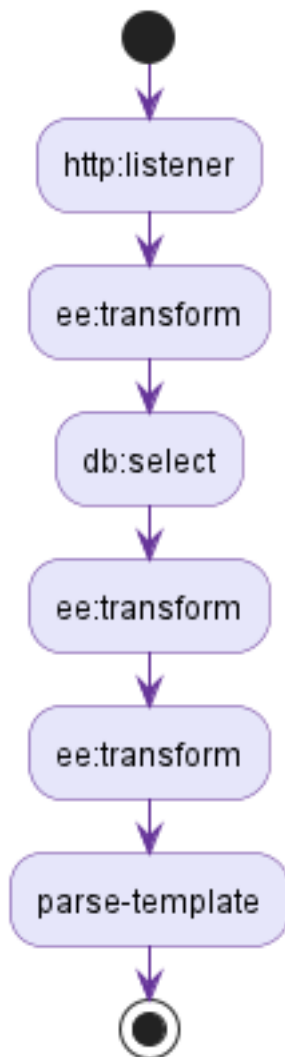


### 2.2.17 apireviewexceptionsFlow3

Path: src\main\mule\apireviewexceptions.xml

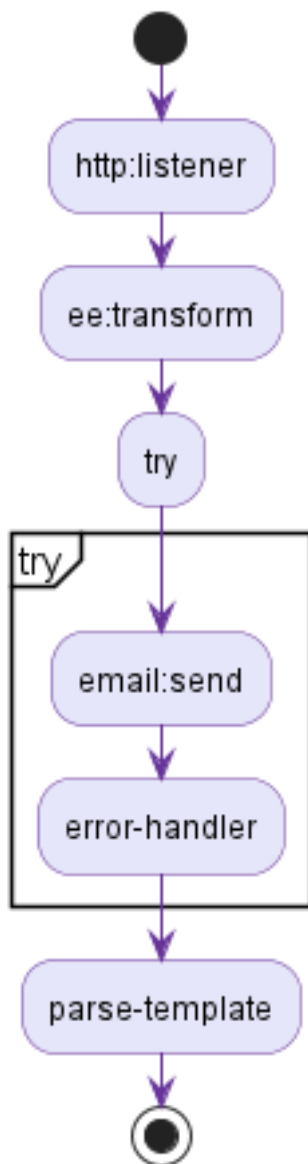


### 2.2.18 devtrackerreadFlow

Path: src\main\mule\devtrackerread.xml

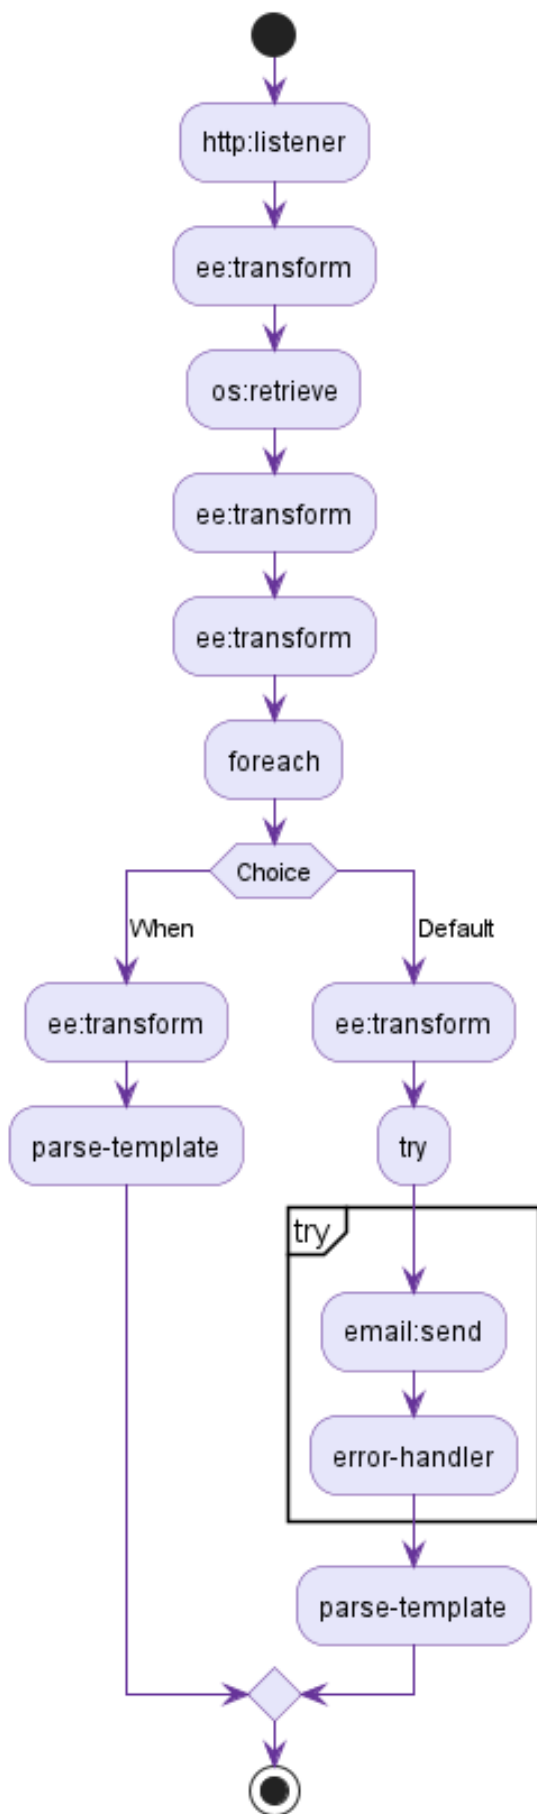


### 2.2.19 devtrackerreadFlow1

Path: src\main\mule\devtrackerread.xml

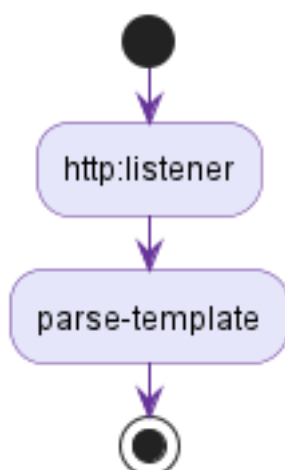


### 2.2.20 devtrackerreadFlow2

Path: src\main\mule\devtrackerread.xml

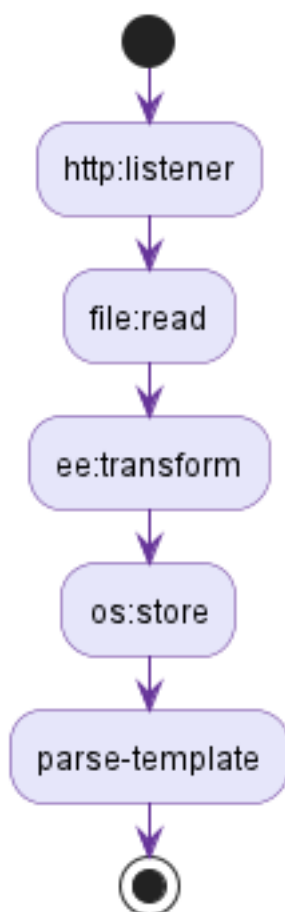

### 2.2.21 devtrackerreadFlow3


Path: src\main\mule\devtrackerread.xml

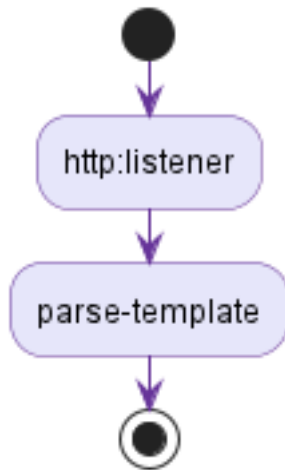

### 2.2.22 interceptcicscallsFlow


Path: src\main\mule\interceptcicscalls.xml



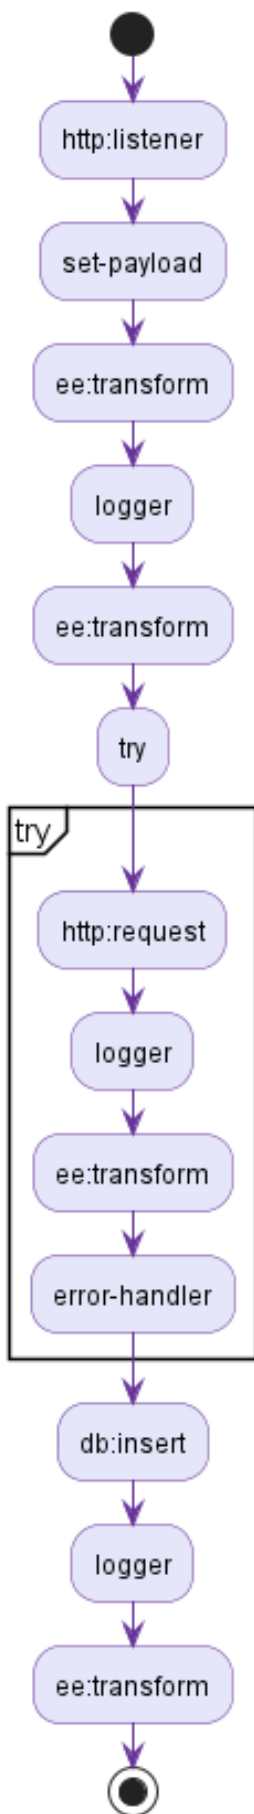


### 2.2.23 interceptcicscallsFlow1

Path: src\main\mule\interceptcicscalls.xml

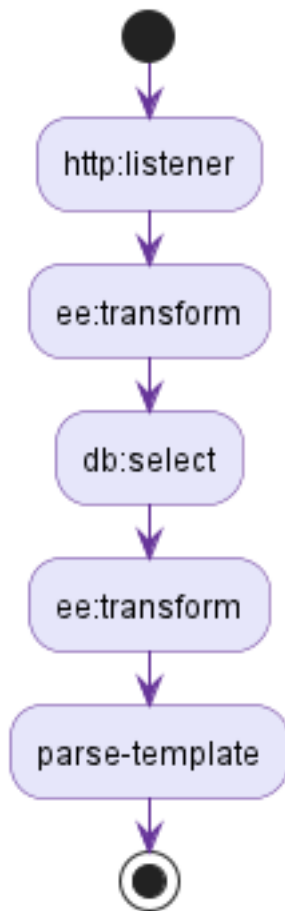


### 2.2.24 interceptcicscallsFlow2

Path: src\main\mule\interceptcicscalls.xml

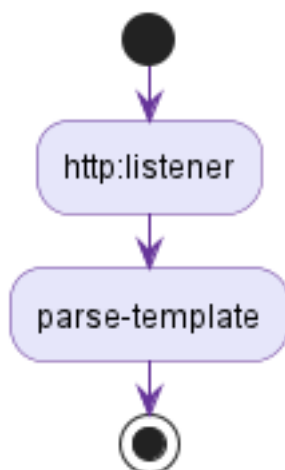

2.2.25 mulemqtriggerFlow


Path: src\main\mule\mulemqtrigger.xml

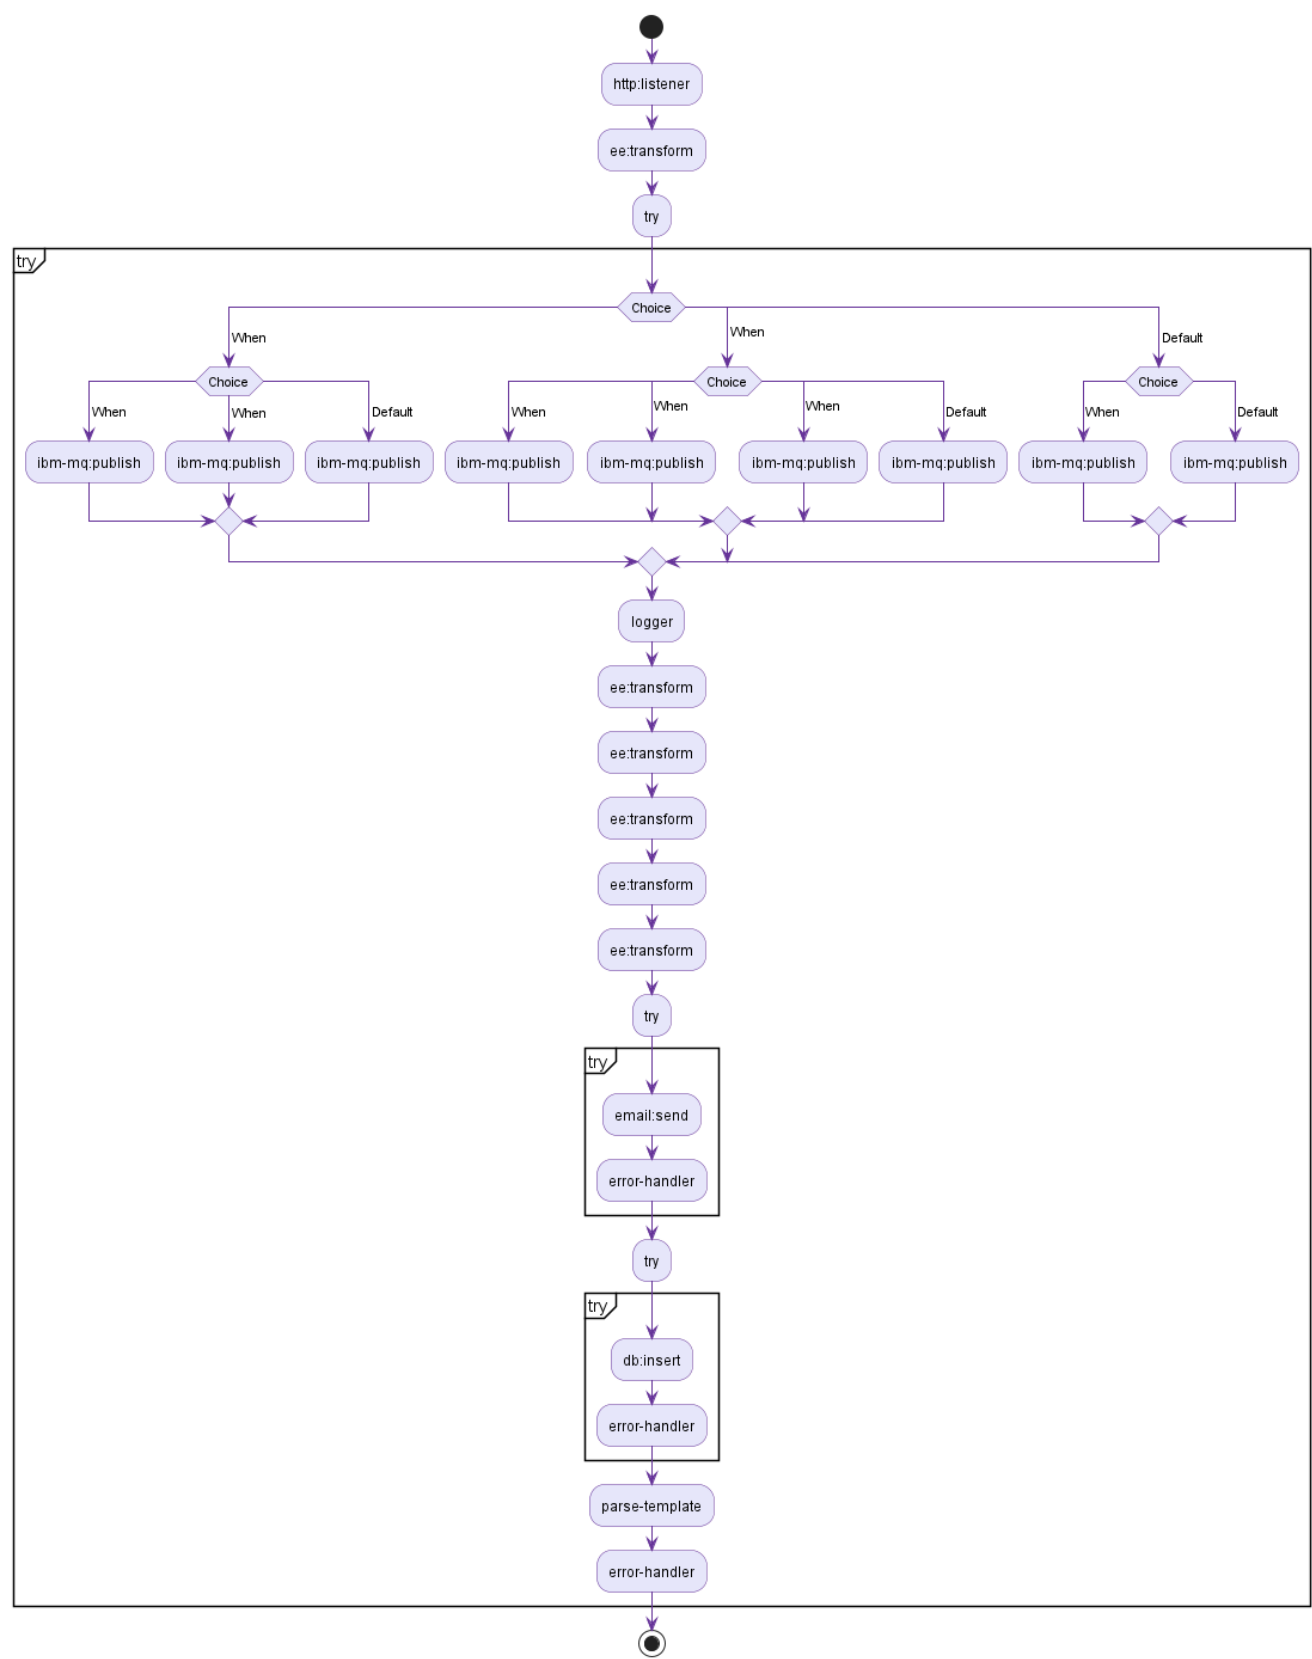

(Diagram scaled to fit page)


### 2.2.26 mulemqtriggerFlow1

Path: src/main/mule/mulemqtrigger.xml

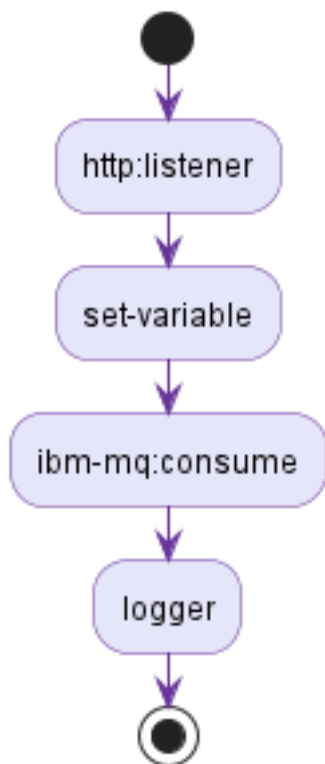


### 2.2.27 mulemqtriggerFlow2

Path: src/main/mule/mulemqtrigger.xml

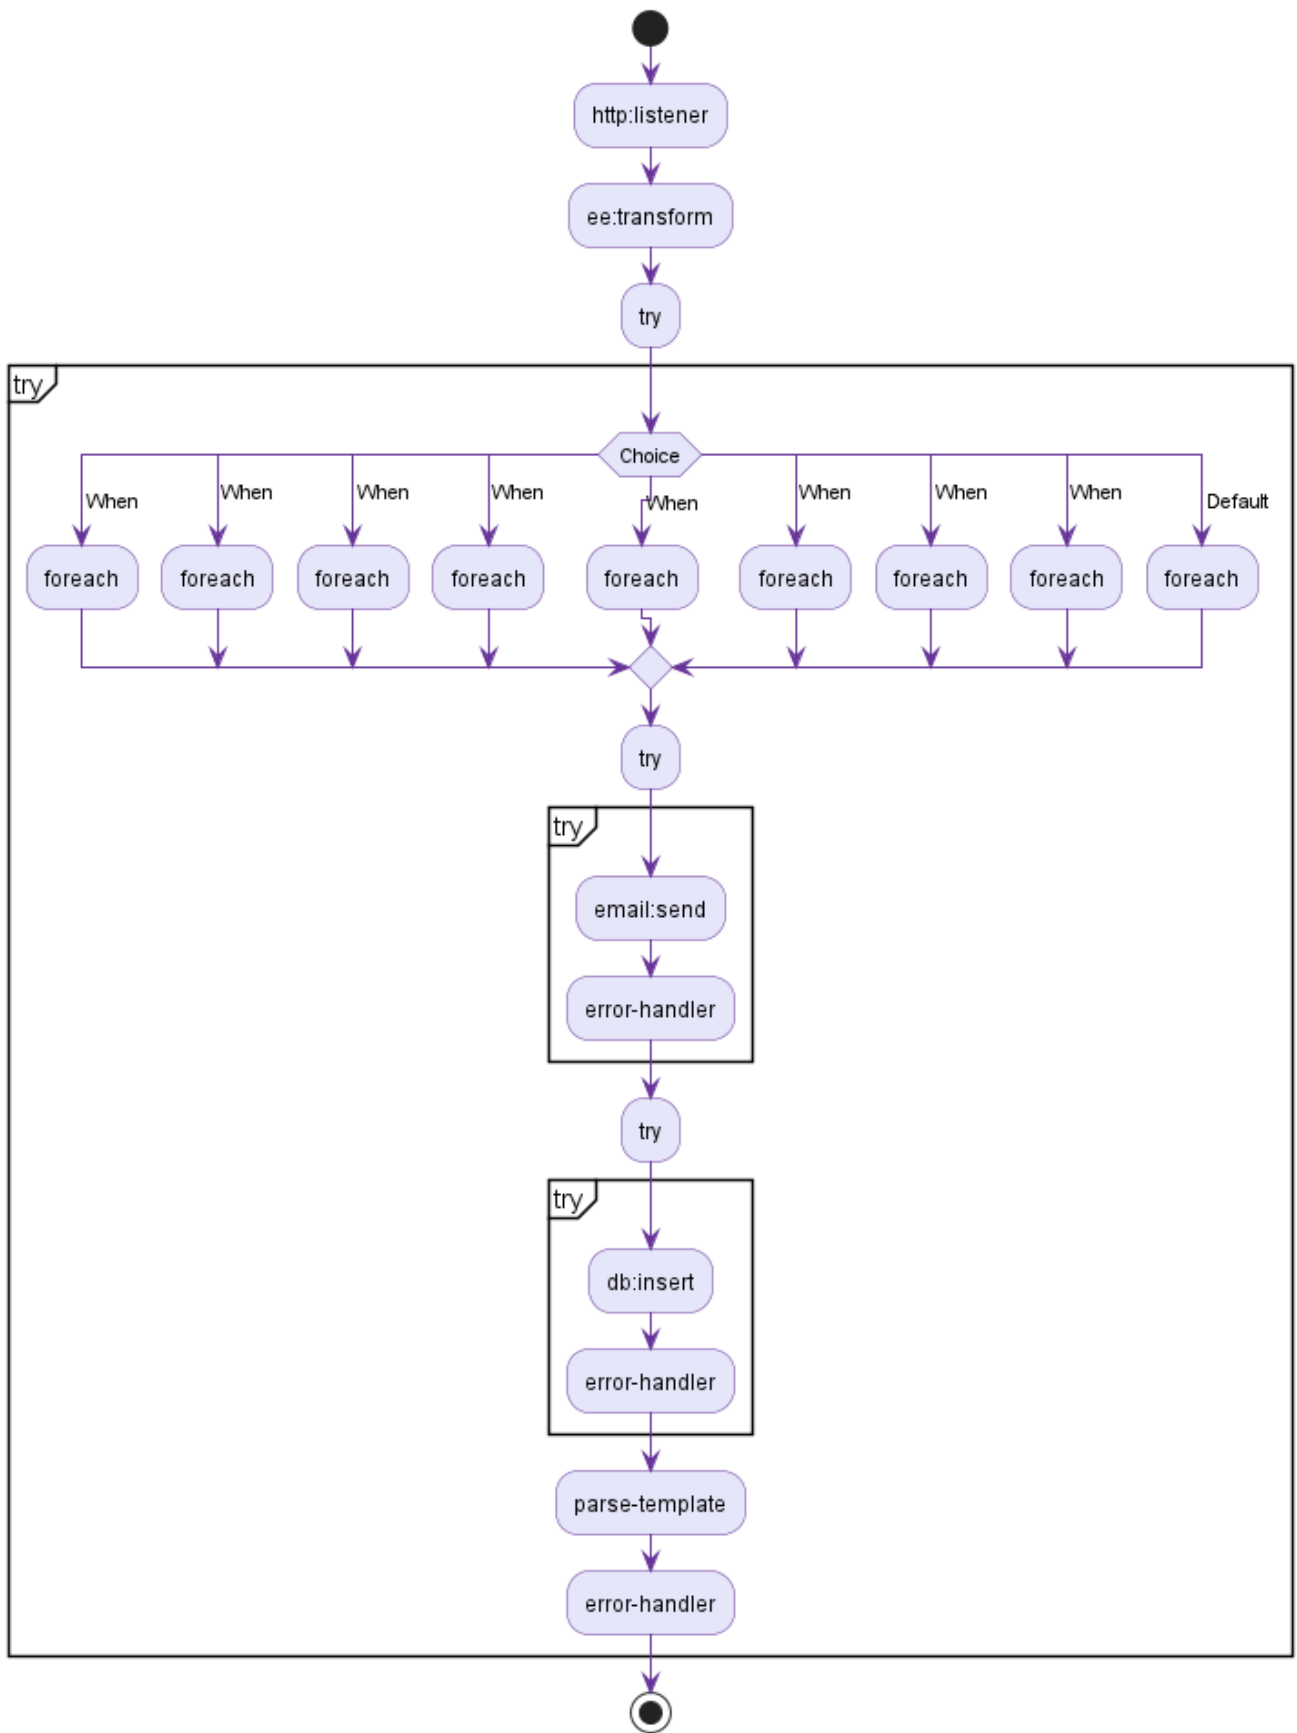


### 2.2.28 mulemqtriggerFlow3

Path: src\main\mule\mulemqtrigger.xml

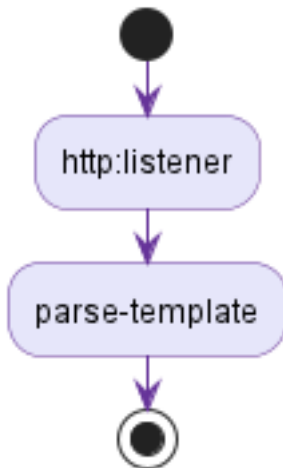


### 2.2.29 mulemqtriggerhome

Path: src\main\mule\mulemqtrigger.xml

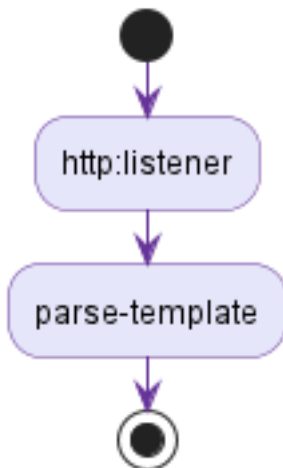


### 2.2.30 parentpomconversionFlow

Path: src\main\mule\parentpomconversion.xml

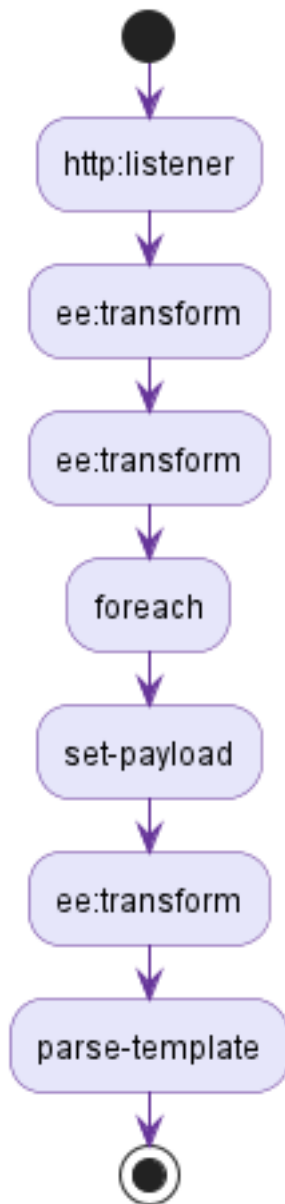


### 2.2.31 parentpomconversionFlow1

Path: src\main\mule\parentpomconversion.xml

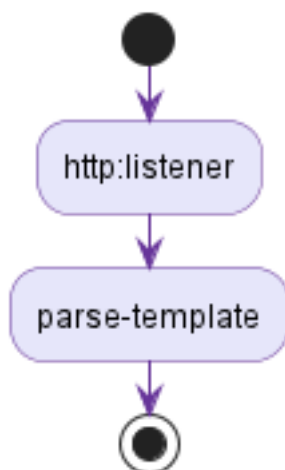

## 2.2.32 responsevalidatorFlow


Path: src\main\mule\responsevalidator.xml

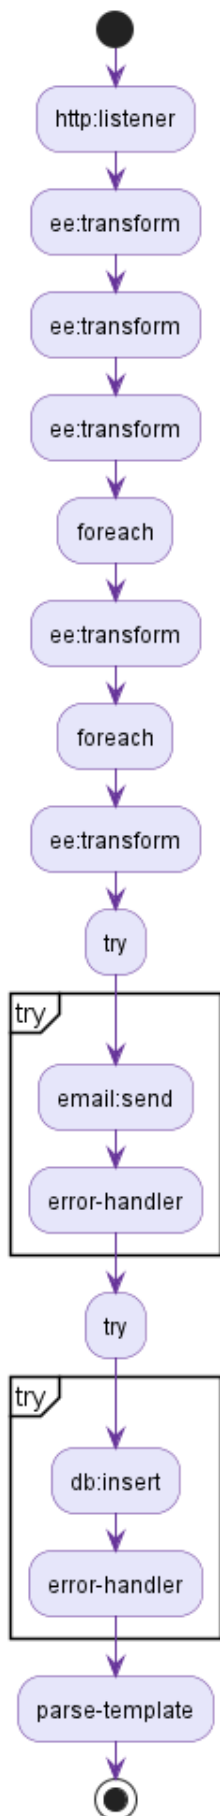




### 2.2.33 responsevalidatorFlow1

Path: src\main\mule\responsevalidator.xml

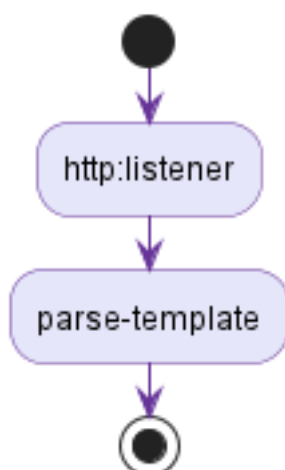

### 2.2.34 t2m\_pocFlow

Path: src\main\mule\t2mpoc.xml

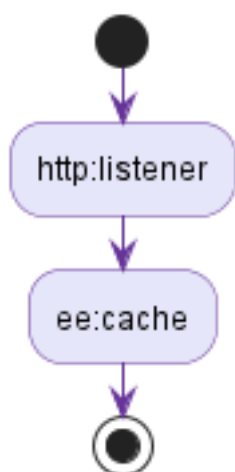


### 2.2.35 t2m\_pocFlow1

Path: src\main\mule\t2mpoc.xml




### 2.2.36 t2mdbexportFlow

*Path: src\main\mule\t2mdbexport.xml*

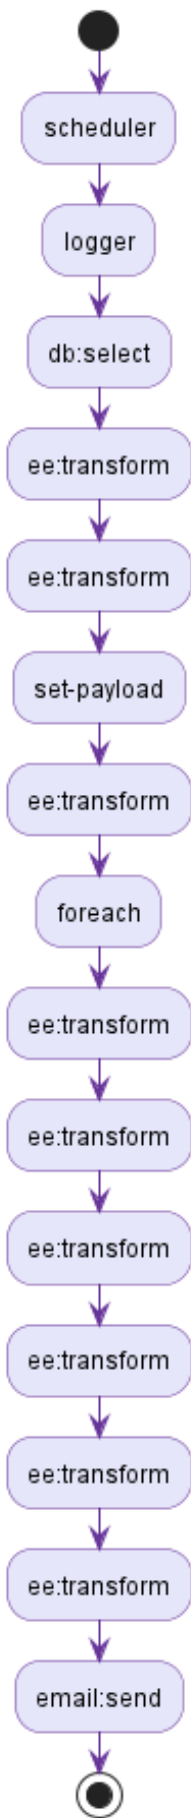


2.2.37 t2mdbexportFlow1

Path: src\main\mule\t2mdbexport.xml

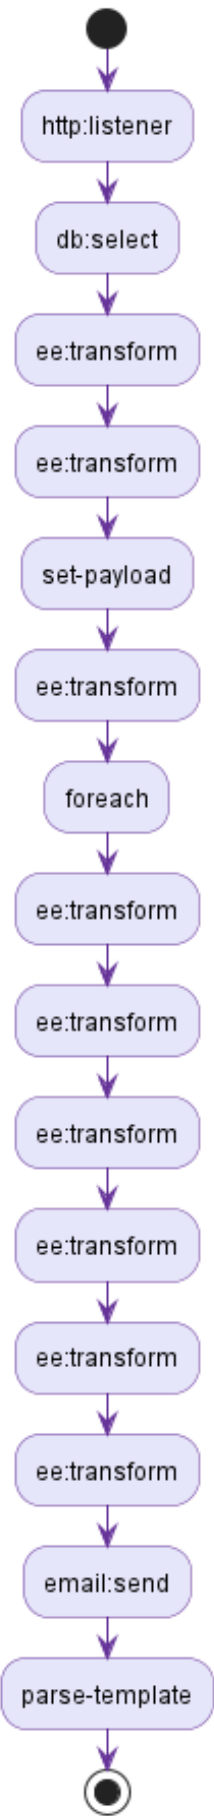


### 2.2.38 t2mdbexportFlow2

Path: src\main\mule\t2mdbexport.xml

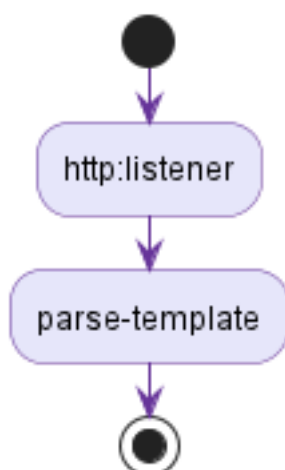

### 2.2.39 t2mpocFlow

Path: src\main\mule\t2mpoc.xml

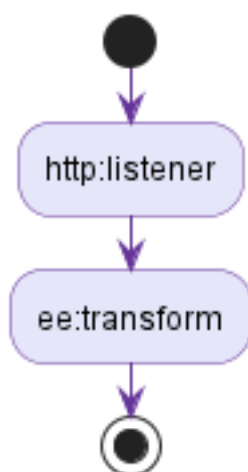

### 3. Global Configuration

## Property Files Found: 2

- src\main\resources\mule-app.properties
- src\main\resources\secure.properties

**Total Properties: 86**

### 3.1 src\main\resources\mule-app.properties (80 properties)

Key	Value
keystore.path	eapi-mule-lastmile.truist-tst.com.jks
channel.trn	TRN10.MUL.API.SVRCON
liveConsumer.queueName	MUL.FN5SUBMIT.FRAUDNETFORATOAPI.PREP.L
qmanager.tdv	MUL_DEV_QM1
smtp.from	DL.API.T2M@truist.com
input.inquiryLevel	101,102,103,100,000,00 0,00ab0,000@,null, ,removetag
input.userids	A71595,A71 595,D34526,A7159500000000,000000000A71595,B12765,B12765#,null, ,removetag
input.channels	AD,BP,CSB,OLBWEB,OLB WEB,AR,OW,OM,BV,GH,MP,PV,NNC,CHANNEL,null, ,removetag
qmanager.tpp	MULTPPQM1
wmq.queueManager2	MUL_DEV_QM1
wmq.queueManager3	MUL_DEV_QM1
doTestConnectivity	False
input.staticKeys	1845192,1845195,201035013,1845200,1845212,35791287,0000000051778527,184-5212,18452.12,63103818,6310 3818,6310ab3818,34287311,0000000038081234,1337375,1174669,384899,1734152,1035079,9802055,1580961,1174631,2121607,1363479,2338997,7816684,1919249,2224265,162922,2065369,1131481,887250,389433,1903799,49629805,000000072149650,000000051778527,78527,null, ,removetag
input.applications	DDA,DA,ASD,DSA,DS A,DS#A, ,removetag
wmq.cps.numOfConsumers	4
input.customerids	00004491623402066988,00004491623402568154,00004491623401502602,00004491623409665094,00004491623408382240,572267304,000000000572267304000000000000000000,0000000000000000000000000000000572267304,000000000572267304#,00000128000000390a,-0.5,00004491623404821933,00004491623409195181,00004491623408613410,00004491623409772246,00004491623404815377,0000449162340 436319,00004491623409223777,00004491623405348197,00004491623405336145,null, ,removetag
wmq.connectionNameList.prep	trmqmultpp.truist-tst.com(11415)
wmq.connectionNameList	dev-vmulwmq01.bbtdnet.com(11415)
gui.appHome	\${mule.home}/apps/\${app.name}/
qmanager.mne	MUL_DEV_QM1
wmq.host.drl	tdh-vmulwmq01.bbtdnet.com

### 3.1 src\main\resources\mule-app.properties (80 properties)

Key	Value
wmq.dlp.requestqueue	EAPI_MUL.ESP.SCHEDULE.ARCHIVEAPPDATAAPI.TRIGGER
input.codes	01,08,80,ad,F5,T6,H7,123,12A,#, ,null,removetag
wmq.sessionCacheSize	25
wmq.connectionNameList.ite	sit-vmulwmq01.bbtnet.com(11415)
qmanager.ibf	MULSITQM1
wmq.connectionNameList.drl	tdh-vmulwmq01.bbtnet.com(11415)
wmq.channel	TDV.TLS.CMAS.SVRCON
channel.mne	ATD10.MUL.API.SVRCON
cacheupdate	/cacheupdate
channel.pite	PIT10.MUL.API.SVRCON
email.subject	T2M Review Tool Report
email.cqc.body	Hello,  Please find the review summary below.  
email.cqc.signature	  Thanks & regards, Mule API review tool  *****  This is an auto generated email, please do not reply to this email.
channel.ibf	PIT10.MUL.API.SVRCON
input.accountnumbers	153211234567,2665544304,36104402555599,1470000863467,4147240000948099,4147241008461655,49629805,5422719530152416,5408009528211210,5408000500012056,5426579800051599,5408009528211210,4491611129302750,4491611302160918,5422769087016332,5408009528211210,2665544304,000000001033021050,000000001043052523,000000001033019986,7082052,7012510104884453,36104402555599,4147240000948099,000000000000000000004341824804502626,4341824804502626,4147240000948099,4118031270571165,41180312 70571165,41180312ab70571165,4000000000536312,4000000000536487,4000000000503197,1483138314,1483107664,148310-7664,14831076.64,0000000000503197,FF0ECC3D7B7D9AC978553605EC04EE90D288DBDA0713290FBCCCCFAF90A79-5D9B,4661890003334253,1470000863470,0000044300003032741,null, ,removetag
input.ssn	00151739394,00151739395,00151-739395,001 517 3935,501-517-393,0151739395,001517ab39395,00151739395#,0000000000151739394,1517393940000000000,400101121,39394,null, ,removetag
password.gitlab	zq7_xjB8dtG7WpxZ3U-1
wmq.cipherSuite	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
email.signature	  Thanks & regards, T2M Review Tool  *****  This is an auto generated email, please do not reply to this email.
wmq.channel2	TDV.TLS.CMAS.SVRCON
channel.tpp	PRP10.MUL.API.SVRCON
wmq.channel3	TDV.TLS.CMAS.SVRCON
input.amounts	0,0,0,0.00000,0000.000,0000,0.12000,12.012223324,01,10,1,1ab,1#,-0.5,-10,251.75,100000.6756,56753,4563,\$3000,10000rs,null, ,removetag
wmq.reconnection.attempts	1
wmq.queuemanager	MUL_DEV_QM1
smtp.port	25
truststore.path	bbt-internal-certs.jks
input.dates	10/11/23,10/12/2021,13/13/2020,13-13-2020,13:13:2020,13:13:2020 00:12:12,13/10/2020 00:12:12,13/10/2020 00:12:12 IST,1/1/2020,1/1,1/2020,2023,2023ab,2023,20090301,200903,20090,2009,200,null, ,removetag

### 3.1 src\main\resources\mule-app.properties (80 properties)

Key	Value
ks.alias	eapi-mule-mq-client-cert-np
ocphost	https://api-lms-sandbox.eapi01.truist-dev.com/t2mpoc-eapi01-sbx
wmq.host.prep	trmqmultpp.truist-tst.com
qmanager.atdv	MUL_DEV_QM1
apild	1234
channel.tdv	TDV10.MUL.API.SVRCON
ks.path	eapi-mule-mq-client-cert-np.jks
wmq.reconnection.frequency	1000
input.banknums	102,0102,104,0104,01 02,01ab02,null,31505,2000,2000000,1020000000000000,-123, ,removetag
input.cardnumbers	4661890021183302,4661890021183305,40070000000027,4661890015731397,4307450030004294,00000002500,4700480030001415,004035370100066008,0041304008000000025,45450700000000080,4393317108099412,4393319950043597,4393-3199-5004-3597,4393-31995004-3597,4661890021183503,466189002 1183302,46618900ab21183302,40070000000027,4661890021183302#,00000000000000004661890021183302,4661890021183302000000000000,890021183,4351420005029050,4661880067702990,4661880061152580,4661880053044639,4393316688084117,null, ,removetag
qmanager.drl	MULTDHQM1
wmq.host.sit	sit-vmulwmq01.bbtnet.com
wmq.host	dev-vmulwmq01.bbtnet.com
smtp.hostname	internal-alerting.bbtnet.com
qmanager.ite	MULSITQM1
input.names	AMWAY STES,JEROME DARD,JOHNY,DAVID,John2,Josh#,123 Fake Drive,Debostotra Jana,MACYS/GECCCC,Autaugaville,1661 Maple Ave,BANKAMERIC,CHESTER,FULTON,AL,GA,CA,MD,GB,GM,121 Single Fam Res, ,removetag
channel.ite	ITE10.MUL.API.SVRCON
email.body	Hello,  Please find the attached review report and API level review summary below.  
keystore.alias	eapi-mule-lastmile.truist-tst.com
qmanager.pite	MULSITQM1
qmanager.trn	MULSITQM1
wmq.cps.timetolive	4
channel.batch	TDV.MUL.BATCH.SVC
channel.drl	TDH10.MUL.API.SVRCON
wmq.port	11415
input.inds	I,A,B,C,D,F,G,HI,JKL,123,#, ,null,removetag
ts.path	multls.mq.tst.truist.com.jks
cacheretrieve	/cacheretrieve
username.gitlab	D97029
t2mdbexport	/t2mdbexport
channel.atdv	ATD10.MUL.API.SVRCON



### 3.2 src\main\resources\secure.properties (6 properties)

Key	Value
truststore.wmq.keypassword	![o+HlBx0x2JOmjK8omjjxXsGv3AWCH/3Z43IUuuamldU=]
lastmile.keypassword	![p/06LGgH1QUpvWg0l8NgXA==]
log.encryption.pwd	![yKyjr1Tz45zVqlZTuB/8yQ==]
wmq.password	![o+HlBx0x2JOmjK8omjjxXsGv3AWCH/3Z43IUuuamldU=]
wmq.userid	![5Xt/10X/w5XUIHsF65nurg==]
truststore.password	![o+HlBx0x2JOmjK8omjjxXsGv3AWCH/3Z43IUuuamldU=]

## 4. Connector Configurations

**Total Configurations: 26**

### 4.1. ATDV (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	3153ef30-94b4-445b-9543-b6cb870f836f
name	ATDV

#### 4.1.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

### 4.2. Batch (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	577dc52f-7414-46be-a487-04e6823c9fbb
name	Batch

#### 4.2.1 ibm-mq:connection

Attribute	Value
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

### 4.3. DRL (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	b461abf8-6483-4155-9d9f-3fee47553402
name	DRL

#### 4.3.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

#### 4.4. Database-Connection (db:config)

Path: src/main/mule/t2mdbexport.xml

Attribute	Value
doc:name	Database Config
doc:id	bcb2903b-9858-4cbd-8fa6-40fc4922c90d
name	Database-Connection

#### 4.4.1 db:generic-connection

Attribute	Value
password	sql5678
driverClassName	com.microsoft.sqlserver.jdbc.SQLServerDriver
user	SV-MULEAPIUTILSDB
url	jdbc:sqlserver://wil-sqltst05.bbnetnet.com:1433;DatabaseName=EAPIUTILSDB;encrypt=true;trustServerCertificate=true;

#### 4.5. Email\_SMTP (email:smtp-config)

Path: src/main/mule/t2mdbexport.xml

Attribute	Value
doc:name	Email SMTP
doc:id	1e458940-e8e1-4b89-919c-c6e227a8880c
name	Email_SMTP

#### 4.5.1 email:smtp-connection

Attribute	Value
port	\${smtp.port}
readTimeout	50
host	\${smtp.hostname}
writeTimeout	50
connectionTimeout	50

#### 4.6. File\_Config (file:config)

Path: src\main\mule\interceptcicscalls.xml

Attribute	Value
doc:name	File Config
doc:id	4920c81c-be8d-4078-96a2-eda06db0ad1c
name	File_Config

#### 4.7. GetCredential (http:request-config)

Path: src\main\mule\PLT.xml

Attribute	Value
doc:name	HTTP Request configuration
doc:id	b58e71dd-5a40-443b-865a-6ebb24d79a2a
name	GetCredential

##### 4.7.1 http:request-connection

Attribute	Value
protocol	HTTPS
port	443
host	gitlab.bbtnet.com
usePersistentConnections	false

#### 4.8. HTTPRVMule (http:request-config)

Path: src\main\mule\responsevalidator.xml

Attribute	Value
doc:name	HTTP Request configuration
doc:id	88e84cb3-9d9f-4bd2-ba2e-b7a9cd0613d4
name	HTTPRVMule

##### 4.8.1 http:request-connection

Attribute	Value
protocol	HTTPS
port	443
host	#[vars.mulehost]
usePersistentConnections	false

#### 4.9. HTTPResponseCompare (http:request-config)

Path: src\main\mule\responsevalidator.xml

Attribute	Value
doc:name	HTTP Request configuration
doc:id	7dc5c6c6-99b6-4900-82cb-d8ffe439b822
name	HTTPResponseCompare

##### 4.9.1 http:request-connection

Attribute	Value
protocol	HTTPS
port	443
host	#[vars.tibcohost]
usePersistentConnections	false
tlsContext	TLS_ContextRV

#### 4.10. HTTP\_Listener\_config (http:listener-config)

Path: src\main\mule\t2mpoc.xml

Attribute	Value
doc:name	HTTP Listener config
doc:id	1044a46a-98f5-442c-ad71-63fa76f4c8cc
name	HTTP_Listener_config

##### 4.10.1 http:listener-connection

Attribute	Value
protocol	HTTPS
port	8081
host	0.0.0.0
usePersistentConnections	false
tlsContext	TLS_Context

#### 4.11. HTTP\_Request\_configuration (http:request-config)

Path: src\main\mule\interceptcicscalls.xml

Attribute	Value
doc:name	HTTP Request configuration
doc:id	faf5f8d4-ca88-4e87-b4b1-2fdb21d434a
name	HTTP_Request_configuration

#### 4.11.1 http:request-connection

Attribute	Value
port	#[vars.port]
host	#[vars.host]
usePersistentConnections	false

### 4.12. IBF (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	e8ef495f-bb50-4b0b-9dd8-5254935513e1
name	IBF

#### 4.12.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

### 4.13. ITE (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	dd787f93-17d1-4492-a3ff-e8fdd8dac3f4
name	ITE

#### 4.13.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

### 4.14. MNE (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	aa6b25a8-24d1-4374-a877-f2d68756a0e8
name	MNE

#### 4.14.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

#### 4.15. ObjectStore\_Config (os:config)

Path: src\main\mule\t2mpoc.xml

Attribute	Value
doc:name	ObjectStore Config
doc:id	d5b9e4e4-cb13-41da-a74c-3d119578f8b4
name	ObjectStore_Config

#### 4.16. PITE (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	3dd02435-4aeb-4b42-88fa-9e46956b74a6
name	PITE

#### 4.16.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

#### 4.17. PLTChecklistupload (http:request-config)

Path: src\main\mule\PLT.xml

Attribute	Value
doc:name	HTTP Request configuration
doc:id	a966099a-33ee-4651-b235-f820de2ceffb
name	PLTChecklistupload

#### 4.17.1 http:request-connection

Attribute	Value
protocol	HTTPS
port	443
host	gitlab.bbtnet.com
usePersistentConnections	false

### 4.18. Policy\_TLS\_Context (tls:context)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	TLS Context
doc:id	8ced47e2-cc3c-4440-9cc8-ab577160313d
name	Policy_TLS_Context

#### 4.18.1 tls:trust-store

Attribute	Value
path	\${ts.path}
password	\${secure::wmq.password}
type	jks

#### 4.18.2 tls:key-store

Attribute	Value
path	\${ks.path}
password	\${secure::truststore.wmq.keypassword}
keyPassword	\${secure::truststore.wmq.keypassword}
alias	\${ks.alias}
type	jks

### 4.19. Secure\_Properties\_Config (secure-properties:config)

Path: src\main\mule\t2mpoc.xml



Attribute	Value
doc:name	Secure Properties Config
doc:id	e84cf3e7-33b7-4b84-ac9f-106d67796258
file	secure.properties
name	Secure_Properties_Config
key	\${secure.key}

## 4.20. TDV (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	8c032524-9324-4e54-8c4b-9fabb92cd01f
name	TDV

### 4.20.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

## 4.21. TLS\_Context (tls:context)

Path: src\main\mule\t2mpoc.xml

Attribute	Value
doc:name	TLS Context
doc:id	b530699e-cf2c-4bc9-a07d-6ace5b7d40f0
name	TLS_Context

### 4.21.1 tls:key-store

Attribute	Value
path	\${keystore.path}
password	\${secure::lastmile.keypassword}
keyPassword	\${secure::lastmile.keypassword}
alias	\${keystore.alias}
type	jks

## 4.22. TLS\_ContextRV (tls:context)

Path: src\main\mule\responsevalidator.xml

Attribute	Value
doc:name	TLS Context
doc:id	ffd24f90-22c9-47ae-9e73-a5f2e8b5aeeb
name	TLS_ContextRV

#### 4.22.1 tls:trust-store

Attribute	Value
path	\${truststore.path}
password	\${secure::truststore.password}
type	jks

#### 4.23. TPP (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	7ea9137c-fa1a-4865-a7a8-140c55b2fcf0
name	TPP

##### 4.23.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

#### 4.24. TRN (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

Attribute	Value
doc:name	IBM MQ Config
doc:id	f9b56120-b8d9-409e-a5db-2061c09a94b1
name	TRN

##### 4.24.1 ibm-mq:connection

Attribute	Value
tlsContext	Policy_TLS_Context
cipherSuite	\${wmq.cipherSuite}
username	\${secure::wmq.userid}

#### 4.25. api-gateway:autodiscovery (api-gateway:autodiscovery)

Path: src\main\mule\t2mpoc.xml

Attribute	Value
doc:name	API Autodiscovery
doc:id	bec42e52-341a-4a11-95db-fa894f8ff968
ignoreBasePath	true
apiId	\${apild}
flowRef	t2mpocFlow

#### 4.26. bbtnetconnection (http:request-config)

Path: src\main\mule\responsevalidator.xml

Attribute	Value
doc:name	HTTP Request configuration
doc:id	58c8bfac-61bd-4090-b5a1-9cd951ceb860
name	bbtnetconnection

##### 4.26.1 http:request-connection

Attribute	Value
port	81
host	webservicetest.bbtnet.com
usePersistentConnections	false

## 5. Mule Flows

**Total Flows: 39**

### 5.1. apireviewexceptionsFlow

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 30

#### 5.1.1 http:listener

Attribute	Value
doc:name	Listener
path	/addreviewexception/{index}/{failurecount}
doc:id	7370492c-981e-4779-acc1-8ae7ed484825
config-ref	HTTP_Listener_config

#### 5.1.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	b5c6020d-5742-4a63-9c4c-a2aad41c6acb

#### 5.1.3 try

Attribute	Value
doc:name	Try1
doc:id	e705a29f-58f1-498d-9e74-694c816eebb7

#### 5.1.4 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	10da896e-f644-4013-93e1-72486ea4977a
location	web\exceptionresponse.html

### 5.2. AddException

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 30

### 5.2.1 http:listener

Attribute	Value
doc:name	Listener
path	/addreviewexception/{index}/{failurecount}/{developer}/{servicename}/{approver}/{exceptionreason}
doc:id	658f2248-da03-4f8c-97b4-9ecb2f30c592
config-ref	HTTP_Listener_config

### 5.2.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	ccd81241-3ed1-4570-a2c7-7865afddfe53

### 5.2.3 try

Attribute	Value
doc:name	Try
doc:id	71175591-e30f-4e9d-95a7-e73e6b786a7c

### 5.2.4 try

Attribute	Value
doc:name	Try1
doc:id	1311b6d1-f360-4dcb-ae5e-2f086d3439e2

### 5.2.5 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	2ef4be81-349e-481c-a518-75273638f0fc
location	web\exceptionapproved.html

## 5.3. apireviewexceptionsFlow1

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 2

### 5.3.1 http:listener

Attribute	Value
doc:name	Listener
path	/apireviewexceptions
doc:id	2636d7fc-3c65-4e01-b45a-543a438b5def
config-ref	HTTP_Listener_config

### 5.3.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	e6df46e6-130b-4089-a85c-a10abc10fe3b
location	web\reviewexceptions.html

## 5.4. apireviewexceptionsFlow3

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 21

### 5.4.1 http:listener

Attribute	Value
doc:name	Listener
path	/rejectexception/{developer}/{approver}/{servicename}
doc:id	fc45d159-9b5a-49f2-94a7-e26559e67659
config-ref	HTTP_Listener_config

### 5.4.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	bcbef359-d5f9-471d-8328-96d4a5142469

### 5.4.3 try

Attribute	Value
doc:name	Try
doc:id	c74413f9-82c2-4fc5-bd4e-167cfaae5c01

### 5.4.4 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	5ead0baa-5d14-41a1-a939-36eba02ec052
location	web\exceptionrejected.html

## 5.5. apireviewexceptionsFlow2

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 23

### 5.5.1 http:listener

Attribute	Value
doc:name	Listener
path	/getfailurecount
doc:id	903b3de5-c7cc-4068-bfd8-d6c823707de4
config-ref	HTTP_Listener_config

### 5.5.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	050d7bda-b5d8-428e-b676-3205a24c8056

### 5.5.3 db:select

Attribute	Value
doc:name	Select
doc:id	70cde1ef-9ba2-40ad-b4eb-37ae677b3dbd
config-ref	Database-Connection

### 5.5.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	42d633b7-6d3e-42d0-85be-debe93254646

### 5.5.5 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	022ac24f-e96f-45b7-92cf-f7427098a477

### 5.5.6 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	6b32b02d-5809-42bf-93ee-dcb6f93404be
location	web\fetchfailures.html

## 5.6. devtrackerreadFlow

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 87

### 5.6.1 http:listener

Attribute	Value
doc:name	Listener
path	/getratelimits
doc:id	c57b6416-9d07-4773-9c72-d7fb7dce63b8
config-ref	HTTP_Listener_config

### 5.6.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	16e5112d-6418-4806-9d6a-241f8eb5c508

### 5.6.3 os:retrieve

Attribute	Value
doc:name	Retrieve
doc:id	6b722f4d-997e-421f-9873-2e7cb73a10ea
objectStore	Object_store
key	Development

### 5.6.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	836b6505-e3a4-45a6-8c93-4014ec32e180

### 5.6.5 ee:transform



Attribute	Value
doc:name	Transform Message
doc:id	5d4f8fd7-57c6-4b82-9af1-c3b980bcda21

### 5.6.6 foreach

Attribute	Value
doc:name	For Each
doc:id	c02d757b-a36b-4f52-bbb4-080e589e1833
collection	#[vars.apiname default []]

### 5.6.7 choice

Attribute	Value
doc:name	Choice
doc:id	db7e7add0-65d2-4988-8180-c7c8844e81c0

## 5.7. devtrackerreadFlow1

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 2

### 5.7.1 http:listener

Attribute	Value
doc:name	Listener
path	/ratelimits
doc:id	84df5f78-89ea-456e-a318-40e6a0a21cd8
config-ref	HTTP_Listener_config

### 5.7.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	30eaca26-0dad-417b-9682-5d7615066fb6
location	web\getratelimits.html

## 5.8. devtrackerreadFlow2

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 8

### 5.8.1 http:listener

Attribute	Value
doc:name	Listener
path	/loadtracker
doc:id	1c64624a-7d1f-40c2-b077-9da914b8fc69
config-ref	HTTP_Listener_config

### 5.8.2 file:read

Attribute	Value
doc:name	Read
path	#[p('gui.apphome') ++ "T2M Wave0 Development Tracker.xlsx"]
doc:id	d5e41ade-231c-4c4f-ae8b-985ad11b524f
outputMimeType	application/xlsx
config-ref	File_Config

### 5.8.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	8354b08e-2140-4698-aef2-43e9335be227

### 5.8.4 os:store

Attribute	Value
doc:name	Store
doc:id	0bf00d12-4090-4f01-84b9-f06561530a1b
objectStore	Object_store
failOnNullValue	false
key	Development

### 5.8.5 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	a8997569-764f-4555-874d-55be38b6e1be
location	web\devtrackerloaded.html

## 5.9. devtrackerreadFlow3

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 2

### 5.9.1 http:listener

Attribute	Value
doc:name	Listener
path	/trackerload
doc:id	2005b670-0626-4764-a670-c77f7e35b78b
config-ref	HTTP_Listener_config

### 5.9.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	ab08e6fb-7c53-40a7-b6e2-68d08ffc0526
location	web\trackerload.html

## 5.10. interceptcicscallsFlow

Path: src\main\mule\interceptcicscalls.xml

Type: flow

Components: 44

### 5.10.1 http:listener

Attribute	Value
doc:name	Listener
path	/cicsintercept/{name}
doc:id	f9b02d64-5549-45e4-8198-4db74b3ddc4c
config-ref	HTTP_Listener_config

### 5.10.2 set-payload

Attribute	Value
doc:name	Set Payload
doc:id	ebadc2da-af03-4f22-85c7-05acae6b2184
contentType	text/plain
value	#[payload]

### 5.10.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	a443f71c-eb89-4c06-b862-d12d15e63926

### 5.10.4 logger

Attribute	Value
doc:name	Logger
doc:id	baea2a8f-5431-4941-b0cf-18c1ff015b93
level	INFO
message	#[%dw 2.0 output text/plain --- (vars.configuration default 'N/A') ++ (vars.postdata default "") ++ (vars.authorization default "")]

#### 5.10.5 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	8157900b-8e0c-46b9-bf6c-f6dfc0d0dc2d

#### 5.10.6 try

Attribute	Value
doc:name	Try
doc:id	8ca804c4-02f8-4dfe-bd95-19151e256177

#### 5.10.7 db:insert

Attribute	Value
doc:name	Insert
doc:id	744e1e2f-3636-4d5a-820a-59d1a2665679
config-ref	Database-Connection

#### 5.10.8 logger

Attribute	Value
doc:name	Logger
doc:id	bafd4e79-cfba-4849-8806-3c37aba7ab3e
level	INFO
message	<pre> #[%dw 2.0 output application/json --- {   APP_NAME : vars.apptype default "",   SERVICE_NAME : vars.service default "",   OPERATION_NAME : vars.operation default "",   HOST : vars.host default "",   PORT : vars.port default "",   PROGRAM_ID : vars.program default "",   REQUEST_URI : vars.requesturi default "",   RECEIVED_URI : vars.configuration default "",   POST_DATA : vars.postdata default "",   CREDENTIAL_RECEIVED : vars.authorization default "",   TXN_TIMESTAMP : (now() &gt;&gt; "America/New_York") as String {format: "y-MM-dd HH:m:s"},   STATUS_CODE : attributes.statusCode ,   STATUS_DESC : attributes.reasonPhrase default "",   STACK_TRACE : (write(attributes,'application/json') ) default "",   RESPONSE_PAYLOAD : vars.responsepayload default "",   RESERVE1 : vars.correlationid default "",   CORRELATION_ID : vars.tibcocorrelationid default "" }] </pre>

#### 5.10.9 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	79729818-9b1d-4b8a-96b2-ee929f7a4419

### 5.11. interceptcicscallsFlow1

Path: src\main\mule\interceptcicscalls.xml

Type: flow

Components: 12

#### 5.11.1 http:listener

Attribute	Value
doc:name	Listener
path	/comparecics
doc:id	f2ec4056-5916-40ba-8dd9-e198c9922046
config-ref	HTTP_Listener_config

### 5.11.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	cfdc6ca7-ee44-4144-8912-fe3df0cfe24c

### 5.11.3 db:select

Attribute	Value
doc:name	Select
doc:id	c9a37c98-26af-4546-b1e2-02d2d8c6c74a
config-ref	Database-Connection

### 5.11.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	d7d845d4-800b-4fc5-af0f-3a9c1760d018

### 5.11.5 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	f3e7390e-7da0-46d2-9ff7-ea8160cc8533

## 5.12. interceptcicscallsFlow2

Path: src\main\mule\interceptcicscalls.xml

Type: flow

Components: 3

### 5.12.1 http:listener

Attribute	Value
doc:name	Listener
path	/cicsinterceptor
doc:id	c17c3ed1-97b8-4ee9-b0ad-7474e4ba77df
config-ref	HTTP_Listener_config

### 5.12.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	26c8e04b-ccb2-48b3-af8b-276d864ddf80

## 5.13. mulemqtriggerFlow

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 105

### 5.13.1 http:listener

Attribute	Value
doc:name	Listener
path	/mqtrigger
doc:id	f83a440f-cbd8-4486-b698-673681669134
config-ref	HTTP_Listener_config

### 5.13.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	6c7bf1e9-4c95-47fd-b237-d7e885eca647

### 5.13.3 try

Attribute	Value
doc:name	Try
doc:id	436239fc-539b-4cae-ab1f-2b78f705abc5

## 5.14. mulemqtriggerhome

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 2

### 5.14.1 http:listener

Attribute	Value
doc:name	Listener
path	/mulemqtrigger
doc:id	f940ff22-1637-4515-88d8-88ff9cc3ddd6
config-ref	HTTP_Listener_config

#### 5.14.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	96ce2cd9-73d1-472c-a24a-0f10b8b8d893
location	web\mulemqtrigger.html

### 5.15. mulemqtriggerFlow1

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 6

#### 5.15.1 http:listener

Attribute	Value
doc:name	Listener
path	/consumequeue
doc:id	1b107f3d-e601-4b39-a8a4-4eb556886ba1
config-ref	HTTP_Listener_config

#### 5.15.2 set-variable

Attribute	Value
doc:name	Set Variable
doc:id	6f255b93-b121-4cb7-b50b-553485d338bb
variableName	batchqueue
value	MUL.ESP.WIREDAILYREPORTAPI.TDV.L

#### 5.15.3 ibm-mq:consume

Attribute	Value
doc:name	Consume
doc:id	dc2ac41f-fa74-45f6-a0fb-f82035b75b02
config-ref	Batch
ackMode	IMMEDIATE
destination	#[vars.batchqueue default ""]

#### 5.15.4 logger



Attribute	Value
doc:name	Logger
doc:id	3f4b7e85-c02a-4aab-857e-7fb8ea5e2c16
level	INFO
message	#[payload ++ " has been received over " ++ (vars.batchqueue default "")]

## 5.16. mulemqtriggerFlow2

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 79

### 5.16.1 http:listener

Attribute	Value
doc:name	Listener
path	/consume
doc:id	d1ecdb10-9429-4e21-87f0-945644831e80
config-ref	HTTP_Listener_config

### 5.16.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	3d6adb03-1926-4d48-9c74-d99688da46ec

### 5.16.3 try

Attribute	Value
doc:name	Try
doc:id	7267fd43-02d3-4036-80cd-83911b901481

## 5.17. mulemqtriggerFlow3

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 2

### 5.17.1 http:listener

Attribute	Value
doc:name	Listener
path	/mqconsumer
doc:id	701aebc0-fc65-4034-ae03-1e0518abf3ba
config-ref	HTTP_Listener_config

### 5.17.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	fd4e2dd6-5451-4328-a05f-7e414a7d4e8c
location	web\mqconsumer.html

## 5.18. parentpomconversionFlow

Path: src\main\mule\parentpomconversion.xml

Type: flow

Components: 24

### 5.18.1 http:listener

Attribute	Value
doc:name	Listener
path	/addparentpomconfig
doc:id	978e5d14-1167-4238-81f6-8b07ec46bfcf
config-ref	HTTP_Listener_config

### 5.18.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	f10c6060-434c-40e8-bef8-b01250576ee9

### 5.18.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	d353c11a-be72-4b67-a1df-54602caaa5c0

### 5.18.4 foreach

Attribute	Value
doc:name	For Each
doc:id	46e1b927-8d95-4baf-afbd-dd9816719413
collection	#[vars.dependencycontent default []]

### 5.18.5 set-payload

Attribute	Value
doc:name	Set Payload
doc:id	16dc2f6e-eeef-48a2-8ef7-e072dabfacbc
contentType	application/xml
value	<pre>#[%dw 2.0 --- (vars.contentbeforeproperties default "") ++ (vars.propertycontent default "") ++ (vars.contentbeforedependencies default "") ++ "&lt;dependencies&gt;" ++ (vars. updateddependencycontent default "") ++ "&lt;/dependencies&gt;" ++ (vars. contentafterdependencies default "")]</pre>

### 5.18.6 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	3214c5ff-4a4a-49bf-ab00-e88273f62b8a

### 5.18.7 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	3b0b80da-6dee-4683-a91a-5530e5e64745
location	web\parentpomresponse.html

## 5.19. parentpomconversionFlow1

Path: src\main\mule\parentpomconversion.xml

Type: flow

Components: 2

### 5.19.1 http:listener

Attribute	Value
doc:name	Listener
path	/addparentpom
doc:id	03870793-c0ec-4813-a287-222bbdad86bd
config-ref	HTTP_Listener_config

### 5.19.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	5bf5758e-d5b4-4dbc-8f75-ba31282b4154
location	web\addparentpom.html

## 5.20. PLTFlow

Path: src\main\mule\PLT.xml

Type: flow

Components: 30

### 5.20.1 http:listener

Attribute	Value
doc:name	Listener
path	/pltsummary
doc:id	38c63198-7be5-4e42-952c-bc50c6bbad70
config-ref	HTTP_Listener_config

### 5.20.2 choice

Attribute	Value
doc:name	Choice
doc:id	2a849623-35e9-4af3-bce7-c90dc38ab668

### 5.20.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	383b78bb-9ff1-437d-9176-eefbcfe6e660

### 5.20.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	18aca5ee-c1e6-4421-9919-2147661cdfd8

### 5.20.5 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	a1777432-8a8f-4e18-b14c-cf8419c25ca1

### 5.20.6 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	255afa10-492b-4a37-9337-4bfcd5f5b812
location	web\pltsummary.html

## 5.21. PLTUpdate

Path: src\main\mule\PLT.xml

Type: flow

Components: 38

### 5.21.1 http:listener

Attribute	Value
doc:name	Listener
path	/updatepltentry/{index}
doc:id	e0ea1a2e-303b-40d6-8691-2991ee7e63dc
config-ref	HTTP_Listener_config

### 5.21.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	72d2f2c8-5a4f-4ac8-9b65-12890801db13

### 5.21.3 db:select

Attribute	Value
doc:name	Select
doc:id	8c740e47-fc00-4352-872f-aa922f69d76f
config-ref	Database-Connection

### 5.21.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	8da605cd-443e-4595-9295-5010718428a2

### 5.21.5 db:update

Attribute	Value
doc:name	Update
doc:id	73c89eaf-8169-49fa-bc46-7d60fb78d2e4
config-ref	Database-Connection

#### 5.21.6 db:select

Attribute	Value
doc:name	Select
doc:id	db76fd06-2dc0-403d-9ca1-7f4b4cca759b
config-ref	Database-Connection

#### 5.21.7 ee:transform

Attribute	Value
doc:name	Transform Message1
doc:id	0563d67f-3f61-4d77-88ef-da84e36b7b6c

#### 5.21.8 ee:transform

Attribute	Value
doc:name	Transform Message2
doc:id	a44f4af8-6e4c-4304-b176-9bdffd4433ff

#### 5.21.9 ee:transform

Attribute	Value
doc:name	Transform Message3
doc:id	fdbe3150-5777-4ec3-8c0a-0dd1340b796b

#### 5.21.10 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	e1817831-1a7a-423a-b8cd-3739712393e8
location	web\existingplntentries.html

### 5.22. PLTFlow2

Path: src\main\mule\PLT.xml

Type: flow

Components: 20

#### 5.22.1 http:listener

Attribute	Value
doc:name	Listener
path	/fetchpltdata
doc:id	c92384dc-e76b-4a56-a7c3-a0ed0522e97e
config-ref	HTTP_Listener_config

#### 5.22.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	37f669b6-bad6-4e39-9799-b21540b4b2c0

#### 5.22.3 db:select

Attribute	Value
doc:name	Select
doc:id	8ab45822-25bf-4f42-845e-7981fad7f3f7
config-ref	Database-Connection

#### 5.22.4 ee:transform

Attribute	Value
doc:name	Transform Message1
doc:id	4f6ca73a-5035-46a9-81f5-ad3481a9f4c4

#### 5.22.5 ee:transform

Attribute	Value
doc:name	Transform Message2
doc:id	f2189895-3f1d-4549-8408-3e565944b127

#### 5.22.6 ee:transform

Attribute	Value
doc:name	Transform Message3
doc:id	68a63311-7ccd-45c8-b393-d7911a94f2c9

#### 5.22.7 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	59ce5a2a-a95c-4140-9ecd-83fc26f77cfe
location	web\existingpltentries.html

## 5.23. PLTFlow1

Path: src\main\mule\PLT.xml

Type: flow

Components: 2

### 5.23.1 http:listener

Attribute	Value
doc:name	Listener
path	/plt
doc:id	127414d0-876c-4082-959a-93e4ebb1caec
config-ref	HTTP_Listener_config

### 5.23.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	1476dbc5-42c9-4de5-82f4-0c761477607e
location	web\fetchpltdata.html

## 5.24. PLTFlow3

Path: src\main\mule\PLT.xml

Type: flow

Components: 54

### 5.24.1 http:listener

Attribute	Value
doc:name	Listener
path	/addpltentry
doc:id	d63e35a2-7719-44c6-8964-c9b079740015
config-ref	HTTP_Listener_config

### 5.24.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	6d1ca89f-a1d6-433f-ae8-011da43bd675

### 5.24.3 db:insert



Attribute	Value
doc:name	Insert
doc:id	1529647d-5e13-4d1d-9c48-d088dea68a8c
config-ref	Database-Connection

#### 5.24.4 db:select

Attribute	Value
doc:name	Select
doc:id	1eb505c2-696e-42b7-a708-65adfa9e724d
config-ref	Database-Connection

#### 5.24.5 ee:transform

Attribute	Value
doc:name	Transform Message1
doc:id	3f1bddc6-6bb3-4411-a081-666c2e81bcc3

#### 5.24.6 ee:transform

Attribute	Value
doc:name	Transform Message2
doc:id	44e5ece1-5e3e-4d51-996c-c80307689cf3

#### 5.24.7 ee:transform

Attribute	Value
doc:name	Transform Message3
doc:id	8dc0516b-5989-4dbc-9d16-6ca326cb6044

#### 5.24.8 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	c66b032b-12cb-4b15-890b-8d6fcc6fe5da
location	web\existingplntentries.html

#### 5.24.9 error-handler

### 5.25. PLTFlow4

Path: src\main\mule\PLT.xml

Type: flow

Components: 12

#### 5.25.1 http:listener

Attribute	Value
doc:name	Listener
path	/loadpltdatabulk
doc:id	47278ef7-18e1-4b2b-9e63-7eb35f3ee14a
config-ref	HTTP_Listener_config

### 5.25.2 file:read

Attribute	Value
doc:name	Read
path	C:\data\PLT\Wave 7 & 8\Wave 7 and 8 PLT.xlsx
doc:id	793f1de9-3d1d-4f36-a578-730c2322720d
outputMimeType	application/xlsx
config-ref	File_Config

### 5.25.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	0da7de13-cd5e-4235-bfc8-acb71fcf6168

### 5.25.4 foreach

Attribute	Value
doc:name	For Each
doc:id	54941d89-4dd3-4ba0-a2bb-204d4616689f

## 5.26. PLTFlow5

Path: src\main\mule\PLT.xml

Type: flow

Components: 65

### 5.26.1 http:listener

Attribute	Value
doc:name	Listener
path	/requestplt
doc:id	60491449-37e4-41e5-86c5-99893a2593f1
config-ref	HTTP_Listener_config

### 5.26.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	3d85a7f1-9b58-4afa-abba-847d10ffaa73

### 5.26.3 choice

Attribute	Value
doc:name	Choice
doc:id	fc68bf03-35f6-4e8f-8aad-ece7f341b965

## 5.27. PLTFlow6

Path: src\main\mule\PLT.xml

Type: flow

Components: 2

### 5.27.1 http:listener

Attribute	Value
doc:name	Listener
path	/pltrequest
doc:id	5f27fb4c-8a09-441f-81aa-581037f8e50d
config-ref	HTTP_Listener_config

### 5.27.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	26b269e9-cb2c-4f4a-8a8f-9501e5a62dc9
location	web\requestpltstart.html

## 5.28. PLTFlow7

Path: src\main\mule\PLT.xml

Type: flow

Components: 79

### 5.28.1 http:listener

Attribute	Value
doc:name	Listener
path	/fetchapireviewstatus
doc:id	770869e5-1e94-4ab8-9935-88b9c8e84628
config-ref	HTTP_Listener_config

#### 5.28.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	5b35ffe4-b7b9-4711-94bc-333ad9240303

#### 5.28.3 db:select

Attribute	Value
doc:name	Select
doc:id	e6a69c3b-fc7e-4cb3-a2a2-6f0315d72c88
config-ref	Database-Connection

#### 5.28.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	78df76f4-35bb-4c16-a2dd-780d2e1c0a78

#### 5.28.5 try

Attribute	Value
doc:name	Try
doc:id	e0b20b2b-39dc-4806-b266-6a3712edc563

#### 5.28.6 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	eaecd8d0-1298-4fc0-b23c-6584c9e2aae3

#### 5.28.7 try

Attribute	Value
doc:name	Try
doc:id	51358bf2-5d6a-4e99-b41d-82092d497770

#### 5.28.8 try

Attribute	Value
doc:name	Try
doc:id	a1b5fd62-bb1e-437b-b343-fe0cbe2f474d

#### 5.28.9 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	c9fd1537-98ee-48ca-9db9-ac455f5f0558

#### 5.28.10 ee:transform

Attribute	Value
doc:name	Transform Message1
doc:id	2629bdce-439b-484a-85c4-e2c6acb5e0b3

#### 5.28.11 http:request

Attribute	Value
doc:name	request
path	#[payload]
doc:id	17d3e2f6-08c4-439d-a29b-dd3fcfd233cd
method	GET
config-ref	GetCredential

#### 5.28.12 ee:transform

Attribute	Value
doc:name	Transform Message2
doc:id	6326e9a7-bec7-4ce6-b099-bf14c23d981a

#### 5.28.13 ee:transform

Attribute	Value
doc:name	Transform Message3
doc:id	ee8d2fd6-8b17-42dd-a003-a851c5d6061c

#### 5.28.14 http:request

Attribute	Value
doc:name	Request
path	#[payload]
doc:id	3684f2d5-3ca1-41fe-bc89-b8f3145efd44
method	GET
config-ref	GetCredential

#### 5.28.15 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	b3fa3834-b9bf-4d84-a6d8-8788fb65ce76

#### 5.28.16 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	74214964-54df-45da-992f-7528dada20d3
location	web\apipltvalidation.html

### 5.29. PLTLive

Path: src\main\mule\PLT.xml

Type: flow

Components: 43

#### 5.29.1 http:listener

Attribute	Value
doc:name	Listener
path	/pltplanned
doc:id	d394596b-4d1e-4e16-9ae3-bd4d39495265
config-ref	HTTP_Listener_config

#### 5.29.2 choice

Attribute	Value
doc:name	Choice
doc:id	9805d70c-ddfa-4303-9585-fe6e6f9bde31

#### 5.29.3 choice

Attribute	Value
doc:name	Choice
doc:id	09348612-9e2e-4355-859e-2f798684714a

#### 5.29.4 db:select

Attribute	Value
doc:name	Select
doc:id	10ab1b5d-89f4-4ed1-89d7-02bb2e8696dd
config-ref	Database-Connection

#### 5.29.5 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	de9bd3f0-102c-4071-908c-c1fc9fa675a5

#### 5.29.6 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	801cc97f-8737-4662-aaaf-da39950d71e1

#### 5.29.7 foreach

Attribute	Value
doc:name	For Each
doc:id	4f84db55-5597-4a79-b399-72be8e1855c4
collection	#[payload]

#### 5.29.8 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	0464ce59-3b79-4b30-af20-612b070e0150
location	web\ongoingplt.html

### 5.30. PLTLiveStart

Path: src\main\mule\PLT.xml

Type: flow

Components: 2

#### 5.30.1 http:listener

Attribute	Value
doc:name	Listener
path	/planplt
doc:id	aa309db3-e69c-4359-b9f0-ae08c6343a8
config-ref	HTTP_Listener_config

#### 5.30.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	b5b448d3-7582-470e-81a0-82d2d3b61bd5
location	web\pltpanning.html

### 5.31. responsevalidatorFlow

Path: src\main\mule\responsevalidator.xml

Type: flow

Components: 286

#### 5.31.1 http:listener

Attribute	Value
doc:name	Listener
path	/compareresponses
doc:id	e26d407a-6b58-48d7-8687-58a738bb2992
config-ref	HTTP_Listener_config

#### 5.31.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	90b88bbc-7c67-4899-83f4-f51ec0e4d727

#### 5.31.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	f923c383-f1cf-44ab-b9a6-3eb10ecfd1c0

#### 5.31.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	5d62c7b8-15b1-4291-8c39-cd2c85c9bc4b

#### 5.31.5 foreach

Attribute	Value
doc:name	For Each
doc:id	9bfd61c3-6156-4b0c-8cbc-39652505bd3a
collection	#[payload default []]

#### 5.31.6 ee:transform



Attribute	Value
doc:name	Transform Message
doc:id	416add2a-b71e-42a0-9b16-eb376139919c

#### 5.31.7 foreach

Attribute	Value
doc:name	For Each
doc:id	a016202f-d365-4280-b6fa-54510d516642
collection	#[payload default []]

#### 5.31.8 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	fe1d7e33-441a-42f8-921d-30f6bb28c0d1

#### 5.31.9 try

Attribute	Value
doc:name	Try
doc:id	8a5c31aa-49da-42e0-9158-7ebf72703026

#### 5.31.10 try

Attribute	Value
doc:name	Try1
doc:id	2d946306-9a51-4879-868f-42ea00d29443

#### 5.31.11 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	ae69f99e-3708-4742-b007-f31dd458ea68
location	web\compareapiresponses.html

### 5.32. responsevalidatorFlow1

Path: src\main\mule\responsevalidator.xml

Type: flow

Components: 2

#### 5.32.1 http:listener

Attribute	Value
doc:name	Listener
path	/compareapiresponses
doc:id	f5c8b649-8f37-46c4-8b01-6a9c4c07a5bd
config-ref	HTTP_Listener_config

### 5.32.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	cb5586a4-e511-4e12-b880-bb119bb194d0
location	web\compareresponseseshome.html

### 5.33. t2mdbexportFlow

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 58

#### 5.33.1 scheduler

Attribute	Value
doc:name	Scheduler
doc:id	17e6aafe-926e-49e2-b2c7-3a37eb3913e0

#### 5.33.2 logger

Attribute	Value
doc:name	Logger
doc:id	3bde5e67-e45e-44fd-95cb-f57632267abb
level	INFO
message	Daily review report has been triggered

#### 5.33.3 db:select

Attribute	Value
doc:name	Select
doc:id	3eb45017-d30d-4024-87db-f489aa99065c
config-ref	Database-Connection

#### 5.33.4 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	49066764-49a2-4ae9-aaf5-da0a2771c68b

#### 5.33.5 ee:transform

Attribute	Value
doc:name	Transform Message1
doc:id	b1edf3dd-0f4d-4a07-bc78-168e5a612fd9

#### 5.33.6 set-payload

Attribute	Value
doc:name	Set Payload
doc:id	faa813aa-a04c-4b4c-9e91-c93f3cfb7978
value	#[payload]

#### 5.33.7 ee:transform

Attribute	Value
doc:name	Transform Message2
doc:id	6823bd08-1e78-4979-9354-43fa7869cf75

#### 5.33.8 foreach

Attribute	Value
doc:name	For Each
doc:id	e35e9595-a65b-41b0-ac98-3b57429f39e1
collection	#[vars.dbresponse default []]

#### 5.33.9 ee:transform

Attribute	Value
doc:name	Transform Message3
doc:id	9602c730-7129-4721-9b49-7c014568f16a

#### 5.33.10 ee:transform

Attribute	Value
doc:name	Transform Message4
doc:id	d1fccb48-4eb8-4c7b-9056-d7623dde01a6

#### 5.33.11 ee:transform

Attribute	Value
doc:name	Transform Message5
doc:id	83ef27b3-0e24-4df2-9ba2-1ba9c4cf301f

#### 5.33.12 ee:transform

Attribute	Value
doc:name	Transform Message6
doc:id	642f0daa-8698-4dec-a57c-594fffb02983

#### 5.33.13 ee:transform

Attribute	Value
doc:name	Transform Message7
doc:id	e87984a9-031a-41f9-98f0-0a3991e3bea9

#### 5.33.14 ee:transform

Attribute	Value
doc:name	Transform Message8
doc:id	eb9cd7aa-0680-41b7-8f6e-fcf49748098c

#### 5.33.15 email:send

Attribute	Value
doc:name	Send
doc:id	57e1b14d-9694-44db-bfa5-7db22ced0575
config-ref	Email_SMTP
subject	#["T2M Review Tool Report - Daily"]
fromAddress	\${smtp.from}

### 5.34. t2mdbexportFlow1

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 56

#### 5.34.1 http:listener

Attribute	Value
doc:name	Listener
path	\${t2mdbexport}
doc:id	6ed0fa4b-1a2e-4ce5-9d07-68a087d866d8
config-ref	HTTP_Listener_config

#### 5.34.2 db:select

Attribute	Value
doc:name	Select
doc:id	94fc2cb5-152c-4090-8d67-ac243999180e
config-ref	Database-Connection

#### 5.34.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	28fbaeaf-a54c-4aa8-83b8-deef2deba110

#### 5.34.4 ee:transform

Attribute	Value
doc:name	Transform Message1
doc:id	dfcc2af2-f2bc-4626-b617-14be12b5ddcf

#### 5.34.5 set-payload

Attribute	Value
doc:name	Set Payload
doc:id	b6341ecf-a95e-4c10-ac35-9ad258474155
value	#[payload]

#### 5.34.6 ee:transform

Attribute	Value
doc:name	Transform Message2
doc:id	b95eb1d2-689b-4043-9a24-b1a7f074dd5e

#### 5.34.7 foreach

Attribute	Value
doc:name	For Each
doc:id	7d94a485-3df0-416d-ab85-41a65b84f595
collection	#[vars.dbresponse default []]

#### 5.34.8 ee:transform

Attribute	Value
doc:name	Transform Message3
doc:id	7eb5dc60-422e-4b4e-b7fa-a274e3fa93cb

#### 5.34.9 ee:transform

Attribute	Value
doc:name	Transform Message4
doc:id	e01ff422-ed58-44a3-9e5e-958e4aa48209

#### 5.34.10 ee:transform

Attribute	Value
doc:name	Transform Message5
doc:id	aff2448f-f04b-43a9-b204-6688e4dcd532

#### 5.34.11 ee:transform

Attribute	Value
doc:name	Transform Message6
doc:id	18e24366-d626-4426-a163-44856662f70d

#### 5.34.12 ee:transform

Attribute	Value
doc:name	Transform Message7
doc:id	92050549-efdf-4d99-b315-01c734d7e3a6

#### 5.34.13 ee:transform

Attribute	Value
doc:name	Transform Message8
doc:id	bba05bbd-9429-4438-8a3c-9b3c940ee7bb

#### 5.34.14 email:send

Attribute	Value
doc:name	Send
doc:id	71dc98-25a1-41d1-b6cc-4f883ce996e2
config-ref	Email_SMTP
subject	#["T2M Review Tool Report - Daily"]
fromAddress	\${smtp.from}

#### 5.34.15 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	50d9bfc9-1d98-4a24-b55f-e357fc0b39d9
location	web\t2mdailyreviewreport.html

### 5.35. ReviewSummary

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 109

#### 5.35.1 http:listener

Attribute	Value
doc:name	Listener
path	/t2mapisummary
doc:id	a625f3d7-e788-4444-980b-fb894ccedfe1
config-ref	HTTP_Listener_config

#### 5.35.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	8d926f6b-2ea7-4d32-a691-dcf3332407d4

#### 5.35.3 db:select

Attribute	Value
doc:name	Select
doc:id	0a74599b-18f6-4c83-8d60-85c856d087c1
config-ref	Database-Connection

#### 5.35.4 choice

Attribute	Value
doc:name	Choice
doc:id	706dd92e-f3eb-4cc4-a7da-1932bf32bd9a

#### 5.35.5 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	5baa9aac-8f7d-4362-9f14-29c02175f735

#### 5.35.6 set-variable

Attribute	Value
doc:name	Set Variable
doc:id	0c76067f-dda8-4d12-9e40-bf41051cacfa
variableName	apireviewsummary
value	#[%dw 2.0 output text/plain --- vars.mapdata.mapdata joinBy("\n")]

#### 5.35.7 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	85163cb8-939f-4f0b-9874-3051c9e45964

#### 5.35.8 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	9027f013-eb69-4ed6-a3a1-26c743aa1f84

#### 5.35.9 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	cd28d408-9ee9-45c2-ba2c-c7fb30b60ea8

#### 5.35.10 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	59cb009e-8c2f-433a-ae73-6c906e41fee1

#### 5.35.11 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	4cfb3ac0-c576-4f22-87e8-96c916a36d8b

#### 5.35.12 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	11aca510-0cfb-46ad-958c-990f4bfae241

#### 5.35.13 ee:transform



Attribute	Value
doc:name	Transform Message
doc:id	652926b7-2705-416a-9022-277b1574dd6d

#### 5.35.14 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	9eb5e8fa-e078-4bce-9eb6-1d43ccc13a9d

#### 5.35.15 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	45702b4b-a3ce-4c76-9656-b6356535768f

#### 5.35.16 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	82404b96-cbcc-4c4a-bbbc-991e53c3be66
location	web\apireviewsummary.html

### 5.36. t2mdbexportFlow2

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 2

#### 5.36.1 http:listener

Attribute	Value
doc:name	Listener
path	/t2mtools
doc:id	e3f5b4e4-5b5c-43da-a4ef-7cca65000cf7
config-ref	HTTP_Listener_config

#### 5.36.2 parse-template

Attribute	Value
doc:name	Parse Template
doc:id	4ad1a230-23ac-4d3f-af2f-6e3fa4cedc74
location	web\t2mtools.html

### 5.37. t2m\_pocFlow

Path: src\main\mule\t2mpoc.xml

Type: flow

Components: 8

#### 5.37.1 http:listener

Attribute	Value
doc:name	Listener
path	\${cacheupdate}
doc:id	1044a46a-98f5-442c-ad71-63fa76f4c8cc
config-ref	HTTP_Listener_config

#### 5.37.2 ee:cache

Attribute	Value
doc:name	Cache
doc:id	25aa8e0a-0fc4-42f3-8d61-227a0089ba6d
cachingStrategy-ref	Caching_Strategy

### 5.38. t2m\_pocFlow1

Path: src\main\mule\t2mpoc.xml

Type: flow

Components: 5

#### 5.38.1 http:listener

Attribute	Value
doc:name	Listener
path	\${cacheretrieve}
doc:id	a3c3359a-b4d6-4c01-9961-633fa4481cb7
config-ref	HTTP_Listener_config

#### 5.38.2 os:retrieve

Attribute	Value
doc:name	Retrieve
doc:id	58224208-611b-4199-abe3-0bd3684d74f1
objectStore	Object_store
key	cachevalue

### 5.38.3 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	07e86e01-e6ac-4f29-8a5e-30780af5dd95

## 5.39. t2mpocFlow

Path: src\main\mule\t2mpoc.xml

Type: flow

Components: 4

### 5.39.1 http:listener

Attribute	Value
doc:name	Listener
path	/t2mpoc
doc:id	c33a801b-02d2-4269-8d2c-0b618f845ecd
config-ref	HTTP_Listener_config

### 5.39.2 ee:transform

Attribute	Value
doc:name	Transform Message
doc:id	a59fc168-3e67-4886-8a6d-e7ca68ad95d8

## 6. Mule Sub-Flows

No sub-flows found

## 7. DataWeave Files

No DataWeave files found

## 8. Other Resources

File Name	Relative Path
home.md	exchange-docs\home.md
addparentpom.html	src\main\resources\web\addparentpom.html
apipltvalidation.html	src\main\resources\web\apipltvalidation.html
apiratelimitdata.html	src\main\resources\web\apiratelimitdata.html
apireviewsummary.html	src\main\resources\web\apireviewsummary.html
compareapiresponses.html	src\main\resources\web\compareapiresponses.html
compareresponseshome.html	src\main\resources\web\compareresponseshome.html
devtrackerloaded.html	src\main\resources\web\devtrackerloaded.html
duplicatepltentries.html	src\main\resources\web\duplicatepltentries.html
errorresponse.html	src\main\resources\web\errorresponse.html
exceptionapproved.html	src\main\resources\web\exceptionapproved.html
exceptionrejected.html	src\main\resources\web\exceptionrejected.html
exceptionresponse.html	src\main\resources\web\exceptionresponse.html
existingpltentries.html	src\main\resources\web\existingpltentries.html
fetchfailures.html	src\main\resources\web\fetchfailures.html
fetchpltdata.html	src\main\resources\web\fetchpltdata.html
getratelimits.html	src\main\resources\web\getratelimits.html
mqconsumeerror.html	src\main\resources\web\mqconsumeerror.html
mqconsumer.html	src\main\resources\web\mqconsumer.html
mqconsumesuccess.html	src\main\resources\web\mqconsumesuccess.html
mulemqtrigger.html	src\main\resources\web\mulemqtrigger.html
ongoingplt.html	src\main\resources\web\ongoingplt.html
parentpomresponse.html	src\main\resources\web\parentpomresponse.html
PLT Request error.html	src\main\resources\web\PLT Request error.html
pltplanning.html	src\main\resources\web\pltplanning.html
pltrequestsubmitted.html	src\main\resources\web\pltrequestsubmitted.html
pltsummary.html	src\main\resources\web\pltsummary.html
ratelimitexportsent.html	src\main\resources\web\ratelimitexportsent.html
requestplt.html	src\main\resources\web\requestplt.html
requestpltstart.html	src\main\resources\web\requestpltstart.html
reviewexceptions.html	src\main\resources\web\reviewexceptions.html
t2mdailyreviewreport.html	src\main\resources\web\t2mdailyreviewreport.html
t2mtools.html	src\main\resources\web\t2mtools.html
trackerload.html	src\main\resources\web\trackerload.html
triggerresponse.html	src\main\resources\web\triggerresponse.html
bbt-internal-certs.jks	src\main\resources\bbt-internal-certs.jks
eapi-mule-lastmile.truist-tst.com.jks	src\main\resources\eapi-mule-lastmile.truist-tst.com.jks
eapi-mule-mq-client-cert-np.jks	src\main\resources\eapi-mule-mq-client-cert-np.jks
multls.mq.tst.truist.com.jks	src\main\resources\multls.mq.tst.truist.com.jks
T2M Wave0 Development Tracker.xlsx	src\main\resources\T2M Wave0 Development Tracker.xlsx
README.md	README.md

## 9. References

References section is placeholder for any reference details team requires. It can have team playbook re