

Project Analysis Report

t2mpoc

Comprehensive analysis and documentation of Mule project configuration, flows, and resources

Generated: December 20, 2025 22:54:39 CST

Table of Contents

| | |
|---|----|
| 1. Project Information | 3 |
| 1.1 Project Details | 3 |
| 1.2 POM Details | 3 |
| 1.3 Mule-artifact.json | 4 |
| 1.4 Release-info.json | 4 |
| 2. Flow Diagrams | 5 |
| 2.1 Mule Project Flow Integration | 5 |
| 2.1.1 AddException | 5 |
| 2.1.2 PLTFlow | 5 |
| 2.1.3 PLTFlow1 | 6 |
| 2.1.4 PLTFlow2 | 6 |
| 2.1.5 PLTFlow3 | 7 |
| 2.1.6 PLTFlow4 | 8 |
| 2.1.7 PLTFlow5 | 8 |
| 2.1.8 PLTFlow6 | 9 |
| 2.1.9 PLTFlow7 | 10 |
| 2.1.10 PLTLive | 11 |
| 2.1.11 PLTLiveStart | 11 |
| 2.1.12 PLTUpdate | 12 |
| 2.1.13 ReviewSummary | 12 |
| 2.1.14 apireviewexceptionsFlow | 13 |
| 2.1.15 apireviewexceptionsFlow1 | 13 |
| 2.1.16 apireviewexceptionsFlow2 | 13 |
| 2.1.17 apireviewexceptionsFlow3 | 14 |
| 2.1.18 devtrackerreadFlow | 14 |
| 2.1.19 devtrackerreadFlow1 | 15 |
| 2.1.20 devtrackerreadFlow2 | 15 |
| 2.1.21 devtrackerreadFlow3 | 16 |
| 2.1.22 interceptcicscallsFlow | 16 |
| 2.1.23 interceptcicscallsFlow1 | 17 |
| 2.1.24 interceptcicscallsFlow2 | 18 |
| 2.1.25 mulemqtriggerFlow | 18 |
| 2.1.26 mulemqtriggerFlow1 | 20 |
| 2.1.27 mulemqtriggerFlow2 | 20 |
| 2.1.28 mulemqtriggerFlow3 | 22 |

| | |
|---------------------------------|----|
| 2.1.29 mulemqtriggerhome | 23 |
| 2.1.30 parentpomconversionFlow | 23 |
| 2.1.31 parentpomconversionFlow1 | 24 |
| 2.1.32 responsevalidatorFlow | 24 |
| 2.1.33 responsevalidatorFlow1 | 25 |
| 2.1.34 t2m_pocFlow | 26 |
| 2.1.35 t2m_pocFlow1 | 26 |
| 2.1.36 t2mdbexportFlow | 26 |
| 2.1.37 t2mdbexportFlow1 | 27 |
| 2.1.38 t2mdbexportFlow2 | 27 |
| 2.1.39 t2mpocFlow | 27 |
| 2.2 Mule Project Flow Diagram | 29 |
| 2.2.1 AddException | 29 |
| 2.2.2 PLTFlow | 30 |
| 2.2.3 PLTFlow1 | 31 |
| 2.2.4 PLTFlow2 | 31 |
| 2.2.5 PLTFlow3 | 32 |
| 2.2.6 PLTFlow4 | 34 |
| 2.2.7 PLTFlow5 | 34 |
| 2.2.8 PLTFlow6 | 36 |
| 2.2.9 PLTFlow7 | 36 |
| 2.2.10 PLTLive | 38 |
| 2.2.11 PLTLiveStart | 39 |
| 2.2.12 PLTUpdate | 39 |
| 2.2.13 ReviewSummary | 41 |
| 2.2.14 apireviewexceptionsFlow | 42 |
| 2.2.15 apireviewexceptionsFlow1 | 42 |
| 2.2.16 apireviewexceptionsFlow2 | 43 |
| 2.2.17 apireviewexceptionsFlow3 | 44 |
| 2.2.18 devtrackerreadFlow | 44 |
| 2.2.19 devtrackerreadFlow1 | 46 |
| 2.2.20 devtrackerreadFlow2 | 46 |
| 2.2.21 devtrackerreadFlow3 | 47 |
| 2.2.22 interceptcicscallsFlow | 47 |
| 2.2.23 interceptcicscallsFlow1 | 49 |
| 2.2.24 interceptcicscallsFlow2 | 49 |
| 2.2.25 mulemqtriggerFlow | 50 |

| | |
|---|----|
| 2.2.26 mulemqtriggerFlow1 | 52 |
| 2.2.27 mulemqtriggerFlow2 | 52 |
| 2.2.28 mulemqtriggerFlow3 | 54 |
| 2.2.29 mulemqtriggerhome | 54 |
| 2.2.30 parentpomconversionFlow | 54 |
| 2.2.31 parentpomconversionFlow1 | 55 |
| 2.2.32 responsevalidatorFlow | 56 |
| 2.2.33 responsevalidatorFlow1 | 57 |
| 2.2.34 t2m_pocFlow | 57 |
| 2.2.35 t2m_pocFlow1 | 57 |
| 2.2.36 t2mdbexportFlow | 58 |
| 2.2.37 t2mdbexportFlow1 | 60 |
| 2.2.38 t2mdbexportFlow2 | 61 |
| 2.2.39 t2mpocFlow | 61 |
| 3. Global Configuration | 62 |
| 3.1 src\main\resources\mule-app.properties | 62 |
| 3.2 src\main\resources\secure.properties | 65 |
| 4. Connector Configurations | 66 |
| 4.1. ATDV (ibm-mq:config) | 66 |
| 4.1.1 ibm-mq:connection | 66 |
| 4.2. Batch (ibm-mq:config) | 66 |
| 4.2.1 ibm-mq:connection | 66 |
| 4.3. DRL (ibm-mq:config) | 66 |
| 4.3.1 ibm-mq:connection | 67 |
| 4.4. Database-Connection (db:config) | 67 |
| 4.4.1 db:generic-connection | 67 |
| 4.5. Email_SMTP (email:smtp-config) | 67 |
| 4.5.1 email:smtp-connection | 67 |
| 4.6. File_Config (file:config) | 68 |
| 4.7. GetCredential (http:request-config) | 68 |
| 4.7.1 http:request-connection | 68 |
| 4.8. HTTPRVMule (http:request-config) | 68 |
| 4.8.1 http:request-connection | 68 |
| 4.9. HTTPResponseCompare (http:request-config) | 69 |
| 4.9.1 http:request-connection | 69 |
| 4.10. HTTP_Listener_config (http:listener-config) | 69 |
| 4.10.1 http:listener-connection | 69 |

| | |
|---|----|
| 4.11. HTTP_Request_configuration (http:request-config) | 70 |
| 4.11.1 http:request-connection | 71 |
| 4.12. IBF (ibm-mq:config) | 71 |
| 4.12.1 ibm-mq:connection | 71 |
| 4.13. ITE (ibm-mq:config) | 71 |
| 4.13.1 ibm-mq:connection | 71 |
| 4.14. MNE (ibm-mq:config) | 71 |
| 4.14.1 ibm-mq:connection | 72 |
| 4.15. ObjectStore_Config (os:config) | 72 |
| 4.16. PITE (ibm-mq:config) | 72 |
| 4.16.1 ibm-mq:connection | 72 |
| 4.17. PLTChecklistupload (http:request-config) | 72 |
| 4.17.1 http:request-connection | 73 |
| 4.18. Policy_TLS_Context (tls:context) | 73 |
| 4.18.1 tls:trust-store | 73 |
| 4.18.2 tls:key-store | 73 |
| 4.19. Secure_Properties_Config (secure-properties:config) | 73 |
| 4.20. TDV (ibm-mq:config) | 74 |
| 4.20.1 ibm-mq:connection | 74 |
| 4.21. TLS_Context (tls:context) | 74 |
| 4.21.1 tls:key-store | 74 |
| 4.22. TLS_ContextRV (tls:context) | 74 |
| 4.22.1 tls:trust-store | 75 |
| 4.23. TPP (ibm-mq:config) | 75 |
| 4.23.1 ibm-mq:connection | 75 |
| 4.24. TRN (ibm-mq:config) | 75 |
| 4.24.1 ibm-mq:connection | 75 |
| 4.25. api-gateway:autodiscovery (api-gateway:autodiscovery) | 75 |
| 4.26. bbtnetconnection (http:request-config) | 76 |
| 4.26.1 http:request-connection | 76 |
| 5. Mule Flows | 77 |
| 5.1 apireviewexceptionsFlow | 77 |
| 5.1.1 http:listener | 77 |
| 5.1.2 ee:transform | 77 |
| 5.1.3 try | 77 |
| 5.1.4 parse-template | 77 |
| 5.2 AddException | 77 |

| | |
|------------------------------------|----|
| 5.2.1 http:listener | 79 |
| 5.2.2 ee:transform | 79 |
| 5.2.3 try | 79 |
| 5.2.4 try | 79 |
| 5.2.5 parse-template | 79 |
| 5.3 apireviewexceptionsFlow1 | 79 |
| 5.3.1 http:listener | 79 |
| 5.3.2 parse-template | 80 |
| 5.4 apireviewexceptionsFlow3 | 80 |
| 5.4.1 http:listener | 80 |
| 5.4.2 ee:transform | 80 |
| 5.4.3 try | 80 |
| 5.4.4 parse-template | 80 |
| 5.5 apireviewexceptionsFlow2 | 81 |
| 5.5.1 http:listener | 81 |
| 5.5.2 ee:transform | 81 |
| 5.5.3 db:select | 81 |
| 5.5.4 ee:transform | 81 |
| 5.5.5 ee:transform | 81 |
| 5.5.6 parse-template | 81 |
| 5.6 devtrackerreadFlow | 82 |
| 5.6.1 http:listener | 82 |
| 5.6.2 ee:transform | 82 |
| 5.6.3 os:retrieve | 82 |
| 5.6.4 ee:transform | 82 |
| 5.6.5 ee:transform | 82 |
| 5.6.6 foreach | 83 |
| 5.6.7 choice | 83 |
| 5.7 devtrackerreadFlow1 | 83 |
| 5.7.1 http:listener | 83 |
| 5.7.2 parse-template | 83 |
| 5.8 devtrackerreadFlow2 | 83 |
| 5.8.1 http:listener | 83 |
| 5.8.2 file:read | 84 |
| 5.8.3 ee:transform | 84 |
| 5.8.4 os:store | 84 |
| 5.8.5 parse-template | 84 |

| | |
|------------------------------------|----|
| 5.9 devtrackerreadFlow3 | 85 |
| 5.9.1 http:listener | 85 |
| 5.9.2 parse-template | 86 |
| 5.10 interceptcicscallsFlow | 86 |
| 5.10.1 http:listener | 86 |
| 5.10.2 set-payload | 86 |
| 5.10.3 ee:transform | 86 |
| 5.10.4 logger | 86 |
| 5.10.5 ee:transform | 87 |
| 5.10.6 try | 87 |
| 5.10.7 db:insert | 87 |
| 5.10.8 logger | 87 |
| 5.10.9 ee:transform | 88 |
| 5.11 interceptcicscallsFlow1 | 88 |
| 5.11.1 http:listener | 88 |
| 5.11.2 ee:transform | 89 |
| 5.11.3 db:select | 89 |
| 5.11.4 ee:transform | 89 |
| 5.11.5 parse-template | 89 |
| 5.12 interceptcicscallsFlow2 | 89 |
| 5.12.1 http:listener | 89 |
| 5.12.2 parse-template | 90 |
| 5.13 mulemqtriggerFlow | 90 |
| 5.13.1 http:listener | 90 |
| 5.13.2 ee:transform | 90 |
| 5.13.3 try | 90 |
| 5.14 mulemqtriggerhome | 90 |
| 5.14.1 http:listener | 90 |
| 5.14.2 parse-template | 91 |
| 5.15 mulemqtriggerFlow1 | 91 |
| 5.15.1 http:listener | 91 |
| 5.15.2 set-variable | 91 |
| 5.15.3 ibm-mq:consume | 91 |
| 5.15.4 logger | 91 |
| 5.16 mulemqtriggerFlow2 | 92 |
| 5.16.1 http:listener | 92 |
| 5.16.2 ee:transform | 92 |

| | |
|-------------------------------------|----|
| 5.16.3 try | 93 |
| 5.17 mulemqtriggerFlow3 | 93 |
| 5.17.1 http:listener | 93 |
| 5.17.2 parse-template | 94 |
| 5.18 parentpomconversionFlow | 94 |
| 5.18.1 http:listener | 94 |
| 5.18.2 ee:transform | 94 |
| 5.18.3 ee:transform | 94 |
| 5.18.4 foreach | 94 |
| 5.18.5 set-payload | 95 |
| 5.18.6 ee:transform | 95 |
| 5.18.7 parse-template | 95 |
| 5.19 parentpomconversionFlow1 | 95 |
| 5.19.1 http:listener | 95 |
| 5.19.2 parse-template | 95 |
| 5.20 PLTFlow | 96 |
| 5.20.1 http:listener | 96 |
| 5.20.2 choice | 96 |
| 5.20.3 ee:transform | 96 |
| 5.20.4 ee:transform | 96 |
| 5.20.5 ee:transform | 96 |
| 5.20.6 parse-template | 96 |
| 5.21 PLTUpdate | 97 |
| 5.21.1 http:listener | 97 |
| 5.21.2 ee:transform | 97 |
| 5.21.3 db:select | 97 |
| 5.21.4 ee:transform | 97 |
| 5.21.5 db:update | 97 |
| 5.21.6 db:select | 98 |
| 5.21.7 ee:transform | 98 |
| 5.21.8 ee:transform | 98 |
| 5.21.9 ee:transform | 98 |
| 5.21.10 parse-template | 98 |
| 5.22 PLTFlow2 | 98 |
| 5.22.1 http:listener | 98 |
| 5.22.2 ee:transform | 99 |
| 5.22.3 db:select | 99 |

| | |
|-----------------------------|-----|
| 5.22.4 ee:transform | 100 |
| 5.22.5 ee:transform | 100 |
| 5.22.6 ee:transform | 100 |
| 5.22.7 parse-template | 100 |
| 5.23 PLTFlow1 | 101 |
| 5.23.1 http:listener | 101 |
| 5.23.2 parse-template | 101 |
| 5.24 PLTFlow3 | 101 |
| 5.24.1 http:listener | 101 |
| 5.24.2 ee:transform | 101 |
| 5.24.3 db:insert | 101 |
| 5.24.4 db:select | 102 |
| 5.24.5 ee:transform | 102 |
| 5.24.6 ee:transform | 102 |
| 5.24.7 ee:transform | 102 |
| 5.24.8 parse-template | 102 |
| 5.24.9 error-handler | 102 |
| 5.25 PLTFlow4 | 102 |
| 5.25.1 http:listener | 102 |
| 5.25.2 file:read | 103 |
| 5.25.3 ee:transform | 103 |
| 5.25.4 foreach | 103 |
| 5.26 PLTFlow5 | 103 |
| 5.26.1 http:listener | 103 |
| 5.26.2 ee:transform | 103 |
| 5.26.3 choice | 104 |
| 5.27 PLTFlow6 | 104 |
| 5.27.1 http:listener | 104 |
| 5.27.2 parse-template | 104 |
| 5.28 PLTFlow7 | 104 |
| 5.28.1 http:listener | 104 |
| 5.28.2 ee:transform | 105 |
| 5.28.3 db:select | 105 |
| 5.28.4 ee:transform | 105 |
| 5.28.5 try | 105 |
| 5.28.6 ee:transform | 105 |
| 5.28.7 try | 105 |

| | |
|-----------------------------------|-----|
| 5.28.8 try | 106 |
| 5.28.9 ee:transform | 107 |
| 5.28.10 ee:transform | 107 |
| 5.28.11 http:request | 107 |
| 5.28.12 ee:transform | 107 |
| 5.28.13 ee:transform | 107 |
| 5.28.14 http:request | 107 |
| 5.28.15 ee:transform | 107 |
| 5.28.16 parse-template | 108 |
| 5.29 PLTLive | 108 |
| 5.29.1 http:listener | 108 |
| 5.29.2 choice | 108 |
| 5.29.3 choice | 108 |
| 5.29.4 db:select | 108 |
| 5.29.5 ee:transform | 108 |
| 5.29.6 ee:transform | 109 |
| 5.29.7 foreach | 109 |
| 5.29.8 parse-template | 109 |
| 5.30 PLTLiveStart | 109 |
| 5.30.1 http:listener | 109 |
| 5.30.2 parse-template | 109 |
| 5.31 responsevalidatorFlow | 110 |
| 5.31.1 http:listener | 110 |
| 5.31.2 ee:transform | 110 |
| 5.31.3 ee:transform | 110 |
| 5.31.4 ee:transform | 110 |
| 5.31.5 foreach | 110 |
| 5.31.6 ee:transform | 110 |
| 5.31.7 foreach | 111 |
| 5.31.8 ee:transform | 111 |
| 5.31.9 try | 111 |
| 5.31.10 try | 111 |
| 5.31.11 parse-template | 111 |
| 5.32 responsevalidatorFlow1 | 111 |
| 5.32.1 http:listener | 111 |
| 5.32.2 parse-template | 112 |
| 5.33 t2mdbexportFlow | 112 |

| | |
|------------------------------|-----|
| 5.33.1 scheduler | 113 |
| 5.33.2 logger | 113 |
| 5.33.3 db:select | 113 |
| 5.33.4 ee:transform | 113 |
| 5.33.5 ee:transform | 114 |
| 5.33.6 set-payload | 114 |
| 5.33.7 ee:transform | 114 |
| 5.33.8 foreach | 114 |
| 5.33.9 ee:transform | 114 |
| 5.33.10 ee:transform | 114 |
| 5.33.11 ee:transform | 114 |
| 5.33.12 ee:transform | 115 |
| 5.33.13 ee:transform | 115 |
| 5.33.14 ee:transform | 115 |
| 5.33.15 email:send | 115 |
| 5.34 t2mdbexportFlow1 | 115 |
| 5.34.1 http:listener | 115 |
| 5.34.2 db:select | 116 |
| 5.34.3 ee:transform | 116 |
| 5.34.4 ee:transform | 116 |
| 5.34.5 set-payload | 116 |
| 5.34.6 ee:transform | 116 |
| 5.34.7 foreach | 116 |
| 5.34.8 ee:transform | 116 |
| 5.34.9 ee:transform | 117 |
| 5.34.10 ee:transform | 117 |
| 5.34.11 ee:transform | 117 |
| 5.34.12 ee:transform | 117 |
| 5.34.13 ee:transform | 117 |
| 5.34.14 email:send | 117 |
| 5.34.15 parse-template | 117 |
| 5.35 ReviewSummary | 118 |
| 5.35.1 http:listener | 118 |
| 5.35.2 ee:transform | 118 |
| 5.35.3 db:select | 118 |
| 5.35.4 choice | 118 |
| 5.35.5 ee:transform | 118 |

| | |
|------------------------------|-----|
| 5.35.6 set-variable | 119 |
| 5.35.7 ee:transform | 120 |
| 5.35.8 ee:transform | 120 |
| 5.35.9 ee:transform | 120 |
| 5.35.10 ee:transform | 120 |
| 5.35.11 ee:transform | 120 |
| 5.35.12 ee:transform | 120 |
| 5.35.13 ee:transform | 120 |
| 5.35.14 ee:transform | 121 |
| 5.35.15 ee:transform | 121 |
| 5.35.16 parse-template | 121 |
| 5.36 t2mdbexportFlow2 | 121 |
| 5.36.1 http:listener | 121 |
| 5.36.2 parse-template | 121 |
| 5.37 t2m_pocFlow | 122 |
| 5.37.1 http:listener | 122 |
| 5.37.2 ee:cache | 122 |
| 5.38 t2m_pocFlow1 | 122 |
| 5.38.1 http:listener | 122 |
| 5.38.2 os:retrieve | 122 |
| 5.38.3 ee:transform | 123 |
| 5.39 t2mpocFlow | 123 |
| 5.39.1 http:listener | 123 |
| 5.39.2 ee:transform | 123 |
| 6. Mule Sub-Flows | 124 |
| 7. DataWeave Files | 125 |
| 8. Other Resources | 126 |
| 9. References | 127 |

1. Project Information

1.1 Project Details

| Property | Value |
|--------------|---|
| Project Name | t2mpoc |
| Version | 1.0.0 |
| Project Path | C:\raks\apiguard\raksanalyzer\.\testdata\t2mpoc |

1.2 POM Details

Path: pom.xml

1.2.1 Basic Information

| Property | Value |
|---------------|---|
| Model Version | 4.0.0 |
| Group ID | com.truist.eapi01 |
| Artifact ID | t2mpoc |
| Version | 1.0.0 |
| Packaging | mule-application |
| Name | t2mpoc-1.0.0-mule-application |
| Description | t2mpoc api is created for t2m related POCs. |

1.2.2 Properties

| Key | Value |
|----------------------------------|----------------|
| mule.maven.plugin.version | 4.0.0 |
| munit.version | 3.0.0 |
| project.build.sourceEncoding | UTF-8 |
| app.runtime | 4.4.0-20240219 |
| project.reporting.outputEncoding | UTF-8 |
| cicd.mule.version | 4.4.0 |

1.2.3 Plugins

| Group ID | Artifact ID | Version |
|--------------------------|--------------------|-------------------------------|
| org.apache.maven.plugins | maven-clean-plugin | 3.0.0 |
| org.mule.tools.maven | mule-maven-plugin | \${mule.maven.plugin.version} |
| com.mulesoft.munit.tools | munit-maven-plugin | 3.0.0 |

1.2.4 Dependencies

| Group ID | Artifact ID | Version |
|-------------------------|---|----------------------|
| com.enterprisemath | em-utils | 4.1.1 |
| org.apache.poi | poi | 5.2.4 |
| org.apache.poi | poi-ooxml | 5.2.4 |
| org.apache.poi | poi-ooxml-schemas | 4.1.2 |
| org.eclipse.jgit | org.eclipse.jgit | 6.8.0.202311291450-r |
| org.mule.connectors | mule-http-connector | 1.9.0 |
| org.mule.connectors | mule-sockets-connector | 1.2.4 |
| org.mule.connectors | mule-objectstore-connector | 1.2.2 |
| org.mule.connectors | mule-file-connector | 1.5.2 |
| org.mule.connectors | mule-email-connector | 1.7.2 |
| org.mule.module | mule-java-module | 1.2.12 |
| org.mule.modules | mule-xml-module | 1.4.2 |
| org.mule.modules | mule-compression-module | 2.2.3 |
| com.mulesoft.modules | mule-secure-configuration-property-module | 1.2.7 |
| org.mule.connectors | mule-db-connector | 1.14.7 |
| com.microsoft.sqlserver | mssql-jdbc | 12.6.0.jre8 |
| org.antlr | antlr4-runtime | 4.9.3 |
| com.mulesoft.connectors | mule-ibm-mq-connector | 1.6.23 |
| com.ibm.mq | com.ibm.mq.allclient | 9.3.5.1 |
| org.json | json | 20240205 |

1.3 Mule-artifact.json

Path: mule-artifact.json

```
{
  "minMuleVersion": "4.4.0"
}
```

1.4 Release-info.json

Path: releaseinfo.json


```
{
  "API CI Name": "YourAPIServiceName",
  "Release Value": "YourReleaseValueHere",
  "Release Number": "RLSEXXXXXXX",
  "Project Name": "YourProjectNameHere",
  "Implementation Date": "mm/dd/ccyy HH:MM - mm/dd/ccyy HH:MM",
  "Project ID": "YourProjectIdHere",
  "RFC": "YourServiceNowChangeRequestIdHere"
}
```

2. Flow Diagrams

2.1 Mule Project Flow Integration


2.1.1 AddException

Path: src\main\mule\apireviewexceptions.xml

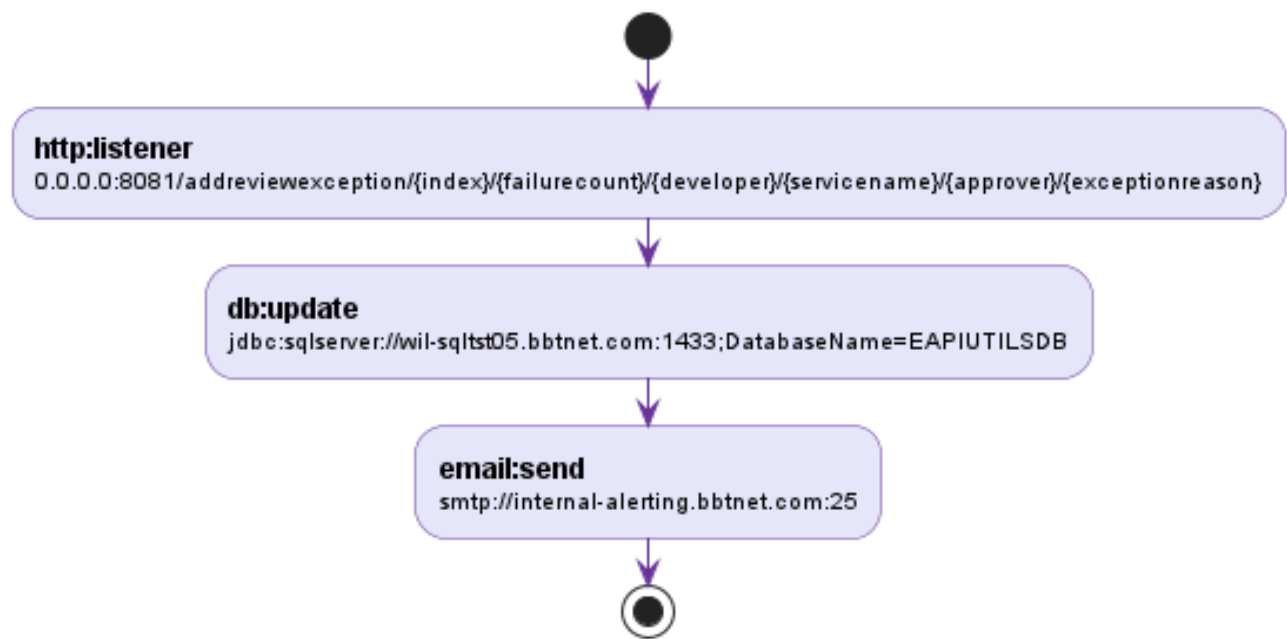


2.1.2 PLTFlow

Path: src\main\mule\PLT.xml

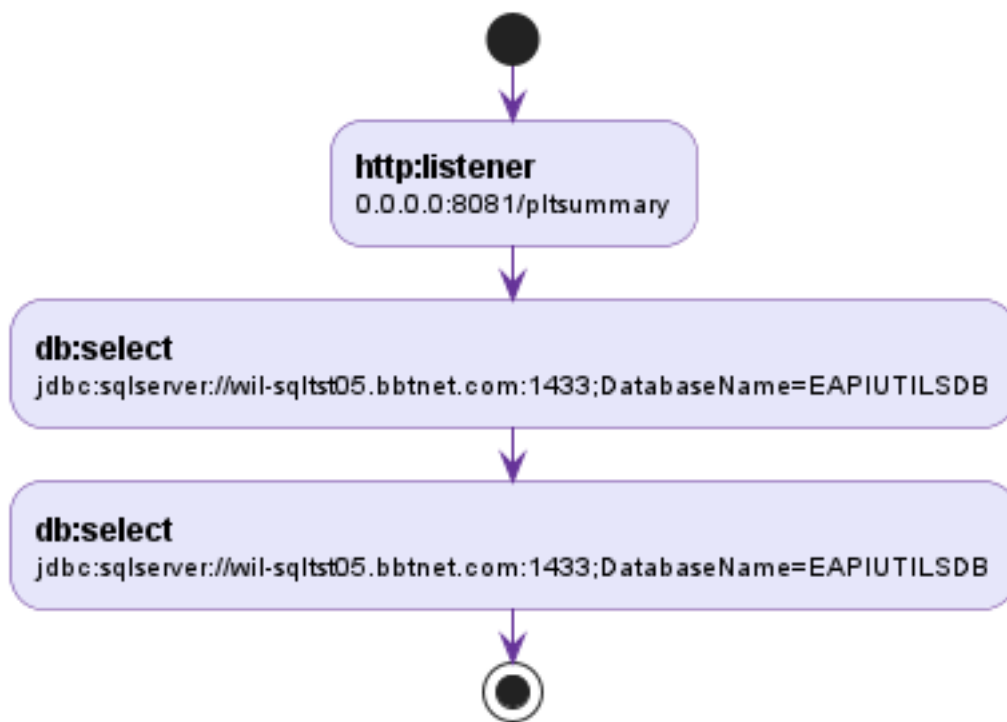


2.1.3 PLTFlow1

Path: src\main\mule\PLT.xml

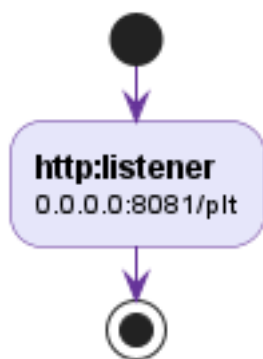


2.1.4 PLTFlow2

Path: src\main\mule\PLT.xml

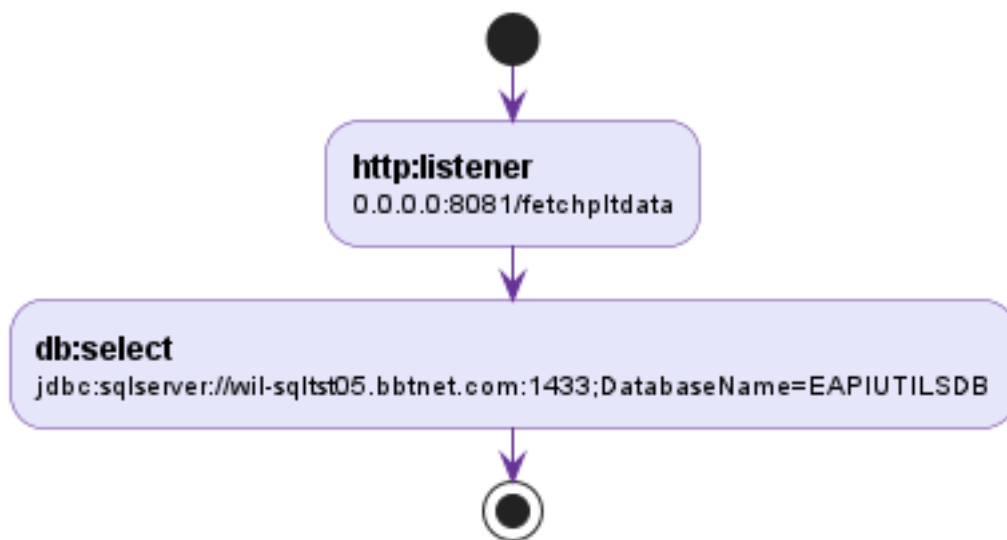


2.1.5 PLTFlow3

Path: src\main\mule\PLT.xml

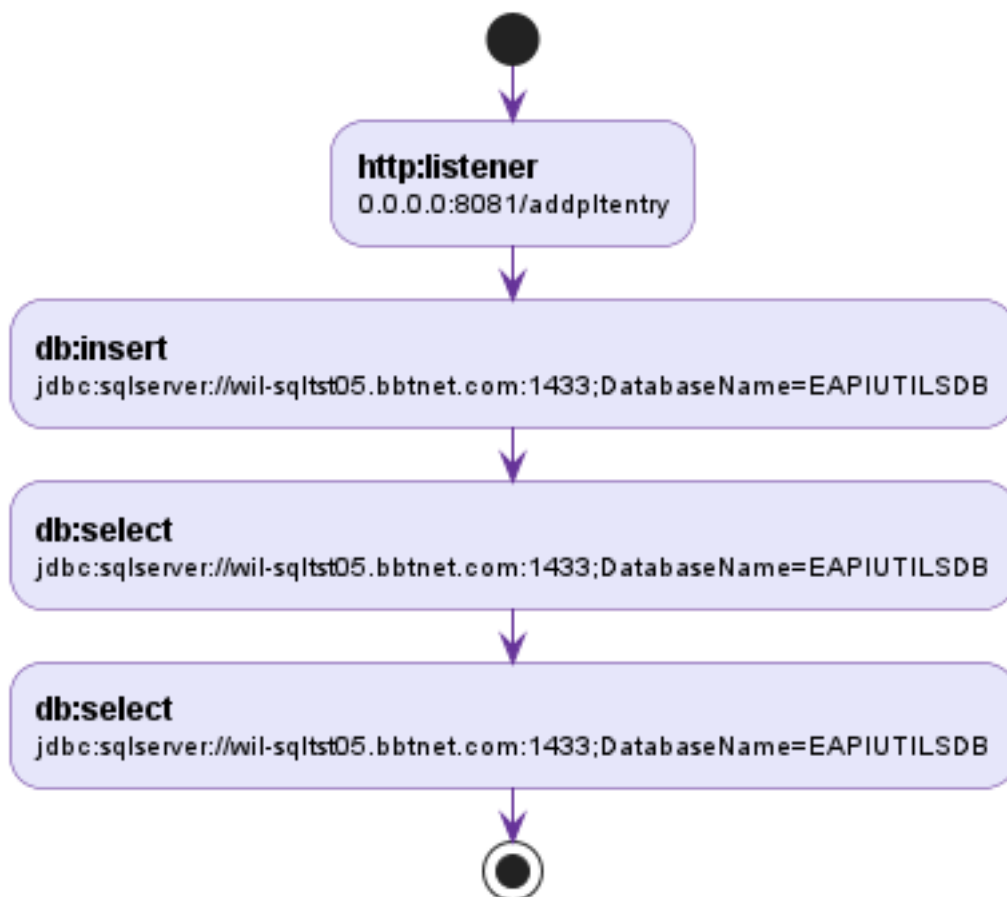


2.1.6 PLTFlow4

Path: src\main\mule\PLT.xml

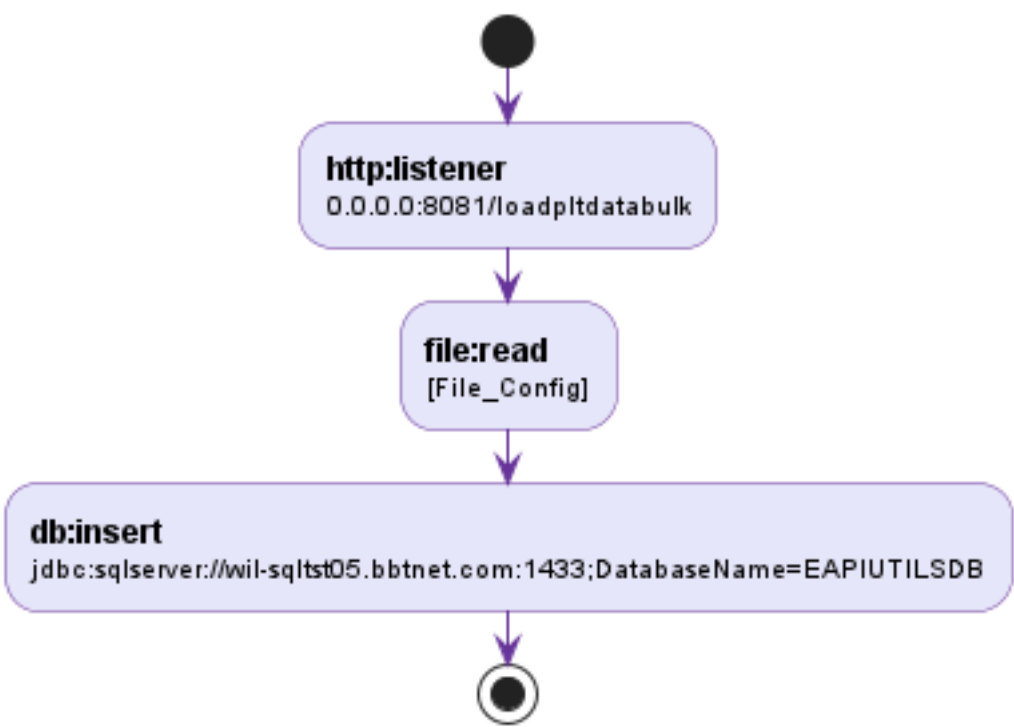


2.1.7 PLTFlow5

Path: src\main\mule\PLT.xml

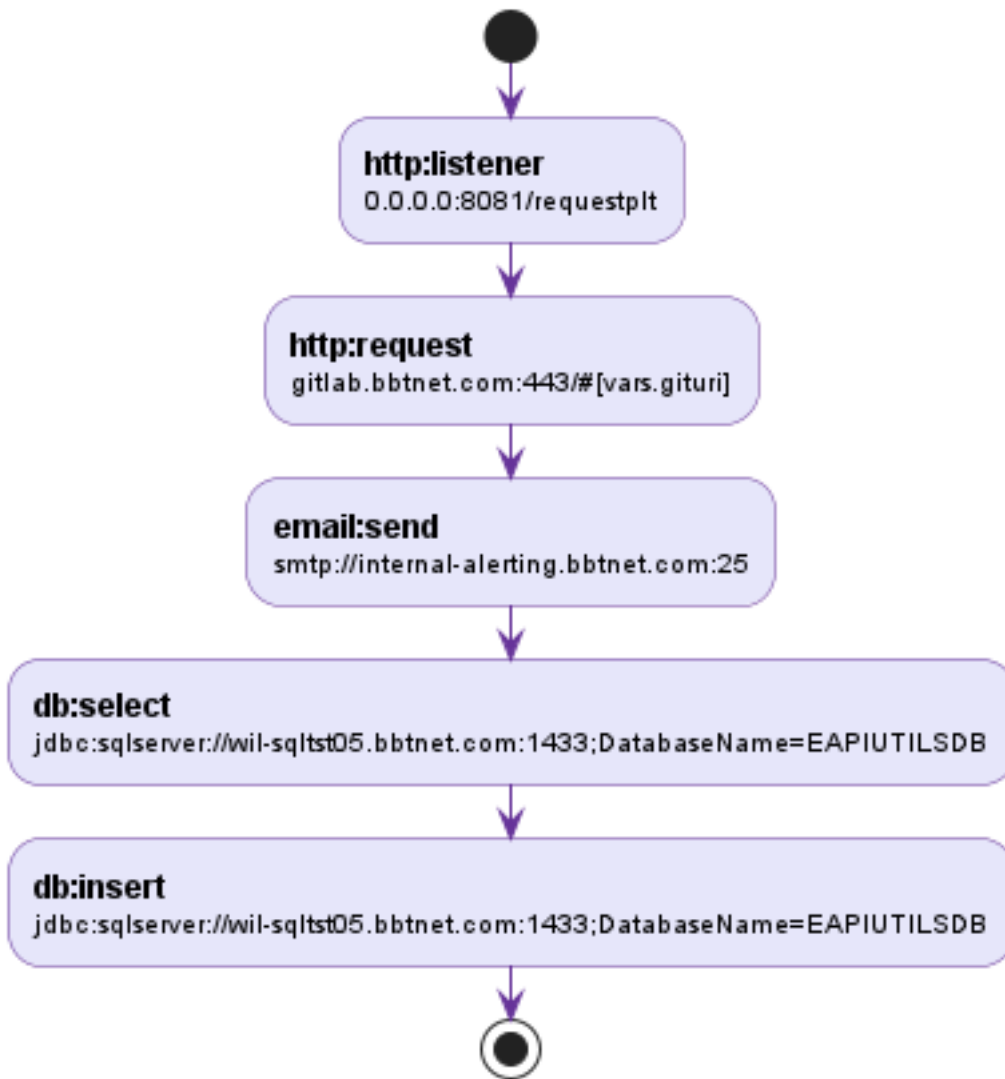


2.1.8 PLTFlow6

Path: src\main\mule\PLT.xml

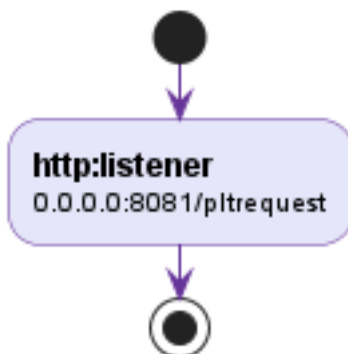


2.1.9 PLTFlow7

Path: src\main\mule\PLT.xml

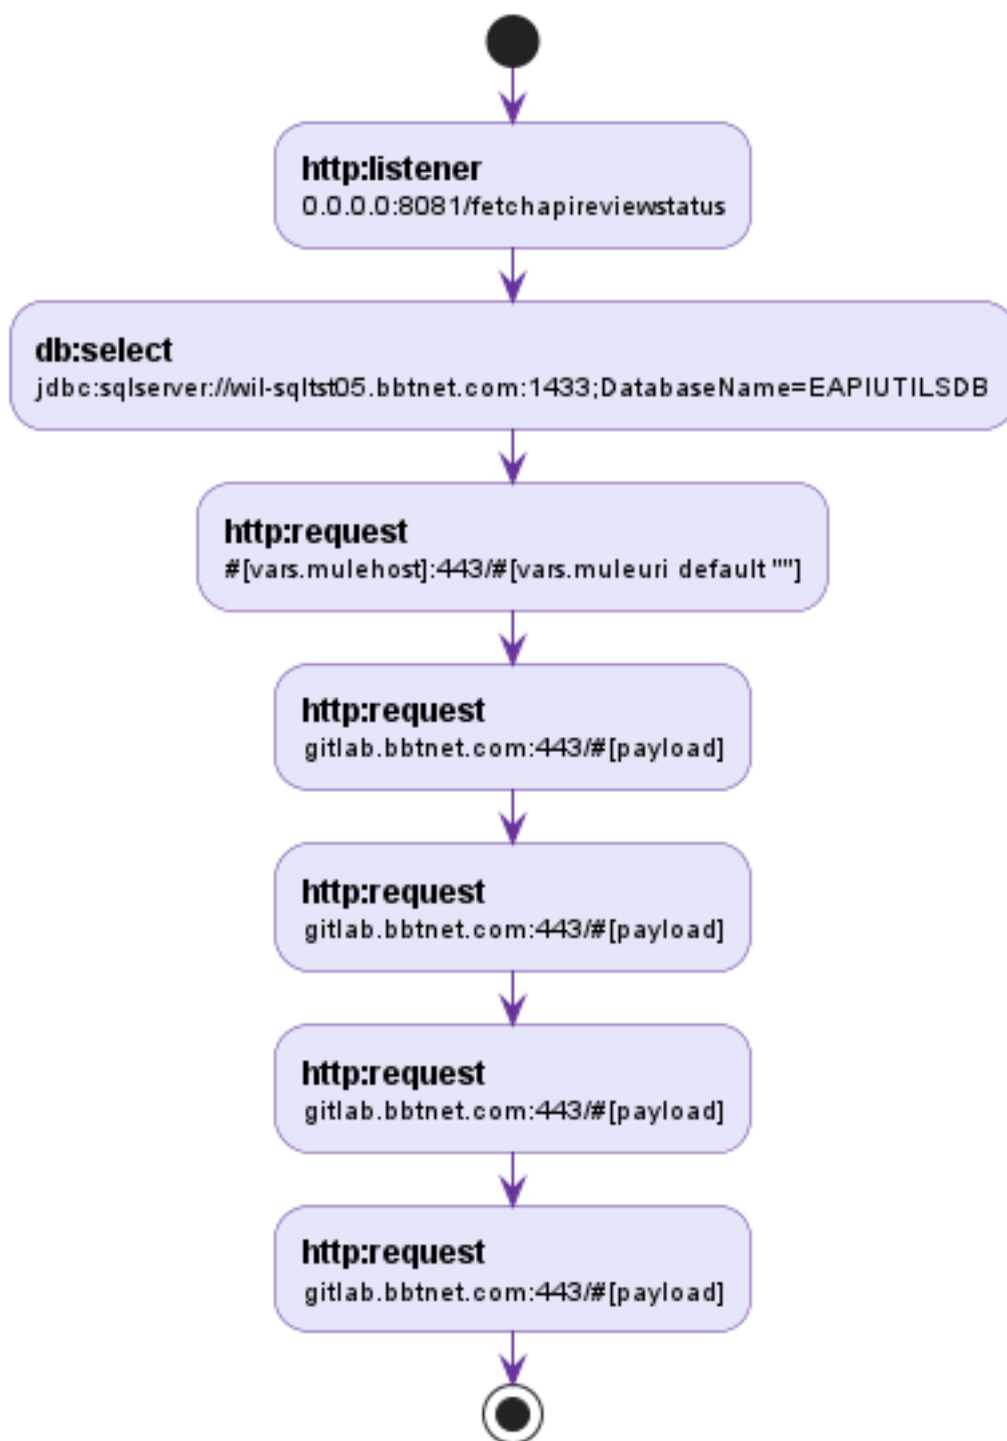


2.1.10 PLTLive

Path: src\main\mule\PLT.xml

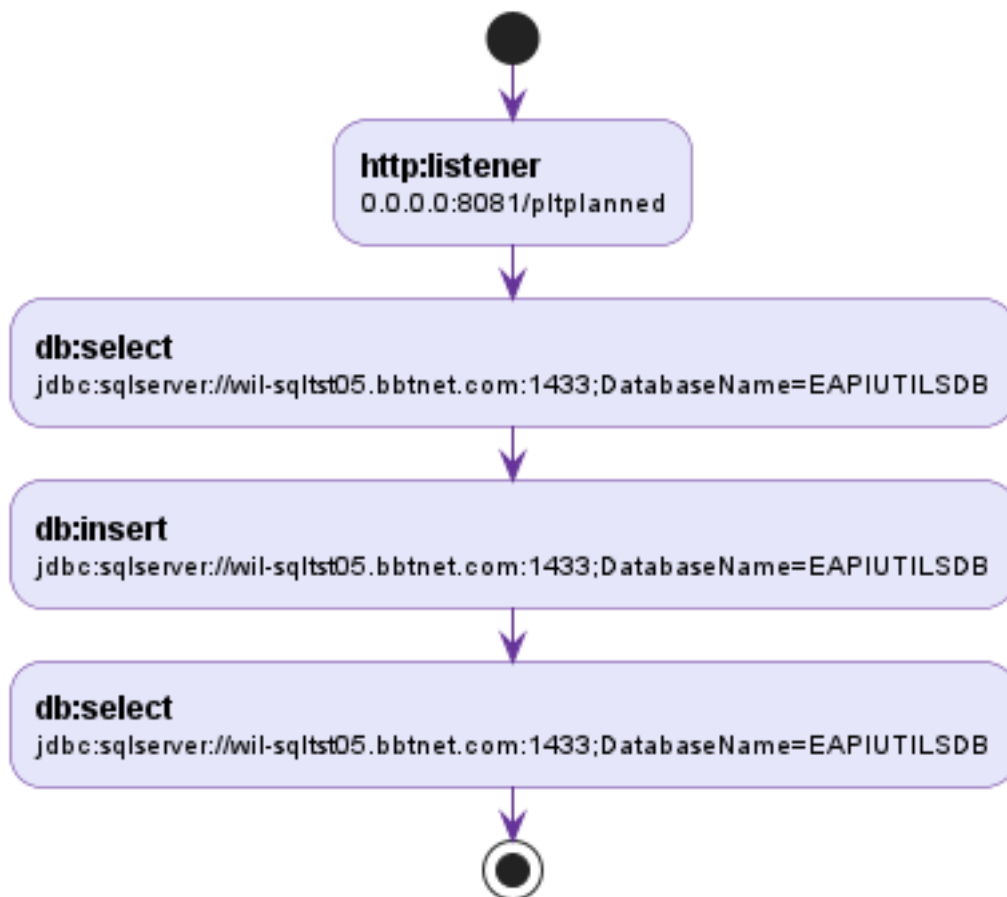


2.1.11 PLTLiveStart

Path: src\main\mule\PLT.xml

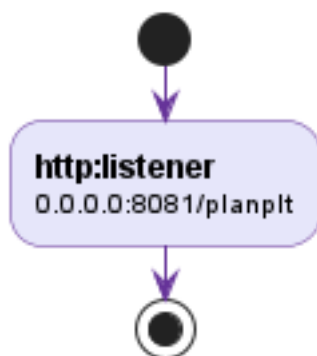


2.1.12 PLTUpdate

Path: src\main\mule\PLT.xml

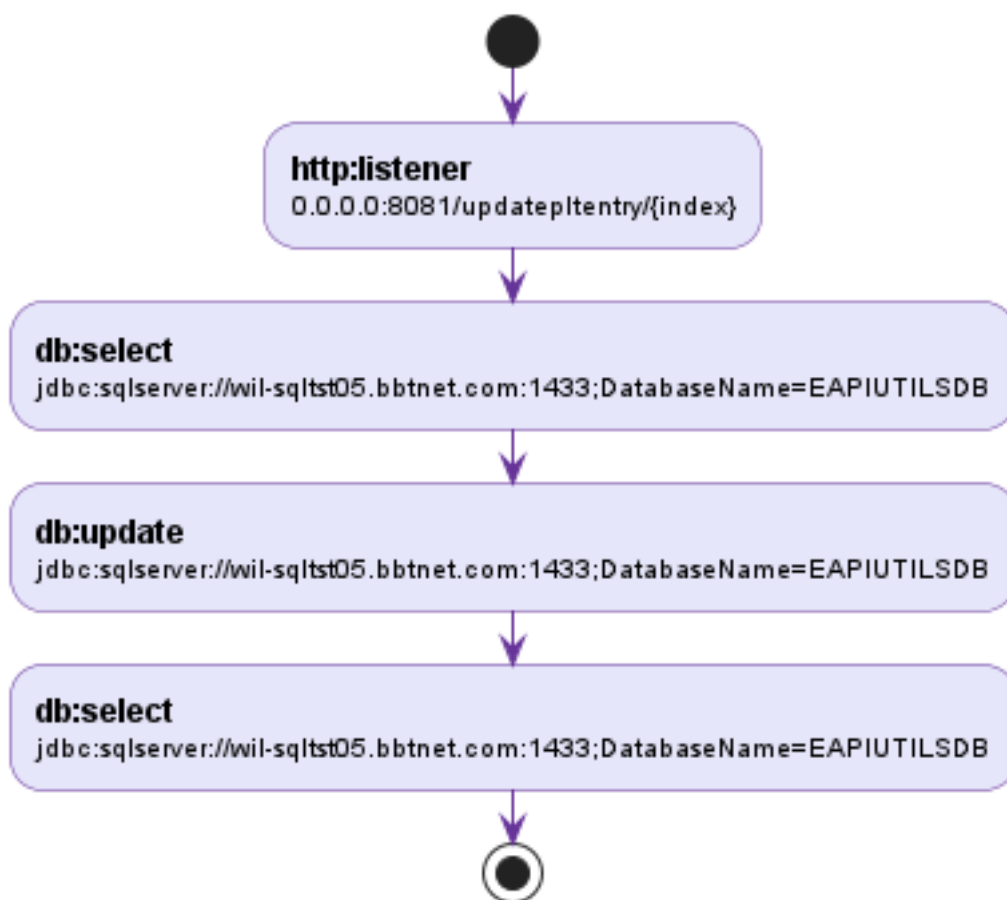


2.1.13 ReviewSummary

Path: src\main\mule\t2mdbexport.xml

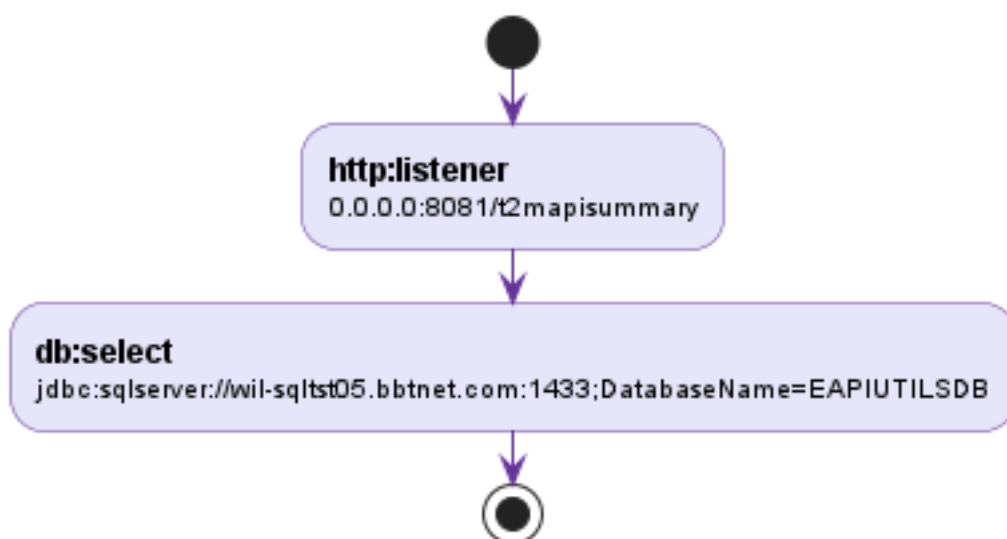


2.1.14 apireviewexceptionsFlow

Path: src\main\mule\apireviewexceptions.xml

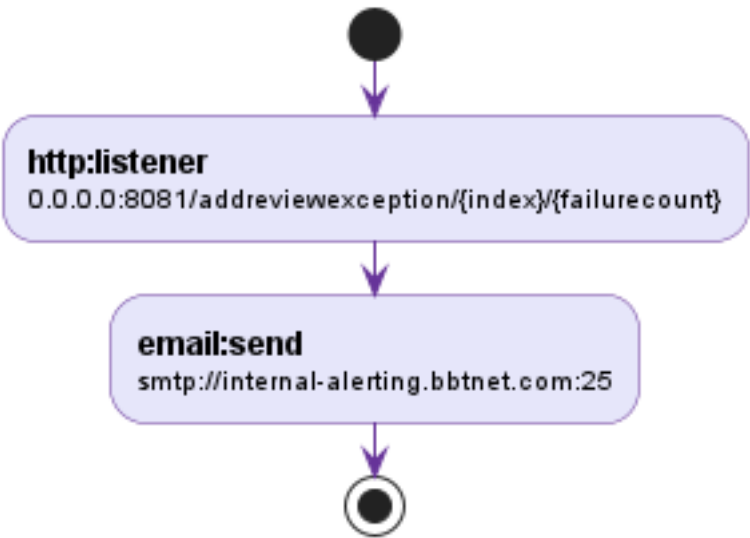


2.1.15 apireviewexceptionsFlow1

Path: src\main\mule\apireviewexceptions.xml

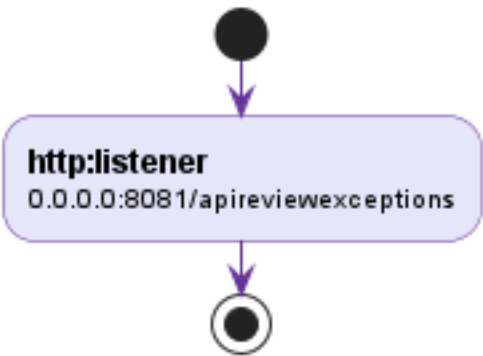


2.1.16 apireviewexceptionsFlow2

Path: src\main\mule\apireviewexceptions.xml

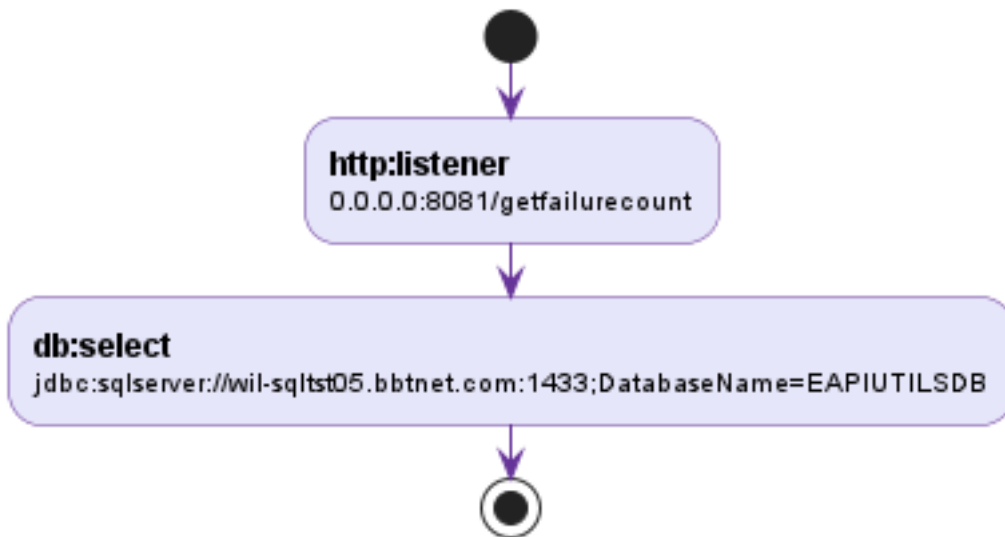


2.1.17 apireviewexceptionsFlow3

Path: src\main\mule\apireviewexceptions.xml

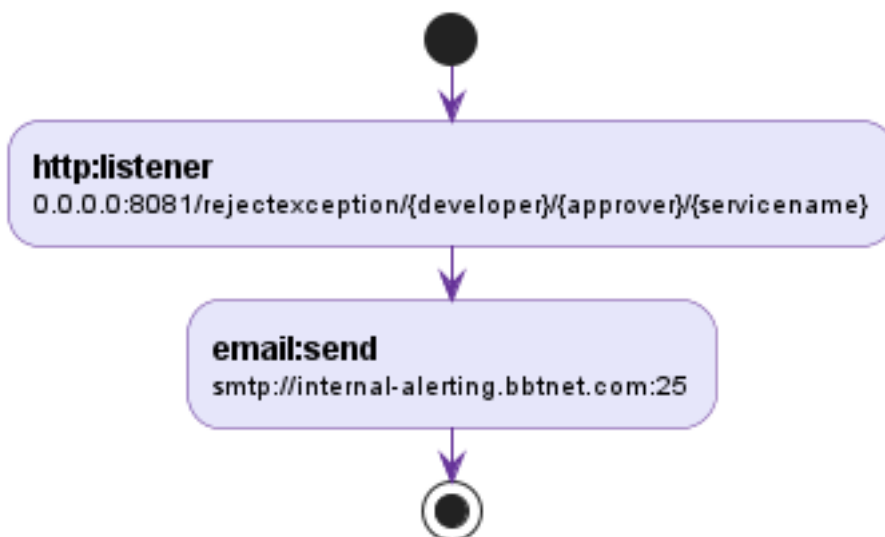


2.1.18 devtrackerreadFlow

Path: src\main\mule\devtrackerread.xml

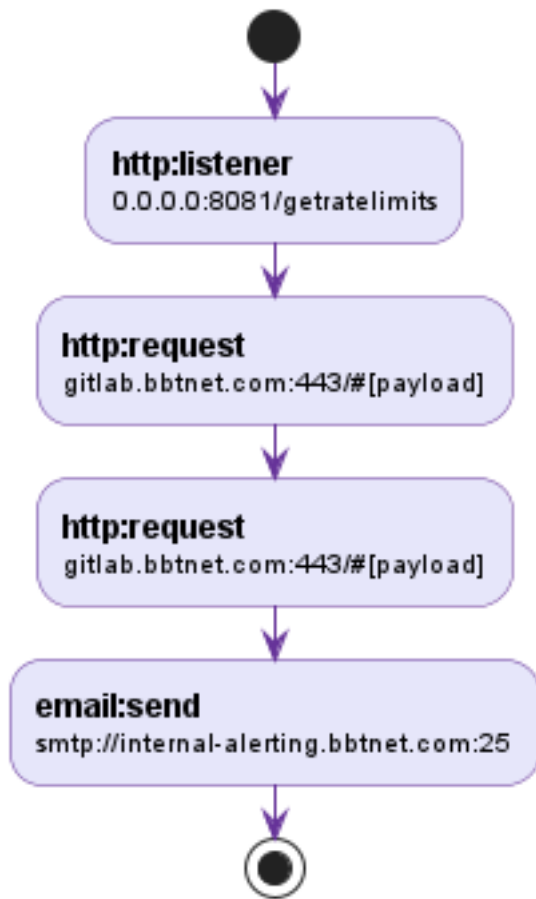


2.1.19 devtrackerreadFlow1

Path: src\main\mule\devtrackerread.xml

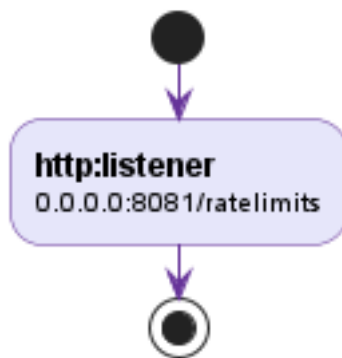


2.1.20 devtrackerreadFlow2

Path: src\main\mule\devtrackerread.xml

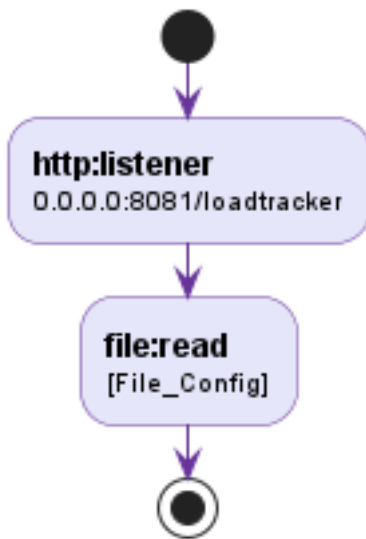


2.1.21 devtrackerreadFlow3

Path: src\main\mule\devtrackerread.xml

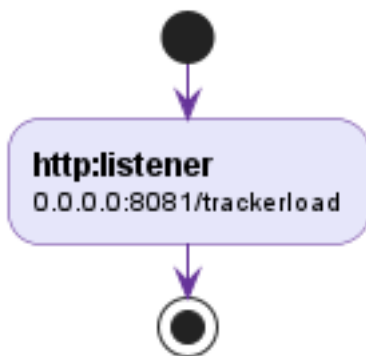


2.1.22 interceptcicscallsFlow

Path: src\main\mule\interceptcicscalls.xml

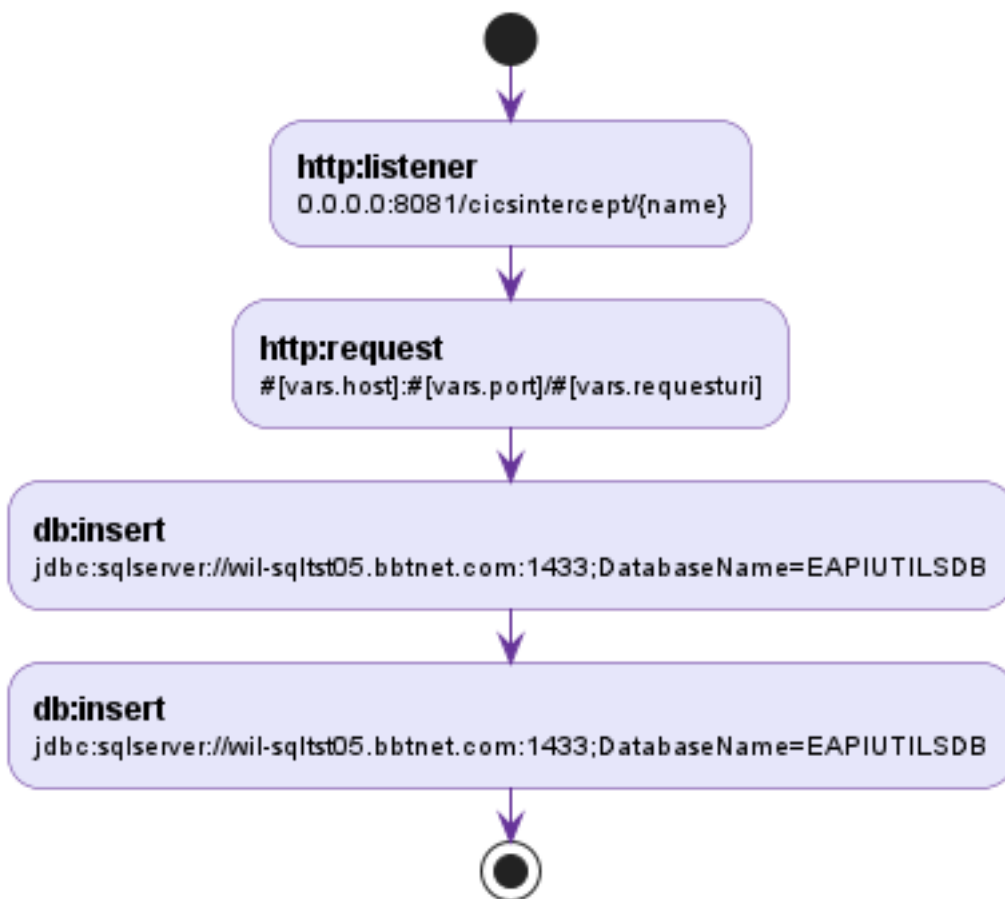

2.1.23 interceptcicscallsFlow1

Path: `src\main\mule\interceptcicscalls.xml`

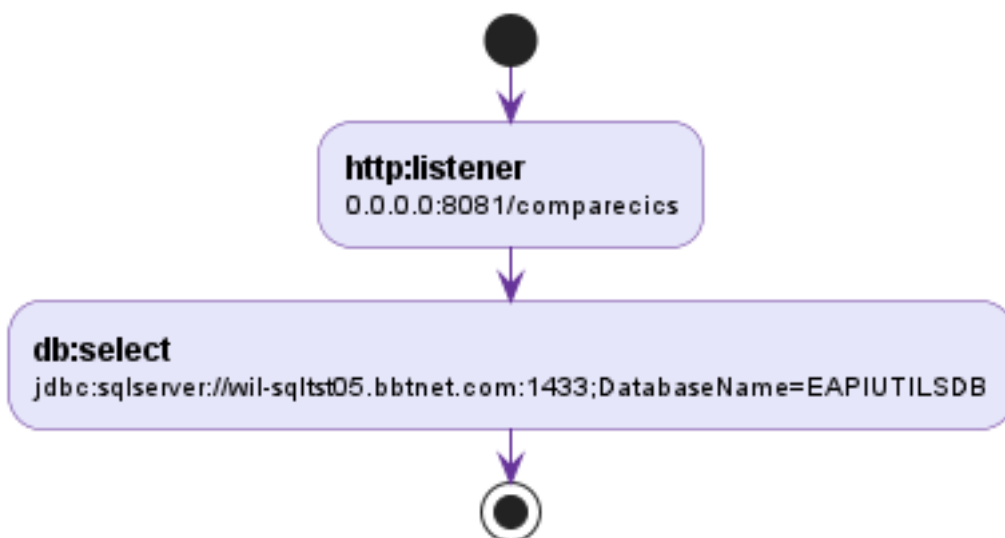


2.1.24 interceptcicscallsFlow2

Path: src\main\mule\interceptcicscalls.xml




2.1.25 mulemqtriggerFlow

Path: src\main\mule\mulemqtrigger.xml

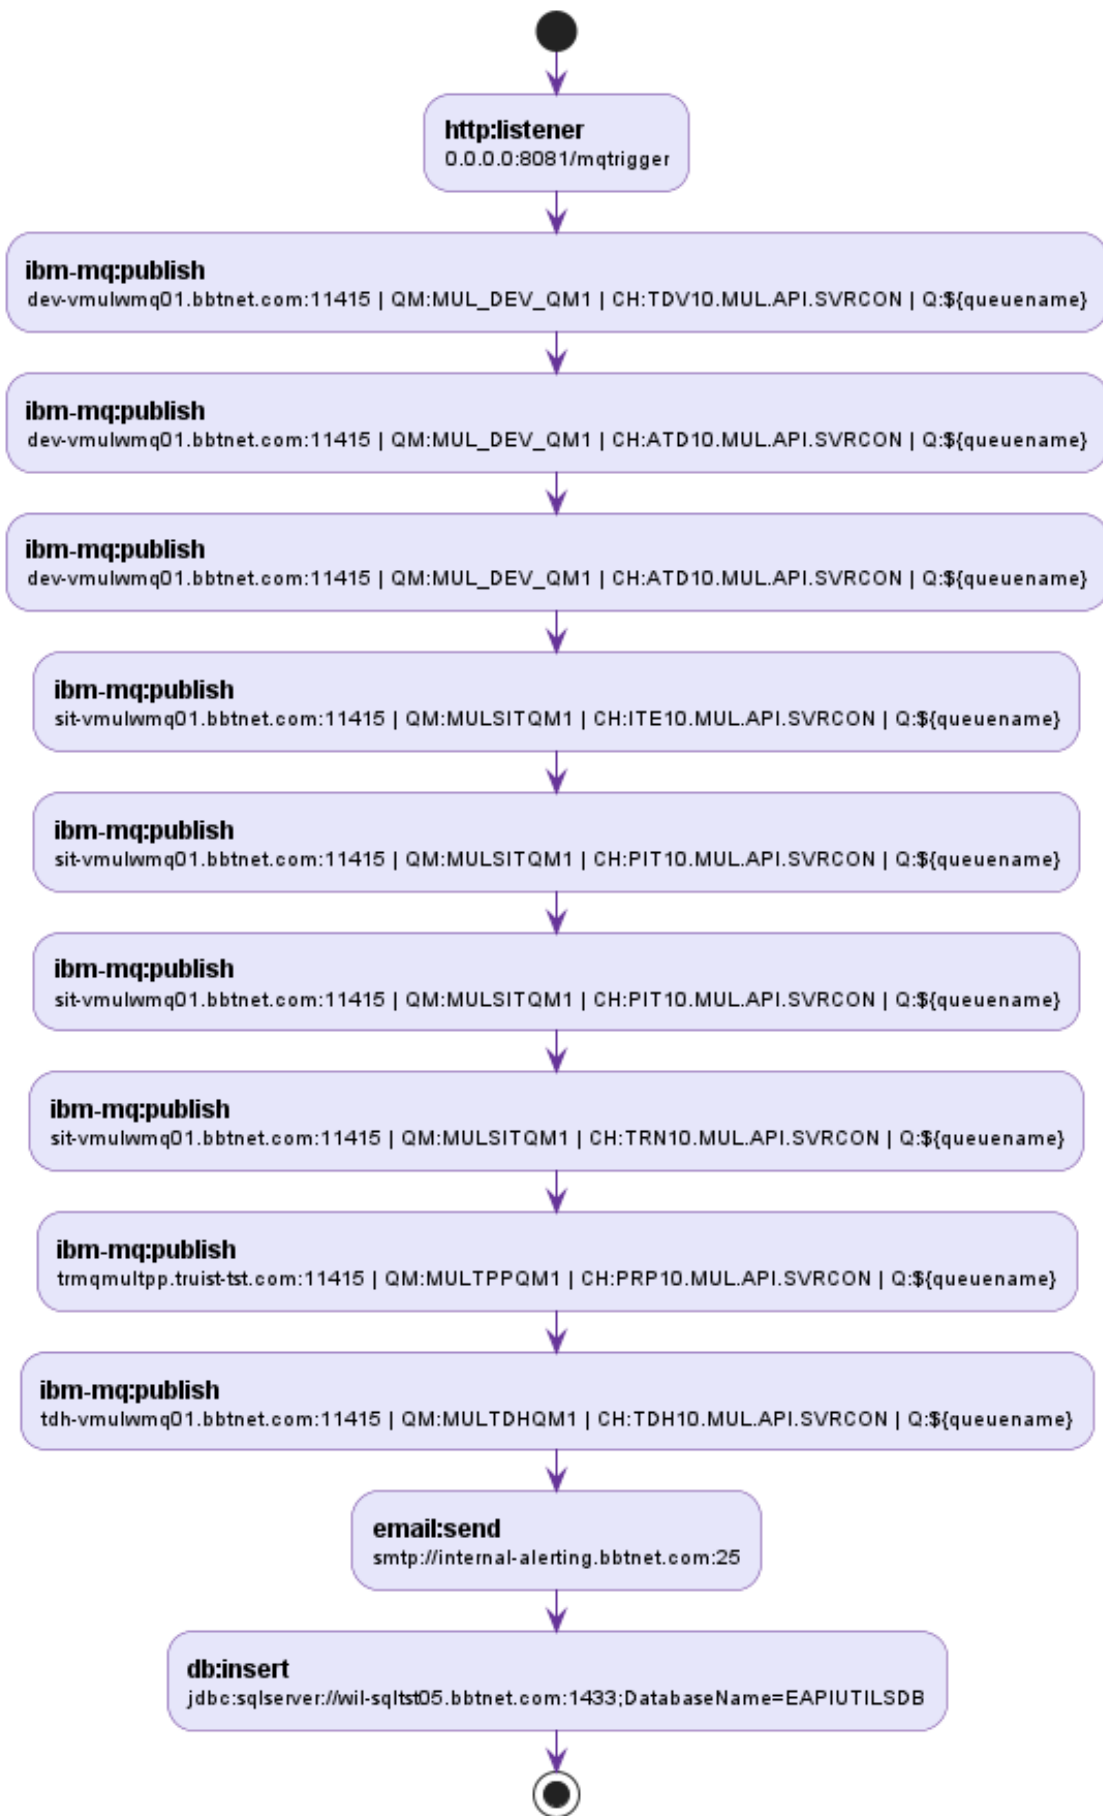


2.1.26 mulemqtriggerFlow1

Path: src\main\mule\mulemqtrigger.xml

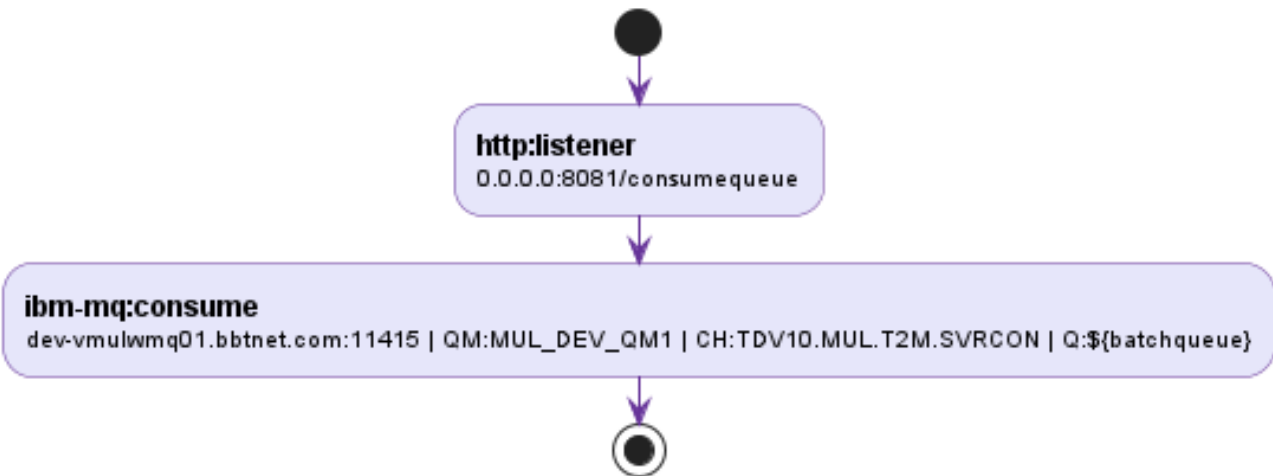


2.1.27 mulemqtriggerFlow2

Path: src\main\mule\mulemqtrigger.xml

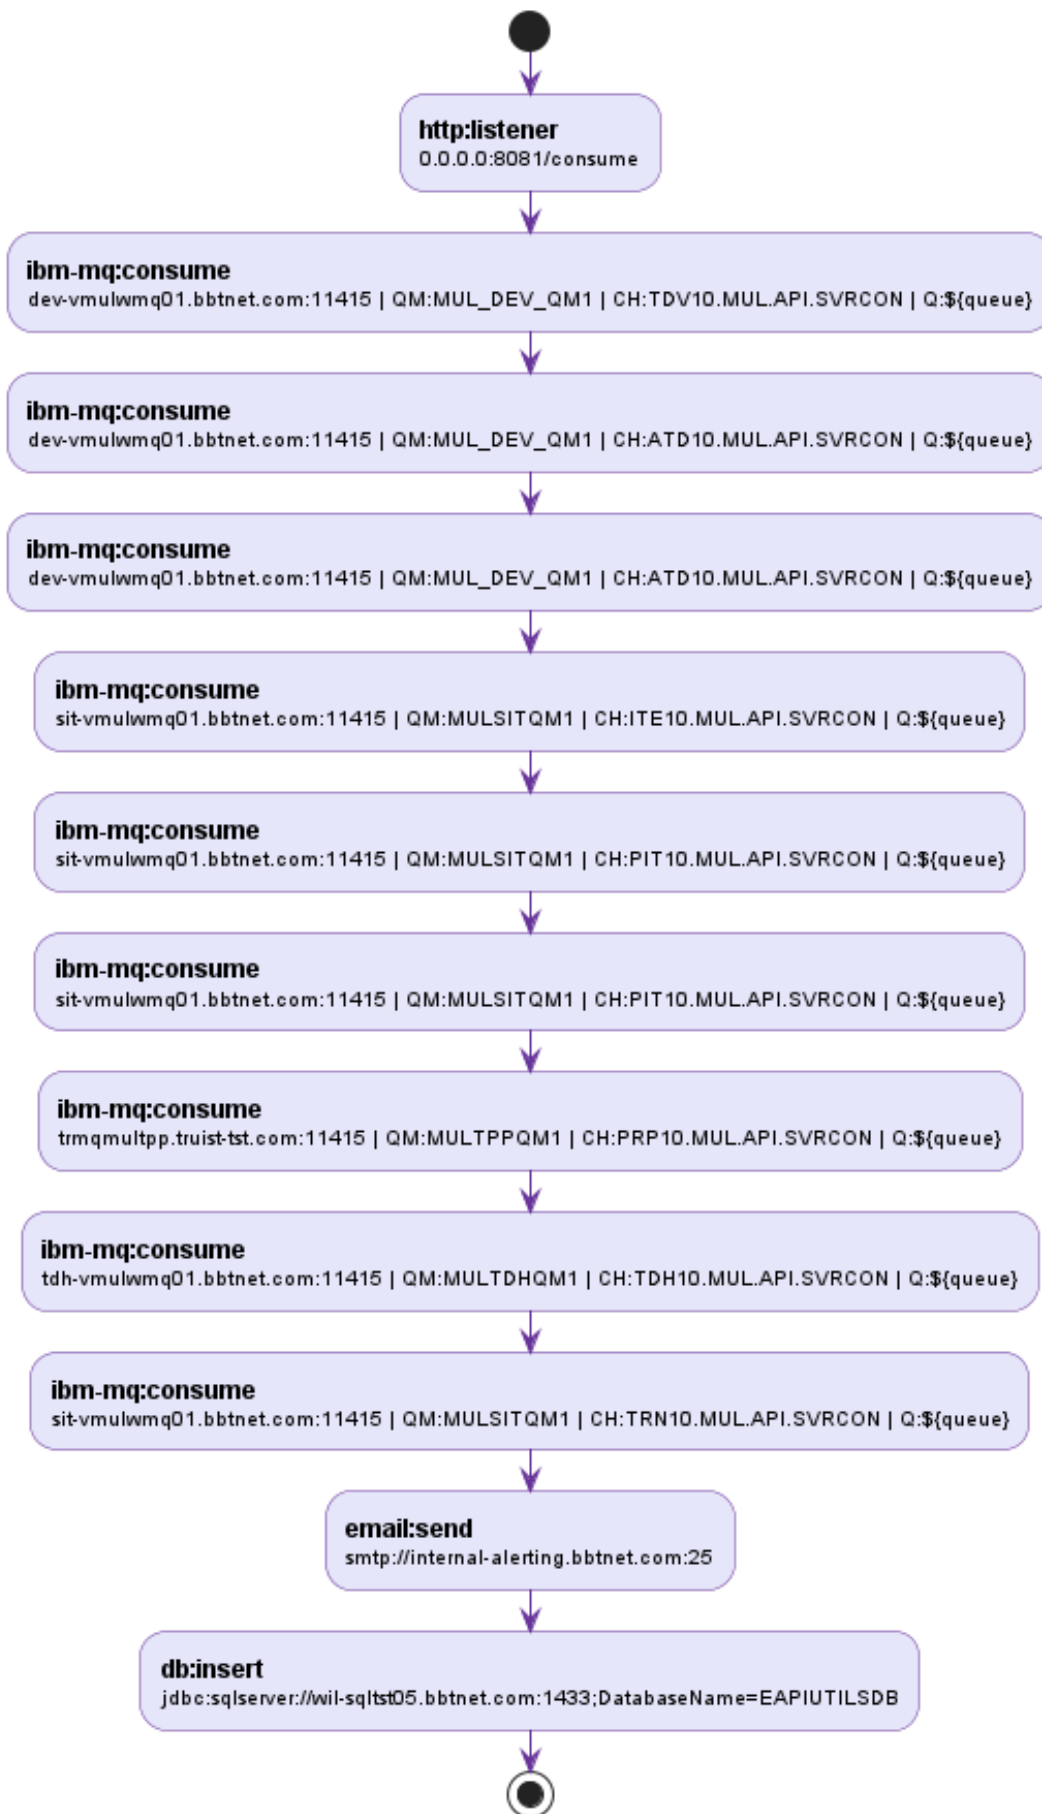


2.1.28 mulemqtriggerFlow3

Path: src\main\mule\mulemqtrigger.xml

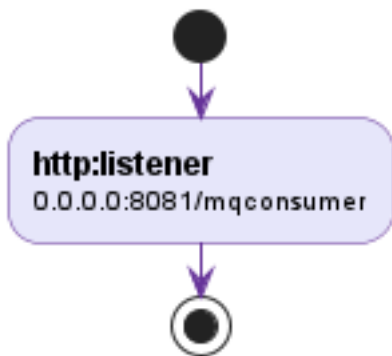


2.1.29 mulemqtriggerhome

Path: src\main\mule\mulemqtrigger.xml

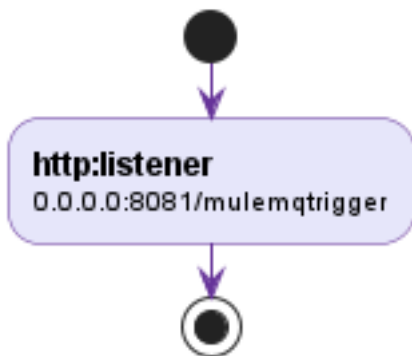


2.1.30 parentpomconversionFlow

Path: src\main\mule\parentpomconversion.xml

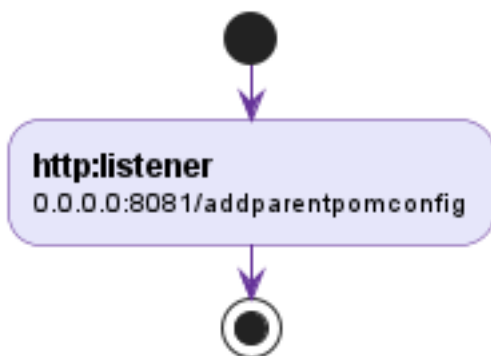


2.1.31 parentpomconversionFlow1

Path: src\main\mule\parentpomconversion.xml

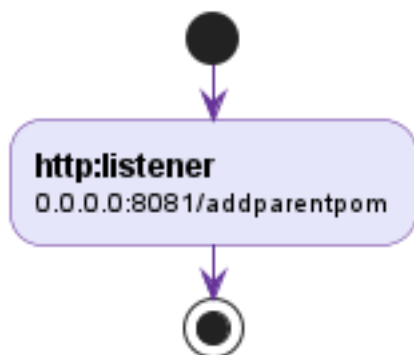


2.1.32 responsevalidatorFlow

Path: src\main\mule\responsevalidator.xml

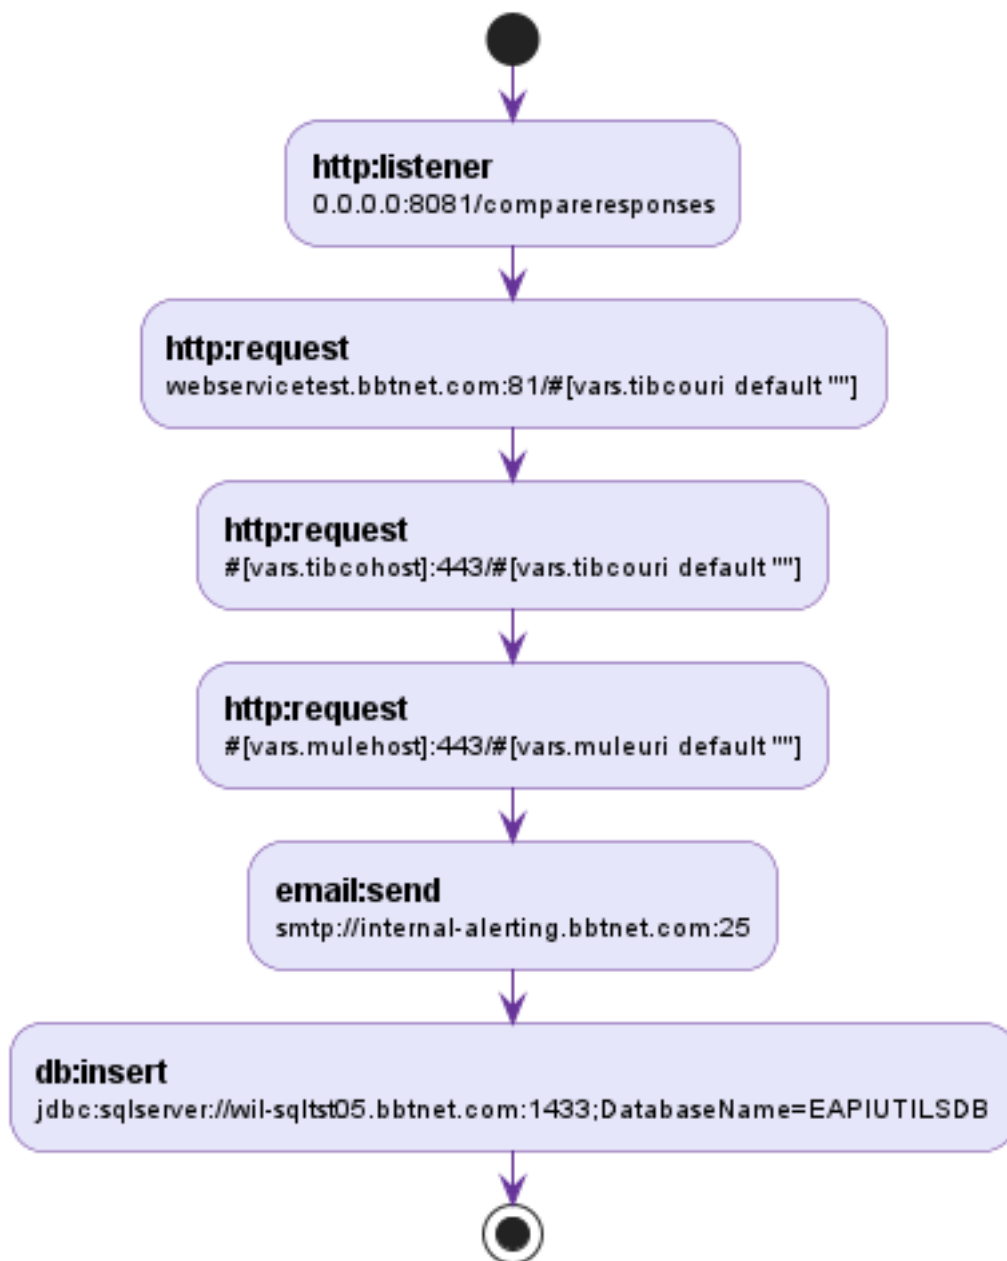


2.1.33 responsevalidatorFlow1

Path: src\main\mule\responsevalidator.xml

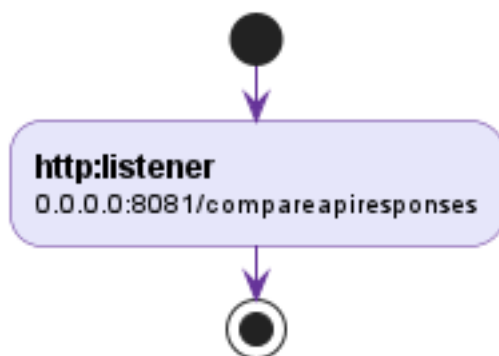


2.1.34 t2m_pocFlow

Path: src\main\mule\t2mpoc.xml

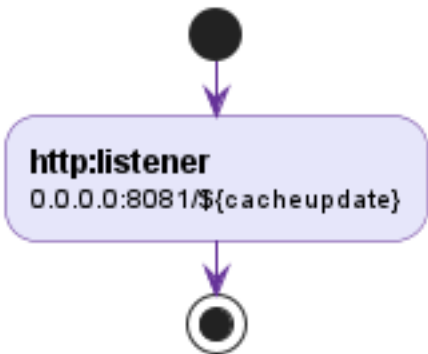


2.1.35 t2m_pocFlow1

Path: src\main\mule\t2mpoc.xml

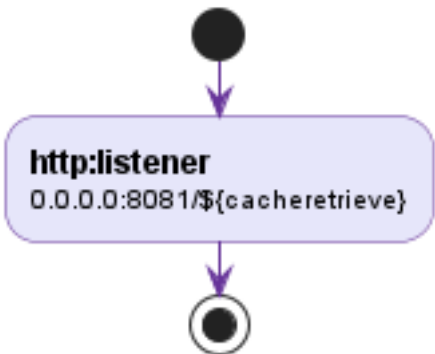


2.1.36 t2mdbexportFlow

Path: src\main\mule\t2mdbexport.xml

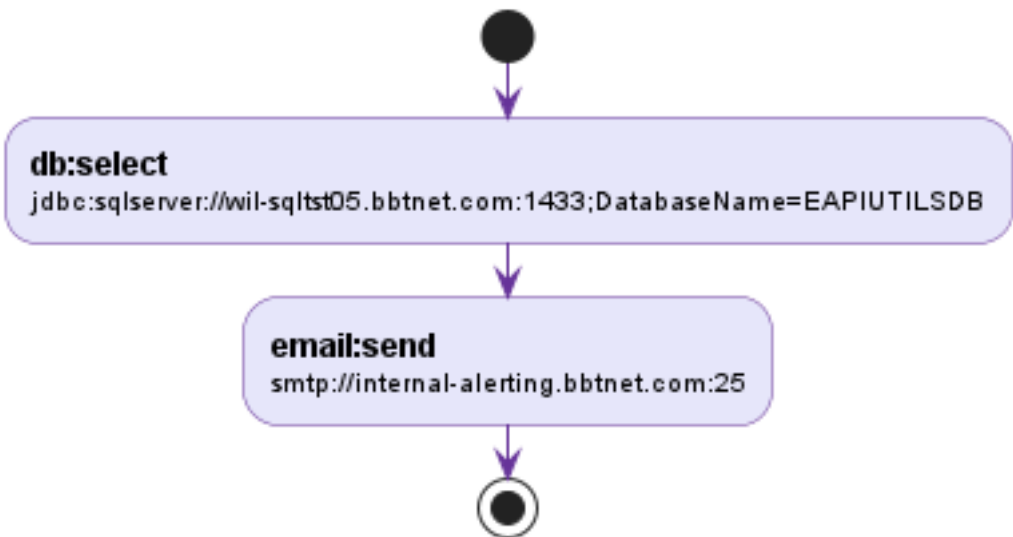


2.1.37 t2mdbexportFlow1

Path: src\main\mule\t2mdbexport.xml

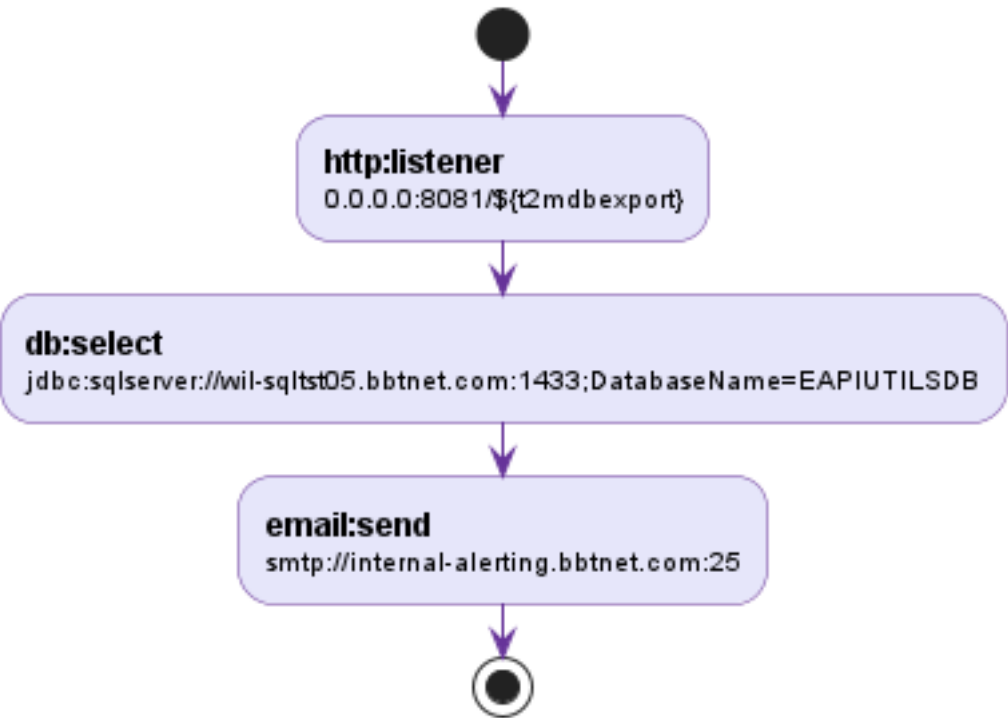


2.1.38 t2mdbexportFlow2

Path: src\main\mule\t2mdbexport.xml



2.1.39 t2mpocFlow


Path: src\main\mule\t2mpoc.xml

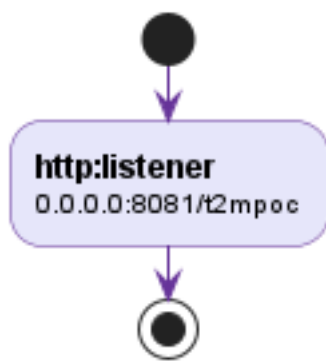

2.2 Mule Project Flow Diagram


2.2.1 AddException

Path: src\main\mule\apireviewexceptions.xml

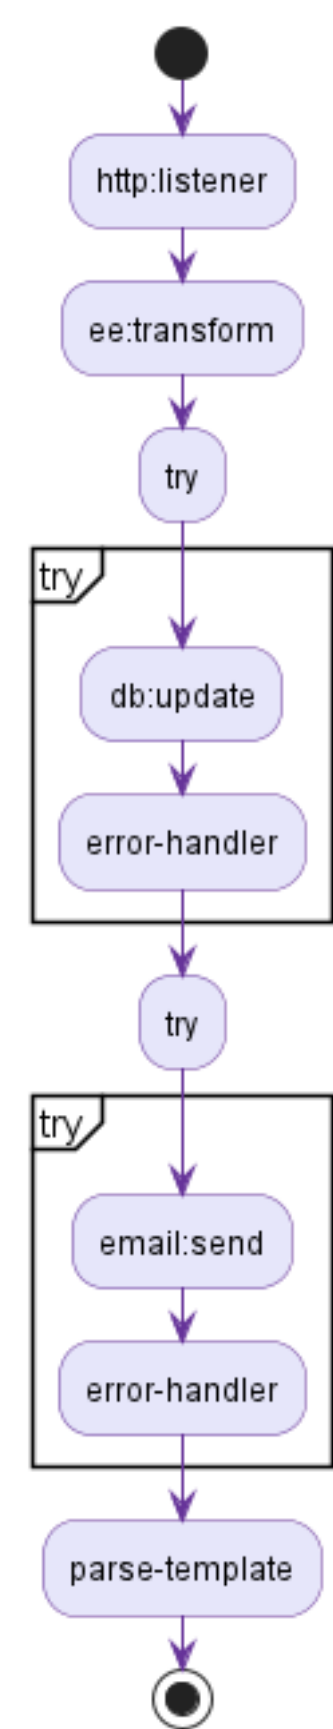


2.2.2 PLTFlow

Path: src\main\mule\PLT.xml

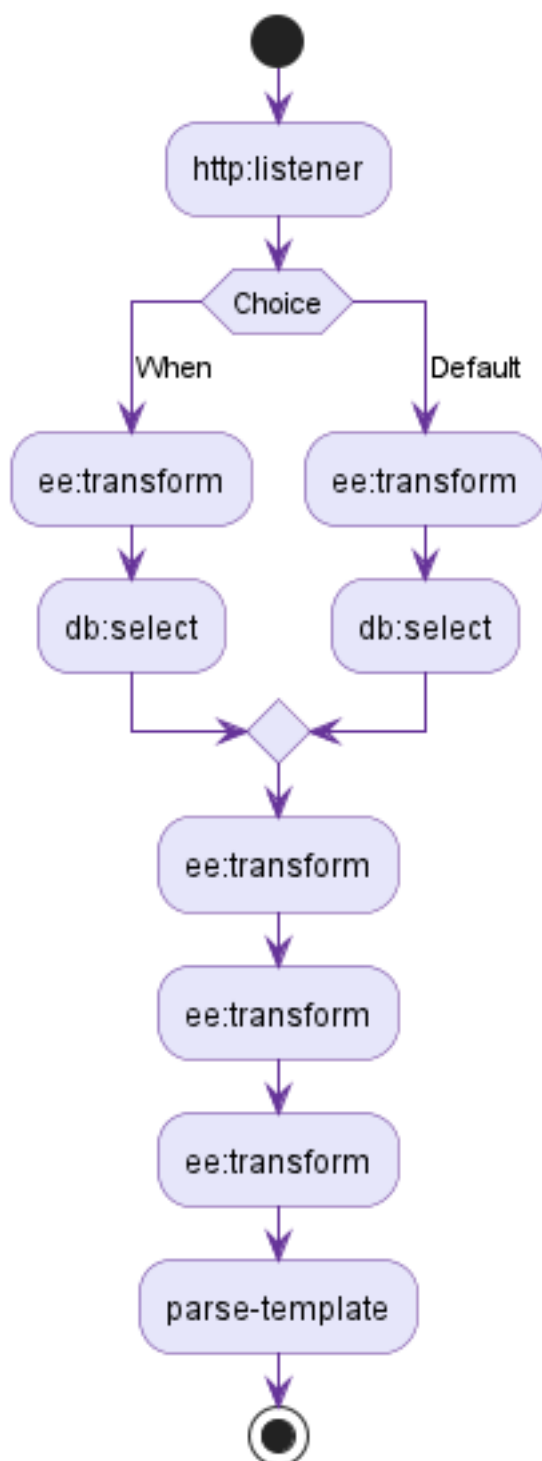


2.2.3 PLTFlow1

Path: src\main\mule\PLT.xml

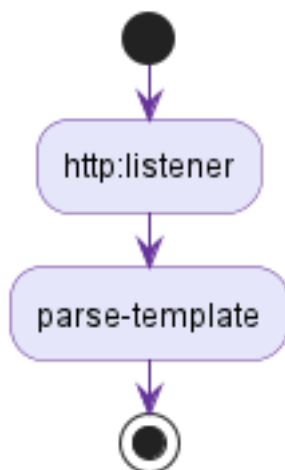


2.2.4 PLTFlow2

Path: src\main\mule\PLT.xml

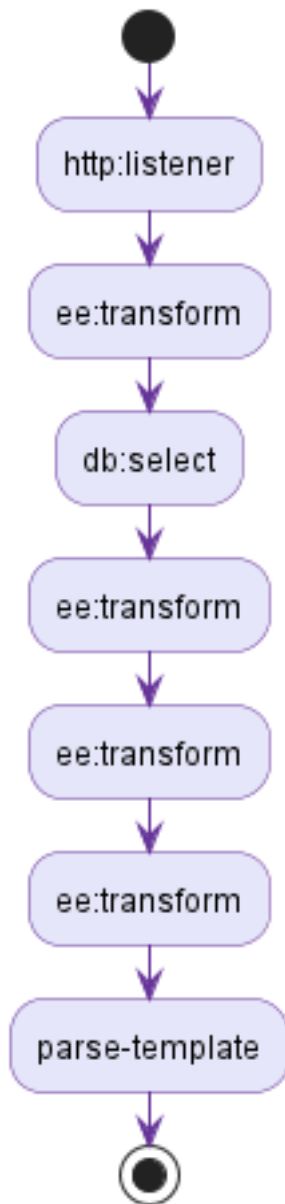


2.2.5 PLTFlow3

Path: src\main\mule\PLT.xml

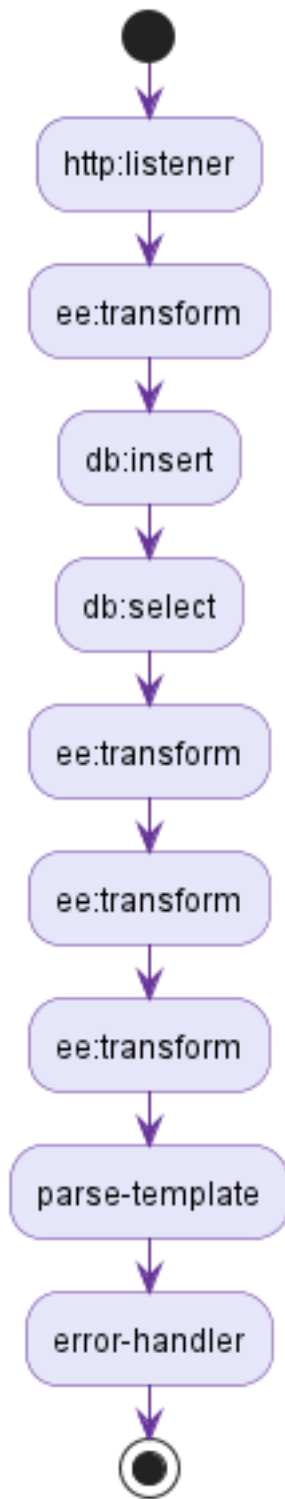


2.2.6 PLTFlow4

Path: src\main\mule\PLT.xml

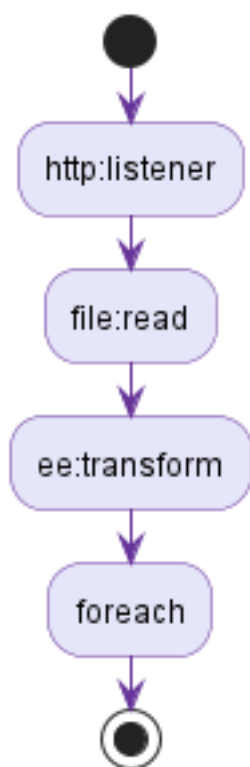


2.2.7 PLTFlow5

Path: src\main\mule\PLT.xml

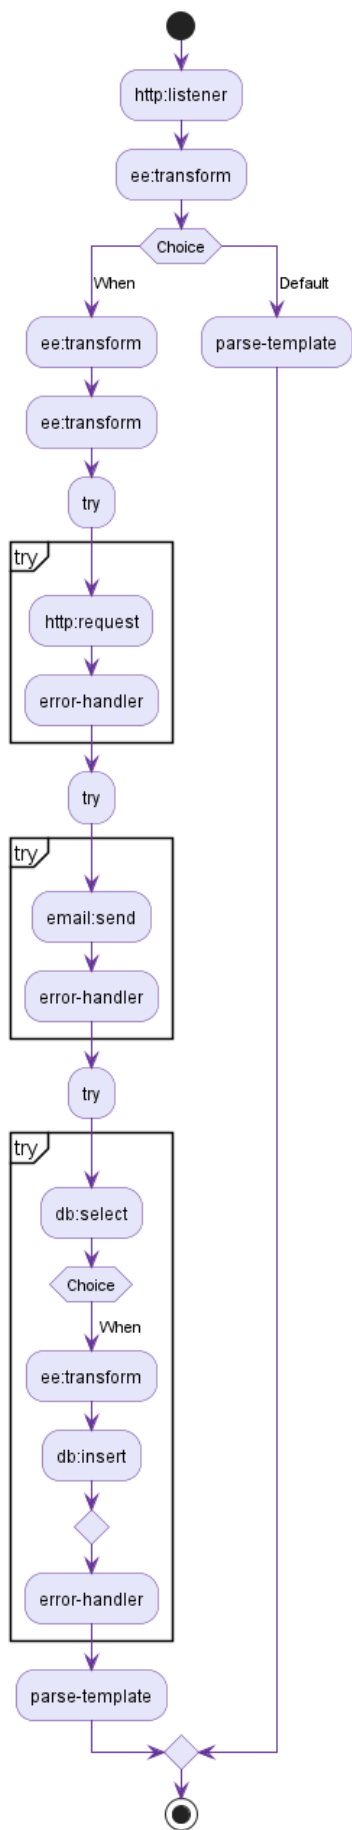


2.2.8 PLTFlow6

Path: src\main\mule\PLT.xml

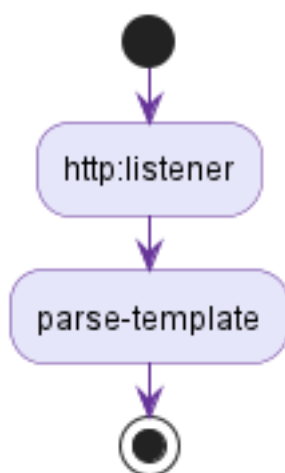

2.2.9 PLTFlow7


Path: src\main\mule\PLT.xml



(Diagram scaled to fit page)


2.2.10 PLTLive

Path: src\main\mule\PLT.xml

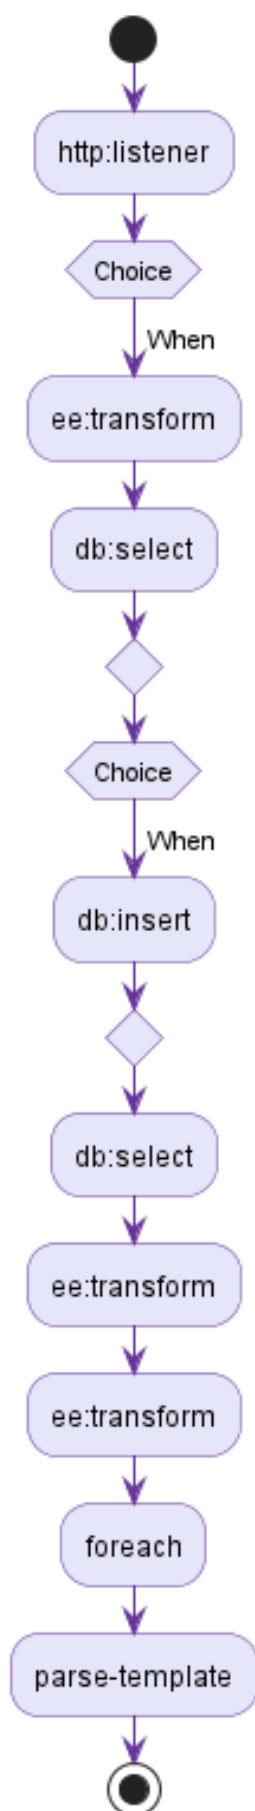


2.2.11 PLTLiveStart

Path: src\main\mule\PLT.xml

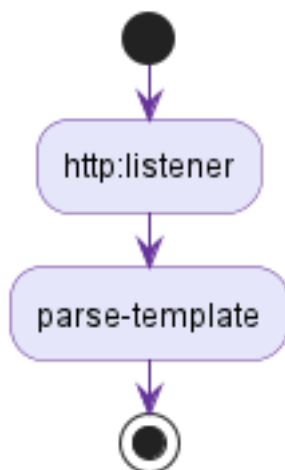


2.2.12 PLTUpdate

Path: src\main\mule\PLT.xml

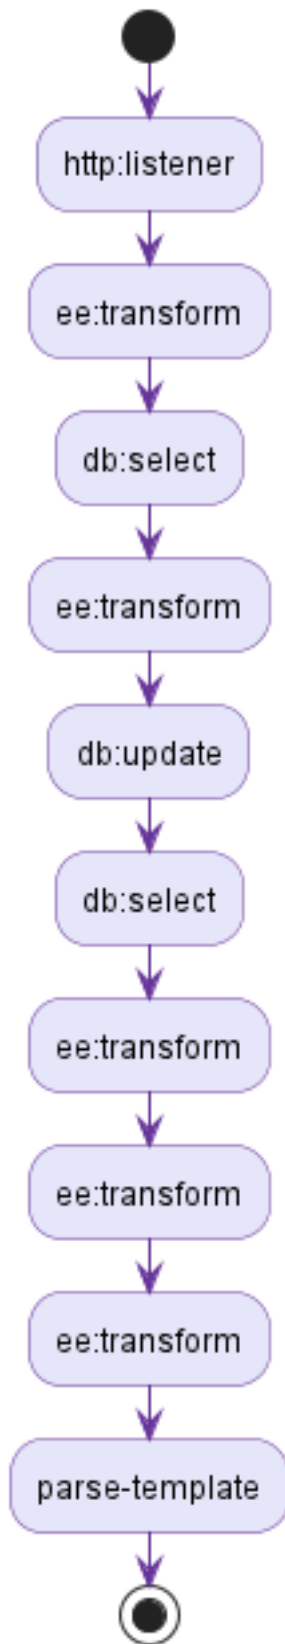


2.2.13 ReviewSummary

Path: src\main\mule\lt2mdbexport.xml

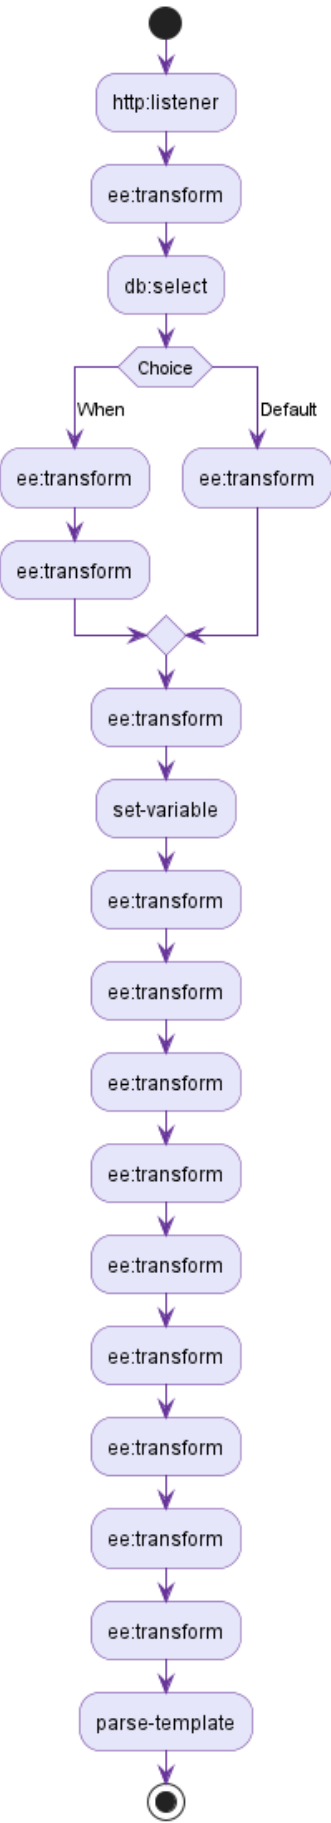


2.2.14 apireviewexceptionsFlow

Path: src\main\mule\apireviewexceptions.xml

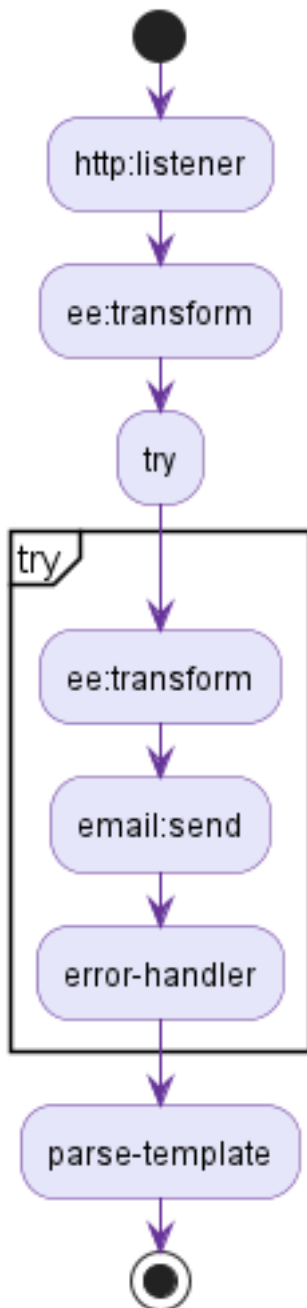


2.2.15 apireviewexceptionsFlow1

Path: src\main\mule\apireviewexceptions.xml

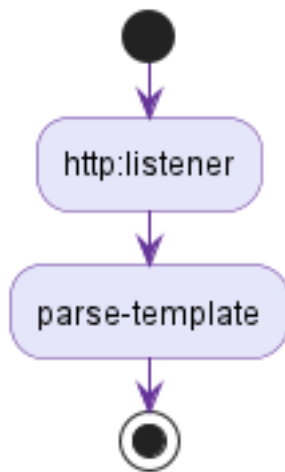


2.2.16 apireviewexceptionsFlow2

Path: src\main\mule\apireviewexceptions.xml

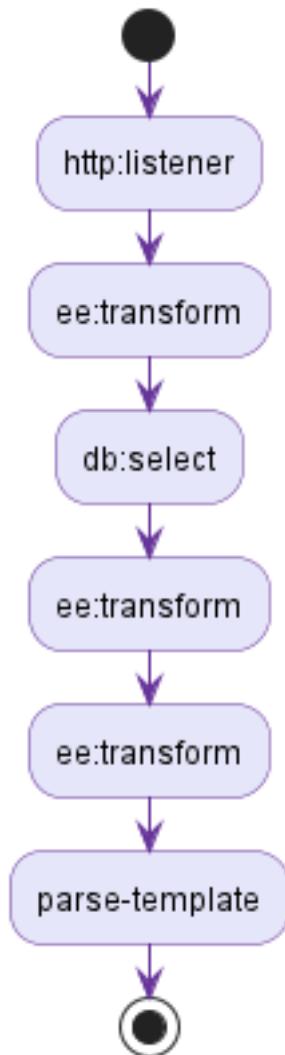


2.2.17 apireviewexceptionsFlow3

Path: src\main\mule\apireviewexceptions.xml

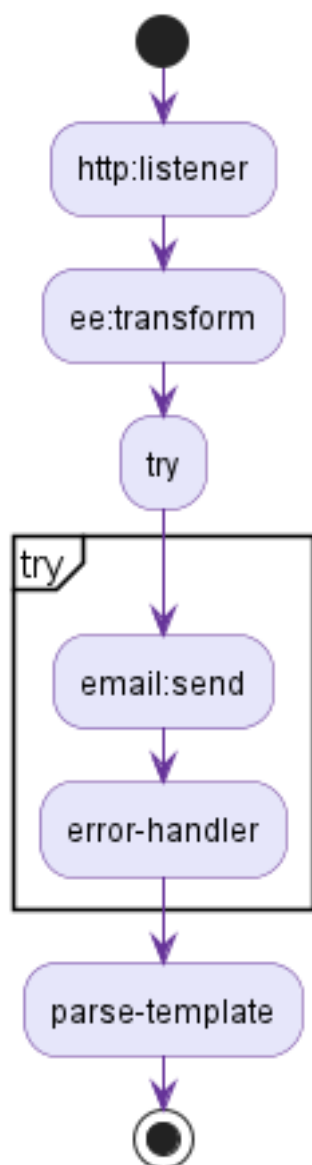


2.2.18 devtrackerreadFlow

Path: src\main\mule\devtrackerread.xml

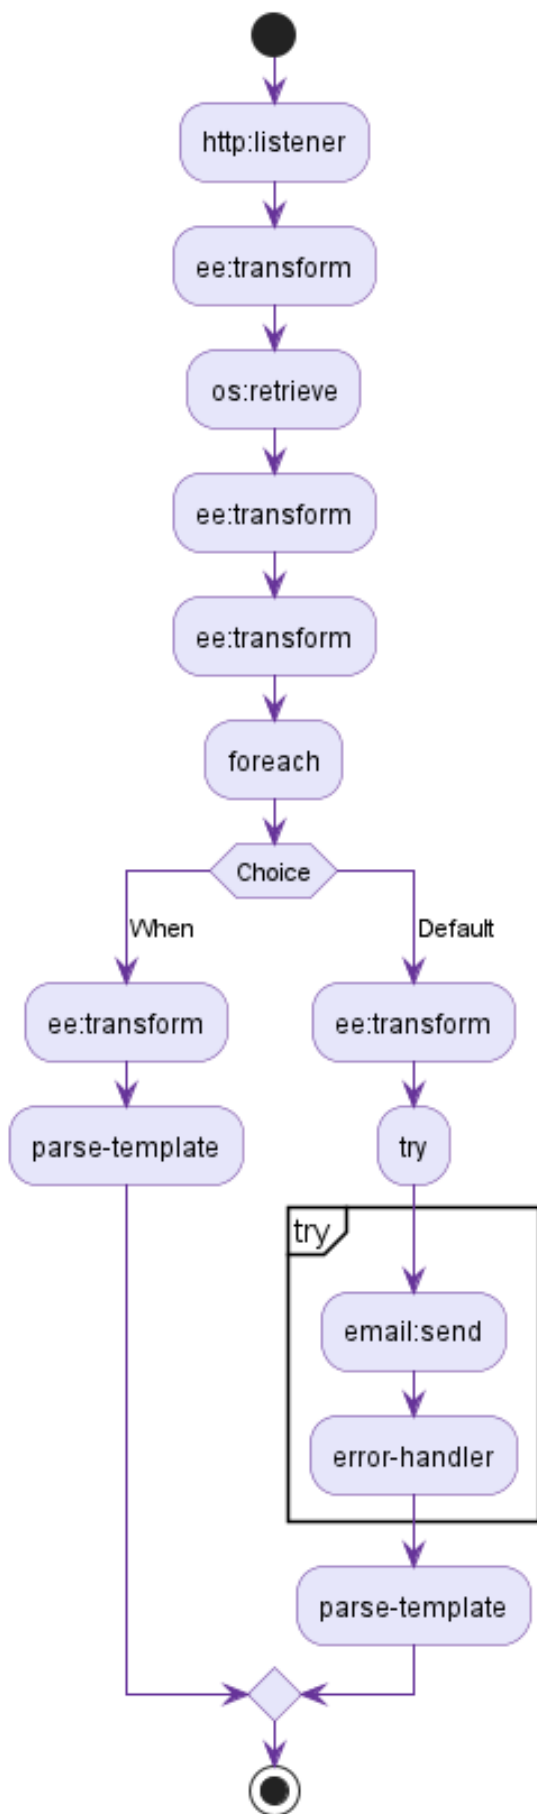


2.2.19 devtrackerreadFlow1

Path: src\main\mule\devtrackerread.xml

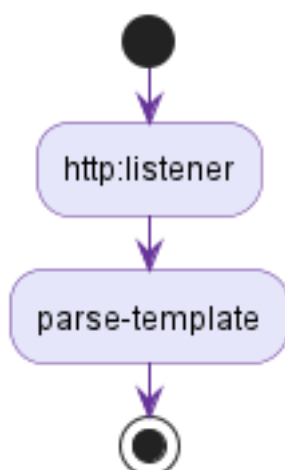


2.2.20 devtrackerreadFlow2

Path: src\main\mule\devtrackerread.xml

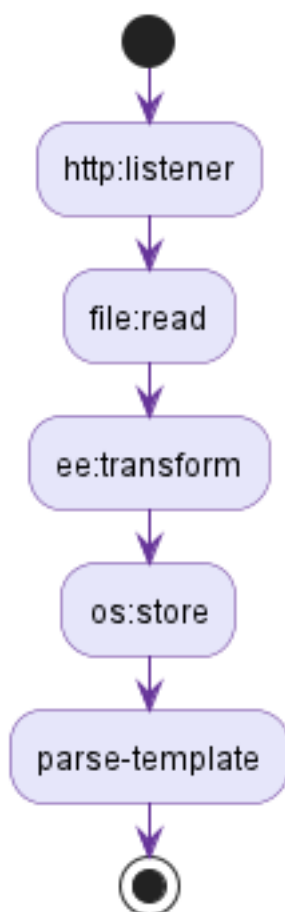


2.2.21 devtrackerreadFlow3

Path: src\main\mule\devtrackerread.xml

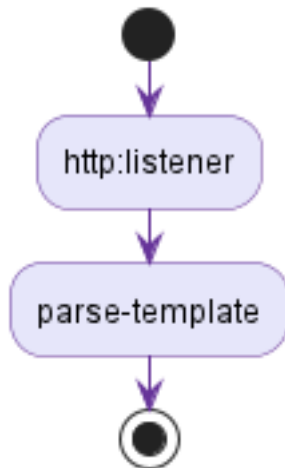


2.2.22 interceptcicscallsFlow

Path: src\main\mule\interceptcicscalls.xml

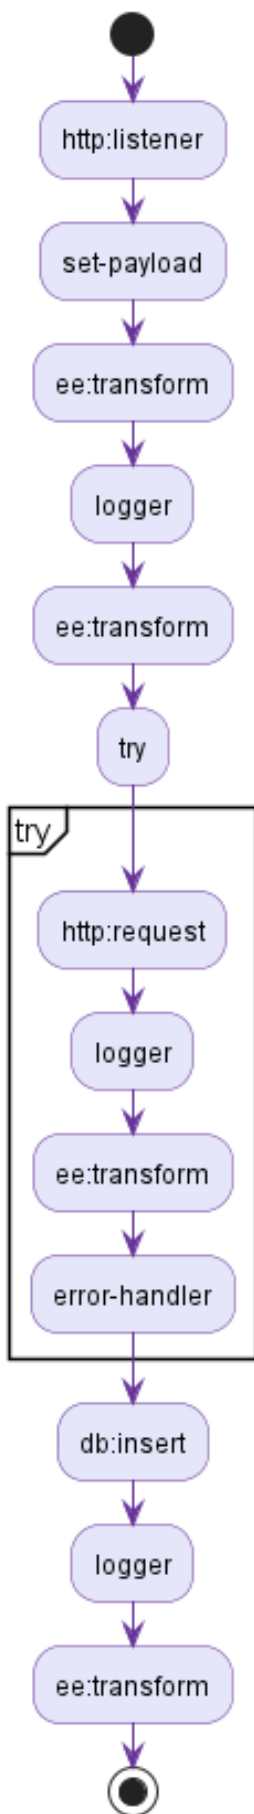


2.2.23 interceptcicscallsFlow1

Path: src\main\mule\interceptcicscalls.xml

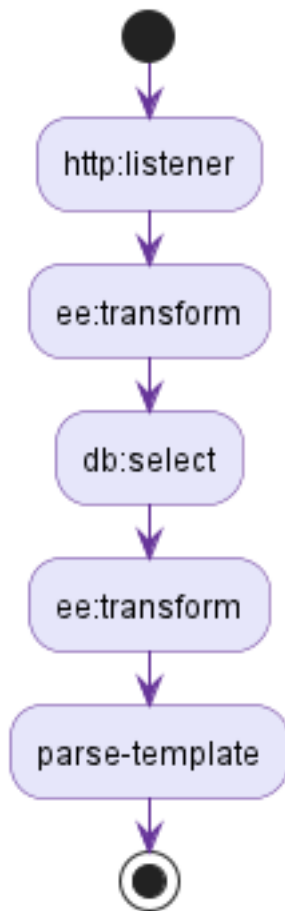


2.2.24 interceptcicscallsFlow2

Path: src\main\mule\interceptcicscalls.xml

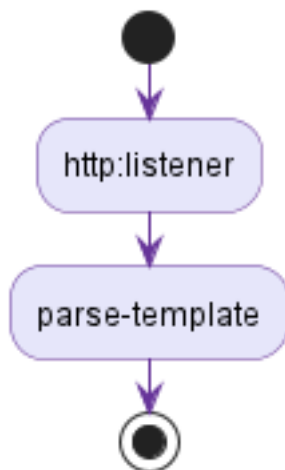

2.2.25 mulemqtriggerFlow


Path: src\main\mule\mulemqtrigger.xml

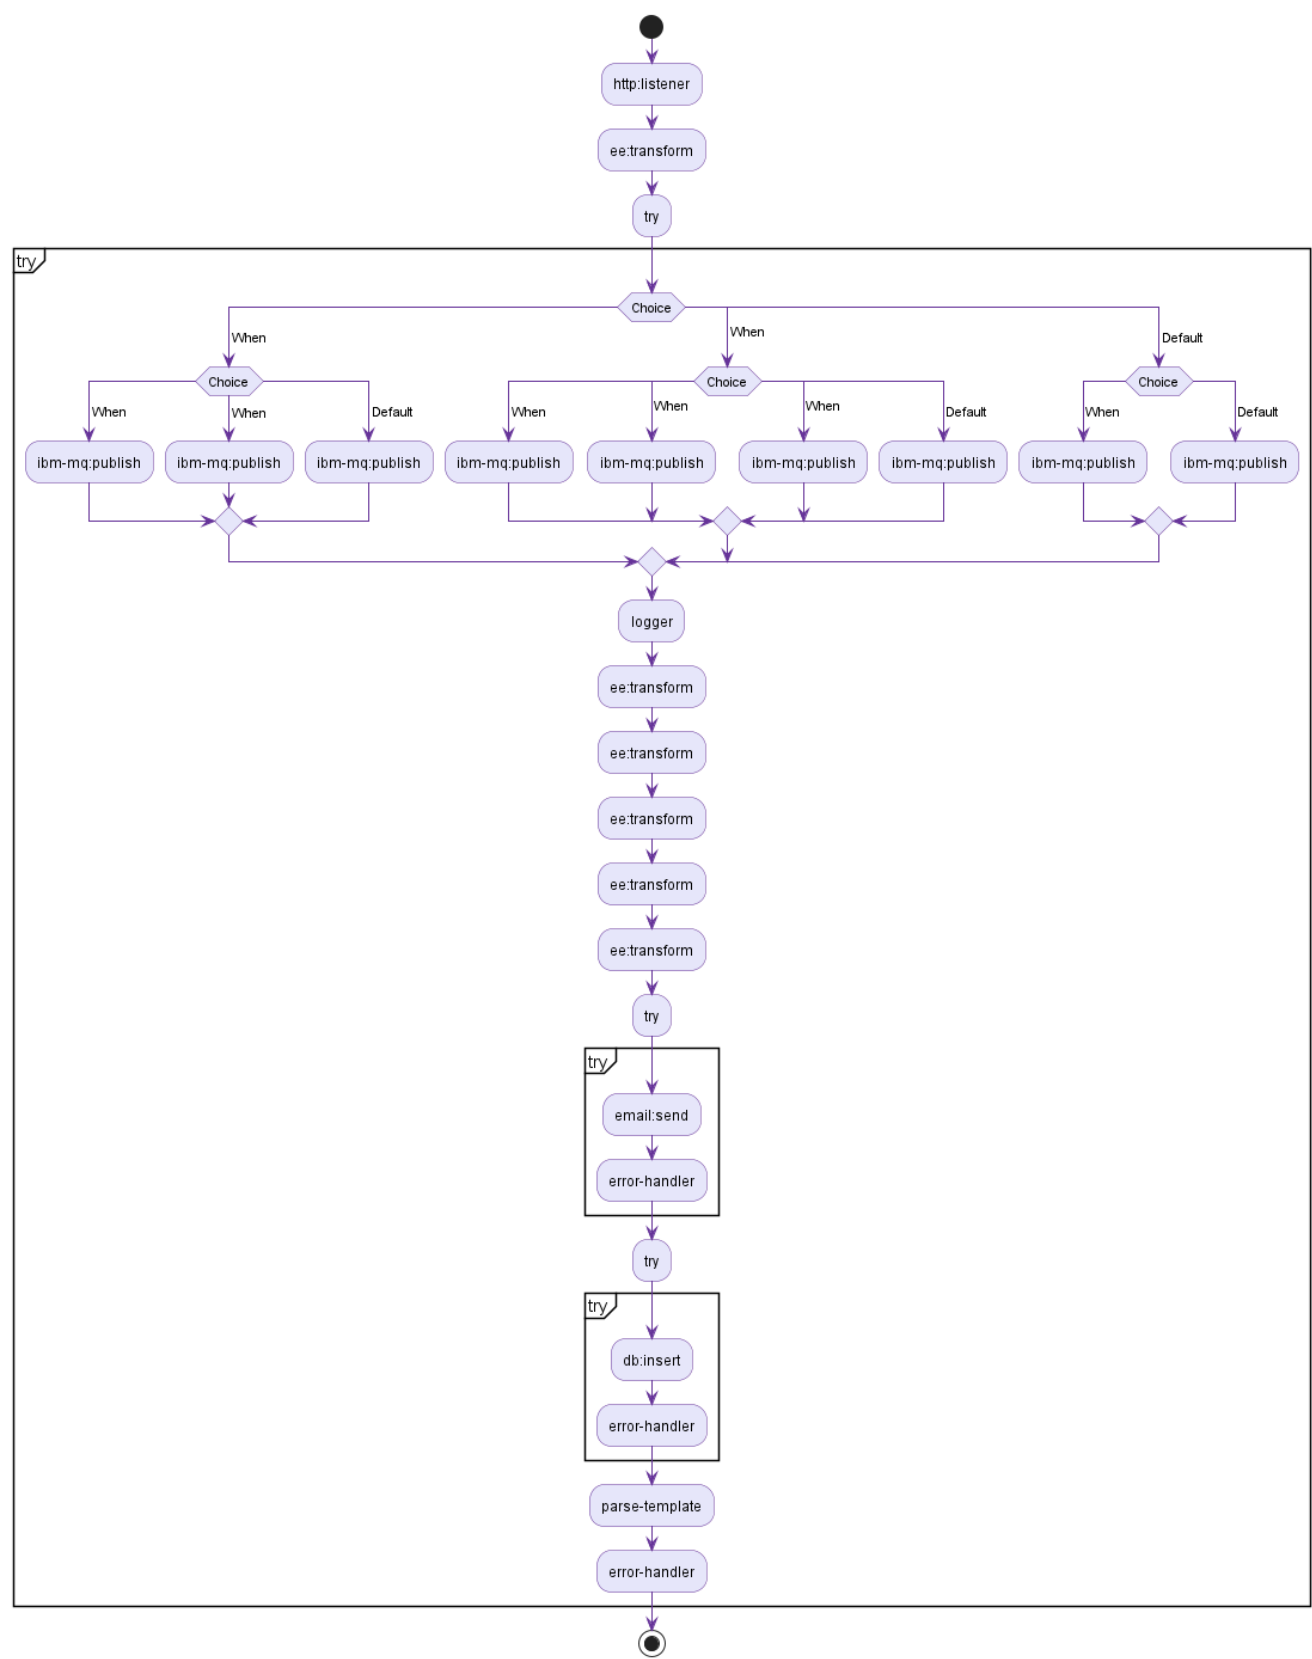

(Diagram scaled to fit page)


2.2.26 mulemqtriggerFlow1

Path: src/main/mule/mulemqtrigger.xml

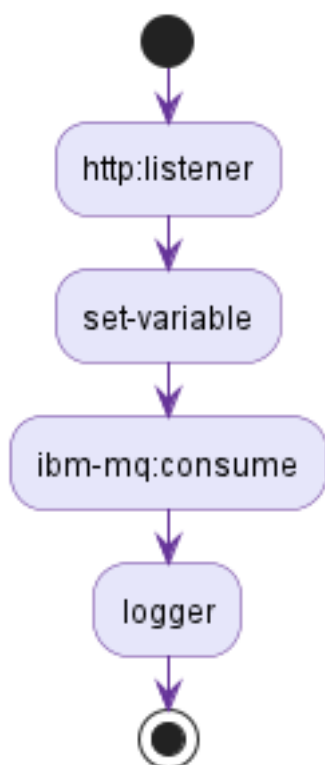


2.2.27 mulemqtriggerFlow2

Path: src/main/mule/mulemqtrigger.xml

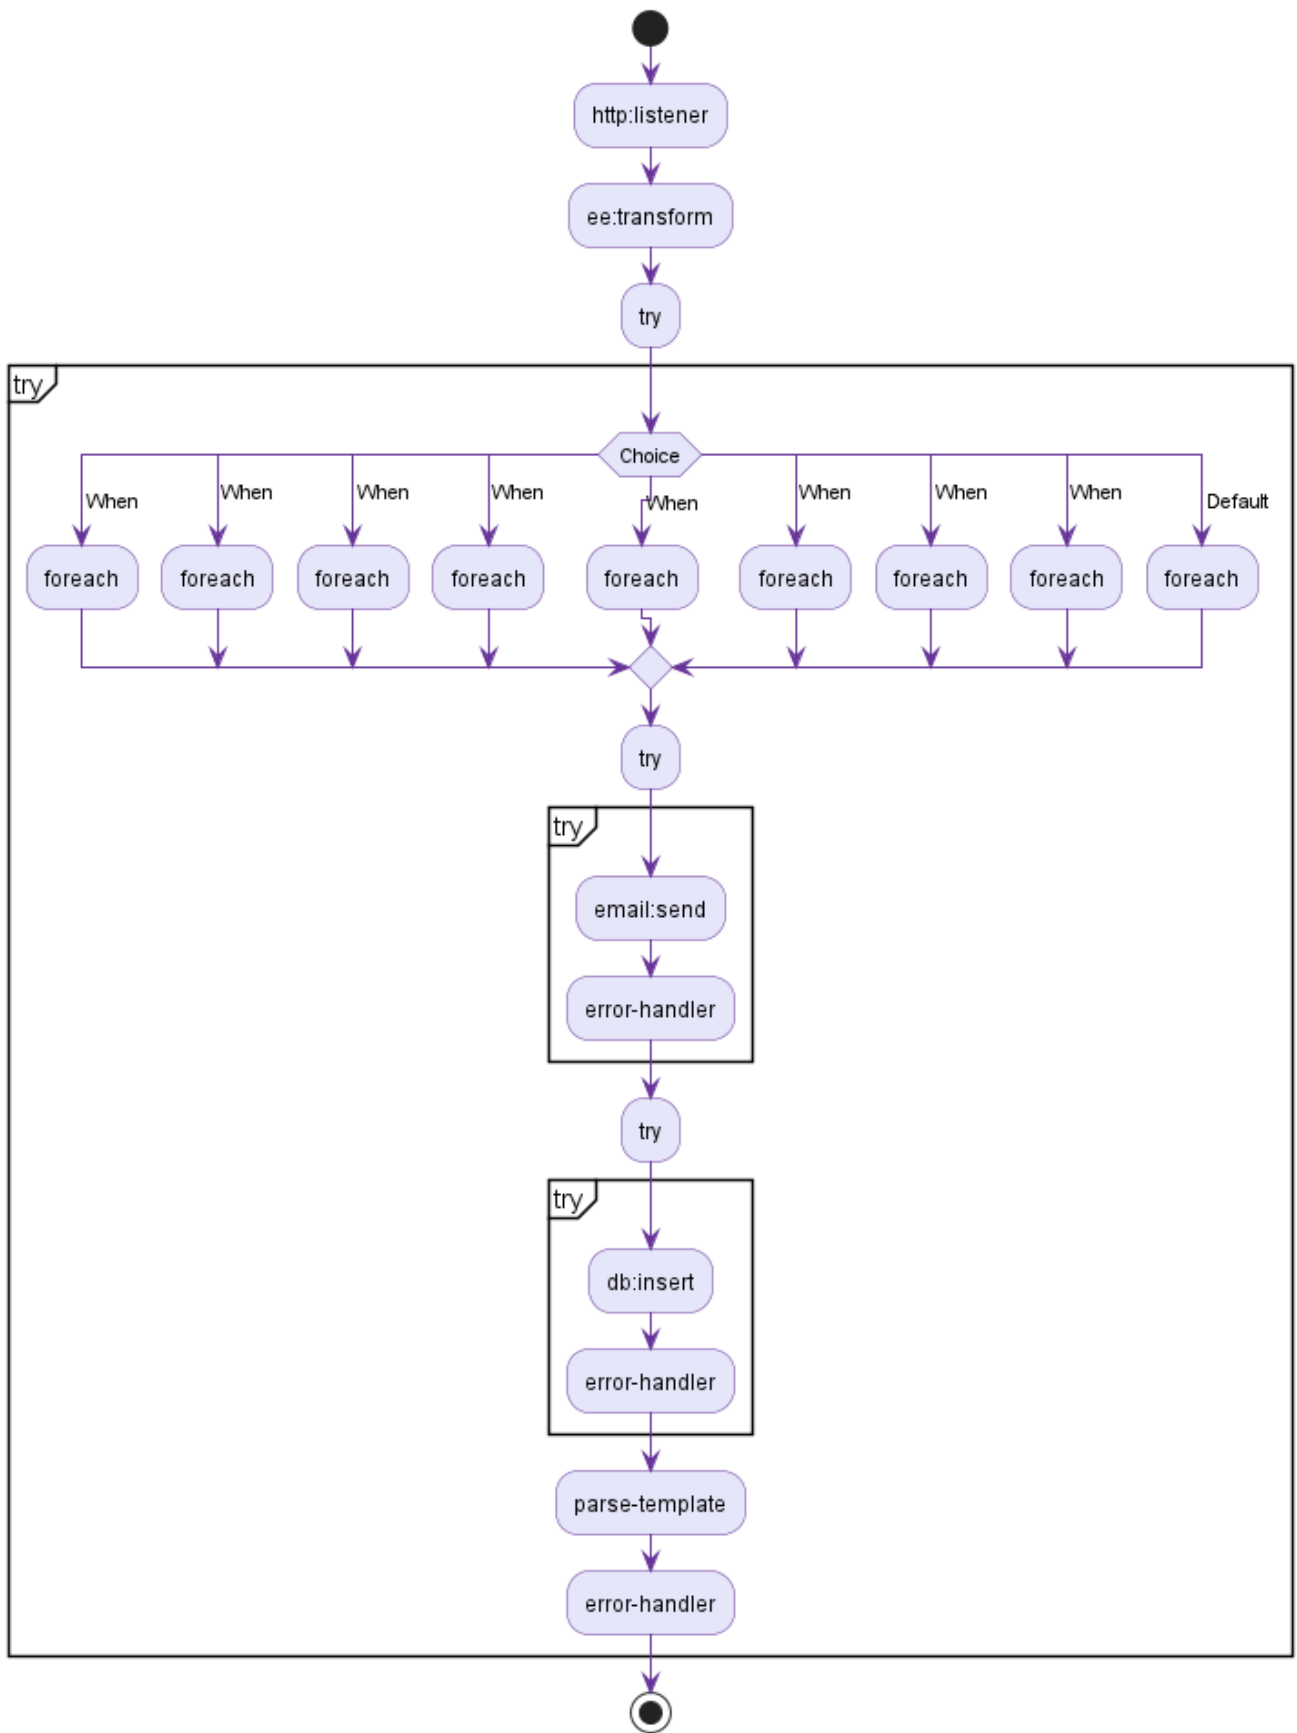


2.2.28 mulemqtriggerFlow3

Path: src\main\mule\mulemqtrigger.xml

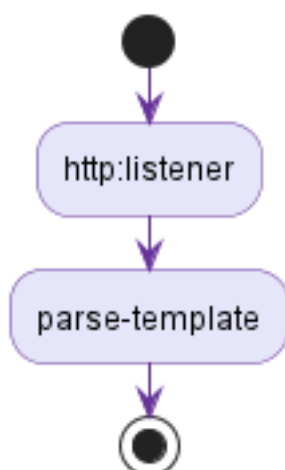


2.2.29 mulemqtriggerhome

Path: src\main\mule\mulemqtrigger.xml

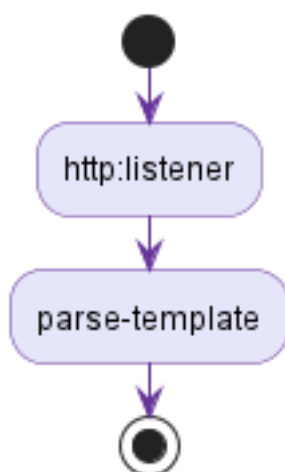


2.2.30 parentpomconversionFlow

Path: src\main\mule\parentpomconversion.xml

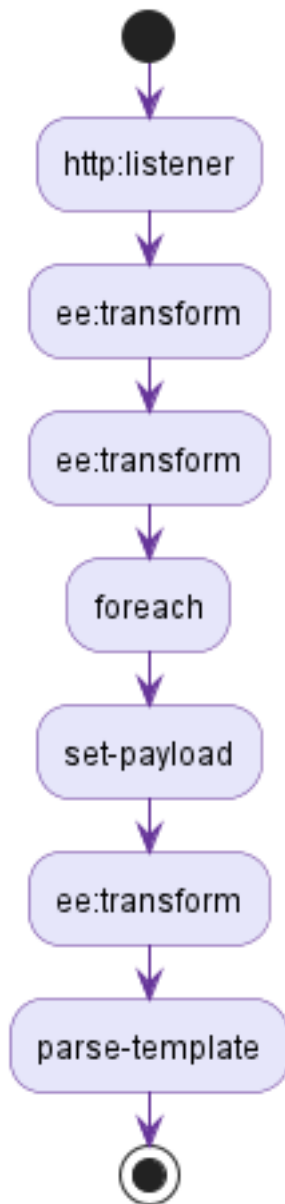


2.2.31 parentpomconversionFlow1

Path: src\main\mule\parentpomconversion.xml

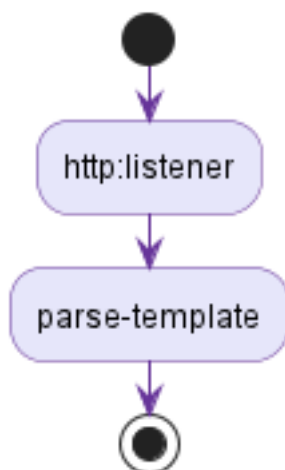


2.2.32 responsevalidatorFlow

Path: src\main\mule\responsevalidator.xml

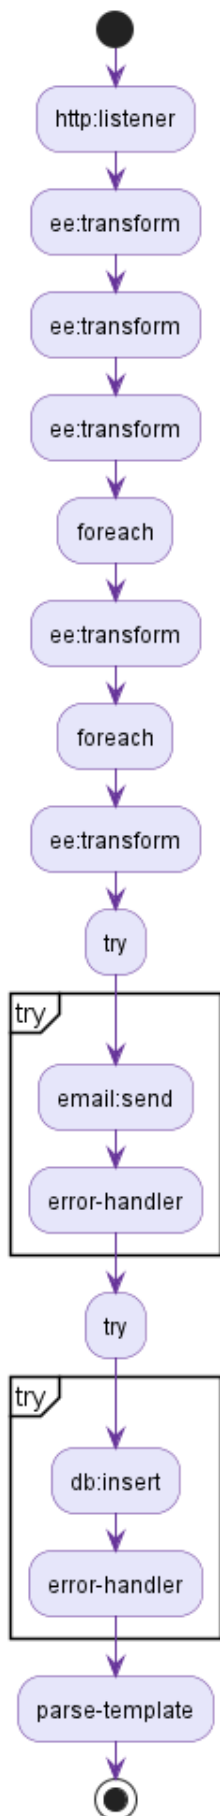


2.2.33 responsevalidatorFlow1

Path: src\main\mule\responsevalidator.xml

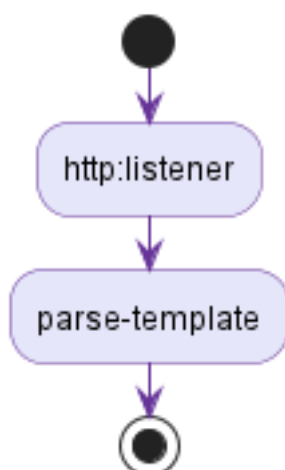

2.2.34 t2m_pocFlow

Path: src\main\mule\t2mpoc.xml

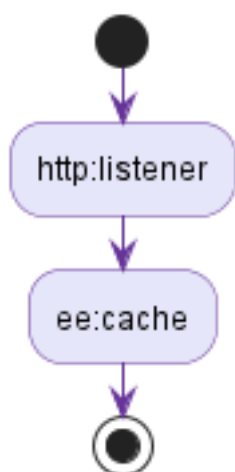


2.2.35 t2m_pocFlow1

Path: src\main\mule\t2mpoc.xml




2.2.36 t2mdbexportFlow

Path: src\main\mule\t2mdbexport.xml

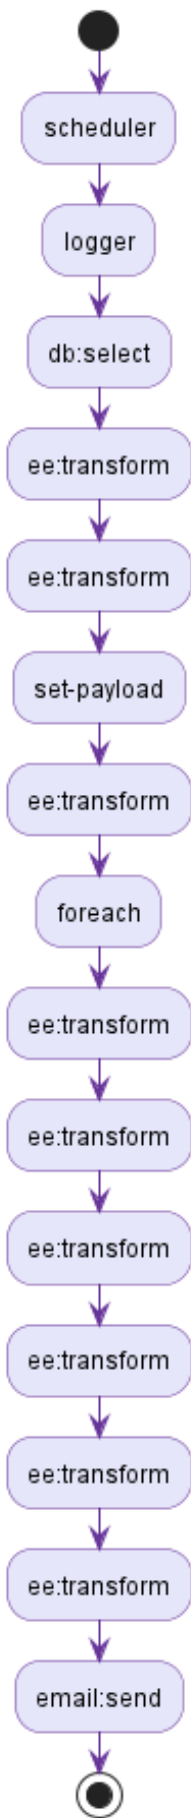


2.2.37 t2mdbexportFlow1

Path: src\main\mule\t2mdbexport.xml

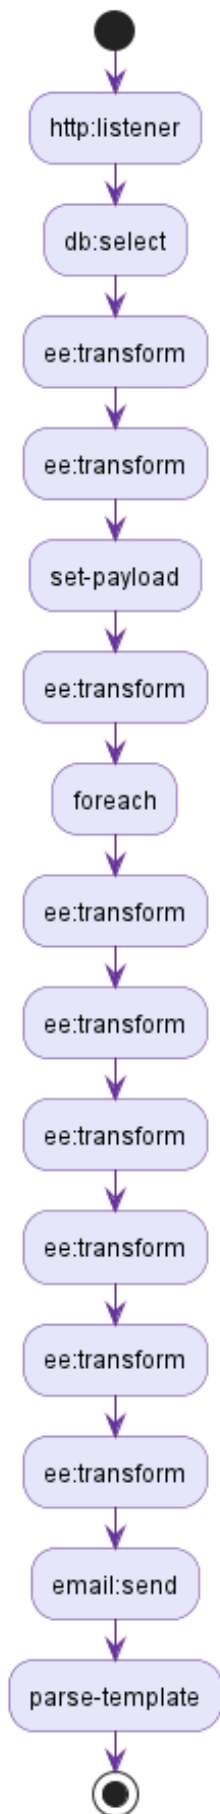


2.2.38 t2mdbexportFlow2

Path: src\main\mule\t2mdbexport.xml

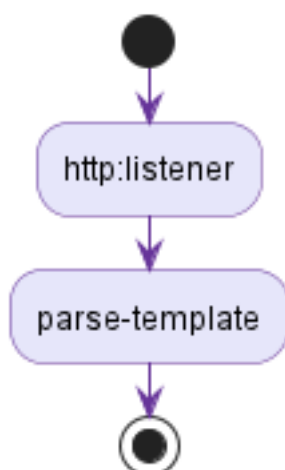

2.2.39 t2mpocFlow

Path: src\main\mule\t2mpoc.xml

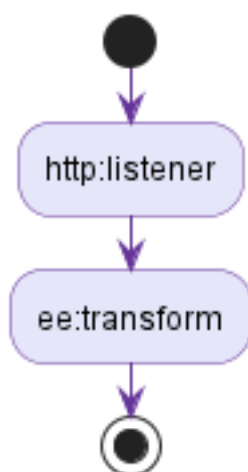

3. Global Configuration

Property Files Found: 2

- src\main\resources\mule-app.properties
- src\main\resources\secure.properties

Total Properties: 86

3.1 src\main\resources\mule-app.properties (80 properties)

| Key | Value |
|-----------------------------|--|
| keystore.path | eapi-mule-lastmile.truist-tst.com.jks |
| channel.trn | TRN10.MUL.API.SVRCON |
| liveConsumer.queueName | MUL.FN5SUBMIT.FRAUDNETFORATOAPI.PREP.L |
| qmanager.tdv | MUL_DEV_QM1 |
| smtp.from | DL.API.T2M@truist.com |
| input.inquiryLevel | 101,102,103,100,000,00 0,00ab0,000@,null, ,removetag |
| input.userids | A71595,A71 595,D34526,A7159500000000,000000000A71595,B12765,B12765#,null, ,removetag |
| input.channels | AD,BP,CSB,OLBWEB,OLB WEB,AR,OW,OM,BV,GH,MP,PV,NNC,CHANNEL,null, ,removetag |
| qmanager.tpp | MULTPPQM1 |
| wmq.queueManager2 | MUL_DEV_QM1 |
| wmq.queueManager3 | MUL_DEV_QM1 |
| doTestConnectivity | False |
| input.staticKeys | 1845192,1845195,201035013,1845200,1845212,35791287,0000000051778527,184-5212,18452.12,63103818,6310 3818,6310ab3818,34287311,0000000038081234,1337375,1174669,384899,1734152,1035079,9802055,1580961,1174631,2121607,1363479,2338997,7816684,1919249,2224265,162922,2065369,1131481,887250,389433,1903799,49629805,000000072149650,000000051778527,78527,null, ,removetag |
| input.applications | DDA,DA,ASD,DSA,DS A,DS#A, ,removetag |
| wmq.cps.numOfConsumers | 4 |
| input.customerids | 00004491623402066988,00004491623402568154,00004491623401502602,00004491623409665094,00004491623408382240,572267304,000000000572267304000000000000000000,00000000000000000000000000000000000572267304,000000000572267304#,00000128000000390a,-0.5,00004491623404821933,00004491623409195181,00004491623408613410,00004491623409772246,00004491623404815377,0000449162340 436319,00004491623409223777,00004491623405348197,00004491623405336145,null, ,removetag |
| wmq.connectionNameList.prep | trmqmultpp.truist-tst.com(11415) |
| wmq.connectionNameList | dev-vmulwmq01.bbtnet.com(11415) |
| gui.appHome | \${mule.home}/apps/\${app.name}/ |
| qmanager.mne | MUL_DEV_QM1 |
| wmq.host.drl | tdh-vmulwmq01.bbtnet.com |

3.1 src\main\resources\mule-app.properties (80 properties)

| Key | Value |
|----------------------------|---|
| wmq.dlp.requestqueue | EAPI_MUL.ESP.SCHEDULE.ARCHIVEAPPDATAAPI.TRIGGER |
| input.codes | 01,08,80,ad,F5,T6,H7,123,12A,#, ,null,removetag |
| wmq.sessionCacheSize | 25 |
| wmq.connectionNameList.ite | sit-vmulwmq01.bbtnet.com(11415) |
| qmanager.ibf | MULSITQM1 |
| wmq.connectionNameList.drl | tdh-vmulwmq01.bbtnet.com(11415) |
| wmq.channel | TDV.TLS.CMAS.SVRCON |
| channel.mne | ATD10.MUL.API.SVRCON |
| cacheupdate | /cacheupdate |
| channel.pite | PIT10.MUL.API.SVRCON |
| email.subject | T2M Review Tool Report |
| email.cqc.body | Hello, Please find the review summary below. |
| email.cqc.signature | Thanks & regards, Mule API review tool ***** This is an auto generated email, please do not reply to this email. |
| channel.ibf | PIT10.MUL.API.SVRCON |
| input.accountnumbers | 153211234567,2665544304,36104402555599,1470000863467,4147240000948099,4147241008461655,49629805,5422719530152416,5408009528211210,5408000500012056,5426579800051599,5408009528211210,4491611129302750,4491611302160918,5422769087016332,5408009528211210,2665544304,000000001033021050,000000001043052523,000000001033019986,7082052,7012510104884453,36104402555599,4147240000948099,000000000000000000004341824804502626,4341824804502626,4147240000948099,4118031270571165,41180312 70571165,41180312ab70571165,4000000000536312,4000000000536487,4000000000503197,1483138314,1483107664,148310-7664,14831076.64,0000000000503197,FF0ECC3D7B7D9AC978553605EC04EE90D288DBDA0713290FBCCCCFAF90A79-5D9B,4661890003334253,1470000863470,0000044300003032741,null, ,removetag |
| input.ssn | 00151739394,00151739395,00151-739395,001 517 3935,501-517-393,0151739395,001517ab39395,00151739395#,0000000000151739394,1517393940000000000,400101121,39394,null, ,removetag |
| password.gitlab | zq7_xjB8dtG7WpxZ3U-1 |
| wmq.cipherSuite | TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 |
| email.signature | Thanks & regards, T2M Review Tool ***** This is an auto generated email, please do not reply to this email. |
| wmq.channel2 | TDV.TLS.CMAS.SVRCON |
| channel.tpp | PRP10.MUL.API.SVRCON |
| wmq.channel3 | TDV.TLS.CMAS.SVRCON |
| input.amounts | 0,0,0,0.00000,0000.000,0000,0.12000,12.012223324,01,10,1,1ab,1#,-0.5,-10,251.75,100000.6756,56753,4563,\$3000,10000rs,null, ,removetag |
| wmq.reconnection.attempts | 1 |
| wmq.queuemanager | MUL_DEV_QM1 |
| smtp.port | 25 |
| truststore.path | bbt-internal-certs.jks |
| input.dates | 10/11/23,10/12/2021,13/13/2020,13-13-2020,13:13:2020,13:13:2020 00:12:12,13/10/2020 00:12:12,13/10/2020 00:12:12 IST,1/1/2020,1/1,1/2020,2023,2023ab,2023,20090301,200903,20090,2009,200,null, ,removetag |

3.1 src\main\resources\mule-app.properties (80 properties)

| Key | Value |
|----------------------------|--|
| ks.alias | eapi-mule-mq-client-cert-np |
| ocphost | https://api-lms-sandbox.eapi01.truist-dev.com/t2mpoc-eapi01-sbx |
| wmq.host.prep | trmqmultpp.truist-tst.com |
| qmanager.atdv | MUL_DEV_QM1 |
| apild | 1234 |
| channel.tdv | TDV10.MUL.API.SVRCON |
| ks.path | eapi-mule-mq-client-cert-np.jks |
| wmq.reconnection.frequency | 1000 |
| input.banknums | 102,0102,104,0104,01 02,01ab02,null,31505,2000,2000000,1020000000000000,-123, ,removetag |
| input.cardnumbers | 4661890021183302,4661890021183305,40070000000027,4661890015731397,4307450030004294,00000002500,4700480030001415,004035370100066008,0041304008000000025,45450700000000080,4393317108099412,4393319950043597,4393-3199-5004-3597,4393-31995004-3597,4661890021183503,466189002 1183302,46618900ab21183302,40070000000027,4661890021183302#,00000000000000004661890021183302,4661890021183302000000000000,890021183,4351420005029050,4661880067702990,4661880061152580,4661880053044639,4393316688084117,null, ,removetag |
| qmanager.drl | MULTDHQM1 |
| wmq.host.sit | sit-vmulwmq01.bbttnet.com |
| wmq.host | dev-vmulwmq01.bbttnet.com |
| smtp.hostname | internal-alerting.bbttnet.com |
| qmanager.ite | MULSITQM1 |
| input.names | AMWAY STES,JEROME DARD,JOHNY,DAVID,John2,Josh#,123 Fake Drive,Debostotra Jana,MACYS/GECCCC,Autaugaville,1661 Maple Ave,BANKAMERIC,CHESTER,FULTON,AL,GA,CA,MD,GB,GM,121 Single Fam Res, ,removetag |
| channel.ite | ITE10.MUL.API.SVRCON |
| email.body | Hello, Please find the attached review report and API level review summary below. |
| keystore.alias | eapi-mule-lastmile.truist-tst.com |
| qmanager.pite | MULSITQM1 |
| qmanager.trn | MULSITQM1 |
| wmq.cps.timetolive | 4 |
| channel.batch | TDV.MUL.BATCH.SVC |
| channel.drl | TDH10.MUL.API.SVRCON |
| wmq.port | 11415 |
| input.inds | I,A,B,C,D,F,G,HI,JKL,123,#, ,null,removetag |
| ts.path | multls.mq.tst.truist.com.jks |
| cacheretrieve | /cacheretrieve |
| username.gitlab | D97029 |
| t2mdbexport | /t2mdbexport |
| channel.atdv | ATD10.MUL.API.SVRCON |

3.2 src\main\resources\secure.properties (6 properties)

| Key | Value |
|----------------------------|---|
| truststore.wmq.keypassword | ![o+HlBx0x2JOmjK8omjjxXsGv3AWCH/3Z43IUuuamldU=] |
| lastmile.keypassword | ![p/06LGgH1QUpvWg0l8NgXA==] |
| log.encryption.pwd | ![yKyjr1Tz45zVqlZTuB/8yQ==] |
| wmq.password | ![o+HlBx0x2JOmjK8omjjxXsGv3AWCH/3Z43IUuuamldU=] |
| wmq.userid | ![5Xt/10X/w5XUIHsF65nurg==] |
| truststore.password | ![o+HlBx0x2JOmjK8omjjxXsGv3AWCH/3Z43IUuuamldU=] |

4. Connector Configurations

Total Configurations: 26

4.1. ATDV (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | 3153ef30-94b4-445b-9543-b6cb870f836f |
| name | ATDV |

4.1.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.2. Batch (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | 577dc52f-7414-46be-a487-04e6823c9fbb |
| name | Batch |

4.2.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.3. DRL (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | b461abf8-6483-4155-9d9f-3fee47553402 |
| name | DRL |

4.3.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.4. Database-Connection (db:config)

Path: src/main/mule/t2mdbexport.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Database Config |
| doc:id | bcb2903b-9858-4cbd-8fa6-40fc4922c90d |
| name | Database-Connection |

4.4.1 db:generic-connection

| Attribute | Value |
|-----------------|---|
| password | sql5678 |
| driverClassName | com.microsoft.sqlserver.jdbc.SQLServerDriver |
| user | SV-MULEAPIUTILSDB |
| url | jdbc:sqlserver://wil-sqltst05.bbnet. com:1433;DatabaseName=EAPIUTILSDB;encrypt=true;trustServerCertificate=true; |

4.5. Email_SMTP (email:smtp-config)

Path: src/main/mule/t2mdbexport.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Email SMTP |
| doc:id | 1e458940-e8e1-4b89-919c-c6e227a8880c |
| name | Email_SMTP |

4.5.1 email:smtp-connection

| Attribute | Value |
|-------------------|-------------------|
| port | \${smtp.port} |
| readTimeout | 50 |
| host | \${smtp.hostname} |
| writeTimeout | 50 |
| connectionTimeout | 50 |

4.6. File_Config (file:config)

Path: src\main\mule\interceptcicscalls.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | File Config |
| doc:id | 4920c81c-be8d-4078-96a2-eda06db0ad1c |
| name | File_Config |

4.7. GetCredential (http:request-config)

Path: src\main\mule\PLT.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | HTTP Request configuration |
| doc:id | b58e71dd-5a40-443b-865a-6ebb24d79a2a |
| name | GetCredential |

4.7.1 http:request-connection

| Attribute | Value |
|--------------------------|-------------------|
| protocol | HTTPS |
| port | 443 |
| host | gitlab.bbtnet.com |
| usePersistentConnections | false |

4.8. HTTPRVMule (http:request-config)

Path: src\main\mule\responsevalidator.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | HTTP Request configuration |
| doc:id | 88e84cb3-9d9f-4bd2-ba2e-b7a9cd0613d4 |
| name | HTTPRVMule |

4.8.1 http:request-connection

| Attribute | Value |
|--------------------------|------------------|
| protocol | HTTPS |
| port | 443 |
| host | #[vars.mulehost] |
| usePersistentConnections | false |

4.9. HTTPResponseCompare (http:request-config)

Path: src\main\mule\responsevalidator.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | HTTP Request configuration |
| doc:id | 7dc5c6c6-99b6-4900-82cb-d8ffe439b822 |
| name | HTTPResponseCompare |

4.9.1 http:request-connection

| Attribute | Value |
|--------------------------|-------------------|
| protocol | HTTPS |
| port | 443 |
| host | #[vars.tibcohost] |
| usePersistentConnections | false |
| tlsContext | TLS_ContextRV |

4.10. HTTP_Listener_config (http:listener-config)

Path: src\main\mule\t2mpoc.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | HTTP Listener config |
| doc:id | 1044a46a-98f5-442c-ad71-63fa76f4c8cc |
| name | HTTP_Listener_config |

4.10.1 http:listener-connection

| Attribute | Value |
|--------------------------|-------------|
| protocol | HTTPS |
| port | 8081 |
| host | 0.0.0.0 |
| usePersistentConnections | false |
| tlsContext | TLS_Context |

4.11. HTTP_Request_configuration (http:request-config)

Path: src\main\mule\interceptcicscalls.xml

| Attribute | Value |
|-----------|-------------------------------------|
| doc:name | HTTP Request configuration |
| doc:id | faf5f8d4-ca88-4e87-b4b1-2fdb21d434a |
| name | HTTP_Request_configuration |

4.11.1 http:request-connection

| Attribute | Value |
|--------------------------|--------------|
| port | #[vars.port] |
| host | #[vars.host] |
| usePersistentConnections | false |

4.12. IBF (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | e8ef495f-bb50-4b0b-9dd8-5254935513e1 |
| name | IBF |

4.12.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.13. ITE (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | dd787f93-17d1-4492-a3ff-e8fdd8dac3f4 |
| name | ITE |

4.13.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.14. MNE (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | aa6b25a8-24d1-4374-a877-f2d68756a0e8 |
| name | MNE |

4.14.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.15. ObjectStore_Config (os:config)

Path: src\main\mule\t2mpoc.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | ObjectStore Config |
| doc:id | d5b9e4e4-cb13-41da-a74c-3d119578f8b4 |
| name | ObjectStore_Config |

4.16. PITE (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | 3dd02435-4aeb-4b42-88fa-9e46956b74a6 |
| name | PITE |

4.16.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.17. PLTChecklistupload (http:request-config)

Path: src\main\mule\PLT.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | HTTP Request configuration |
| doc:id | a966099a-33ee-4651-b235-f820de2ceffb |
| name | PLTChecklistupload |

4.17.1 http:request-connection

| Attribute | Value |
|--------------------------|-------------------|
| protocol | HTTPS |
| port | 443 |
| host | gitlab.bbtnet.com |
| usePersistentConnections | false |

4.18. Policy_TLS_Context (tls:context)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | TLS Context |
| doc:id | 8ced47e2-cc3c-4440-9cc8-ab577160313d |
| name | Policy_TLS_Context |

4.18.1 tls:trust-store

| Attribute | Value |
|-----------|--------------------------|
| path | \${ts.path} |
| password | \${secure::wmq.password} |
| type | jks |

4.18.2 tls:key-store

| Attribute | Value |
|-------------|--|
| path | \${ks.path} |
| password | \${secure::truststore.wmq.keypassword} |
| keyPassword | \${secure::truststore.wmq.keypassword} |
| alias | \${ks.alias} |
| type | jks |

4.19. Secure_Properties_Config (secure-properties:config)

Path: src\main\mule\t2mpoc.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Secure Properties Config |
| doc:id | e84cf3e7-33b7-4b84-ac9f-106d67796258 |
| file | secure.properties |
| name | Secure_Properties_Config |
| key | \${secure.key} |

4.20. TDV (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | 8c032524-9324-4e54-8c4b-9fabb92cd01f |
| name | TDV |

4.20.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.21. TLS_Context (tls:context)

Path: src\main\mule\t2mpoc.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | TLS Context |
| doc:id | b530699e-cf2c-4bc9-a07d-6ace5b7d40f0 |
| name | TLS_Context |

4.21.1 tls:key-store

| Attribute | Value |
|-------------|----------------------------------|
| path | \${keystore.path} |
| password | \${secure::lastmile.keypassword} |
| keyPassword | \${secure::lastmile.keypassword} |
| alias | \${keystore.alias} |
| type | jks |

4.22. TLS_ContextRV (tls:context)

Path: src\main\mule\responsevalidator.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | TLS Context |
| doc:id | ffd24f90-22c9-47ae-9e73-a5f2e8b5aeeb |
| name | TLS_ContextRV |

4.22.1 tls:trust-store

| Attribute | Value |
|-----------|---------------------------------|
| path | \${truststore.path} |
| password | \${secure::truststore.password} |
| type | jks |

4.23. TPP (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | 7ea9137c-fa1a-4865-a7a8-140c55b2fcf0 |
| name | TPP |

4.23.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.24. TRN (ibm-mq:config)

Path: src\main\mule\mulemqtrigger.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | IBM MQ Config |
| doc:id | f9b56120-b8d9-409e-a5db-2061c09a94b1 |
| name | TRN |

4.24.1 ibm-mq:connection

| Attribute | Value |
|-------------|------------------------|
| tlsContext | Policy_TLS_Context |
| cipherSuite | \${wmq.cipherSuite} |
| username | \${secure::wmq.userid} |

4.25. api-gateway:autodiscovery (api-gateway:autodiscovery)

Path: src\main\mule\t2mpoc.xml

| Attribute | Value |
|----------------|--------------------------------------|
| doc:name | API Autodiscovery |
| doc:id | bec42e52-341a-4a11-95db-fa894f8ff968 |
| ignoreBasePath | true |
| apild | \${apild} |
| flowRef | t2mpocFlow |

4.26. bbtnetconnection (http:request-config)

Path: src\main\mule\responsevalidator.xml

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | HTTP Request configuration |
| doc:id | 58c8bfac-61bd-4090-b5a1-9cd951ceb860 |
| name | bbtnetconnection |

4.26.1 http:request-connection

| Attribute | Value |
|--------------------------|---------------------------|
| port | 81 |
| host | webservicetest.bbtnet.com |
| usePersistentConnections | false |

5. Mule Flows

Total Flows: 39

5.1. apireviewexceptionsFlow

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 30

5.1.1 http:listener

| Attribute | Value |
|------------|--|
| doc:name | Listener |
| path | /addreviewexception/{index}/{failurecount} |
| doc:id | 7370492c-981e-4779-acc1-8ae7ed484825 |
| config-ref | HTTP_Listener_config |

5.1.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | b5c6020d-5742-4a63-9c4c-a2aad41c6acb |

5.1.3 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try1 |
| doc:id | e705a29f-58f1-498d-9e74-694c816eebb7 |

5.1.4 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 10da896e-f644-4013-93e1-72486ea4977a |
| location | web\exceptionresponse.html |

5.2. AddException

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 30

5.2.1 http:listener

| Attribute | Value |
|------------|---|
| doc:name | Listener |
| path | /addreviewexception/{index}/{failurecount}/{developer}/{servicename}/{approver}/{exceptionreason} |
| doc:id | 658f2248-da03-4f8c-97b4-9ecb2f30c592 |
| config-ref | HTTP_Listener_config |

5.2.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | ccd81241-3ed1-4570-a2c7-7865afddfe53 |

5.2.3 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | 71175591-e30f-4e9d-95a7-e73e6b786a7c |

5.2.4 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try1 |
| doc:id | 1311b6d1-f360-4dcb-ae5e-2f086d3439e2 |

5.2.5 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 2ef4be81-349e-481c-a518-75273638f0fc |
| location | web\exceptionapproved.html |

5.3. apireviewexceptionsFlow1

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 2

5.3.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /apireviewexceptions |
| doc:id | 2636d7fc-3c65-4e01-b45a-543a438b5def |
| config-ref | HTTP_Listener_config |

5.3.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | e6df46e6-130b-4089-a85c-a10abc10fe3b |
| location | web\reviewexceptions.html |

5.4. apireviewexceptionsFlow3

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 21

5.4.1 http:listener

| Attribute | Value |
|------------|---|
| doc:name | Listener |
| path | /rejectexception/{developer}/{approver}/{servicename} |
| doc:id | fc45d159-9b5a-49f2-94a7-e26559e67659 |
| config-ref | HTTP_Listener_config |

5.4.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | bcbef359-d5f9-471d-8328-96d4a5142469 |

5.4.3 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | c74413f9-82c2-4fc5-bd4e-167cfaae5c01 |

5.4.4 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 5ead0baa-5d14-41a1-a939-36eba02ec052 |
| location | web\exceptionrejected.html |

5.5. apireviewexceptionsFlow2

Path: src\main\mule\apireviewexceptions.xml

Type: flow

Components: 23

5.5.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /getfailurecount |
| doc:id | 903b3de5-c7cc-4068-bfd8-d6c823707de4 |
| config-ref | HTTP_Listener_config |

5.5.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 050d7bda-b5d8-428e-b676-3205a24c8056 |

5.5.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 70cde1ef-9ba2-40ad-b4eb-37ae677b3dbd |
| config-ref | Database-Connection |

5.5.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 42d633b7-6d3e-42d0-85be-debe93254646 |

5.5.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 022ac24f-e96f-45b7-92cf-f7427098a477 |

5.5.6 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 6b32b02d-5809-42bf-93ee-dcb6f93404be |
| location | web\fetchfailures.html |

5.6. devtrackerreadFlow

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 87

5.6.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /getratelimits |
| doc:id | c57b6416-9d07-4773-9c72-d7fb7dce63b8 |
| config-ref | HTTP_Listener_config |

5.6.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 16e5112d-6418-4806-9d6a-241f8eb5c508 |

5.6.3 os:retrieve

| Attribute | Value |
|-------------|--------------------------------------|
| doc:name | Retrieve |
| doc:id | 6b722f4d-997e-421f-9873-2e7cb73a10ea |
| objectStore | Object_store |
| key | Development |

5.6.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 836b6505-e3a4-45a6-8c93-4014ec32e180 |

5.6.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 5d4f8fd7-57c6-4b82-9af1-c3b980bcda21 |

5.6.6 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | c02d757b-a36b-4f52-bbb4-080e589e1833 |
| collection | #[vars.apiname default []] |

5.6.7 choice

| Attribute | Value |
|-----------|-------------------------------------|
| doc:name | Choice |
| doc:id | db7add0-65d2-4988-8180-c7c8844e81c0 |

5.7. devtrackerreadFlow1

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 2

5.7.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /ratelimits |
| doc:id | 84df5f78-89ea-456e-a318-40e6a0a21cd8 |
| config-ref | HTTP_Listener_config |

5.7.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 30eaca26-0dad-417b-9682-5d7615066fb6 |
| location | web\getratelimits.html |

5.8. devtrackerreadFlow2

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 8

5.8.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /loadtracker |
| doc:id | 1c64624a-7d1f-40c2-b077-9da914b8fc69 |
| config-ref | HTTP_Listener_config |

5.8.2 file:read

| Attribute | Value |
|----------------|---|
| doc:name | Read |
| path | #[p('gui.apphome') ++ "T2M Wave0 Development Tracker.xlsx"] |
| doc:id | d5e41ade-231c-4c4f-ae8b-985ad11b524f |
| outputMimeType | application/xlsx |
| config-ref | File_Config |

5.8.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 8354b08e-2140-4698-aef2-43e9335be227 |

5.8.4 os:store

| Attribute | Value |
|-----------------|--------------------------------------|
| doc:name | Store |
| doc:id | 0bf00d12-4090-4f01-84b9-f06561530a1b |
| objectStore | Object_store |
| failOnNullValue | false |
| key | Development |

5.8.5 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | a8997569-764f-4555-874d-55be38b6e1be |
| location | web\devtrackerloaded.html |

5.9. devtrackerreadFlow3

Path: src\main\mule\devtrackerread.xml

Type: flow

Components: 2

5.9.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /trackerload |
| doc:id | 2005b670-0626-4764-a670-c77f7e35b78b |
| config-ref | HTTP_Listener_config |

5.9.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | ab08e6fb-7c53-40a7-b6e2-68d08ffc0526 |
| location | web\trackerload.html |

5.10. interceptcicscallsFlow

Path: src\main\mule\interceptcicscalls.xml

Type: flow

Components: 44

5.10.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /cicsintercept/{name} |
| doc:id | f9b02d64-5549-45e4-8198-4db74b3ddc4c |
| config-ref | HTTP_Listener_config |

5.10.2 set-payload

| Attribute | Value |
|-------------|--------------------------------------|
| doc:name | Set Payload |
| doc:id | ebadc2da-af03-4f22-85c7-05acae6b2184 |
| contentType | text/plain |
| value | #[payload] |

5.10.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | a443f71c-eb89-4c06-b862-d12d15e63926 |

5.10.4 logger

| Attribute | Value |
|-----------|---|
| doc:name | Logger |
| doc:id | baea2a8f-5431-4941-b0cf-18c1ff015b93 |
| level | INFO |
| message | #[%dw 2.0 output text/plain --- (vars.configuration default 'N/A') ++ (vars.postdata default "") ++ (vars.authorization default "")] |

5.10.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 8157900b-8e0c-46b9-bf6c-f6dfc0d0dc2d |

5.10.6 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | 8ca804c4-02f8-4dfe-bd95-19151e256177 |

5.10.7 db:insert

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Insert |
| doc:id | 744e1e2f-3636-4d5a-820a-59d1a2665679 |
| config-ref | Database-Connection |

5.10.8 logger

| Attribute | Value |
|-----------|--|
| doc:name | Logger |
| doc:id | bafd4e79-cfba-4849-8806-3c37aba7ab3e |
| level | INFO |
| message | <pre> #[%dw 2.0 output application/json --- { APP_NAME : vars.apptype default "", SERVICE_NAME : vars.service default "", OPERATION_NAME : vars.operation default "", HOST : vars.host default "", PORT : vars.port default "", PROGRAM_ID : vars.program default "", REQUEST_URI : vars.requesturi default "", RECEIVED_URI : vars.configuration default "", POST_DATA : vars.postdata default "", CREDENTIAL_RECEIVED : vars.authorization default "", TXN_TIMESTAMP : (now() >> "America/New_York") as String {format: "y-MM-dd HH:m:s"}, STATUS_CODE : attributes.statusCode , STATUS_DESC : attributes.reasonPhrase default "", STACK_TRACE : (write(attributes,'application/json')) default "", RESPONSE_PAYLOAD : vars.responsepayload default "", RESERVE1 : vars.correlationid default "", CORRELATION_ID : vars.tibcocorrelationid default "" }] </pre> |

5.10.9 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 79729818-9b1d-4b8a-96b2-ee929f7a4419 |

5.11. interceptcicscallsFlow1

Path: src\main\mule\interceptcicscalls.xml

Type: flow

Components: 12

5.11.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /comparecics |
| doc:id | f2ec4056-5916-40ba-8dd9-e198c9922046 |
| config-ref | HTTP_Listener_config |

5.11.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | cfdc6ca7-ee44-4144-8912-fe3df0cfe24c |

5.11.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | c9a37c98-26af-4546-b1e2-02d2d8c6c74a |
| config-ref | Database-Connection |

5.11.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | d7d845d4-800b-4fc5-af0f-3a9c1760d018 |

5.11.5 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | f3e7390e-7da0-46d2-9ff7-ea8160cc8533 |

5.12. interceptcicscallsFlow2

Path: src\main\mule\interceptcicscalls.xml

Type: flow

Components: 3

5.12.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /cicsinterceptor |
| doc:id | c17c3ed1-97b8-4ee9-b0ad-7474e4ba77df |
| config-ref | HTTP_Listener_config |

5.12.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 26c8e04b-ccb2-48b3-af8b-276d864ddf80 |

5.13. mulemqtriggerFlow

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 105

5.13.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /mqtrigger |
| doc:id | f83a440f-cbd8-4486-b698-673681669134 |
| config-ref | HTTP_Listener_config |

5.13.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 6c7bf1e9-4c95-47fd-b237-d7e885eca647 |

5.13.3 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | 436239fc-539b-4cae-ab1f-2b78f705abc5 |

5.14. mulemqtriggerhome

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 2

5.14.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /mulemqtrigger |
| doc:id | f940ff22-1637-4515-88d8-88ff9cc3ddd6 |
| config-ref | HTTP_Listener_config |

5.14.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 96ce2cd9-73d1-472c-a24a-0f10b8b8d893 |
| location | web\mulemqtrigger.html |

5.15. mulemqtriggerFlow1

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 6

5.15.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /consumequeue |
| doc:id | 1b107f3d-e601-4b39-a8a4-4eb556886ba1 |
| config-ref | HTTP_Listener_config |

5.15.2 set-variable

| Attribute | Value |
|--------------|--------------------------------------|
| doc:name | Set Variable |
| doc:id | 6f255b93-b121-4cb7-b50b-553485d338bb |
| variableName | batchqueue |
| value | MUL.ESP.WIREDAILYREPORTAPI.TDV.L |

5.15.3 ibm-mq:consume

| Attribute | Value |
|-------------|--------------------------------------|
| doc:name | Consume |
| doc:id | dc2ac41f-fa74-45f6-a0fb-f82035b75b02 |
| config-ref | Batch |
| ackMode | IMMEDIATE |
| destination | #[vars.batchqueue default ""] |

5.15.4 logger

| Attribute | Value |
|-----------|--|
| doc:name | Logger |
| doc:id | 3f4b7e85-c02a-4aab-857e-7fb8ea5e2c16 |
| level | INFO |
| message | #[payload ++ " has been received over " ++ (vars.batchqueue default "")] |

5.16. mulemqtriggerFlow2

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 79

5.16.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /consume |
| doc:id | d1ecdb10-9429-4e21-87f0-945644831e80 |
| config-ref | HTTP_Listener_config |

5.16.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 3d6adb03-1926-4d48-9c74-d99688da46ec |

5.16.3 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | 7267fd43-02d3-4036-80cd-83911b901481 |

5.17. mulemqtriggerFlow3

Path: src\main\mule\mulemqtrigger.xml

Type: flow

Components: 2

5.17.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /mqconsumer |
| doc:id | 701aebc0-fc65-4034-ae03-1e0518abf3ba |
| config-ref | HTTP_Listener_config |

5.17.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | fd4e2dd6-5451-4328-a05f-7e414a7d4e8c |
| location | web\mqconsumer.html |

5.18. parentpomconversionFlow

Path: src\main\mule\parentpomconversion.xml

Type: flow

Components: 24

5.18.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /addparentpomconfig |
| doc:id | 978e5d14-1167-4238-81f6-8b07ec46bfcf |
| config-ref | HTTP_Listener_config |

5.18.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | f10c6060-434c-40e8-bef8-b01250576ee9 |

5.18.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | d353c11a-be72-4b67-a1df-54602caaa5c0 |

5.18.4 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | 46e1b927-8d95-4baf-afbd-dd9816719413 |
| collection | #[vars.dependencycontent default []] |

5.18.5 set-payload

| Attribute | Value |
|-------------|--|
| doc:name | Set Payload |
| doc:id | 16dc2f6e-eeef-48a2-8ef7-e072dabfacbc |
| contentType | application/xml |
| value | <pre>#[%dw 2.0 --- (vars.contentbeforeproperties default "") ++ (vars.propertycontent default "") ++ (vars.contentbeforedependencies default "") ++ "<dependencies>" ++ (vars. updateddependencycontent default "") ++ "</dependencies>" ++ (vars. contentafterdependencies default "")]</pre> |

5.18.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 3214c5ff-4a4a-49bf-ab00-e88273f62b8a |

5.18.7 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 3b0b80da-6dee-4683-a91a-5530e5e64745 |
| location | web\parentpomresponse.html |

5.19. parentpomconversionFlow1

Path: src\main\mule\parentpomconversion.xml

Type: flow

Components: 2

5.19.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /addparentpom |
| doc:id | 03870793-c0ec-4813-a287-222bbdad86bd |
| config-ref | HTTP_Listener_config |

5.19.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 5bf5758e-d5b4-4dbc-8f75-ba31282b4154 |
| location | web\addparentpom.html |

5.20. PLTFlow

Path: src\main\mule\PLT.xml

Type: flow

Components: 30

5.20.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /pltsummary |
| doc:id | 38c63198-7be5-4e42-952c-bc50c6bbad70 |
| config-ref | HTTP_Listener_config |

5.20.2 choice

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Choice |
| doc:id | 2a849623-35e9-4af3-bce7-c90dc38ab668 |

5.20.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 383b78bb-9ff1-437d-9176-eefbcfe6e660 |

5.20.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 18aca5ee-c1e6-4421-9919-2147661cdfd8 |

5.20.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | a1777432-8a8f-4e18-b14c-cf8419c25ca1 |

5.20.6 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 255afa10-492b-4a37-9337-4bfcd5f5b812 |
| location | web\pltsummary.html |

5.21. PLTUpdate

Path: src\main\mule\PLT.xml

Type: flow

Components: 38

5.21.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /updatepltentry/{index} |
| doc:id | e0ea1a2e-303b-40d6-8691-2991ee7e63dc |
| config-ref | HTTP_Listener_config |

5.21.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 72d2f2c8-5a4f-4ac8-9b65-12890801db13 |

5.21.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 8c740e47-fc00-4352-872f-aa922f69d76f |
| config-ref | Database-Connection |

5.21.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 8da605cd-443e-4595-9295-5010718428a2 |

5.21.5 db:update

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Update |
| doc:id | 73c89eaf-8169-49fa-bc46-7d60fb78d2e4 |
| config-ref | Database-Connection |

5.21.6 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | db76fd06-2dc0-403d-9ca1-7f4b4cca759b |
| config-ref | Database-Connection |

5.21.7 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message1 |
| doc:id | 0563d67f-3f61-4d77-88ef-da84e36b7b6c |

5.21.8 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message2 |
| doc:id | a44f4af8-6e4c-4304-b176-9bdffd4433ff |

5.21.9 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message3 |
| doc:id | fdbe3150-5777-4ec3-8c0a-0dd1340b796b |

5.21.10 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | e1817831-1a7a-423a-b8cd-3739712393e8 |
| location | web\existingplntentries.html |

5.22. PLTFlow2

Path: src\main\mule\PLT.xml

Type: flow

Components: 20

5.22.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /fetchpltdata |
| doc:id | c92384dc-e76b-4a56-a7c3-a0ed0522e97e |
| config-ref | HTTP_Listener_config |

5.22.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 37f669b6-bad6-4e39-9799-b21540b4b2c0 |

5.22.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 8ab45822-25bf-4f42-845e-7981fad7f3f7 |
| config-ref | Database-Connection |

5.22.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message1 |
| doc:id | 4f6ca73a-5035-46a9-81f5-ad3481a9f4c4 |

5.22.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message2 |
| doc:id | f2189895-3f1d-4549-8408-3e565944b127 |

5.22.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message3 |
| doc:id | 68a63311-7ccd-45c8-b393-d7911a94f2c9 |

5.22.7 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 59ce5a2a-a95c-4140-9ecd-83fc26f77cfe |
| location | web\existingplentries.html |

5.23. PLTFlow1

Path: src\main\mule\PLT.xml

Type: flow

Components: 2

5.23.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /plt |
| doc:id | 127414d0-876c-4082-959a-93e4ebb1caec |
| config-ref | HTTP_Listener_config |

5.23.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 1476dbc5-42c9-4de5-82f4-0c761477607e |
| location | web\fetchpltdata.html |

5.24. PLTFlow3

Path: src\main\mule\PLT.xml

Type: flow

Components: 54

5.24.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /addpltentry |
| doc:id | d63e35a2-7719-44c6-8964-c9b079740015 |
| config-ref | HTTP_Listener_config |

5.24.2 ee:transform

| Attribute | Value |
|-----------|-------------------------------------|
| doc:name | Transform Message |
| doc:id | 6d1ca89f-a1d6-433f-ae8-011da43bd675 |

5.24.3 db:insert

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Insert |
| doc:id | 1529647d-5e13-4d1d-9c48-d088dea68a8c |
| config-ref | Database-Connection |

5.24.4 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 1eb505c2-696e-42b7-a708-65adfa9e724d |
| config-ref | Database-Connection |

5.24.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message1 |
| doc:id | 3f1bddc6-6bb3-4411-a081-666c2e81bcc3 |

5.24.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message2 |
| doc:id | 44e5ece1-5e3e-4d51-996c-c80307689cf3 |

5.24.7 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message3 |
| doc:id | 8dc0516b-5989-4dbc-9d16-6ca326cb6044 |

5.24.8 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | c66b032b-12cb-4b15-890b-8d6fcc6fe5da |
| location | web\existingplntentries.html |

5.24.9 error-handler

5.25. PLTFlow4

Path: src\main\mule\PLT.xml

Type: flow

Components: 12

5.25.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /loadpltdatabulk |
| doc:id | 47278ef7-18e1-4b2b-9e63-7eb35f3ee14a |
| config-ref | HTTP_Listener_config |

5.25.2 file:read

| Attribute | Value |
|----------------|--|
| doc:name | Read |
| path | C:\data\PLT\Wave 7 & 8\Wave 7 and 8 PLT.xlsx |
| doc:id | 793f1de9-3d1d-4f36-a578-730c2322720d |
| outputMimeType | application/xlsx |
| config-ref | File_Config |

5.25.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 0da7de13-cd5e-4235-bfc8-acb71fcf6168 |

5.25.4 foreach

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | For Each |
| doc:id | 54941d89-4dd3-4ba0-a2bb-204d4616689f |

5.26. PLTFlow5

Path: src\main\mule\PLT.xml

Type: flow

Components: 65

5.26.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /requestplt |
| doc:id | 60491449-37e4-41e5-86c5-99893a2593f1 |
| config-ref | HTTP_Listener_config |

5.26.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 3d85a7f1-9b58-4afa-abba-847d10ffaa73 |

5.26.3 choice

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Choice |
| doc:id | fc68bf03-35f6-4e8f-8aad-ece7f341b965 |

5.27. PLTFlow6

Path: src\main\mule\PLT.xml

Type: flow

Components: 2

5.27.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /pltrequest |
| doc:id | 5f27fb4c-8a09-441f-81aa-581037f8e50d |
| config-ref | HTTP_Listener_config |

5.27.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 26b269e9-cb2c-4f4a-8a8f-9501e5a62dc9 |
| location | web\requestpltstart.html |

5.28. PLTFlow7

Path: src\main\mule\PLT.xml

Type: flow

Components: 79

5.28.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /fetchapireviewstatus |
| doc:id | 770869e5-1e94-4ab8-9935-88b9c8e84628 |
| config-ref | HTTP_Listener_config |

5.28.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 5b35ffe4-b7b9-4711-94bc-333ad9240303 |

5.28.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | e6a69c3b-fc7e-4cb3-a2a2-6f0315d72c88 |
| config-ref | Database-Connection |

5.28.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 78df76f4-35bb-4c16-a2dd-780d2e1c0a78 |

5.28.5 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | e0b20b2b-39dc-4806-b266-6a3712edc563 |

5.28.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | eaecd8d0-1298-4fc0-b23c-6584c9e2aae3 |

5.28.7 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | 51358bf2-5d6a-4e99-b41d-82092d497770 |

5.28.8 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | a1b5fd62-bb1e-437b-b343-fe0cbe2f474d |

5.28.9 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | c9fd1537-98ee-48ca-9db9-ac455f5f0558 |

5.28.10 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message1 |
| doc:id | 2629bdce-439b-484a-85c4-e2c6acb5e0b3 |

5.28.11 http:request

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | request |
| path | #[payload] |
| doc:id | 17d3e2f6-08c4-439d-a29b-dd3fcfd233cd |
| method | GET |
| config-ref | GetCredential |

5.28.12 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message2 |
| doc:id | 6326e9a7-bec7-4ce6-b099-bf14c23d981a |

5.28.13 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message3 |
| doc:id | ee8d2fd6-8b17-42dd-a003-a851c5d6061c |

5.28.14 http:request

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Request |
| path | #[payload] |
| doc:id | 3684f2d5-3ca1-41fe-bc89-b8f3145efd44 |
| method | GET |
| config-ref | GetCredential |

5.28.15 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | b3fa3834-b9bf-4d84-a6d8-8788fb65ce76 |

5.28.16 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 74214964-54df-45da-992f-7528dada20d3 |
| location | web\apipltvalidation.html |

5.29. PLTLive

Path: src\main\mule\PLT.xml

Type: flow

Components: 43

5.29.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /pltplanned |
| doc:id | d394596b-4d1e-4e16-9ae3-bd4d39495265 |
| config-ref | HTTP_Listener_config |

5.29.2 choice

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Choice |
| doc:id | 9805d70c-ddfa-4303-9585-fe6e6f9bde31 |

5.29.3 choice

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Choice |
| doc:id | 09348612-9e2e-4355-859e-2f798684714a |

5.29.4 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 10ab1b5d-89f4-4ed1-89d7-02bb2e8696dd |
| config-ref | Database-Connection |

5.29.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | de9bd3f0-102c-4071-908c-c1fc9fa675a5 |

5.29.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 801cc97f-8737-4662-aaaf-da39950d71e1 |

5.29.7 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | 4f84db55-5597-4a79-b399-72be8e1855c4 |
| collection | #[payload] |

5.29.8 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 0464ce59-3b79-4b30-af20-612b070e0150 |
| location | web\ongoingplt.html |

5.30. PLTLiveStart

Path: src\main\mule\PLT.xml

Type: flow

Components: 2

5.30.1 http:listener

| Attribute | Value |
|------------|-------------------------------------|
| doc:name | Listener |
| path | /planplt |
| doc:id | aa309db3-e69c-4359-b9f0-ae08c6343a8 |
| config-ref | HTTP_Listener_config |

5.30.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | b5b448d3-7582-470e-81a0-82d2d3b61bd5 |
| location | web\pltpanning.html |

5.31. responsevalidatorFlow

Path: src\main\mule\responsevalidator.xml

Type: flow

Components: 286

5.31.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /compareresponses |
| doc:id | e26d407a-6b58-48d7-8687-58a738bb2992 |
| config-ref | HTTP_Listener_config |

5.31.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 90b88bbc-7c67-4899-83f4-f51ec0e4d727 |

5.31.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | f923c383-f1cf-44ab-b9a6-3eb10ecfd1c0 |

5.31.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 5d62c7b8-15b1-4291-8c39-cd2c85c9bc4b |

5.31.5 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | 9bfd61c3-6156-4b0c-8cbc-39652505bd3a |
| collection | #[payload default []] |

5.31.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 416add2a-b71e-42a0-9b16-eb376139919c |

5.31.7 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | a016202f-d365-4280-b6fa-54510d516642 |
| collection | #[payload default []] |

5.31.8 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | fe1d7e33-441a-42f8-921d-30f6bb28c0d1 |

5.31.9 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try |
| doc:id | 8a5c31aa-49da-42e0-9158-7ebf72703026 |

5.31.10 try

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Try1 |
| doc:id | 2d946306-9a51-4879-868f-42ea00d29443 |

5.31.11 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | ae69f99e-3708-4742-b007-f31dd458ea68 |
| location | web\compareapiresponses.html |

5.32. responsevalidatorFlow1

Path: src\main\mule\responsevalidator.xml

Type: flow

Components: 2

5.32.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /compareapiresponses |
| doc:id | f5c8b649-8f37-46c4-8b01-6a9c4c07a5bd |
| config-ref | HTTP_Listener_config |

5.32.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | cb5586a4-e511-4e12-b880-bb119bb194d0 |
| location | web\compareresponseseshome.html |

5.33. t2mdbexportFlow

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 58

5.33.1 scheduler

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Scheduler |
| doc:id | 17e6aafe-926e-49e2-b2c7-3a37eb3913e0 |

5.33.2 logger

| Attribute | Value |
|-----------|--|
| doc:name | Logger |
| doc:id | 3bde5e67-e45e-44fd-95cb-f57632267abb |
| level | INFO |
| message | Daily review report has been triggered |

5.33.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 3eb45017-d30d-4024-87db-f489aa99065c |
| config-ref | Database-Connection |

5.33.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 49066764-49a2-4ae9-aaf5-da0a2771c68b |

5.33.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message1 |
| doc:id | b1edf3dd-0f4d-4a07-bc78-168e5a612fd9 |

5.33.6 set-payload

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Set Payload |
| doc:id | faa813aa-a04c-4b4c-9e91-c93f3cfb7978 |
| value | #[payload] |

5.33.7 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message2 |
| doc:id | 6823bd08-1e78-4979-9354-43fa7869cf75 |

5.33.8 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | e35e9595-a65b-41b0-ac98-3b57429f39e1 |
| collection | #[vars.dbresponse default []] |

5.33.9 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message3 |
| doc:id | 9602c730-7129-4721-9b49-7c014568f16a |

5.33.10 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message4 |
| doc:id | d1fccb48-4eb8-4c7b-9056-d7623dde01a6 |

5.33.11 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message5 |
| doc:id | 83ef27b3-0e24-4df2-9ba2-1ba9c4cf301f |

5.33.12 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message6 |
| doc:id | 642f0daa-8698-4dec-a57c-594fffb02983 |

5.33.13 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message7 |
| doc:id | e87984a9-031a-41f9-98f0-0a3991e3bea9 |

5.33.14 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message8 |
| doc:id | eb9cd7aa-0680-41b7-8f6e-fcf49748098c |

5.33.15 email:send

| Attribute | Value |
|-------------|--------------------------------------|
| doc:name | Send |
| doc:id | 57e1b14d-9694-44db-bfa5-7db22ced0575 |
| config-ref | Email_SMTP |
| subject | #["T2M Review Tool Report - Daily"] |
| fromAddress | \${smtp.from} |

5.34. t2mdbexportFlow1

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 56

5.34.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | \${t2mdbexport} |
| doc:id | 6ed0fa4b-1a2e-4ce5-9d07-68a087d866d8 |
| config-ref | HTTP_Listener_config |

5.34.2 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 94fc2cb5-152c-4090-8d67-ac243999180e |
| config-ref | Database-Connection |

5.34.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 28fbaeaf-a54c-4aa8-83b8-deef2deba110 |

5.34.4 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message1 |
| doc:id | dfcc2af2-f2bc-4626-b617-14be12b5ddcf |

5.34.5 set-payload

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Set Payload |
| doc:id | b6341ecf-a95e-4c10-ac35-9ad258474155 |
| value | #[payload] |

5.34.6 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message2 |
| doc:id | b95eb1d2-689b-4043-9a24-b1a7f074dd5e |

5.34.7 foreach

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | For Each |
| doc:id | 7d94a485-3df0-416d-ab85-41a65b84f595 |
| collection | #[vars.dbresponse default []] |

5.34.8 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message3 |
| doc:id | 7eb5dc60-422e-4b4e-b7fa-a274e3fa93cb |

5.34.9 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message4 |
| doc:id | e01ff422-ed58-44a3-9e5e-958e4aa48209 |

5.34.10 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message5 |
| doc:id | aff2448f-f04b-43a9-b204-6688e4dcd532 |

5.34.11 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message6 |
| doc:id | 18e24366-d626-4426-a163-44856662f70d |

5.34.12 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message7 |
| doc:id | 92050549-efdf-4d99-b315-01c734d7e3a6 |

5.34.13 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message8 |
| doc:id | bba05bbd-9429-4438-8a3c-9b3c940ee7bb |

5.34.14 email:send

| Attribute | Value |
|-------------|-------------------------------------|
| doc:name | Send |
| doc:id | 71dc98-25a1-41d1-b6cc-4f883ce996e2 |
| config-ref | Email_SMTP |
| subject | #["T2M Review Tool Report - Daily"] |
| fromAddress | \${smtp.from} |

5.34.15 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 50d9bfc9-1d98-4a24-b55f-e357fc0b39d9 |
| location | web\t2mdailyreviewreport.html |

5.35. ReviewSummary

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 109

5.35.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /t2mapisummary |
| doc:id | a625f3d7-e788-4444-980b-fb894ccedfe1 |
| config-ref | HTTP_Listener_config |

5.35.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 8d926f6b-2ea7-4d32-a691-dcf3332407d4 |

5.35.3 db:select

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Select |
| doc:id | 0a74599b-18f6-4c83-8d60-85c856d087c1 |
| config-ref | Database-Connection |

5.35.4 choice

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Choice |
| doc:id | 706dd92e-f3eb-4cc4-a7da-1932bf32bd9a |

5.35.5 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 5baa9aac-8f7d-4362-9f14-29c02175f735 |

5.35.6 set-variable

| Attribute | Value |
|--------------|---|
| doc:name | Set Variable |
| doc:id | 0c76067f-dda8-4d12-9e40-bf41051cacfa |
| variableName | apireviewsummary |
| value | #[%dw 2.0 output text/plain --- vars.mapdata.mapdata joinBy("\n")] |

5.35.7 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 85163cb8-939f-4f0b-9874-3051c9e45964 |

5.35.8 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 9027f013-eb69-4ed6-a3a1-26c743aa1f84 |

5.35.9 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | cd28d408-9ee9-45c2-ba2c-c7fb30b60ea8 |

5.35.10 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 59cb009e-8c2f-433a-ae73-6c906e41fee1 |

5.35.11 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 4cfb3ac0-c576-4f22-87e8-96c916a36d8b |

5.35.12 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 11aca510-0cfb-46ad-958c-990f4bfae241 |

5.35.13 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 652926b7-2705-416a-9022-277b1574dd6d |

5.35.14 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 9eb5e8fa-e078-4bce-9eb6-1d43ccc13a9d |

5.35.15 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 45702b4b-a3ce-4c76-9656-b6356535768f |

5.35.16 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 82404b96-cbcc-4c4a-bbbc-991e53c3be66 |
| location | web\apireviewsummary.html |

5.36. t2mdbexportFlow2

Path: src\main\mule\t2mdbexport.xml

Type: flow

Components: 2

5.36.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /t2mtools |
| doc:id | e3f5b4e4-5b5c-43da-a4ef-7cca65000cf7 |
| config-ref | HTTP_Listener_config |

5.36.2 parse-template

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Parse Template |
| doc:id | 4ad1a230-23ac-4d3f-af2f-6e3fa4cedc74 |
| location | web\t2mtools.html |

5.37. t2m_pocFlow

Path: src\main\mule\t2mpoc.xml

Type: flow

Components: 8

5.37.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | \${cacheupdate} |
| doc:id | 1044a46a-98f5-442c-ad71-63fa76f4c8cc |
| config-ref | HTTP_Listener_config |

5.37.2 ee:cache

| Attribute | Value |
|---------------------|--------------------------------------|
| doc:name | Cache |
| doc:id | 25aa8e0a-0fc4-42f3-8d61-227a0089ba6d |
| cachingStrategy-ref | Caching_Strategy |

5.38. t2m_pocFlow1

Path: src\main\mule\t2mpoc.xml

Type: flow

Components: 5

5.38.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | \${cacheretrieve} |
| doc:id | a3c3359a-b4d6-4c01-9961-633fa4481cb7 |
| config-ref | HTTP_Listener_config |

5.38.2 os:retrieve

| Attribute | Value |
|-------------|--------------------------------------|
| doc:name | Retrieve |
| doc:id | 58224208-611b-4199-abe3-0bd3684d74f1 |
| objectStore | Object_store |
| key | cachevalue |

5.38.3 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | 07e86e01-e6ac-4f29-8a5e-30780af5dd95 |

5.39. t2mpocFlow

Path: src\main\mule\t2mpoc.xml

Type: flow

Components: 4

5.39.1 http:listener

| Attribute | Value |
|------------|--------------------------------------|
| doc:name | Listener |
| path | /t2mpoc |
| doc:id | c33a801b-02d2-4269-8d2c-0b618f845ecd |
| config-ref | HTTP_Listener_config |

5.39.2 ee:transform

| Attribute | Value |
|-----------|--------------------------------------|
| doc:name | Transform Message |
| doc:id | a59fc168-3e67-4886-8a6d-e7ca68ad95d8 |

6. Mule Sub-Flows

No sub-flows found

7. DataWeave Files

No DataWeave files found

8. Other Resources

| File Name | Relative Path |
|---------------------------------------|--|
| home.md | exchange-docs\home.md |
| addparentpom.html | src\main\resources\web\addparentpom.html |
| apipltvalidation.html | src\main\resources\web\apipltvalidation.html |
| apiratelimitdata.html | src\main\resources\web\apiratelimitdata.html |
| apireviewsummary.html | src\main\resources\web\apireviewsummary.html |
| compareapiresponses.html | src\main\resources\web\compareapiresponses.html |
| compareresponseshome.html | src\main\resources\web\compareresponseshome.html |
| devtrackerloaded.html | src\main\resources\web\devtrackerloaded.html |
| duplicatepltentries.html | src\main\resources\web\duplicatepltentries.html |
| errorresponse.html | src\main\resources\web\errorresponse.html |
| exceptionapproved.html | src\main\resources\web\exceptionapproved.html |
| exceptionrejected.html | src\main\resources\web\exceptionrejected.html |
| exceptionresponse.html | src\main\resources\web\exceptionresponse.html |
| existingpltentries.html | src\main\resources\web\existingpltentries.html |
| fetchfailures.html | src\main\resources\web\fetchfailures.html |
| fetchpltdata.html | src\main\resources\web\fetchpltdata.html |
| getratelimits.html | src\main\resources\web\getratelimits.html |
| mqconsumeerror.html | src\main\resources\web\mqconsumeerror.html |
| mqconsumer.html | src\main\resources\web\mqconsumer.html |
| mqconsumesuccess.html | src\main\resources\web\mqconsumesuccess.html |
| mulemqtrigger.html | src\main\resources\web\mulemqtrigger.html |
| ongoingplt.html | src\main\resources\web\ongoingplt.html |
| parentpomresponse.html | src\main\resources\web\parentpomresponse.html |
| PLT Request error.html | src\main\resources\web\PLT Request error.html |
| pltplanning.html | src\main\resources\web\pltplanning.html |
| pltrequestsubmitted.html | src\main\resources\web\pltrequestsubmitted.html |
| pltsummary.html | src\main\resources\web\pltsummary.html |
| ratelimitexportsent.html | src\main\resources\web\ratelimitexportsent.html |
| requestplt.html | src\main\resources\web\requestplt.html |
| requestpltstart.html | src\main\resources\web\requestpltstart.html |
| reviewexceptions.html | src\main\resources\web\reviewexceptions.html |
| t2mdailyreviewreport.html | src\main\resources\web\t2mdailyreviewreport.html |
| t2mtools.html | src\main\resources\web\t2mtools.html |
| trackerload.html | src\main\resources\web\trackerload.html |
| triggerresponse.html | src\main\resources\web\triggerresponse.html |
| bbt-internal-certs.jks | src\main\resources\bbt-internal-certs.jks |
| eapi-mule-lastmile.truist-tst.com.jks | src\main\resources\eapi-mule-lastmile.truist-tst.com.jks |
| eapi-mule-mq-client-cert-np.jks | src\main\resources\eapi-mule-mq-client-cert-np.jks |
| multls.mq.tst.truist.com.jks | src\main\resources\multls.mq.tst.truist.com.jks |
| T2M Wave0 Development Tracker.xlsx | src\main\resources\T2M Wave0 Development Tracker.xlsx |
| README.md | README.md |

9. References

References section is placeholder for any reference details team requires. It can have team playbook reference details or any other information for project.