

# Compact proofs of model performance via mechanistic interpretability

Refer: [https://github.com/LouisYRYJ/Proof\\_based\\_approach\\_tutorial/blob/master/proof\\_public.ipynb](https://github.com/LouisYRYJ/Proof_based_approach_tutorial/blob/master/proof_public.ipynb)

## Introduction

### The problem of understanding a model

#### Why do we care about understanding a model?

When we use or train a model, many things can go wrong. For example, during training the model can learn undesired behaviour, which is not obvious to us (deceptive alignment). Or it might have failure modes that are not salient to us (adversarial examples). On the other hand, we could steer a model towards a desired behaviour, if we understood how it works.

All of these issues could be resolved, if the models were transparent to us (though this is not the only approach). So an important question to raise here is: What do we mean when we talk of “a mechanistic understanding” of a model? When is a model transparent to us?

This is a difficult question! Let’s say you study a model and reverse engineered parts of it, like a circuit. How can you be sure that the circuit you found actually does the thing you are claiming it is? Let’s look at the specific example of autoencoders. This is a quote from [Towards Monosemanticity: Decomposing Language Models With Dictionary Learning](#)

Usually in machine learning we can quite easily tell if a method is working by looking at an easily-measured quantity like the test loss. We spent quite some time searching for an equivalent metric to guide our efforts here, and unfortunately have yet to find anything satisfactory.

We began by looking for an information-based metric, so that we could say in some sense that the best factorization is the one that minimizes the total information of the autoencoder and the data. Unfortunately, this total information did not generally correlate with subjective feature interpretability or activation sparsity.[...]

Thus we ended up using a combination of several additional metrics to guide our investigations[...]

Interpreting or measuring some of these signals can be difficult, though. For instance, at various points we thought we saw features which at first didn’t make any sense, but with deeper inspection we could understand.

We think it would be very helpful if we could identify better metrics for dictionary learning solutions from sparse autoencoders trained on transformers.

See also Section 5 of this review [Mechanistic Interpretability for AI Safety – A Review](#) for more references on the difficulty of evaluating interpretability results.


### Quantative methods for interpretability

Having quantative methods would not only make mechanistic interpretability research more rigorous. If we want to scale up methods to huge models, we will need to automate parts of the process and we won’t be able to have a human in the loop at every crucial point. A lack of quantative benchmarks makes this task seem almost impossible. To spoiler the punchline: Compact proofs provide such a quantative benchmark, although they currently are infeasible for larger models.

Before getting into the details, let's nail down two things that we want to quantify. The following two points are taken from the [Compact proofs blog post](#), see also this [comment](#) by Ryan Greenblatt.

1. Correspondence (or faithfulness): How well our explanation reflects the model's internals.
2. Compression: Explanations compress the particular behavior of interest. Not just so that it fits in our heads, but also so that it generalizes well and is feasible to find and check.

Specifically, the second point implies that the explanation, say the circuit that we discovered, should be more **compact** and therefore more understandable for us humans: The weights of a model are a perfectly faithful explanation of its behaviour, but this explanation is not helpful for us.

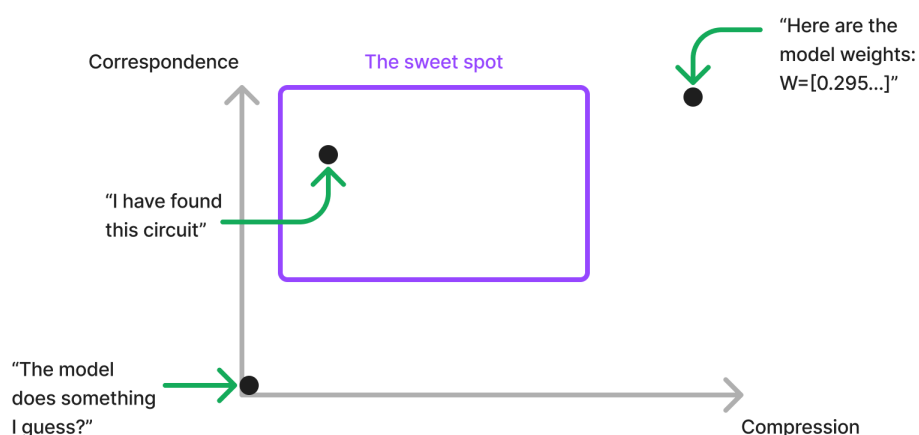

An important insight that we will make is that our explanations are not as good as we might think. Specifically, **noise** in the model's weights seem negligible. But worst case bound imply that it could still be an important contributing factor. In fact, it might be that something that we deem as noise, is important for the model's computation, but we simply don't understand it. This issue with the noise is another point that a quantitative evaluation should be able to address.