

-
1. [Stripe Dashboard URLs](#)
 2. [Environment Variables](#)
 3. [Product vs Price ID](#)
 4. [Webhook Configuration](#)
 5. [Test Card Numbers](#)
 6. [API Endpoints](#)
 7. [Database Queries](#)
 8. [Subscription Plans](#)
 9. [Troubleshooting](#)
 10. [Deployment Checklist](#)
-

Home	<u>https://dashboard.stripe.com</u>
Test Mode	<u>https://dashboard.stripe.com/test</u>
Live Mode	<u>https://dashboard.stripe.com/live</u>

API Keys	<u>https://dashboard.stripe.com/test/apikeys</u>
Webhooks	<u>https://dashboard.stripe.com/test/webhooks</u>
Webhook Events	<u>https://dashboard.stripe.com/test/webhooks/{webhook_id}</u> .

Products	https://dashboard.stripe.com/test/products
Subscriptions	https://dashboard.stripe.com/test/subscriptions
Customers	https://dashboard.stripe.com/test/customers
Invoices	https://dashboard.stripe.com/test/invoices
Payments	https://dashboard.stripe.com/test/payments

Events	https://dashboard.stripe.com/test/events
Logs	https://dashboard.stripe.com/test/logs
Workbench	https://dashboard.stripe.com/test/workbench

bash

```
# =====  
# STRIPE PAYMENT INTEGRATION  
# =====  
  
# API Secret Key (from Dashboard → API Keys → Secret key)  
# Test keys start with: sk_test_  
# Live keys start with: sk_live_  
STRIPE_SECRET_KEY=sk_test_XXXXXXXXXXXXXXXXXXXXXXXXXXXX  
  
# Webhook Signing Secret (from Dashboard → Webhooks → Signing secret)  
# Starts with: whsec_  
STRIPE_WEBHOOK_SECRET=whsec_XXXXXXXXXXXXXXXXXXXXXXXXXXXX  
  
# Price IDs (from Dashboard → Products → [Product] → Pricing)  
# IMPORTANT: Use PRICE IDs (price_XXX), NOT Product IDs (prod_XXX)  
STRIPE_PRICE_BASIC=price_XXXXXXXXXXXXXXXXXXXX  
STRIPE_PRICE_PRO=price_XXXXXXXXXXXXXXXXXXXX  
STRIPE_PRICE_ENTERPRISE=price_XXXXXXXXXXXXXXXXXXXX
```

GCP	Same <code>sk_test_XXX</code>	Different <code>whsec_gcp_XXX</code>
AWS	Same <code>sk_test_XXX</code>	Different <code>whsec_aws_XXX</code>

API keys and Price IDs are the SAME for both environments. Only Webhook Secrets are different (each webhook endpoint has its own signing secret).

Product ID	<code>prod_</code>	<code>prod_TUbQK8FQUOm1ss</code>	❌ DO NOT use for checkout
	<code>price_</code>	<code>price_1SXc2GFCBa9Gd3Zv</code>	✅ REQUIRED for checkout

Stripe error: No such price: 'prod_TUbQK8FQUOm1ss'

Using Product ID instead of Price ID in `.env` file.

1. Go to: <https://dashboard.stripe.com/test/products>
2. Click on the product (e.g., "Pro Plan")
3. Scroll to section
4. Click on the price row (e.g., "\$9.99 USD / month")
5. Copy the (starts with `price_`)

Pro Plan

└─ Product ID: prod_TUbQK8FQUOm1ss ← DON'T use this

└─ Pricing

└─ \$9.99 USD / month


└─ Price ID: price_1ABC2DEF3GHI ← USE THIS!

GCP	<code>https://api-taskmanager.gcp.sriinfosoft.com/api/stripe/webhook</code>
AWS	<code>https://api-taskmanager.aws.sriinfosoft.com/api/stripe/webhook</code>

Checkout	<code>checkout.session.completed</code>	Payment completed
Customer	<code>customer.subscription.created</code>	New subscription started
Customer	<code>customer.subscription.updated</code>	Plan changed or renewed
Customer	<code>customer.subscription.deleted</code>	Subscription cancelled
Invoice	<code>invoice.payment_succeeded</code>	Payment successful (reset credits)
Invoice	<code>invoice.payment_failed</code>	Payment failed (mark past_due)

- 1. Go to: <https://dashboard.stripe.com/test/webhooks>
- 2. Click
- 3. Enter webhook URL
- 4. Select the 6 events listed above
- 5. Click
- 6. Copy the `(whsec_XXX)`



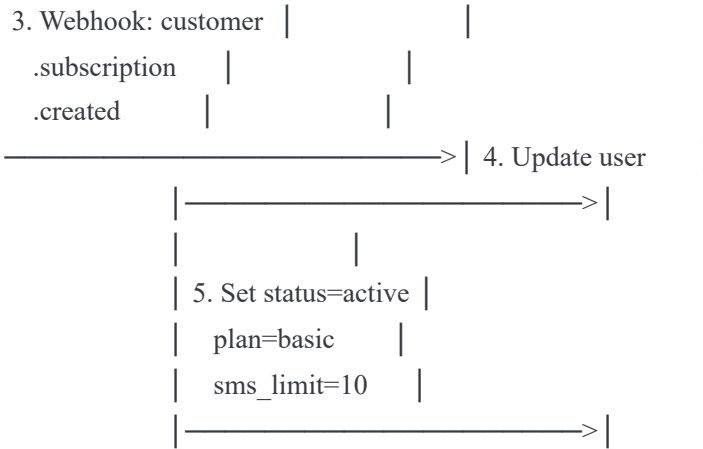

✔ Success (Visa)	4242 4242 4242 4242	Any future	Any 3 digits	Any 5 digits
✔ Success (Mastercard)	5555 5555 5555 4444	Any future	Any 3 digits	Any 5 digits
✔ Success (Amex)	3782 822463 10005	Any future	Any 4 digits	Any 5 digits

✖ Generic Decline	4000 0000 0000 0002
✖ Insufficient Funds	4000 0000 0000 9995
✖ Lost Card	4000 0000 0000 9987
✖ Stolen Card	4000 0000 0000 9979
✖ Expired Card	4000 0000 0000 0069
✖ Incorrect CVC	4000 0000 0000 0127
✖ Processing Error	4000 0000 0000 0119

🔒 3D Secure Required	4000 0025 0000 3155
🔒 3D Secure 2	4000 0027 6000 3184

 Disputes/Chargebacks	4000 0000 0000 0259
 Delayed Success	4000 0000 0000 0077

Card Number: 4242 4242 4242 4242
Expiry: 12/28
CVC: 123
Name: Test User
ZIP: 94105

/api/stripe/plans	GET	✗ Public	Get available plans
/api/stripe/subscription	GET	✓ JWT	Get current subscription
/api/stripe/create-checkout-session	POST	✓ JWT	Create Stripe Checkout
/api/stripe/create-portal-session	POST	✓ JWT	Open Customer Portal
/api/stripe/can-send-sms	GET	✓ JWT	Check SMS credits
/api/stripe/can-use-ai	GET	✓ JWT	Check AI credits
/api/stripe/webhook	POST	✗ *	Stripe webhook (signature verified)

```
bash
curl -X GET
-H
```

```
bash
```

```
curl -X POST
```

```
-H
```

```
-H
```

```
-d
```

```
bash
```

```
curl -X GET
```

```
-H
```

```
bash
```

```
# SSH to server, then:
```

```
docker -it taskmanager-db mysql -u taskuser -p taskmanager
```

```
sql
```

```
DESCRIBE users;
```

```
sql
```

```
SELECT
```

```
  id,  
  email,  
  name,  
  stripe_customer_id,  
  subscription_status,  
  subscription_plan,  
  stripe_subscription_id,  
  sms_credits_used,  
  sms_credits_limit,  
  ai_requests_used,  
  ai_requests_limit,  
  created_at,  
  updated_at
```

```
FROM users
```

```
ORDER BY created_at DESC;
```

```
sql
```

```
SELECT * FROM users WHERE email =      ;
```

```
sql
```

```
SELECT
```

```
  email,  
  subscription_status,  
  subscription_plan,  
  sms_credits_limit,  
  ai_requests_limit
```

```
FROM users
```

```
WHERE subscription_status =      ;
```

```
sql
```

```

SELECT
    ,
    as check_item,
    COUNT(*) as count,
    CASE WHEN COUNT(*) > 1 THEN 🟢 ELSE 🟡 END as status
FROM users
UNION ALL
SELECT
    ,
    COUNT(*),
    CASE WHEN COUNT(*) > 1 THEN 🟢 ELSE 📋 END
FROM users WHERE subscription_status = 'active'
UNION ALL
SELECT
    ,
    COUNT(*),
    CASE WHEN COUNT(*) > 1 THEN 🟢 ELSE 🟡 END
FROM users WHERE stripe_customer_id IS NOT NULL ;

```

```

sql

-- Delete specific user
DELETE FROM users WHERE email = 'user@example.com' ;

-- Delete ALL users (be careful!)
DELETE FROM users;

-- Reset auto-increment
ALTER TABLE users AUTO_INCREMENT = 1 ;

```

```

sql

UPDATE users
SET
    subscription_status = 'inactive',
    subscription_plan = 'basic',
    sms_credits_limit = 100,
    ai_requests_limit = 10,
    stripe_subscription_id = 'stripe_sub_123'
WHERE email = 'user@example.com' ;

```

```
sql

SELECT
    email,
    subscription_plan,
    sms_credits_used,
    sms_credits_limit,
    ai_requests_used,
    ai_requests_limit,
    CONCAT(sms_credits_used, , sms_credits_limit) as sms_usage,
    CONCAT(ai_requests_used, , ai_requests_limit) as ai_usage
FROM users
WHERE subscription_status =      ;
```

Free	\$0	0	0	Basic features only
Basic	\$4.99/month	10/month	50/month	Email, Push, Priority Support
Pro	\$9.99/month	50/month	200/month	+ Advanced Analytics
Enterprise	\$29.99/month	Unlimited	Unlimited	+ Custom Integrations, SLA

```
java

// SMS Limits
free =
basic =
pro =
enterprise = .MAX_VALUE (unlimited)

// AI Limits
free =
basic =
pro =
enterprise = .MAX_VALUE (unlimited)
```

free	No active subscription
active	Subscription is active
trialing	In trial period
past_due	Payment failed



- ☐ Webhooks created for each environment
- ☐ Webhook secrets copied (whsec_XXX)

- ☐ .env file updated with all Stripe variables
- ☐ docker-compose.yml has Stripe environment variables
- ☐ application.properties has Stripe configuration
- ☐ SecurityConfig.java permits /api/stripe/webhook

- ☐ users table created (V007 migration)
- ☐ Table has all required columns

- ☐ Checkout flow works (Basic plan)
- ☐ Checkout flow works (Pro plan)
- ☐ Checkout flow works (Enterprise plan)
- ☐ Webhook updates database
- ☐ Subscription status shows "active"
- ☐ SMS/AI limits set correctly
- ☐ Customer Portal accessible

- ☐ Switch to Live mode keys (sk_live_XXX)
- ☐ Create Live webhooks
- ☐ Update Live Price IDs
- ☐ Test with real card (small amount)
- ☐ Verify webhook delivery in Live mode

Stripe Customer ID (cus_XXX)	Credit card numbers
Stripe Subscription ID (sub_XXX)	CVV/CVC codes
Subscription status	Card expiry dates
Plan name	Billing addresses
Usage counters	Full card details

Your application is _____ because:

- Credit card data is handled entirely by Stripe
 - No card numbers pass through your servers
 - Stripe Checkout is hosted by Stripe
 - Only tokens/IDs are stored in your database
-
- ❌ NEVER commit `.env` file with real keys
 - ❌ NEVER expose `sk_XXX` keys in frontend code
 - ✅ Use `sk_test` keys for development
 - ✅ Use `sk_live` keys only in production
 - ✅ Webhook endpoint is secured by signature verification

Secret Key	<code>sk_test</code> or <code>sk_live</code>	<code>sk_test_51ABC...</code>	API Keys page
Webhook Secret	<code>whsec</code>	<code>whsec_abc123...</code>	Webhook details page
Price ID	<code>price</code>	<code>price_1SXc2G...</code>	Product → Pricing
Product ID	<code>prod</code>	<code>prod_TUbQK8...</code>	Product details (DON'T use)
Customer ID	<code>cus</code>	<code>cus_TUdvit...</code>	Created automatically
Subscription ID	<code>sub</code>	<code>sub_1SXc3H...</code>	Created on subscribe

✅ Success	<code>4242 4242 4242 4242</code>
❌ Declined	<code>4000 0000 0000 0002</code>
🔒 3D Secure	<code>4000 0025 0000 3155</code>