Return values and local state

Learn to understand, design, build, test and explain AI systems responsibly.

Project: Python readiness portfolio

TEACHER GUIDE · 1 OF 9

Prepare the purpose, prerequisites and materials

> Prepare Return values and local state: check the target, prerequisites, resources and adaptable teaching schedule.

Teach the learning cycle

Primary target: Use a returned value in a later calculation

Session · Sequence and minutes · Resources

> **Session:** Session 1 · Understand · 45 min
>
> **Sequence and minutes:** 0–7: recall and prerequisite; 7–15: inspect the concrete case and predict; 15–30: teacher models the worked trace; 30–40: learners explain a step using the text and visual; 40–45: check the core idea.
>
> **Resources:** Sections 1–6; record the brief recall in the workbook.

> **Session:** Session 2 · Practise · 45 min
>
> **Sequence and minutes:** 0–5: retrieve the procedure; 5–15: W2 completion practice; 15–23: explain and check with a partner; 23–30: each learner answers the misconception check; 30–40: targeted reteaching or a harder variation; 40–45: prepare the investigation.
>
> **Resources:** Sections 7–10; use the matching workbook W2 and misconception check.

> **Session:** Session 3 · Investigate and transfer · 45 min

> **Sequence and minutes:** 0–5: retrieve the decision rule; 5–20: investigate or trace; 20–30: start the independent case; 30–38: connect the project; 38–43: act on feedback; 43–45: plan the return check.
>
> **Resources:** Use “Run the investigation”, “Connect your project”, “Show what you know”, “Study a complete case” and “Try a new case independently”. Give extra time for the full task set. If this week has a coding lab, use its named section; section numbers can change when extra explanations are included.

This is a starting allocation of 135 minutes, not a validated duration. Preserve all named topics. Schedule extra time for connected examples, the full investigation, independent cases and project building.

Repeated copies of a case share one recorded attempt; they are not new **evidence**.

Retrieval answer guidance

Functions and arguments

Without opening the old lesson, explain one key idea from Functions and arguments. Give an example and a mistake that the idea helps you avoid.

Look for: Distinguish a function definition from a function call

Reference example, not the only acceptable wording: Name show_remaining; parameters capacity and used. Arguments 15 and 6 match capacity = 15 and used = 6. Expected printed result 9.

Loops and trace tables

Without opening the old lesson, explain one key idea from Loops and trace tables. Give an example and a mistake that the idea helps you avoid.

Look for: Trace variable values before and after each loop iteration

Reference example, not the only acceptable wording: 2, 3 and 4; the stop value is excluded. The body runs three times.

Expressions and operator order

Without opening the old lesson, explain one key idea from Expressions and operator order. Give an example and a mistake that the idea helps you avoid.

Look for: Evaluate numeric expressions using Python’s grouping rules

Reference example, not the only acceptable wording: 3 * 8 + 2 or (3 * 8) + 2 gives 26. 3 * (8 + 2) gives 30 and adds two to each of three packs, not two once.

Use integer **input**s, explicit return and simple local assignments. Avoid global variables, mutable defaults and shared objects in this introduction.

Python reference: https://docs.python.org/3/tutorial/controlflow.html#defining-functions. A call has its own local names; return sends a value to the **caller**. Examples assume valid counts and do not validate them.

Outcomes

Use a returned value in a later calculation

Trace **local variable**s separately for each function call

Detect a missing return and test repeated calls

Preparation

Python 3 editor and returns.py

Separate paper spaces for each call and the **caller**

Expected **return value** and observed **return value** table

Prerequisite answer

The call prints 5. The definition alone creates the function without running its body.

End goal for the pictorial case

Trace **return value**s and local state and explain the changed program before running it.

This added worked case illustrates the week’s main idea. Retain all original and connected topics; schedule its practice within the teaching cycle.

Explain and model the mechanism

> Model Return values and local state using the supplied case, labelled mechanism and reasoning. Make the scope of each conclusion explicit.

Two fictional cupboards have spare spaces. We want to add their spare spaces without copying numbers from the screen. Last week a function printed each answer.

This week a function returns its answer so the calling code can store it, combine it or choose to print it.

Assume nonnegative integer counts and used no greater than capacity. This calculation does not validate those assumptions.

Work in a Python script so a call does not automatically display its **return value** as it might in an interactive console.

Explain Return values and local state · 1

return spaces ends the current function call and sends the value of spaces back. The assignment first = remaining(12, 4) waits for that value and stores 8. The next call stores 3 in second. Neither call prints.

The final statement prints 11. A statement after an executed return in the same call is not reached.

Term	Meaning
Return value	A value a function sends back to its caller
Caller	The code that calls a function
Local variable	A name assigned inside a function and used in that function call
Scope	The region of code in which a name can be looked up
None	A Python value representing no result value in this lesson

Two calls return two values

CALL	INSIDE THIS CALL	BACK IN THE CALLER
remaining(12, 4)	spaces becomes 8	first receives 8
remaining(10, 7)	spaces becomes 3	second receives 3

The caller adds the returned values. Only print(first + second) displays 11.

Explain Return values and local state · 2

first stores 0, second stores 9, and the final print displays 9. Removing only that print leaves the calculations and stored values but no displayed **output**.

Exit: assign answer = remaining(12, 4), then print(answer) and check it is 8 rather than **None**. Repeat with (10, 7), expecting 3. Passing two tests does not establish all-**input** correctness or verify the **input** assumptions.

Model the reasoning aloud

Use the complete worked example below before asking learners to complete W2. Reveal a small part, invite a **prediction**, then explain the deciding step.

These teacher notes contain solutions; do not reveal the independent case answer during modelling.

Point in execution	Local spaces	Caller values
First call before return	8	first not assigned yet
Second call before return	3	first is still 8
After both calls	Not accessible by this local name	first is 8 and second is 3

Model the reasoning aloud · 3

capacity, used and spaces belong to the current call. The second call gets new parameter values and calculates its own spaces; it does not overwrite first.

In a fresh script with no outside variable called spaces, adding print(spaces) after the calls raises NameError. Use the returned value stored in first or second instead.

> **Change the calls to remaining(9, 9) and remaining(9, 0). What values are stored and what does their sum print? What happens if only the final print statement is removed?**

Thinking move	Teacher prompt
Plan	What is given? What is the question? Which procedure fits these facts?
Do	Point to each input and intermediate step in the worked trace. Name the rule that allows the next step.
Check	Does the output answer the question? Which assumption or limitation prevents a larger claim?

Use the diagram and verbal explanation together. Ask learners to match a sentence to a specific visual step; do not assign learners fixed visual or auditory learning styles.

A pictorial worked case: Return values and local state

Return values survive their calls. A function returns a local calculation that the **caller** stores.

The facts we will use

> **Supplied facts**
>
> Python 3: def extra(a,b): result=a+b; return result. Then first=extra(2,5); second=extra(4,1); print(first,second).

AI ACADEMY / PYTHON-BRIDGE/9

Return values and local state

Start with the supplied facts

Follow each arrow. Ask which fact allows the next step.

1. Trace first call

Its local result is 7; return assigns 7 to first.

2. Trace second call

Its new local result is 5; return assigns 5 to second.

3. Read caller values

The final print displays 7 5; the second call does not overwrite first.

CHANGE ONE THING

Add print(result) after the calls in a fresh script with no global result.

Explain the changed result using the matching lesson.

Follow the labelled picture with the matching explanation. Open the vector diagram

Read the picture one step at a time

STEP	WHAT HAPPENS AND WHY
1. Trace first call	Its local result is 7; return assigns 7 to first.
2. Trace second call	Its new local result is 5; return assigns 5 to second.
3. Read caller values	The final print displays 7 5; the second call does not overwrite first.

Match each pictured step to the supplied facts. This is a worked teaching case, not an independent assessment.

Why this result follows

Why the result follows

Returning passes a value back to the **caller**. Local names belong to a function call; storing the returned value creates a separate **caller** binding.

What this example does not establish

Keep the stated limit

The example uses immutable integers; shared mutable objects require additional reasoning about references.

Change one thing in the pictured case

Change one thing

Change: Add print(result) after the calls in a fresh script with no global result.

Predicted result

Prediction: NameError occurs because that local name is not defined in the **caller**.

Why the result follows

Reason: A returned value and the function’s internal name are different things.

Ask while showing the picture

Ask while showing the picture · 4

Cover the result. Ask learners to name the **input**s and predict the next step. Uncover one step, connect the icon to the actual procedure, and explain its **evidence**. Then change the supplied condition and compare.

The picture is a representation; it does not document execution of a real AI model.

Demonstrate and guide practice

> Demonstrate Return values and local state, reduce support deliberately and check individual reasoning before discussing answers.

Choose the pacing route

Compact alternative: this two-session sequence covers selected core tasks. Use the three-session weekly plan for the full lesson, independent transfer, feedback and project work; allow extra time for extensions.

Time or stage	Teacher action
Session 1 start to 7 minutes	Retrieve the Week 8 distinction between definition and call.
7 to 20 minutes	Trace the worked example and move returned-value cards to first and second.
20 to 33 minutes	Complete W1 and trace local names separately for W2.
33 to 45 minutes	Predict the guided case, run it and explain why assignments do not print.
Session 2 start to 8 minutes	Recall where the caller stores a return value.
8 to 20 minutes	Run the printing bug, record None and repair it for W3.
20 to 35 minutes	Collect independent W4 code and predictions before offering hints.
35 to 45 minutes	Use W5 and the exit to check return control flow and test evidence.

Use the worked example in Sections 3 and 6. Collect a **prediction** before revealing its result; ask the learner to point to each intermediate fact.

Use separate boxes on paper labelled **caller** and current call. Move the value card at return, not the local name. Offer the definition header as a hint and record it.

Extension: set spaces = 100 outside the correct worked function, call remaining(9, 4), then print the returned result and outside spaces separately. Expect 5 and 100.

Explain why the two assignments use different **scope**s; do not generalize this to mutation of shared objects.

Reduce help deliberately

Completion practice

Completion task: Using the correct definition, store a = remaining(8, 3), b = remaining(8, 8), c = remaining(8, 3). State a, b and c. In a fresh script, explain why print(spaces) outside the function fails.

Reasoning to listen for

Teacher check: a is 5, b is 0, c is 5. Each call has its own local spaces. That name has not been defined outside the function, so print(spaces) there raises NameError. Print a, b or c to use the saved results.

Start by identifying the given **input**s together. Leave the intermediate steps blank. If needed, model one step, then withdraw that help on the next step. Move to a full trace only when the partial trace is understood.

For partners, alternate explainer and checker; collect a response from every learner before discussion.

Individual reasoning check

Use the worked case for **Return value**s and local state. Proposed explanation: “Printing a value returns that value”. Decide whether this explanation is supported.

Point to the step or supplied fact that decides; explain your repair if needed.

Expected repair

Expected correction: print displays a value. Without an explicit return, these functions return **None**.

Collect explanations, not only yes/no votes. If a misunderstanding is common, re-model the relevant step for the class.

If it affects a few learners, give a short targeted group explanation while others solve a more demanding variation.

Pictorial practice question

> Trace the two returned values and explain why first stays seven. What happens if the **caller** tries to print result directly?

Reasoned teacher answer

The returns are 7 and 5, stored independently as first and second. result is local to each call; accessing it outside in this fresh script raises NameError.

Changed-case reasoning: NameError occurs because that local name is not defined in the **caller**. A returned value and the function's internal name are different things.

Collect each learner's explanation before discussion. Use the first missing connection between **input**, deciding step and result to choose support. This question is worked-case practice, not fresh mastery **evidence**.

Run the investigation and diagnose misconceptions

> Run the Return values and local state investigation and use the first unsupported step to choose a teaching response.

Printing a value returns that value: print displays a value. Without an explicit return, these functions return **None**.

A second call overwrites the first saved answer: These integer results are stored separately in the **caller**. A later call creates new local bindings.

A local name is available anywhere: spaces is assigned inside remaining. In our fresh script it cannot be looked up outside that function.

Zero means the function returned nothing: Zero is a number and supports arithmetic. **None** is a different value.

Use Section 9 for the **evidence** ledger. Add a boundary or missing-**input** case and record the expected response before checking. More successful repeats of one case do not establish wider coverage.

Match the support to the first error

What the response shows	Next teaching action
Missing or misread facts	Read the case aloud, mark supplied versus unknown facts, and let the learner restate it.
Wrong procedure	Return to the deciding step in the worked case. Contrast it with the proposed incorrect explanation.
Arithmetic or implementation error	Trace intermediate values or lines; preserve the first mismatch and retry that step.
Correct result without a reason	Ask for a trace and a changed case before marking independent understanding.
An unsupported wider claim	Ask which supplied evidence supports the claim and which further observation would be needed.

Offer an oral explanation, drawing, enlarged visual or fewer examples when that removes a reading/writing barrier. Keep the same reasoning goal.

Stretch secure learners by changing a boundary or assumption and asking them to defend the effect, not simply by assigning more of the same questions.

TEACHER GUIDE · 5 OF 9

Assess and explain the answers

> Use the Return values and local state questions, teacher keys and criteria after the relevant attempts. Previously discussed cases are practice; protect the separately selected

> independent task.

Guided and exit questions

first stores 0, second stores 9, and the final print displays 9. Removing only that print leaves the calculations and stored values but no displayed **output**.

Exit: assign answer = remaining(12, 4), then print(answer) and check it is 8 rather than **None**. Repeat with (10, 7), expecting 3. Passing two tests does not establish all-**input** correctness or verify the **input** assumptions.

W1 Separate returning from displaying

Workbook question · W1

Using the correct worked definition, execute result = remaining(15, 6), then doubled = result * 2. State both stored values and what the script displays before a print statement is added.

Teacher reasoning · W1

result is 9 and doubled is 18. Nothing is displayed by these assignments or the returning function. print(doubled) would display 18.

W2 Trace separate calls

Workbook question · W2

Using the correct definition, store a = remaining(8, 3), b = remaining(8, 8), c = remaining(8, 3). State a, b and c. In a fresh script, explain why print(spaces) outside the function fails.

Teacher reasoning · W2

a is 5, b is 0, c is 5. Each call has its own local spaces. That name has not been defined outside the function, so print(spaces) there raises NameError. Print a, b or c to use the

saved results.

W3 Repair the returned value

Workbook question · W3

Use the faulty printing version with answer = remaining(11, 2). State the displayed number and the value stored in answer. Explain why print(answer + 1) fails, then repair the function and predict the repaired **output**.

Teacher reasoning · W3

The call displays 9 but stores **None**. **None** + 1 raises TypeError. Replace the internal print(spaces) with return spaces. The repaired call itself displays nothing; print(answer + 1) displays 10.

Rerun (12, 4) and check that the stored value is 8.

W4 Build a reusable calculation independently

Workbook question · W4

Each tray holds 5 counters. Define stock(trays, loose) to return the total using a **local variable** total. Assume nonnegative integer arguments. Store results for (2, 3), (0, 3) and (2, 0).

Print the sum of the first two stored results. Predict that **output** and all three stored values. Call (2, 3) again to check fresh state.

Teacher reasoning · W4

Define stock(trays, loose) with total = trays * 5 + loose followed by return total. Store values 13, 3 and 10. The sum of the first two is 16. The repeat returns 13. The function should not

print; the **caller** prints 16.

W5 Locate a statement that never runs

Workbook question · W5

A function body has spaces = capacity - used, then return spaces, then print("done"), all at the same indentation. What does answer = remaining(4, 4) store and display? Explain whether the final print can run.

Teacher reasoning · W5

The call stores 0 and displays nothing. return ends this call, so the following print("done") is not reached. Zero is a valid returned value here and is different from **None**.

Independent assessment and fresh retry

Teacher key · Independent assessment and fresh retry

W4 must use both arguments, return its local total, store 13, 3, 10 and print 16 in the **caller**. Repeating (2, 3) must return 13.

After support use fresh retry tiles(packs, singles), with 4 tiles per pack: (3, 2), (0, 2), (3, 0) return 14, 2, 12; print the sum of the first two, 16; repeat (3, 2) to obtain 14.

Record help used and collect **prediction**s before running.

Assess independent transfer

Independent question · withhold the key

Selected case: Trace both calls and the final expression. If return total is removed from the function, does this final print complete? Would a separate print(total) outside the function

have access to its **local variable**?

```
def twice(n):
    total = 2 * n
    return total
first = twice(3)
second = twice(5)
print(first, second, first + second)
```

Selected case answer

Teacher key · Selected case answer

With the return: first=6, second=10, sum16, so **output** is6 10 16. Removing the return makes both calls return **None**; evaluating first+second raises TypeError before print runs, so no line is printed.

In this shown program total is local, so an outside print(total) raises NameError. Each call has its own local computation.

Dimension	Evidence required
Explanation	Names the applicable idea or procedure and ties it to the supplied facts.
Trace and result	Preserves the given inputs and shows the relevant intermediate steps; distinguishes a prediction from an observed execution.
Limits	States the assumptions, missing evidence or conditions under which the result would change.

Teacher key · Selected case answer

Record each dimension as not yet, with support, or independent. Accept a valid alternative procedure with a defensible trace.

Do not penalise an honestly recorded model failure if the learner correctly explains its **evidence** and limits.

Feedback that the learner uses

Name the earliest unsupported step and give one action to repair it. Have the learner make that repair now and explain why. Then assess the relevant skill on a fresh, fully specified case.

Confirm it was not previously practised with feedback; solve and check the new case before assigning it. A follow-up design prompt is a starting brief, not automatically an equivalent test.

Connect the project, support and next lesson

> Connect Return values and local state to Python readiness portfolio, adapt support and plan a later changed-case check.

Add a labelled **return value**s and local state **evidence** sheet to Python readiness portfolio. Show how you can use a returned value in a later calculation.

Use the supplied fictional case and keep its **input**s, intermediate steps, calculation or **prediction**, and limitation. Connect this record to last week's record; a matching answer without a trace is insufficient.

Use separate boxes on paper labelled **caller** and current call. Move the value card at return, not the local name. Offer the definition header as a hint and record it.

Extension: set spaces = 100 outside the correct worked function, call remaining(9, 4), then print the returned result and outside spaces separately. Expect 5 and 100.

Explain why the two assignments use different **scope**s; do not generalize this to mutation of shared objects.

Week 10 uses dictionaries to keep related values together as named fields in a record.

Retain the project ledger and assess a changed case after support. Check the relevant prerequisite before carrying this component forward.

Plan the delayed return

Suggested return points in this level: python-bridge/10, python-bridge/12. Use actual classroom dates, adjusting for holidays and gaps. One, three and six teaching weeks are scheduling choices, not a claimed optimal spacing.

At a delayed check, ask for the idea from memory and a changed application. Compare with the earlier independent response and record support used.

For a new level, revisit the previous capstone before checking the new prerequisites.

Record	Teacher evidence
Learner code and date	
Concept and case used; prior exposure	
Explanation / trace / limits	
Support and first repair	
Changed case and delayed outcome	
Next teaching action	

Use the **evidence** to choose reteaching or the next step. A completed page, confidence rating or attractive project does not by itself demonstrate understanding.

Project evidence from this case

For Python readiness before the Responsible Plant Classifier, retain a trace of the values, the predicted **output**s and the changed-case explanation. Use actual Python 3 results to check the **prediction** after reasoning first.

Prepare, teach and assess

> Use this preparation summary alongside the detailed Return values and local state lesson; it is a checklist rather than a replacement for the full sequence.

Teaching target

Teaching target: Use a returned value in a later calculation

Prepare the labelled worked-case picture, the matching workbook, fictional **input** cards and a place for individual responses. Check a local Python 3 environment before class; have a paper-trace version ready.

Session · Plan · Resources

> **Session:** Session 1 · Understand · 45 min
>
> **Plan:** 0–7: recall and prerequisite; 7–15: inspect the concrete case and predict; 15–30: teacher models the worked trace; 30–40: learners explain a step using the text and visual; 40–45: check the core idea.
>
> **Resources:** Sections 1–6; record the brief recall in the workbook.

> **Session:** Session 2 · Practise · 45 min
>
> **Plan:** 0–5: retrieve the procedure; 5–15: W2 completion practice; 15–23: explain and check with a partner; 23–30: each learner answers the misconception check; 30–40: targeted reteaching or a harder variation; 40–45: prepare the investigation.
>
> **Resources:** Sections 7–10; use the matching workbook W2 and misconception check.

> **Session:** Session 3 · Investigate and transfer · 45 min
>
> **Plan:** 0–5: retrieve the decision rule; 5–20: investigate or trace; 20–30: start the independent case; 30–38: connect the project; 38–43: act on feedback; 43–45: plan the return check.

> **Resources:** Use “Run the investigation”, “Connect your project”, “Show what you know”, “Study a complete case” and “Try a new case independently”. Give extra time for the full task set. If this week has a coding lab, use its named section; section numbers can change when extra explanations are included.

Before class, solve the supported practice: Using the correct definition, store a = remaining(8, 3), b = remaining(8, 8), c = remaining(8, 3). State a, b and c.

In a fresh script, explain why print(spaces) outside the function fails.

Supported practice answer

Reasoned practice answer: a is 5, b is 0, c is 5. Each call has its own local spaces. That name has not been defined outside the function, so print(spaces) there raises NameError. Print a, b or c to use the saved results.

Check every learner before discussion: Use the worked case for **Return value**s and local state. Proposed explanation: “Printing a value returns that value”. Decide whether this explanation is supported.

Point to the step or supplied fact that decides; explain your repair if needed.

Repair the misconception

Misconception repair: print displays a value. Without an explicit return, these functions return **None**.

Support without giving away the answer

Support: read the exact case aloud, enlarge the labelled picture, supply **input** cards and model only the first deciding step. Accept a spoken explanation or drawing; retain the reasoning goal.

Extend the reasoning

Extension: Add print(result) after the calls in a fresh script with no global result. Require a **prediction** and a reason before comparing. Expected result: NameError occurs because that local name is not defined in the **caller**.

Reason: A returned value and the function's internal name are different things.

Protect the independent attempt

Independent assessment: withhold the reserved answer until the learner has attempted the new case. Record support separately from correctness.

Criterion	Not yet	With support	Independent
Explanation	Names an answer without a deciding fact	Uses a hint to link fact and decision	Explains the deciding fact in own words
Trace or test	Cannot connect input and result	Completes steps with prompts	Traces or tests a changed case accurately
Limits and revision	Claims more than evidence supports	Names a limit after a prompt	States a defensible limit and useful next test

Project checkpoint

Project checkpoint: Python readiness portfolio. Keep runnable code, **prediction**s, actual **output**s, one repaired error and an explanation of a function on changed **input**s.

Use the weekly teacher answer for topic-specific reasoning. A saved progress tick is an activity record; judge mastery from the learner's explanation and **evidence**.

Use feedback, labs and repair paths

> Use feedback, earlier review and portfolios purposefully. Apply the coding routine only when this lesson has an executable lab.

Use the two formative questions as supported practice, not as independent mastery scores. Discuss the deciding **evidence** rather than accepting a guessed selection.

The feedback comes from the reviewed public worked case. Do not reveal the separately reserved independent teacher answer until the learner has attempted that case.

Ask students to predict before running code. Preserve errors and actual **output**s; collect a changed test and an explanation. The branch-boundary and indexing lessons deliberately include failure cases.

Use the earlier worked-explanation links to address a specific missing building block, then return to the current question. Adapt this suggestion after observing the learner; it is not an automatic diagnosis.


Collect the completed-work portfolio as **evidence**. Record support separately from correctness, and assess explanation, trace/test and limitations. Progress ticks and quiz selections alone do not establish mastery.

Visual concept journey

> Show one Return values and local state graphic at a time, request a prediction and discuss its trace before the independent assessment.

Use one picture at a time. Hide a worked result before asking for a **prediction**, then reveal it for feedback. These are supported teaching cases; retain the separate independent assessment for a fresh first attempt.

01. Return values and local state: the case

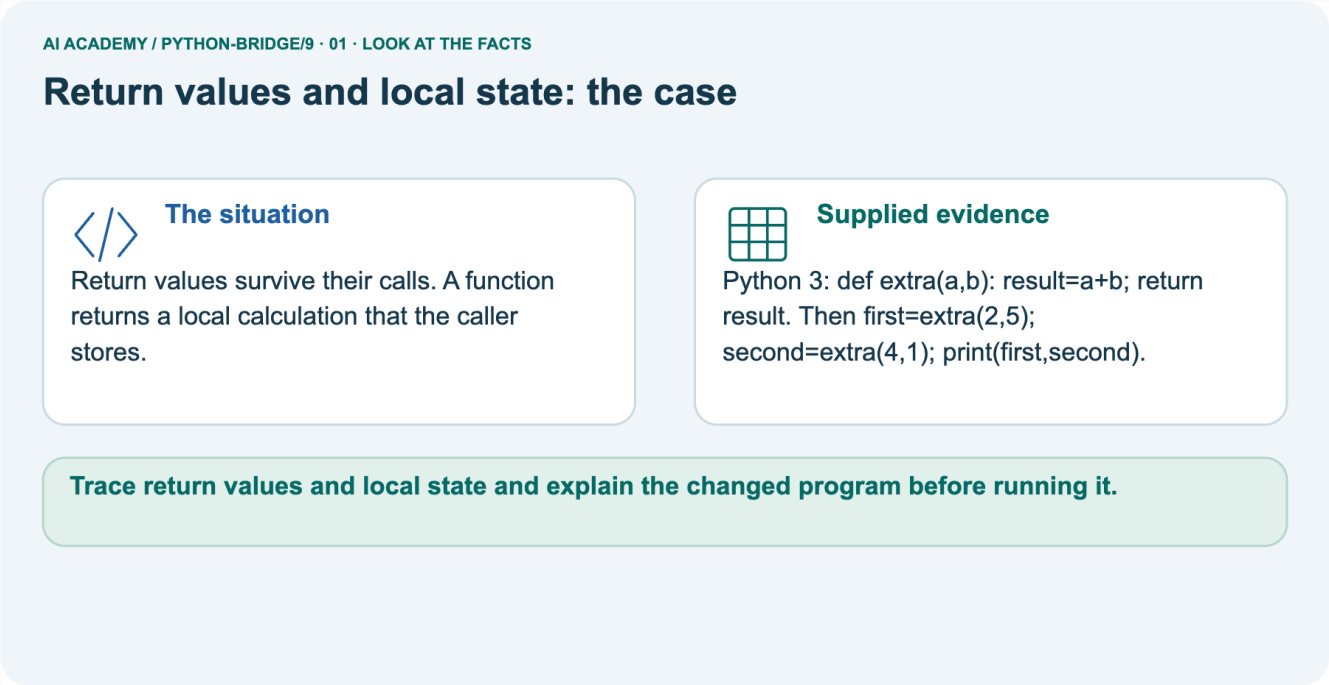

Follow the labelled picture with the matching explanation. Open the vector diagram

Return values survive their calls. A function returns a local calculation that the **caller** stores. Supplied facts: Python 3: def extra(a,b): result=a+b; return result.


Then first=extra(2,5); second=extra(4,1); print(first,second).

Point to the given fact that matters most. Explain why it matters.

Discuss while showing the picture

Teacher prompt: Point to the given fact that matters most. Explain why it matters. Ask learners to describe one label or arrow in ordinary words. Use the adjacent transcript if the image is difficult to see.

02. Follow the deciding steps

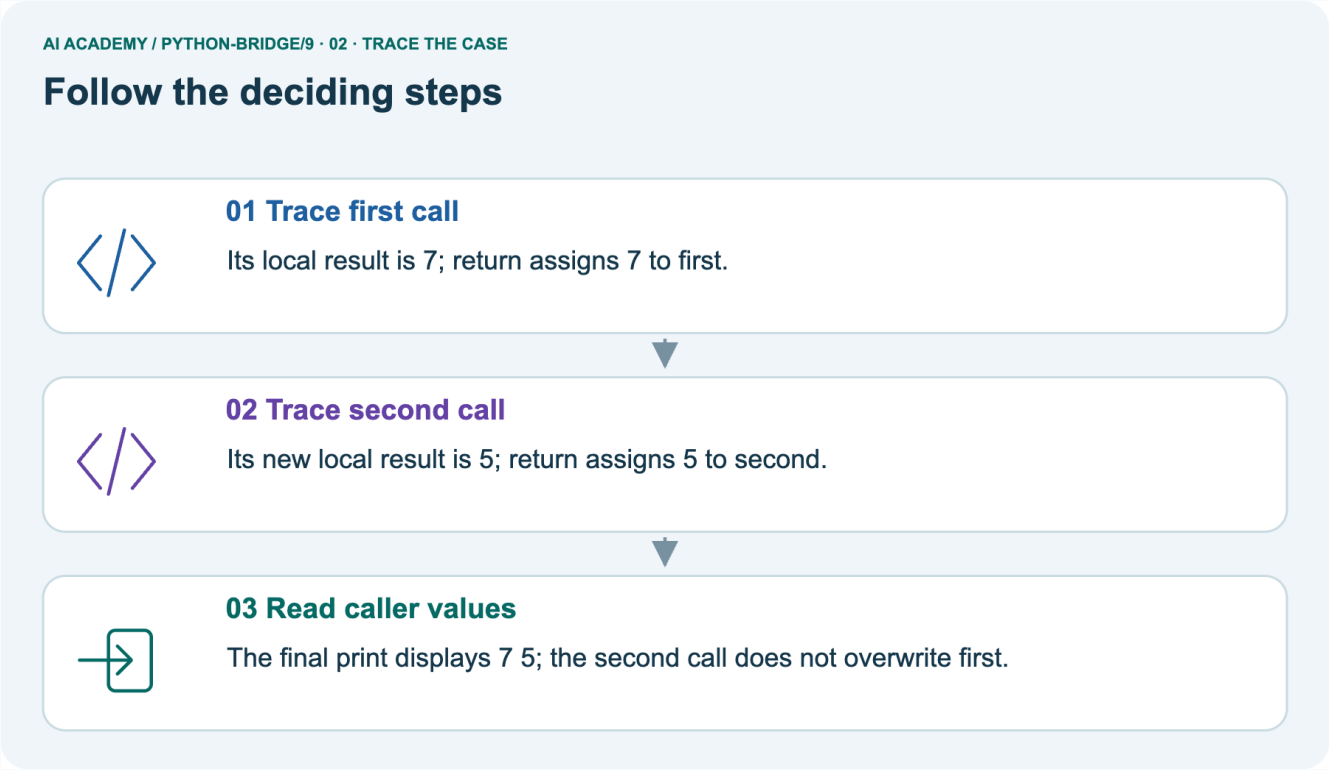

Follow the labelled picture with the matching explanation. Open the vector diagram

Trace first call: Its local result is 7; return assigns 7 to first. → Trace second call: Its new local result is 5; return assigns 5 to second. → Read **caller** values: The final print displays 7 5; the second call does not overwrite first.

Point to each numbered stage and explain which recorded **input** it uses.

Discuss while showing the picture

Teacher prompt: Point to each numbered stage and explain which recorded **input** it uses. Ask learners to describe one label or arrow in ordinary words. Use the adjacent transcript if the image is difficult to see.

03. Two calls return two values

AI ACADEMY / PYTHON-BRIDGE/9 · 03 · INSPECT THE LESSON MODEL

Two calls return two values

Call	Inside this call	Back in the caller
remaining(12, 4)	spaces becomes 8	first receives 8
remaining(10, 7)	spaces becomes 3	second receives 3

The caller adds the returned values. Only print(first + second) displays 11.

Follow the labelled picture with the matching explanation. Open the vector diagram


Two calls return two values. remaining(12, 4) | spaces becomes 8 | first receives 8. remaining(10, 7) | spaces becomes 3 | second receives 3

Read the labels and values. Explain the relationship the model shows.

Discuss while showing the picture

Teacher prompt: Read the labels and values. Explain the relationship the model shows. Ask learners to describe one label or arrow in ordinary words. Use the adjacent transcript if the image is difficult to see.

04. Change one thing. Trace what follows.

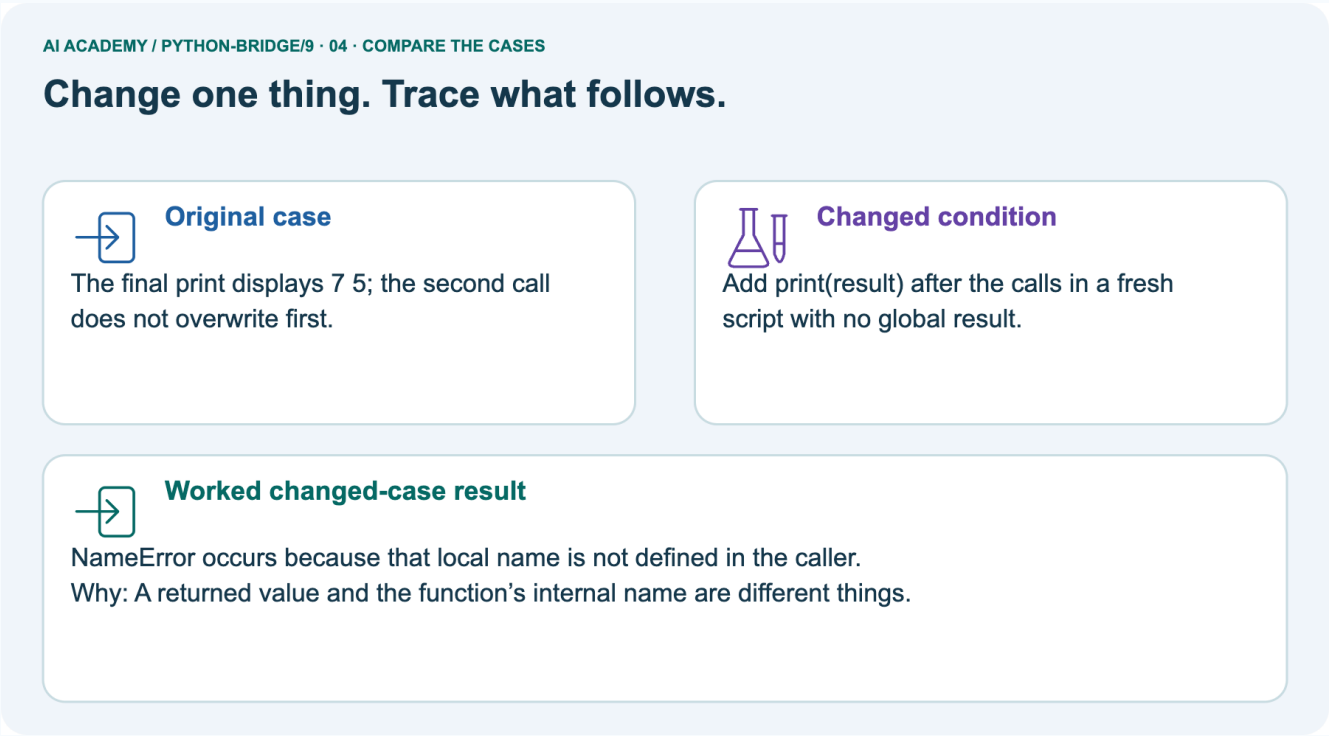

Follow the labelled picture with the matching explanation. Open the vector diagram

Original case: The final print displays 7 5; the second call does not overwrite first. Changed condition: Add print(result) after the calls in a fresh script with no global result.

Expected result: NameError occurs because that local name is not defined in the **caller**. Reason: A returned value and the function's internal name are different things.


Predict before checking the worked changed-case result. Name what changed and what the supplied facts allow you to conclude.

Discuss while showing the picture

Teacher prompt: Predict before checking the worked changed-case result. Name what changed and what the supplied facts allow you to conclude. Ask learners to describe one label or arrow in ordinary words.

Use the adjacent transcript if the image is difficult to see. Changed-case reasoning: A returned value and the function's internal name are different things.

05. Connect the explanation to its limit

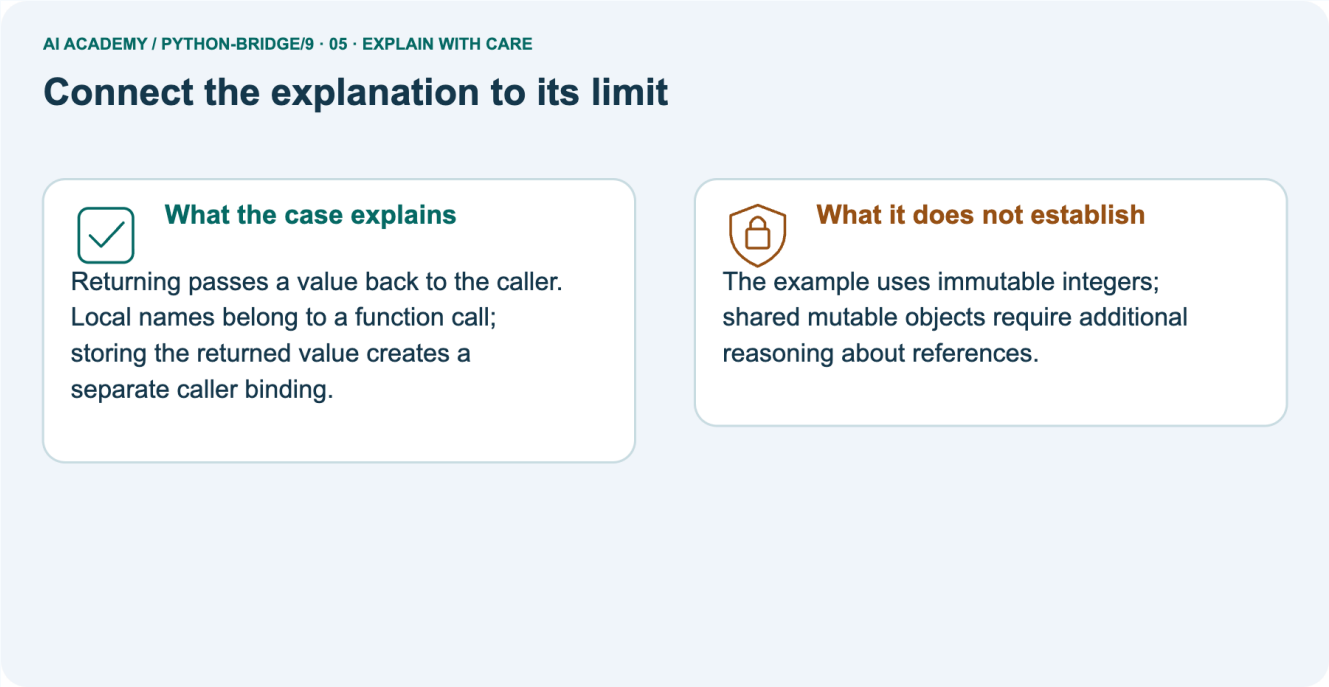

Follow the labelled picture with the matching explanation. Open the vector diagram

Returning passes a value back to the **caller**. Local names belong to a function call; storing the returned value creates a separate **caller** binding.

Limit: The example uses immutable integers; shared mutable objects require additional reasoning about references.


Explain the case, then point to a limit on the claim.

Discuss while showing the picture

Teacher prompt: Explain the case, then point to a limit on the claim. Ask learners to describe one label or arrow in ordinary words. Use the adjacent transcript if the image is difficult to see.

Keep the stated **scope**: The example uses immutable integers; shared mutable objects require additional reasoning about references.

06. Make the idea visible in your project

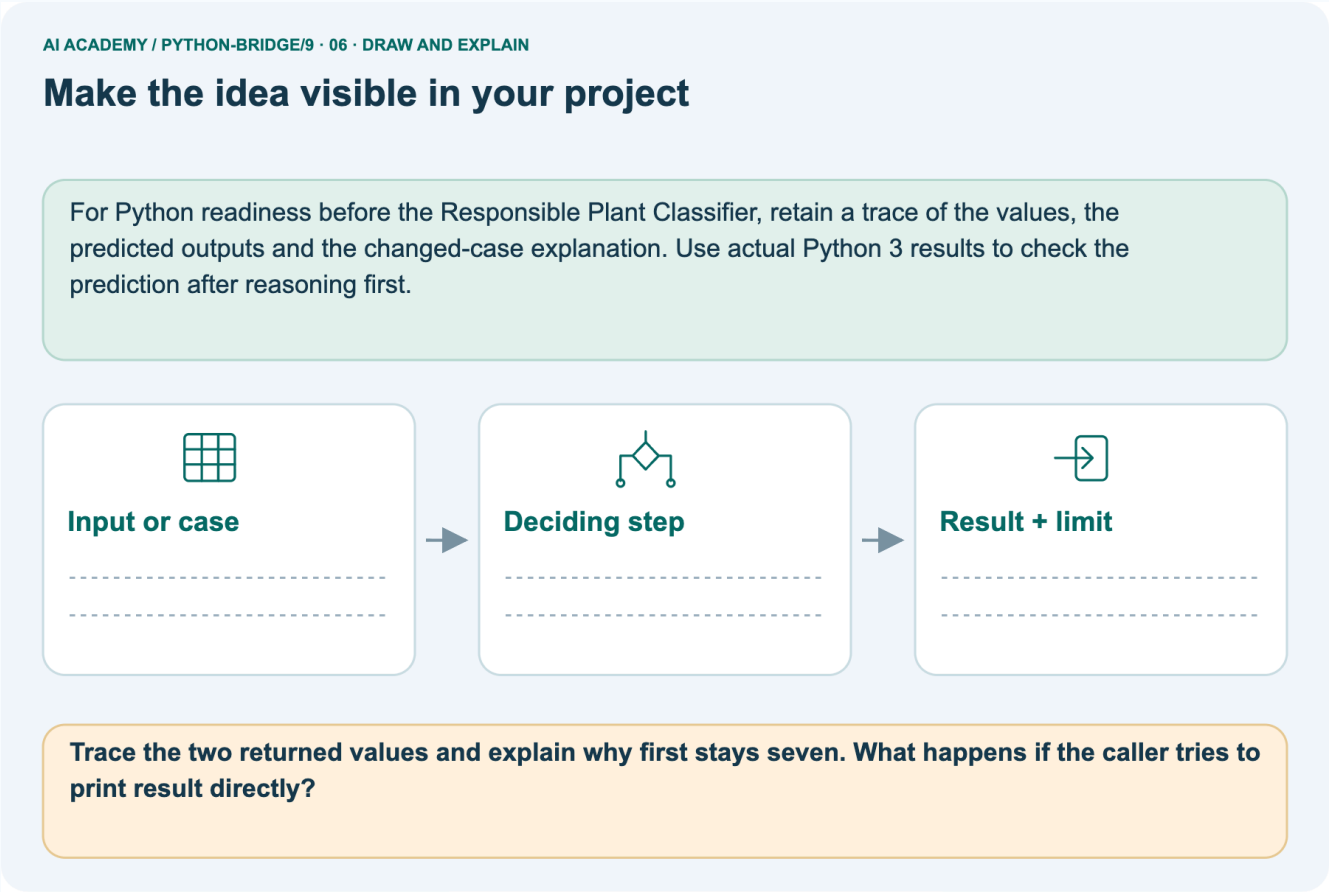

Follow the labelled picture with the matching explanation. Open the vector diagram

For Python readiness before the Responsible Plant Classifier, retain a trace of the values, the predicted **output**s and the changed-case explanation. Use actual Python 3 results to check the **prediction** after reasoning first.

Draw your **input**, deciding step, result and limit. Supported question: Trace the two returned values and explain why first stays seven. What happens if the **caller** tries to print result directly?

Draw your project trace and justify the deciding step using **evidence**.

Discuss while showing the picture

Teacher prompt: Draw your project trace and justify the deciding step using **evidence**. Ask learners to describe one label or arrow in ordinary words. Use the adjacent transcript if the image is difficult to see.

Supported practice key: The returns are 7 and 5, stored independently as first and second. result is local to each call; accessing it outside in this fresh script raises NameError.

Save or print your responses for your portfolio. Progress and drafts on the hosted website stay in the current browser. Use only fictional or teacher-approved data.