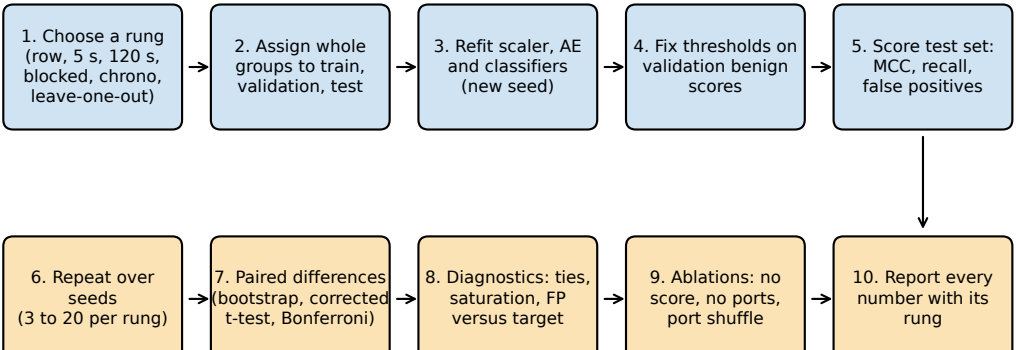
1. Choose a rung (row, 5 s, 120 s, blocked, chrono, leave-one-out)
2. Assign whole groups to train, validation, test
3. Refit scaler, AE and classifiers (new seed)
4. Fix thresholds on validation benign scores
5. Score test set: MCC, recall, false positives
6. Repeat over seeds (3 to 20 per rung)
7. Paired differences (bootstrap, corrected t-test, Bonferroni)
8. Diagnostics: ties, saturation, FP versus target
9. Ablations: no score, no ports, port shuffle
10. Report every number with its rung