



JOINS AND SETS

STEP 1: CREATE TABLES

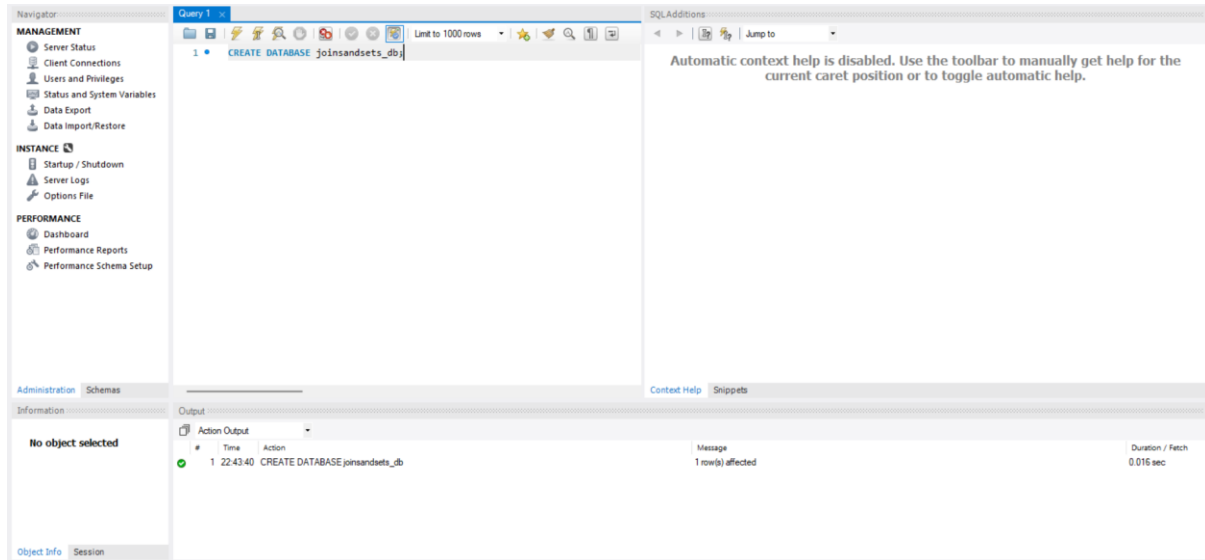

STEP 2 — Create tables

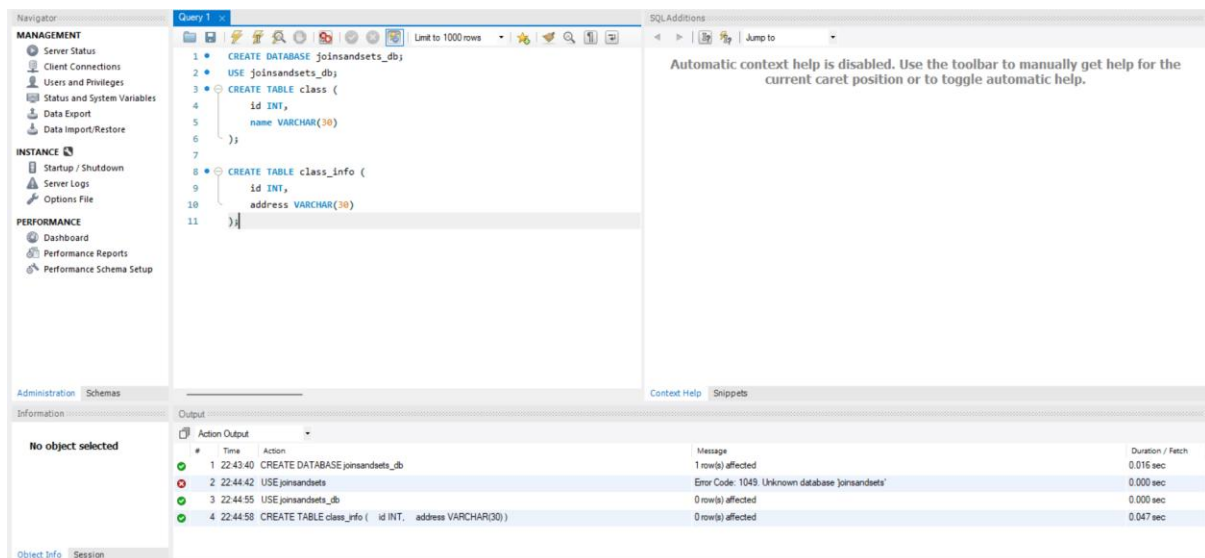

STEP 3 — Insert data

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

1 CREATE DATABASE joinsandsets_db;
2 USE joinsandsets_db;
3 CREATE TABLE class (
4     id INT,
5     name VARCHAR(30)
6 );
7
8 CREATE TABLE class_info (
9     id INT,
10    address VARCHAR(30)
11 );
12
13 INSERT INTO class VALUES
14     (1, 'abhi'),
15     (2, 'adam'),
16     (4, 'alex');
17
18 INSERT INTO class_info VALUES
19     (1, 'DELHI'),
20     (2, 'MUMBAI'),
21     (3, 'CHENNAI');

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	22:43:40	CREATE DATABASE joinsandsets_db	1 row(s) affected	0.016 sec
2	22:44:42	USE joinsandsets_db	Error Code: 1049. Unknown database 'joinsandsets'	0.000 sec
3	22:44:55	USE joinsandsets_db	0 row(s) affected	0.000 sec
4	22:44:58	CREATE TABLE class (id INT, address VARCHAR(30))	0 row(s) affected	0.047 sec
5	22:45:28	INSERT INTO class_info VALUES (1, 'DELHI'), (2, 'MUMBAI'), (3, 'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.016 sec

Question 1 — CROSS JOIN

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

1 CREATE DATABASE joins1_db;
2 USE joinsandsets_db;
3
4 CREATE TABLE class (
5     id INT,
6     name VARCHAR(30)
7 );
8
9 CREATE TABLE class1_info (
10    id INT,
11    address VARCHAR(30)
12 );

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	22:49:25	CREATE DATABASE joins1_db	1 row(s) affected	0.000 sec
2	22:49:28	USE joinsandsets_db	0 row(s) affected	0.000 sec
3	22:49:31	CREATE TABLE class_info (id INT, address VARCHAR(30))	Error Code: 1050. Table 'class_info' already exists	0.000 sec
4	22:49:39	CREATE TABLE class (id INT, name VARCHAR(30))	0 row(s) affected	0.031 sec
5	22:49:41	CREATE TABLE class_info (id INT, address VARCHAR(30))	Error Code: 1050. Table 'class_info' already exists	0.000 sec
6	22:49:49	CREATE TABLE class1_info (id INT, address VARCHAR(30))	0 row(s) affected	0.031 sec

PART 2 — INNER JOIN

Navigator: Query 1

```

1 • CREATE DATABASE joins1_db;
2 • USE joinsandsets_db;
3
4 • CREATE TABLE class (
5     id INT,
6     name VARCHAR(30)
7 );
8
9 • CREATE TABLE class_info (
10    id INT,
11    address VARCHAR(30)
12 );
13 • INSERT INTO class VALUES
14    (3, 'alex'),
15    (4, 'anu');

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Administration Schemas

Information

No object selected

Object Info Session

Output

#	Time	Action	Message	Duration / Fetch
2	22:49:28	USE joinsandsets_db	0 row(s) affected	0.000 sec
3	22:49:31	CREATE TABLE class_info (id INT, address VARCHAR(30))	Error Code: 1050. Table 'class_info' already exists	0.000 sec
4	22:49:39	CREATE TABLE class (id INT, name VARCHAR(30))	0 row(s) affected	0.031 sec
5	22:49:41	CREATE TABLE class_info (id INT, address VARCHAR(30))	Error Code: 1050. Table 'class_info' already exists	0.000 sec
6	22:49:49	CREATE TABLE class_info (id INT, address VARCHAR(30))	0 row(s) affected	0.031 sec
7	22:50:33	INSERT INTO class VALUES (3, 'alex'), (4, 'anu')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec

Question 2 — INNER JOIN

Navigator: Query 1

```

25 (1, 'DELHI'),
26 (2, 'MUMBAI'),
27 (3, 'CHENNAI');
28 • SELECT *
29 FROM class
30 INNER JOIN class_info
31 ON class.id = class_info.id;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Administration Schemas

Information

No object selected

Object Info Session

Output

#	Time	Action	Message	Duration / Fetch
5	22:49:41	CREATE TABLE class_info (id INT, address VARCHAR(30))	Error Code: 1050. Table 'class_info' already exists	0.000 sec
6	22:49:49	CREATE TABLE class_info (id INT, address VARCHAR(30))	0 row(s) affected	0.031 sec
7	22:50:33	INSERT INTO class VALUES (3, 'alex'), (4, 'anu')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec
8	22:51:01	TRUNCATE TABLE class_info	0 row(s) affected	0.047 sec
9	22:51:17	INSERT INTO class_info VALUES (1, 'DELHI'), (2, 'MUMBAI'), (3, 'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.015 sec
10	22:51:54	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

Result Grid

id	name	id	address
3	alex	3	CHENNAI

Question 3 — INNER JOIN

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

30 INNER JOIN class_info
31 ON class.id = class_info.id;
32 * SELECT class.name,
33     class_info.address
34 FROM class
35 INNER JOIN class_info
36 ON class.id = class_info.id;

```

Result Grid

	name	address
1	alex	CHENNAI

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

Form Editor

Field Types

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
6	22:49:49	CREATE TABLE class_info (id INT, address VARCHAR(30))	0 row(s) affected	0.031 sec
7	22:50:33	INSERT INTO class VALUES (3, 'alex'), (4, 'anu')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec
8	22:51:01	TRUNCATE TABLE class_info	0 row(s) affected	0.047 sec
9	22:51:17	INSERT INTO class_info VALUES (1, 'DELHI'), (2, 'MUMBAI'), (3, 'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.015 sec
10	22:51:54	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	22:52:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id L...	1 row(s) returned	0.000 sec / 0.000 sec

PART 3 — NATURAL JOIN

Question 4

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

33 class_info.address
34 FROM class
35 INNER JOIN class_info
36 ON class.id = class_info.id;
37 * SELECT *
38 FROM class
39 NATURAL JOIN class_info;

```

Result Grid

	id	name	address
1	3	alex	CHENNAI

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

Form Editor

Field Types

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
7	22:50:33	INSERT INTO class VALUES (3, 'alex'), (4, 'anu')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec
8	22:51:01	TRUNCATE TABLE class_info	0 row(s) affected	0.047 sec
9	22:51:17	INSERT INTO class_info VALUES (1, 'DELHI'), (2, 'MUMBAI'), (3, 'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.015 sec
10	22:51:54	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	22:52:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id L...	1 row(s) returned	0.000 sec / 0.000 sec
12	22:53:10	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

PART 4 — LEFT OUTER JOIN

STEP 5 — Add extra records

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

26 (2, 'MUMBAI'),
27 (3, 'CHENNAI'));
28 SELECT *
29 FROM class
30 INNER JOIN class_info
31 ON class.id = class_info.id;
32 SELECT class.name,
33        class_info.address
34 FROM class
35 INNER JOIN class_info
36 ON class.id = class_info.id;
37 SELECT *
38 FROM class
39 NATURAL JOIN class_info;
40 INSERT INTO class VALUES
41 (5, 'ashish');
42
43 INSERT INTO class_info VALUES
44 (7, 'NOIDA'),
45 (8, 'PANIPAT');

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
8	22:51:01	TRUNCATE TABLE class_info	0 row(s) affected	0.047 sec
9	22:51:17	INSERT INTO class_info VALUES (1, 'DELHI'), (2, 'MUMBAI'), (3, 'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.015 sec
10	22:51:54	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	22:52:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info.id L...	1 row(s) returned	0.000 sec / 0.000 sec
12	22:53:10	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	22:53:49	INSERT INTO class_info VALUES (7, 'NOIDA'), (8, 'PANIPAT')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.000 sec

Question 5 — LEFT JOIN

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

43 INSERT INTO class_info VALUES
44 (7, 'NOIDA'),
45 (8, 'PANIPAT');
46 SELECT *
47 FROM class
48 LEFT OUTER JOIN class_info
49 ON class.id = class_info.id;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
9	22:51:17	INSERT INTO class_info VALUES (1, 'DELHI'), (2, 'MUMBAI'), (3, 'CHENNAI')	3 row(s) affected Records: 3 Duplicates: 0 Warnings: 0	0.015 sec
10	22:51:54	SELECT * FROM class INNER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	22:52:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class.id = class_info id L...	1 row(s) returned	0.000 sec / 0.000 sec
12	22:53:10	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	22:53:49	INSERT INTO class_info VALUES (7, 'NOIDA'), (8, 'PANIPAT')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.000 sec
14	22:54:26	SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info id LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec

Result Grid

id	name	id	address
3	alex	3	CHENNAI
4	anu	0000	0000

Question 6 — Find students without addresses

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

48 LEFT OUTER JOIN class_info
49 ON class_id = class_info.id;
50 SELECT *
51 FROM class
52 LEFT JOIN class_info
53 ON class_id = class_info.id
54 WHERE class_info.id IS NULL;

```

Result Grid

#	id	name	id	address
4	anu			

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

Form Editor

Field Types

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
10	22:51:54	SELECT * FROM class INNER JOIN class_info ON class_id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	22:52:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class_id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	22:53:10	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	22:53:49	INSERT INTO class_info VALUES (7, 'NOIDA'), (8, 'PANIPAT')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.000 sec
14	22:54:26	SELECT * FROM class LEFT OUTER JOIN class_info ON class_id = class_info.id LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec
15	22:55:44	SELECT * FROM class LEFT JOIN class_info ON class_id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

PART 5 — RIGHT OUTER JOIN

Question 7

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

52 LEFT JOIN class_info
53 ON class_id = class_info.id
54 WHERE class_info.id IS NULL;
55 SELECT *
56 FROM class
57 RIGHT OUTER JOIN class_info
58 ON class_id = class_info.id;

```

Result Grid

#	id	name	id	address
1	DELHI			
2	MUMBAI			
3	alex			
7	NOIDA			
8	PANIPAT			

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

Form Editor

Field Types

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
11	22:52:23	SELECT class.name, class_info.address FROM class INNER JOIN class_info ON class_id = class_info.id LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	22:53:10	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	22:53:49	INSERT INTO class_info VALUES (7, 'NOIDA'), (8, 'PANIPAT')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.000 sec
14	22:54:26	SELECT * FROM class LEFT OUTER JOIN class_info ON class_id = class_info.id LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec
15	22:55:44	SELECT * FROM class LEFT JOIN class_info ON class_id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
16	22:56:46	SELECT * FROM class RIGHT OUTER JOIN class_info ON class_id = class_info.id LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec

Question 8 — Find addresses without students

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

57 RIGHT OUTER JOIN class_info
58 ON class.id = class_info.id;
59 SELECT *
60 FROM class
61 RIGHT JOIN class_info
62 ON class.id = class_info.id
63 WHERE class.id IS NULL;

```

Result Grid

id	name	id	address
1	DELHI		
2	MUMBAI		
7	NOIDA		
8	PANIPAT		

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Output

Action Output

#	Time	Action	Message	Duration / Fetch
12	22:53:10	SELECT * FROM class NATURAL JOIN class_info LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	22:53:49	INSERT INTO class_info VALUES (7, 'NOIDA'), (8, 'PANIPAT')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.000 sec
14	22:54:26	SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec
15	22:55:44	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
16	22:56:46	SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec
17	22:57:33	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec

PART 6 — FULL OUTER JOIN

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

68 UNION
69
70
71 SELECT *
72 FROM class
73 RIGHT JOIN class_info
74 ON class.id = class_info.id;

```

Result Grid

id	name	id	address
3	alex	3	CHENNAI
4	anu	4	CHENNAI
1	DELHI		
2	MUMBAI		
7	NOIDA		
8	PANIPAT		

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Output

Action Output

#	Time	Action	Message	Duration / Fetch
14	22:54:26	SELECT * FROM class LEFT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec
15	22:55:44	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
16	22:56:46	SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec
17	22:57:33	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
18	22:58:14	SELECT * FROM class FULL OUTER JOIN class_info ON class.id = class_info.id	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'FULL OUTER JOIN class_info ON class.id = class_info id' at line 1	0.000 sec
19	22:58:29	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info id UNION SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info id	6 row(s) returned	0.000 sec / 0.000 sec

Question 10 — Unmatched records from both tables

Navigator

Query 1

```

81 UNION
82
83 SELECT *
84 FROM class
85 RIGHT JOIN class_info
86 ON class.id = class_info.id
87 WHERE class.id IS NULL;

```

Result Grid

id	name	id	address
1	DELHI		
2	MUMBAI		
7	NOIDA		
8	PANIPAT		

SQL.Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Administration Schemas

Information

No object selected

Output

Action Output

#	Time	Action	Message	Duration / Fetch
15	22:55:44	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
16	22:56:46	SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec
17	22:57:33	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
18	22:58:14	SELECT * FROM class FULL OUTER JOIN class_info ON class.id = class_info.id	Error Code: 1064 You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
19	22:58:29	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id	6 row(s) returned	0.000 sec / 0.000 sec
20	22:59:05	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

PART 7 — UNION

STEP 6 — Create two new tables

Navigator

Query 1

```

78 ON class.id = class_info.id
79 WHERE class_info.id IS NULL
80
81 UNION
82
83 SELECT *
84 FROM class
85 RIGHT JOIN class_info
86 ON class.id = class_info.id
87 WHERE class.id IS NULL;
88
89 CREATE TABLE first_table (
90   id INT,
91   name VARCHAR(30)
92 );
93
94 CREATE TABLE second_table (
95   id INT,
96   name VARCHAR(30)
97 );

```

SQL.Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Administration Schemas

Information

No object selected

Output

Action Output

#	Time	Action	Message	Duration / Fetch
16	22:56:46	SELECT * FROM class RIGHT OUTER JOIN class_info ON class.id = class_info.id LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec
17	22:57:33	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
18	22:58:14	SELECT * FROM class FULL OUTER JOIN class_info ON class.id = class_info.id	Error Code: 1064 You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
19	22:58:29	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id	6 row(s) returned	0.000 sec / 0.000 sec
20	22:59:05	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec
21	22:59:42	CREATE TABLE second_table (id INT, name VARCHAR(30))	0 row(s) affected	0.047 sec

Object Info Session

STEP 7 — Insert data

Navigator: Query 1

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

SQL: Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

```

84 FROM class
85 RIGHT JOIN class_info
86 ON class.id = class_info.id
87 WHERE class.id IS NULL;
88 CREATE TABLE first_table (
89   id INT,
90   name VARCHAR(30)
91 );
92
93 CREATE TABLE second_table (
94   id INT,
95   name VARCHAR(30)
96 );
97 INSERT INTO first_table VALUES
98 (1, 'abhi'),
99 (2, 'adam');
100
101 INSERT INTO second_table VALUES
102 (2, 'adam'),
103 (3, 'chester');
104
105
106
107

```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
17	22:57:33	SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class.id IS NULL LIMIT 0...	4 row(s) returned	0.000 sec / 0.000 sec
18	22:58:14	SELECT * FROM class FULL OUTER JOIN class_info ON class.id = class_info.id	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
19	22:58:29	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIG...	6 row(s) returned	0.000 sec / 0.000 sec
20	22:59:05	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL UNI...	5 row(s) returned	0.000 sec / 0.000 sec
21	22:59:42	CREATE TABLE second_table (id INT, name VARCHAR(30))	0 row(s) affected	0.047 sec
22	23:00:12	INSERT INTO second_table VALUES (2, 'adam'), (3, 'chester')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec

Question 11 — UNION

Navigator: Query 1

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

SQL: Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

```

87 WHERE class.id IS NULL;
88 CREATE TABLE first_table (
89   id INT,
90   name VARCHAR(30)
91 );
92
93 CREATE TABLE second_table (
94   id INT,
95   name VARCHAR(30)
96 );
97 INSERT INTO first_table VALUES
98 (1, 'abhi'),
99 (2, 'adam');
100
101 INSERT INTO second_table VALUES
102 (2, 'adam'),
103 (3, 'chester');
104
105 SELECT * FROM first_table
106 UNION
107 SELECT * FROM second_table;
108

```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
18	22:58:14	SELECT * FROM class FULL OUTER JOIN class_info ON class.id = class_info.id	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
19	22:58:29	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIG...	6 row(s) returned	0.000 sec / 0.000 sec
20	22:59:05	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL UNI...	5 row(s) returned	0.000 sec / 0.000 sec
21	22:59:42	CREATE TABLE second_table (id INT, name VARCHAR(30))	0 row(s) affected	0.047 sec
22	23:00:12	INSERT INTO second_table VALUES (2, 'adam'), (3, 'chester')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec
23	23:00:49	SELECT * FROM first_table UNION SELECT * FROM second_table	Error Code: 1146. Table 'jansandbeta_db.first_table' doesn't exist	0.000 sec

Question 12 — UNION names

Navigation sidebar with categories: MANAGEMENT (Server Status, Client Connections, Users and Privileges, Status and System Variables, Data Export, Data Import/Restore), INSTANCE (Startup / Shutdown, Server Logs, Options File), PERFORMANCE (Dashboard, Performance Reports, Performance Schema Setup).

Administration | Schemas

Query 1

Limit to 1000 rows

SQL Additions

```
91 }
92
93 CREATE TABLE second_table (
94     id INT,
95     name VARCHAR(30)
96 );
97
98 INSERT INTO first_table VALUES
99 (1, 'abhi'),
100 (2, 'adam');
101
102 INSERT INTO second_table VALUES
103 (2, 'adam'),
104 (3, 'chester');
105
106 SELECT * FROM first_table
107 UNION
108 SELECT * FROM second_table;
109
110 SELECT name FROM first_table
111 UNION
112 SELECT name FROM second_table;
```

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help | Snippets

No object selected

Information

Output

Action Output

#	Time	Action	Message	Duration / Fetch
19	22:58:29	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id UNION SELECT * FROM class RIGHT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL	6 row(s) returned	0.000 sec / 0.000 sec
20	22:59:05	SELECT * FROM class LEFT JOIN class_info ON class.id = class_info.id WHERE class_info.id IS NULL	5 row(s) returned	0.000 sec / 0.000 sec
21	22:59:42	CREATE TABLE second_table (id INT, name VARCHAR(30))	0 row(s) affected	0.047 sec
22	23:00:12	INSERT INTO second_table VALUES (2, 'adam'), (3, 'chester')	2 row(s) affected Records: 2 Duplicates: 0 Warnings: 0	0.016 sec
23	23:00:49	SELECT * FROM first_table UNION SELECT * FROM second_table	Error Code: 1146. Table 'joinsandsets_db.first_table' doesn't exist	0.000 sec
24	23:01:28	SELECT name FROM first_table UNION SELECT name FROM second_table	Error Code: 1146. Table 'joinsandsets_db.first_table' doesn't exist	0.000 sec

Object Info | Session