



MYSQL COMMANDS

1. CREATE DATABASE

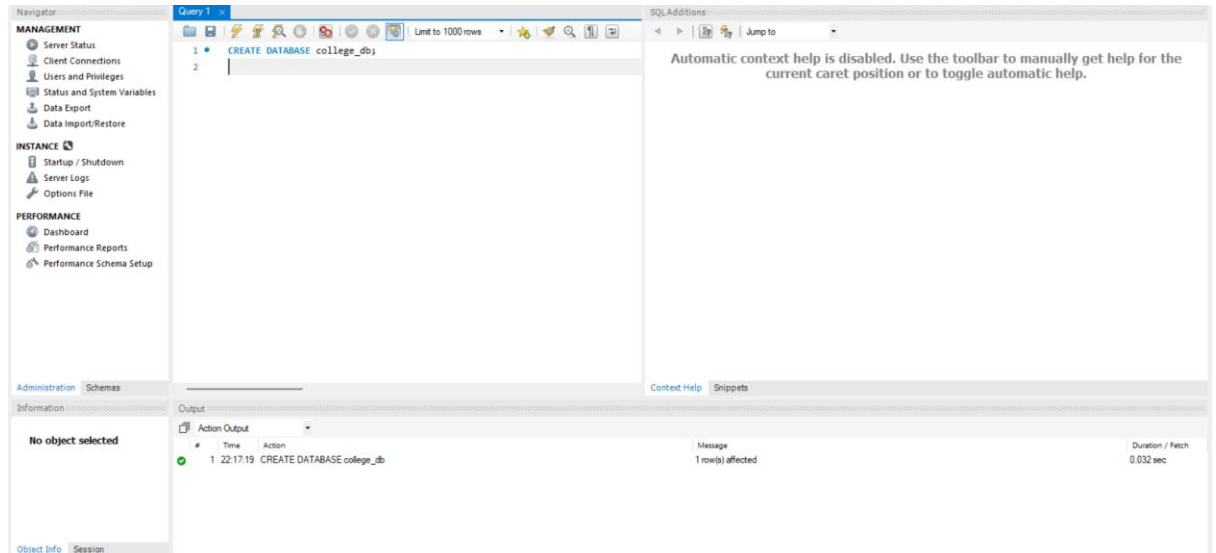

2. CREATE TABLE

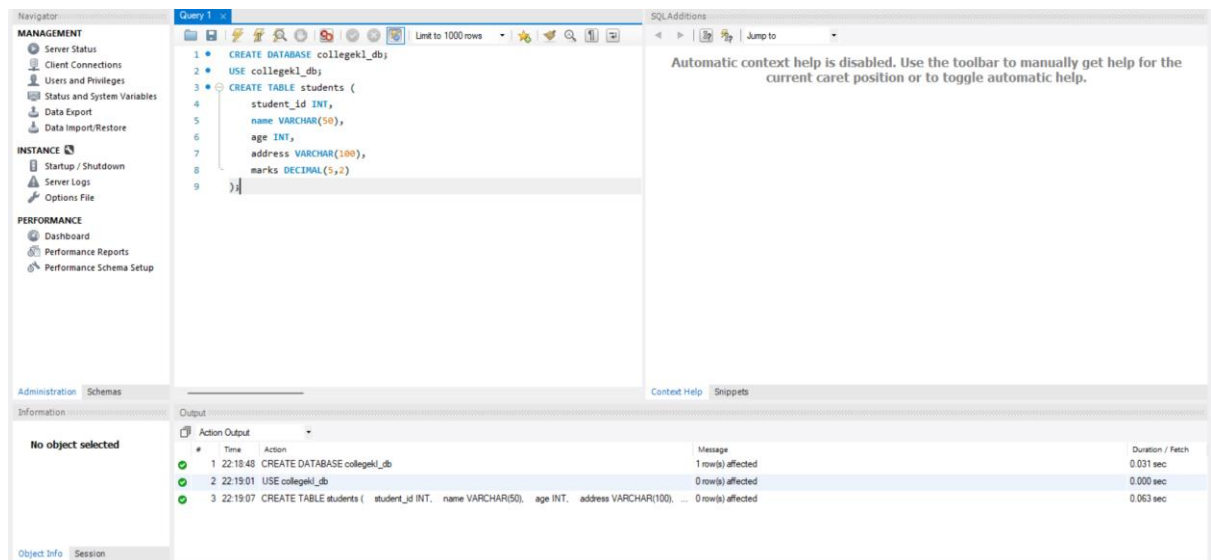

3. INSERT

Navigator

Query 1

```

1 CREATE DATABASE college1_db;
2 USE college1_db;
3 CREATE TABLE students (
4     student_id INT,
5     name VARCHAR(50),
6     age INT,
7     address VARCHAR(100),
8     marks DECIMAL(5,2)
9 );
10 INSERT INTO students
11 (student_id, name, age, address, marks)
12 VALUES
13 (1, 'Ramesh', 20, 'Hyderabad', 85.50);

```

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Output

#	Time	Action	Message	Duration / Fetch
1	22:18:48	CREATE DATABASE college1_db	1 row(s) affected	0.031 sec
2	22:19:01	USE college1_db	0 row(s) affected	0.000 sec
3	22:19:07	CREATE TABLE students (student_id INT, name VARCHAR(50), age INT, address VARCHAR(100), marks DECIMAL(5,2))	0 row(s) affected	0.063 sec
4	22:19:44	INSERT INTO students (student_id, name, age, address, marks) VALUES (1, 'Ramesh', 20, 'Hyderabad', 85.50)	1 row(s) affected	0.032 sec

Object Info Session

4. SELECT

Navigator

Query 1

```

8 marks DECIMAL(5,2)
9 );
10 INSERT INTO students
11 (student_id, name, age, address, marks)
12 VALUES
13 (1, 'Ramesh', 20, 'Hyderabad', 85.50);
14 SELECT * FROM students;

```

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

student_id	name	age	address	marks
1	Ramesh	20	Hyderabad	85.50

students 1 x

Output

#	Time	Action	Message	Duration / Fetch
1	22:18:48	CREATE DATABASE college1_db	1 row(s) affected	0.031 sec
2	22:19:01	USE college1_db	0 row(s) affected	0.000 sec
3	22:19:07	CREATE TABLE students (student_id INT, name VARCHAR(50), age INT, address VARCHAR(100), marks DECIMAL(5,2))	0 row(s) affected	0.063 sec
4	22:19:44	INSERT INTO students (student_id, name, age, address, marks) VALUES (1, 'Ramesh', 20, 'Hyderabad', 85.50)	1 row(s) affected	0.032 sec
5	22:20:25	SELECT * FROM students LIMIT 0.1000	1 row(s) returned	0.016 sec / 0.000 sec

Object Info Session

5. WHERE

Navigator

Query 1

```

11 (student_id, name, age, address, marks)
12 VALUES
13 (1, 'Ramesh', 20, 'Hyderabad', 85.50);
14 SELECT * FROM students;
15 SELECT *
16 FROM students
17 WHERE marks > 80;

```

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

student_id	name	age	address	marks
1	Ramesh	20	Hyderabad	85.50

students 2 x

Output

#	Time	Action	Message	Duration / Fetch
1	22:18:48	CREATE DATABASE college1_db	1 row(s) affected	0.031 sec
2	22:19:01	USE college1_db	0 row(s) affected	0.000 sec
3	22:19:07	CREATE TABLE students (student_id INT, name VARCHAR(50), age INT, address VARCHAR(100), marks DECIMAL(5,2))	0 row(s) affected	0.063 sec
4	22:19:44	INSERT INTO students (student_id, name, age, address, marks) VALUES (1, 'Ramesh', 20, 'Hyderabad', 85.50)	1 row(s) affected	0.032 sec
5	22:20:25	SELECT * FROM students LIMIT 0.1000	1 row(s) returned	0.016 sec / 0.000 sec
6	22:20:59	SELECT * FROM students WHERE marks > 80 LIMIT 0.1000	1 row(s) returned	0.016 sec / 0.000 sec

Object Info Session

6. AND

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

15 SELECT *
16 FROM students
17 WHERE marks > 80;
18 SELECT *
19 FROM students
20 WHERE marks > 80
21 AND age < 22;

```

Result Grid

student_id	name	age	address	marks
1	Ramesh	20	Hyderabad	85.50

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

students 3

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
2	22:19:01	USE collegek_db	0 row(s) affected	0.000 sec
3	22:19:07	CREATE TABLE students (student_id INT, name VARCHAR(50), age INT, address VARCHAR(100), marks DECIMAL(5,2))	0 row(s) affected	0.063 sec
4	22:19:44	INSERT INTO students (student_id,name,age,address,marks) VALUES (1,'Ramesh',20,'Hyderabad',85.50)	1 row(s) affected	0.032 sec
5	22:20:25	SELECT * FROM students LIMIT 0, 1000	1 row(s) returned	0.016 sec / 0.000 sec
6	22:20:59	SELECT * FROM students WHERE marks > 80 LIMIT 0, 1000	1 row(s) returned	0.016 sec / 0.000 sec
7	22:22:06	SELECT * FROM students WHERE marks > 80 AND age < 22 LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

7. OR

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

19 FROM students
20 WHERE marks > 80
21 AND age < 22;
22 SELECT *
23 FROM students
24 WHERE marks > 80
25 OR age < 21;

```

Result Grid

student_id	name	age	address	marks
1	Ramesh	20	Hyderabad	85.50

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

students 4

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
3	22:19:07	CREATE TABLE students (student_id INT, name VARCHAR(50), age INT, address VARCHAR(100), marks DECIMAL(5,2))	0 row(s) affected	0.063 sec
4	22:19:44	INSERT INTO students (student_id,name,age,address,marks) VALUES (1,'Ramesh',20,'Hyderabad',85.50)	1 row(s) affected	0.032 sec
5	22:20:25	SELECT * FROM students LIMIT 0, 1000	1 row(s) returned	0.016 sec / 0.000 sec
6	22:20:59	SELECT * FROM students WHERE marks > 80 LIMIT 0, 1000	1 row(s) returned	0.016 sec / 0.000 sec
7	22:22:06	SELECT * FROM students WHERE marks > 80 AND age < 22 LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
8	22:22:39	SELECT * FROM students WHERE marks > 80 OR age < 21 LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

8. UPDATE

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

17 WHERE marks > 80;
18 SELECT *
19 FROM students
20 WHERE marks > 80
21 AND age < 22;
22 SELECT *
23 FROM students
24 WHERE marks > 80
25 OR age < 21;
26 UPDATE students
27 SET address = 'Hyderabad'
28 WHERE student_id = 1;
29 UPDATE students
30 SET address = 'Chennai',
31 marks = 95
32 WHERE student_id = 1;
33 UPDATE students
34 SET address = 'Chennai',
35 marks = 95
36 WHERE student_id = 1;

```

Result Grid

student_id	name	age	address	marks
1	Ramesh	20	Hyderabad	85.50

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

students 4

Read Only Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
6	22:20:59	SELECT * FROM students WHERE marks > 80 LIMIT 0, 1000	1 row(s) returned	0.016 sec / 0.000 sec
7	22:22:06	SELECT * FROM students WHERE marks > 80 AND age < 22 LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
8	22:22:39	SELECT * FROM students WHERE marks > 80 OR age < 21 LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
9	22:23:12	UPDATE students SET address = 'Hyderabad' WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses ...	0.000 sec
10	22:23:25	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses ...	0.000 sec
11	22:24:22	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses ...	0.000 sec

9. DELETE

Navigator: MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

19 FROM students
20 WHERE marks > 80
21 AND age < 22;
22 • SELECT *
23 FROM students
24 WHERE marks > 80
25 OR age < 21;
26 • UPDATE students
27 SET address = 'Hyderabad'
28 WHERE student_id = 1;
29 • UPDATE students
30 SET address = 'Chennai',
31 marks = 95
32 WHERE student_id = 1;
33 • UPDATE students
34 SET address = 'Chennai',
35 marks = 95
36 WHERE student_id = 1;
37 • DELETE FROM students
38 WHERE student_id = 2;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message
7	22:22:06	SELECT * FROM students WHERE marks > 80 AND age < 22 LIMIT 0, 1000	1 row(s) returned
8	22:22:39	SELECT * FROM students WHERE marks > 80 OR age < 21 LIMIT 0, 1000	1 row(s) returned
9	22:23:12	UPDATE students SET address = 'Hyderabad' WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...
10	22:23:25	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...
11	22:24:22	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...
12	22:25:12	DELETE FROM students WHERE student_id = 2	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...

10.LIKE

Navigator: MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

35 marks = 95
36 WHERE student_id = 1;
37 • DELETE FROM students
38 WHERE student_id = 2;
39 • SELECT *
40 FROM students
41 WHERE name LIKE 'B%';

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
8	22:22:39	SELECT * FROM students WHERE marks > 80 OR age < 21 LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
9	22:23:12	UPDATE students SET address = 'Hyderabad' WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
10	22:23:25	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
11	22:24:22	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
12	22:25:12	DELETE FROM students WHERE student_id = 2	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
13	22:26:58	SELECT * FROM students WHERE name LIKE 'B%'; LIMIT 0, 1000	0 row(s) returned	0.016 sec / 0.000 sec

11. ORDER BY

Query 1:

```

38 WHERE student_id = 2;
39 SELECT *
40 FROM students
41 WHERE name LIKE 'B%';
42 SELECT *
43 FROM students
44 ORDER BY name ASC;

```

Result Grid:

student_id	name	age	address	marks
1	Ramesh	20	Hyderabad	85.50

SQLAdditions:

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Output:

#	Time	Action	Message	Duration / Fetch
9	22:23:12	UPDATE students SET address = 'Hyderabad' WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
10	22:23:25	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
11	22:24:22	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
12	22:25:12	DELETE FROM students WHERE student_id = 2	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
13	22:26:58	SELECT * FROM students WHERE name LIKE 'B%'; LIMIT 0, 1000	0 row(s) returned	0.016 sec / 0.000 sec
14	22:27:44	SELECT * FROM students ORDER BY name ASC LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

12. ALTER TABLE — ADD COLUMN

Query 1:

```

27 SET address = 'Hyderabad'
28 WHERE student_id = 1;
29 UPDATE students
30 SET address = 'Chennai',
31 marks = 95
32 WHERE student_id = 1;
33 UPDATE students
34 SET address = 'Chennai',
35 marks = 95
36 WHERE student_id = 1;
37 DELETE FROM students
38 WHERE student_id = 2;
39 SELECT *
40 FROM students
41 WHERE name LIKE 'B%';
42 SELECT *
43 FROM students
44 ORDER BY name ASC;
45 ALTER TABLE students
46 ADD gender VARCHAR(10);

```

SQLAdditions:

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Output:

#	Time	Action	Message	Duration / Fetch
10	22:23:25	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
11	22:24:22	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
12	22:25:12	DELETE FROM students WHERE student_id = 2	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
13	22:26:58	SELECT * FROM students WHERE name LIKE 'B%'; LIMIT 0, 1000	0 row(s) returned	0.016 sec / 0.000 sec
14	22:27:44	SELECT * FROM students ORDER BY name ASC LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	22:28:22	ALTER TABLE students ADD gender VARCHAR(10)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec

13. ALTER TABLE — MODIFY COLUMN

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Query 1

```

29 • UPDATE students
30   SET address = 'Chennai',
31     marks = 95
32   WHERE student_id = 1;
33 • UPDATE students
34   SET address = 'Chennai',
35     marks = 95
36   WHERE student_id = 1;
37 • DELETE FROM students
38   WHERE student_id = 2;
39 • SELECT *
40   FROM students
41   WHERE name LIKE 'B%';
42 • SELECT *
43   FROM students
44   ORDER BY name ASC;
45 • ALTER TABLE students
46   ADD gender VARCHAR(10);
47 • ALTER TABLE students
48   MODIFY name VARCHAR(100);

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Information

No object selected

Object Info Session

Action Output

#	Time	Action	Message	Duration / Fetch
11	22:24:22	UPDATE students SET address = 'Chennai', marks = 95 WHERE student_id = 1	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
12	22:25:12	DELETE FROM students WHERE student_id = 2	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
13	22:26:58	SELECT * FROM students WHERE name LIKE 'B%'; LIMIT 0, 1000	0 row(s) returned	0.016 sec / 0.000 sec
14	22:27:44	SELECT * FROM students ORDER BY name ASC LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	22:28:22	ALTER TABLE students ADD gender VARCHAR(10)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec
16	22:29:05	ALTER TABLE students MODIFY name VARCHAR(100)	1 row(s) affected Records: 1 Duplicates: 0 Warnings: 0	0.094 sec

14. ALTER TABLE — DROP COLUMN

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Query 1

```

31   marks = 95
32   WHERE student_id = 1;
33 • UPDATE students
34   SET address = 'Chennai',
35     marks = 95
36   WHERE student_id = 1;
37 • DELETE FROM students
38   WHERE student_id = 2;
39 • SELECT *
40   FROM students
41   WHERE name LIKE 'B%';
42 • SELECT *
43   FROM students
44   ORDER BY name ASC;
45 • ALTER TABLE students
46   ADD gender VARCHAR(10);
47 • ALTER TABLE students
48   MODIFY name VARCHAR(100);
49 • ALTER TABLE students
50   DROP COLUMN gender;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Information

No object selected

Object Info Session

Action Output

#	Time	Action	Message	Duration / Fetch
12	22:25:12	DELETE FROM students WHERE student_id = 2	Error Code: 1175. You are using safe update mode and you tried to update a table without a WHERE that uses...	0.000 sec
13	22:26:58	SELECT * FROM students WHERE name LIKE 'B%'; LIMIT 0, 1000	0 row(s) returned	0.016 sec / 0.000 sec
14	22:27:44	SELECT * FROM students ORDER BY name ASC LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	22:28:22	ALTER TABLE students ADD gender VARCHAR(10)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec
16	22:29:05	ALTER TABLE students MODIFY name VARCHAR(100)	1 row(s) affected Records: 1 Duplicates: 0 Warnings: 0	0.094 sec
17	22:29:49	ALTER TABLE students DROP COLUMN gender	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.109 sec

15. TRUNCATE

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

32 WHERE student_id = 1;
33 UPDATE students
34 SET address = 'Chennai',
35 marks = 95
36 WHERE student_id = 1;
37 DELETE FROM students
38 WHERE student_id = 2;
39 SELECT *
40 FROM students
41 WHERE name LIKE 'B%';
42 SELECT *
43 FROM students
44 ORDER BY name ASC;
45 ALTER TABLE students
46 ADD gender VARCHAR(10);
47 ALTER TABLE students
48 MODIFY name VARCHAR(100);
49 ALTER TABLE students
50 DROP COLUMN gender;
51 TRUNCATE TABLE students;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
13	22:26:58	SELECT * FROM students WHERE name LIKE 'B%' LIMIT 0, 1000	0 row(s) returned	0.016 sec / 0.000 sec
14	22:27:44	SELECT * FROM students ORDER BY name ASC LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	22:28:22	ALTER TABLE students ADD gender VARCHAR(10)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec
16	22:29:05	ALTER TABLE students MODIFY name VARCHAR(100)	1 row(s) affected Records: 1 Duplicates: 0 Warnings: 0	0.094 sec
17	22:29:49	ALTER TABLE students DROP COLUMN gender	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.109 sec
18	22:30:28	TRUNCATE TABLE students	0 row(s) affected	0.062 sec

16. DROP TABLE

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

33 UPDATE students
34 SET address = 'Chennai',
35 marks = 95
36 WHERE student_id = 1;
37 DELETE FROM students
38 WHERE student_id = 2;
39 SELECT *
40 FROM students
41 WHERE name LIKE 'B%';
42 SELECT *
43 FROM students
44 ORDER BY name ASC;
45 ALTER TABLE students
46 ADD gender VARCHAR(10);
47 ALTER TABLE students
48 MODIFY name VARCHAR(100);
49 ALTER TABLE students
50 DROP COLUMN gender;
51 TRUNCATE TABLE students;
52 DROP TABLE students;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
14	22:27:44	SELECT * FROM students ORDER BY name ASC LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	22:28:22	ALTER TABLE students ADD gender VARCHAR(10)	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.031 sec
16	22:29:05	ALTER TABLE students MODIFY name VARCHAR(100)	1 row(s) affected Records: 1 Duplicates: 0 Warnings: 0	0.094 sec
17	22:29:49	ALTER TABLE students DROP COLUMN gender	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.109 sec
18	22:30:28	TRUNCATE TABLE students	0 row(s) affected	0.062 sec
19	22:31:04	DROP TABLE students	0 row(s) affected	0.047 sec

17. DISTINCT

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1

```

35 marks = 95
36 WHERE student_id = 1;
37 DELETE FROM students
38 WHERE student_id = 2;
39 SELECT *
40 FROM students
41 WHERE name LIKE 'B%';
42 SELECT *
43 FROM students
44 ORDER BY name ASC;
45 ALTER TABLE students
46 ADD gender VARCHAR(10);
47 ALTER TABLE students
48 MODIFY name VARCHAR(100);
49 ALTER TABLE students
50 DROP COLUMN gender;
51 TRUNCATE TABLE students;
52 DROP TABLE students;
53 SELECT DISTINCT salary
54 FROM students;

```

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
17	22:29:49	ALTER TABLE students DROP COLUMN gender	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	0.109 sec
18	22:30:28	TRUNCATE TABLE students	0 row(s) affected	0.062 sec
19	22:31:04	DROP TABLE students	0 row(s) affected	0.047 sec