



## MONOLITHIC ARCHITECTURE

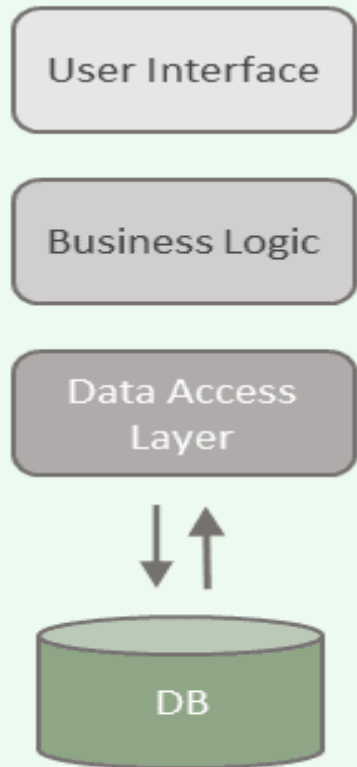

## MICROSERVICES ARCHITECTURE

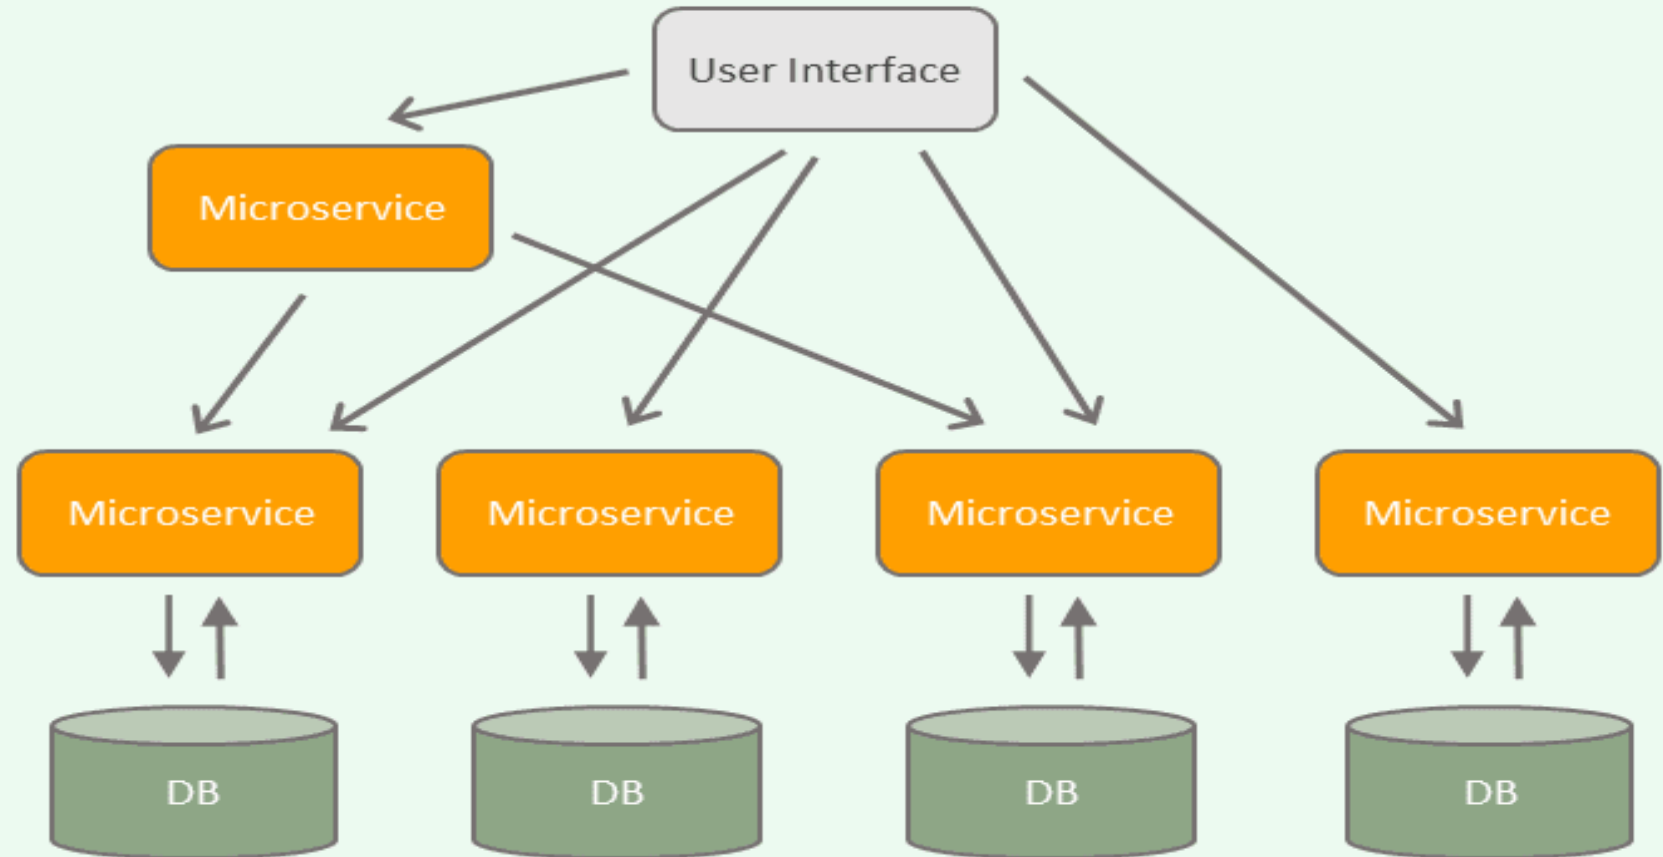

# Container Orchestration

# Containers Limitation?

---

High Availability?

Overlay Network?

Versioning of Application – Rollout, Rollback?

Scaling?


Autoscaling?

Monitoring?

Dependency between containers?

# Container orchestration

---

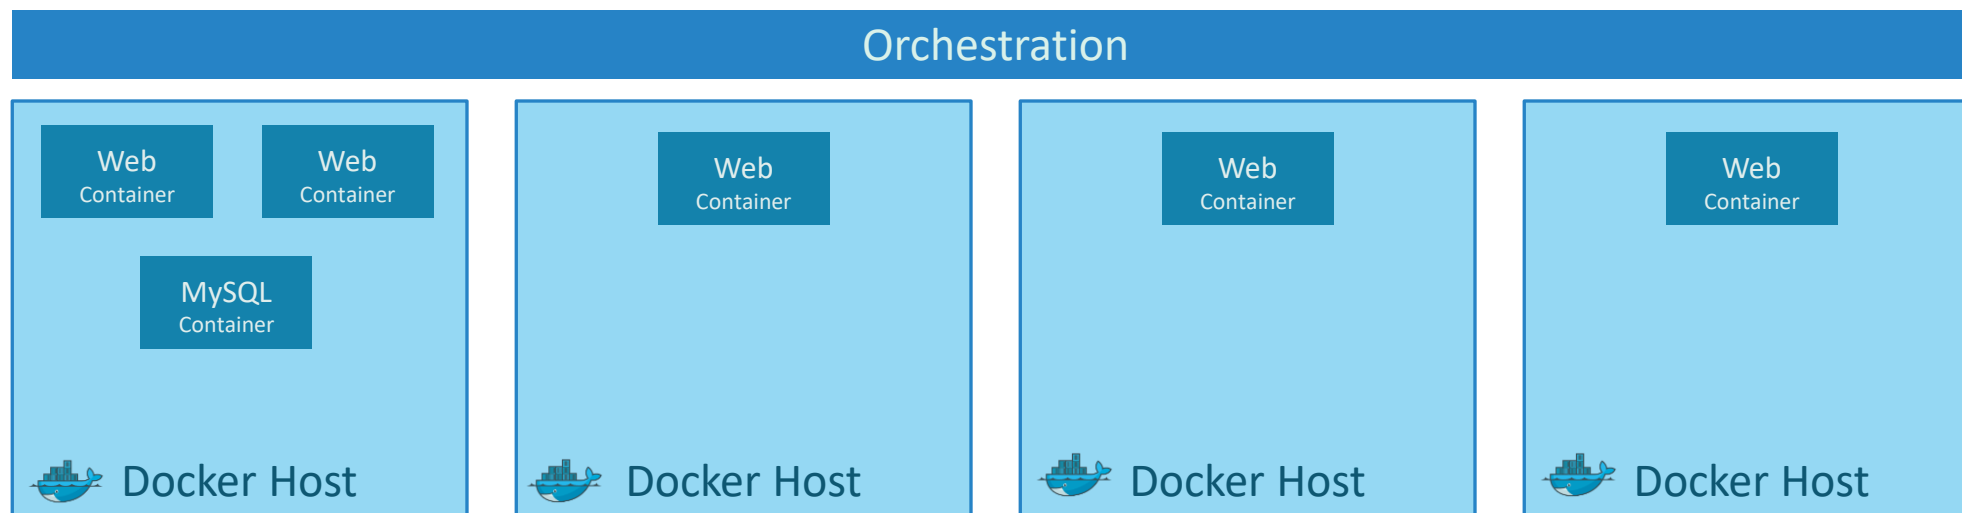

# Orchestration Technologies

---



Docker Swarm



**kubernetes**



MESOS

# What is Kubernetes?

---

The Kubernetes project was started by Google in 2014.

Kubernetes builds upon a decade and a half of experience that Google has with running production workloads at scale.

Kubernetes can run on a range of platforms, from your laptop, to VMs on a cloud provider, to rack of bare metal servers.

Kubernetes is an open-source platform for automating deployment, scaling, and operations of application containers across clusters of hosts, providing container-centric infrastructure.

**portable:** with all public, private, hybrid, community cloud

**self-healing:** auto-placement, auto-restart, auto-replication, auto-scaling

# Why Kubernetes

---

Kubernetes can schedule and run application containers on clusters of physical or virtual machines.

**host-centric** infrastructure to a **container-centric** infrastructure.

Orchestrator

Load balancing


Auto Scaling

Application Health checks

Rolling updates

# Kubernetes Advantage

---

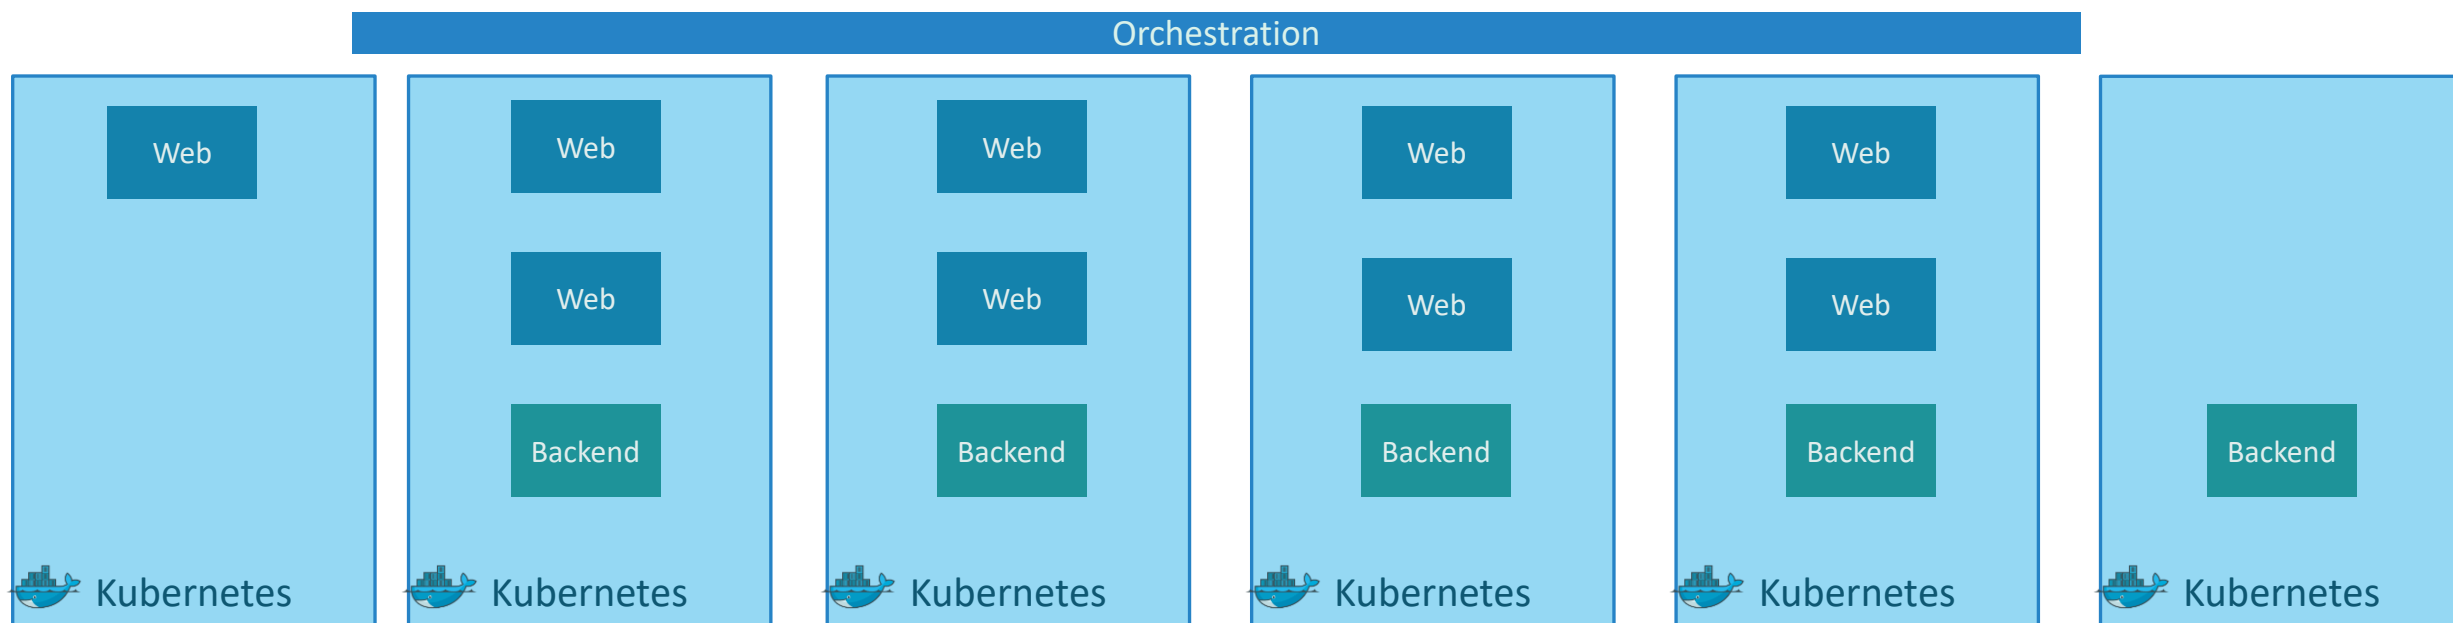



And that is **kubernetes**..

Setup

Raman



**Minikube**



**Kubeadm**



**Google Cloud Platform**



**Amazon Web Services**

[play-with-k8s.com](https://play-with-k8s.com)

# Setup Kubernetes

# Setup - kubeadm

# Kubernetes Cluster

---

A Kubernetes cluster consists of two types of resources:

**Master:** Which coordinates with the cluster

The Master is responsible for managing the cluster. The master coordinates all activities in your cluster, such as scheduling applications, maintaining applications' desired state, scaling applications, and rolling out new updates.

**Nodes:** Are the workers that run application

A node is a VM or a physical computer that serves as a worker machine in a Kubernetes cluster.

Masters manage the cluster and the nodes are used to host the running applications.

**The nodes communicate with the master using the Kubernetes API**, which the master exposes.

kube-  
apiserver



Master

Manages, Plans, Schedules, Monitors Nodes

kubelet



Worker Nodes

Host Application as Containers

Controller-  
Manager

ETCD  
CLUSTER

kube-scheduler


Kube-  
proxy

Container Runtime Engine  
docker rkt


docker

docker

# kubeadm

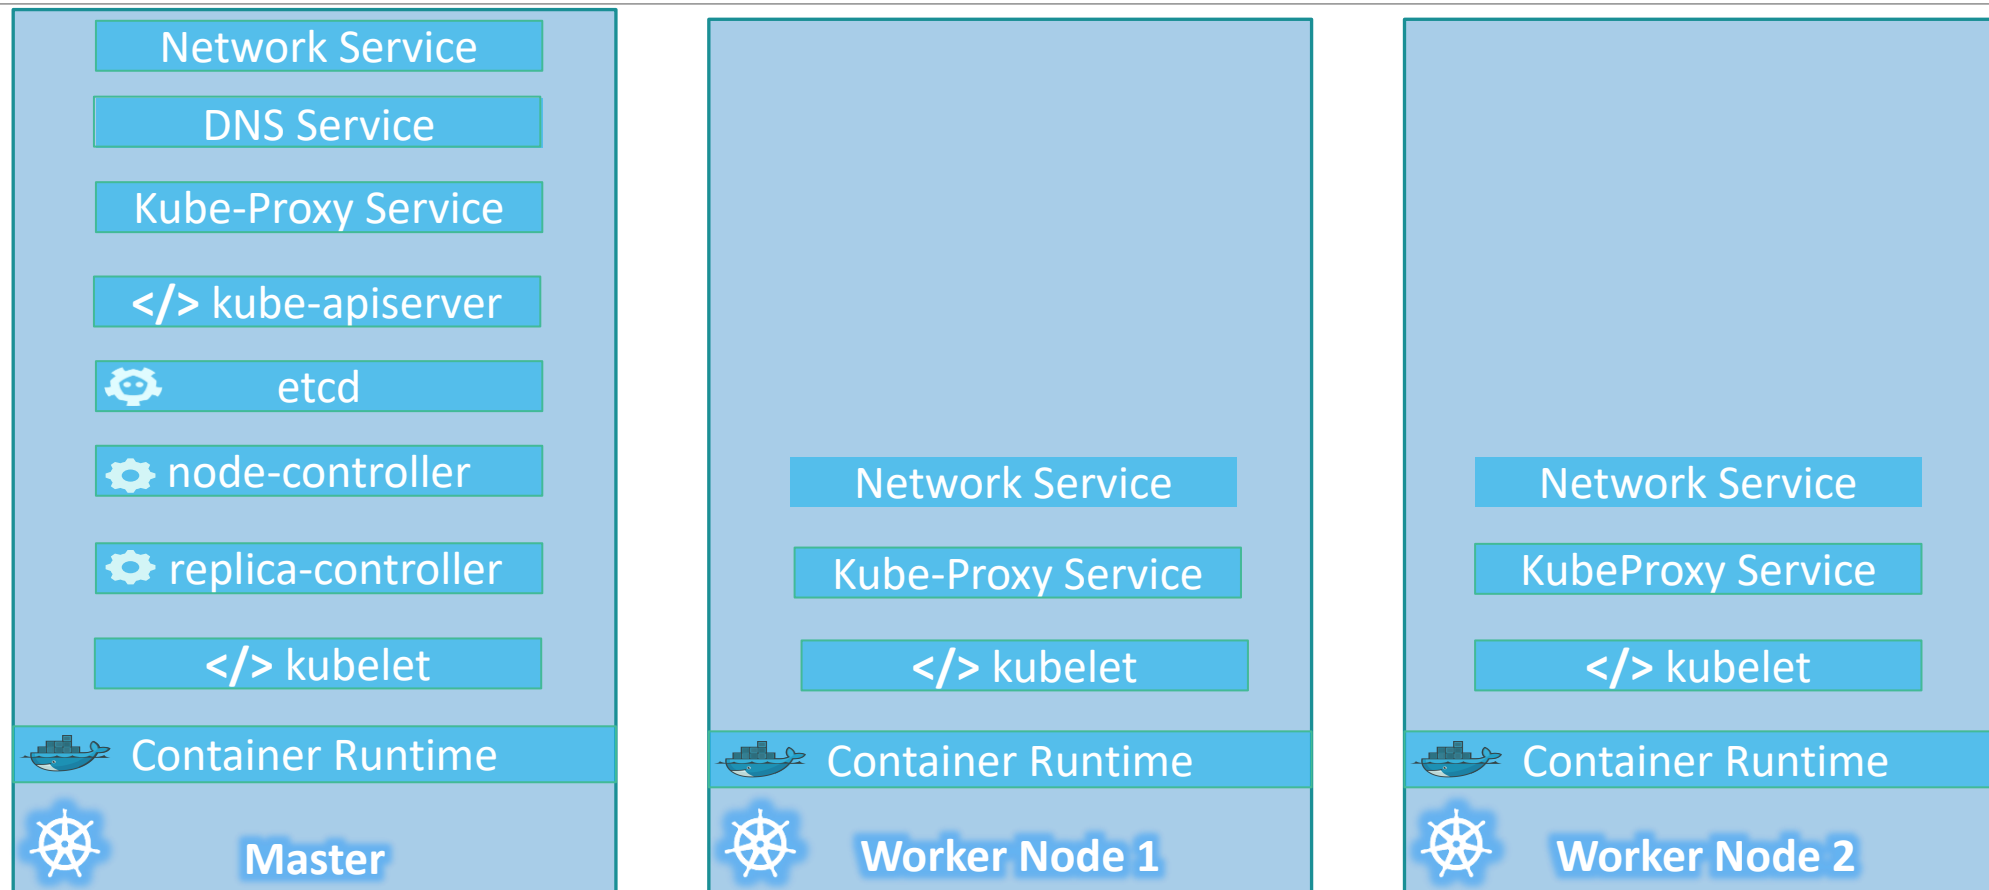

# Steps

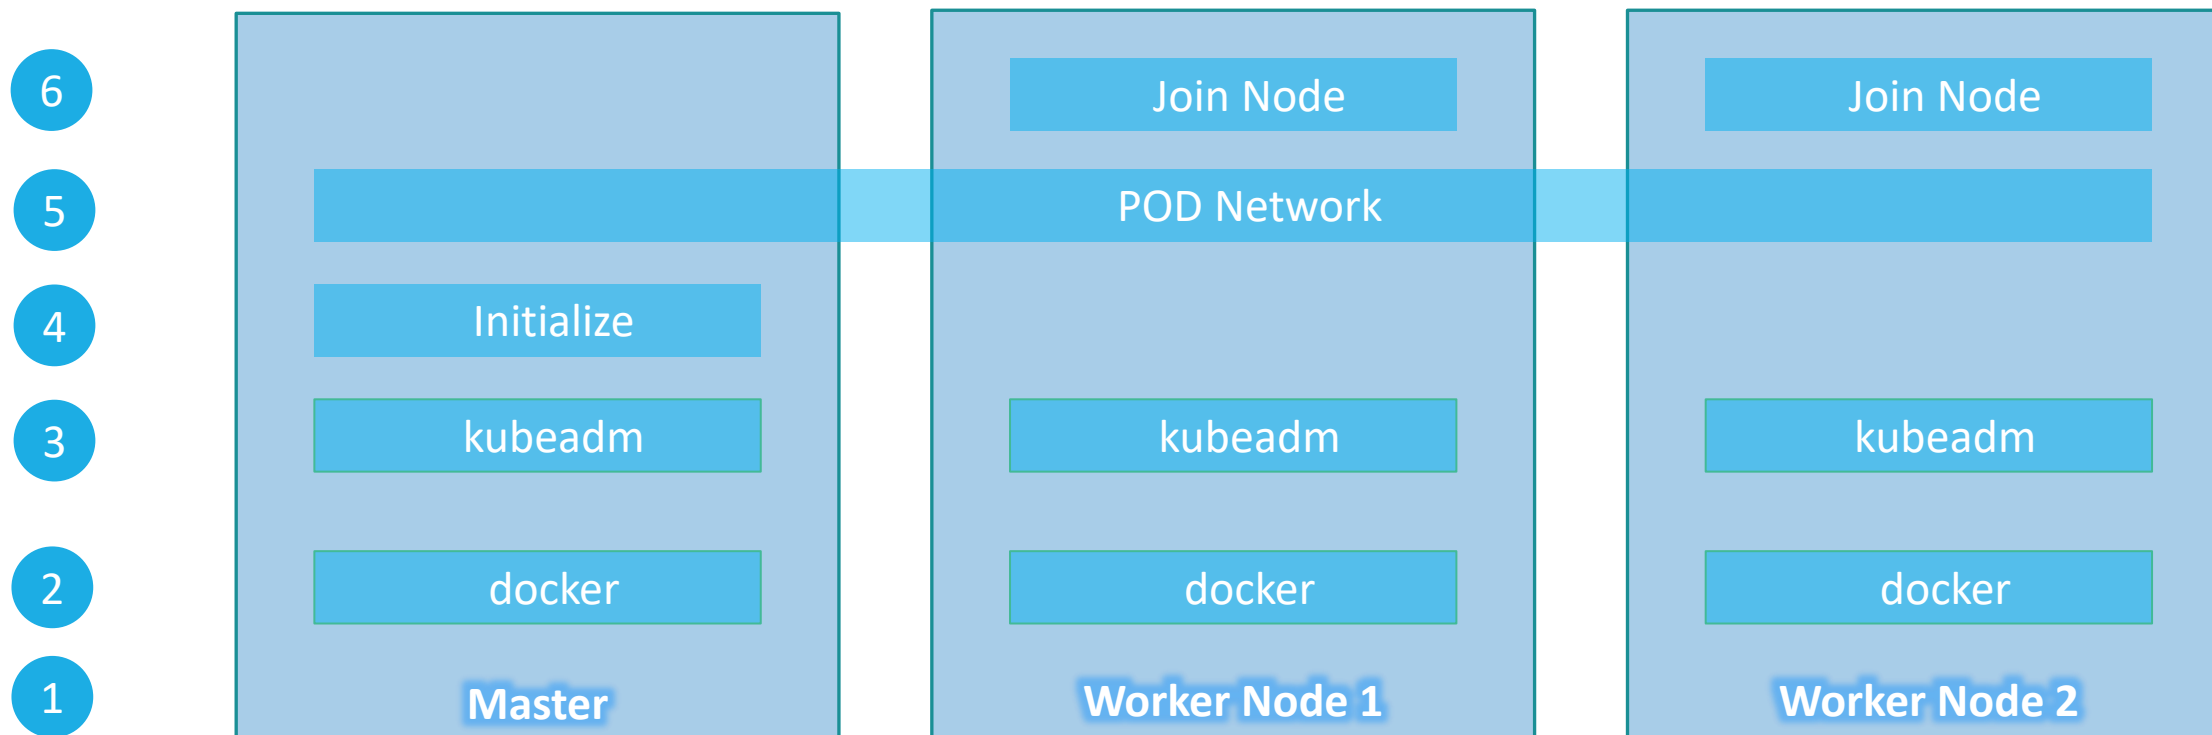



POD

Raman

# Assumptions


---

Docker Image


Kubernetes Cluster

# POD


---

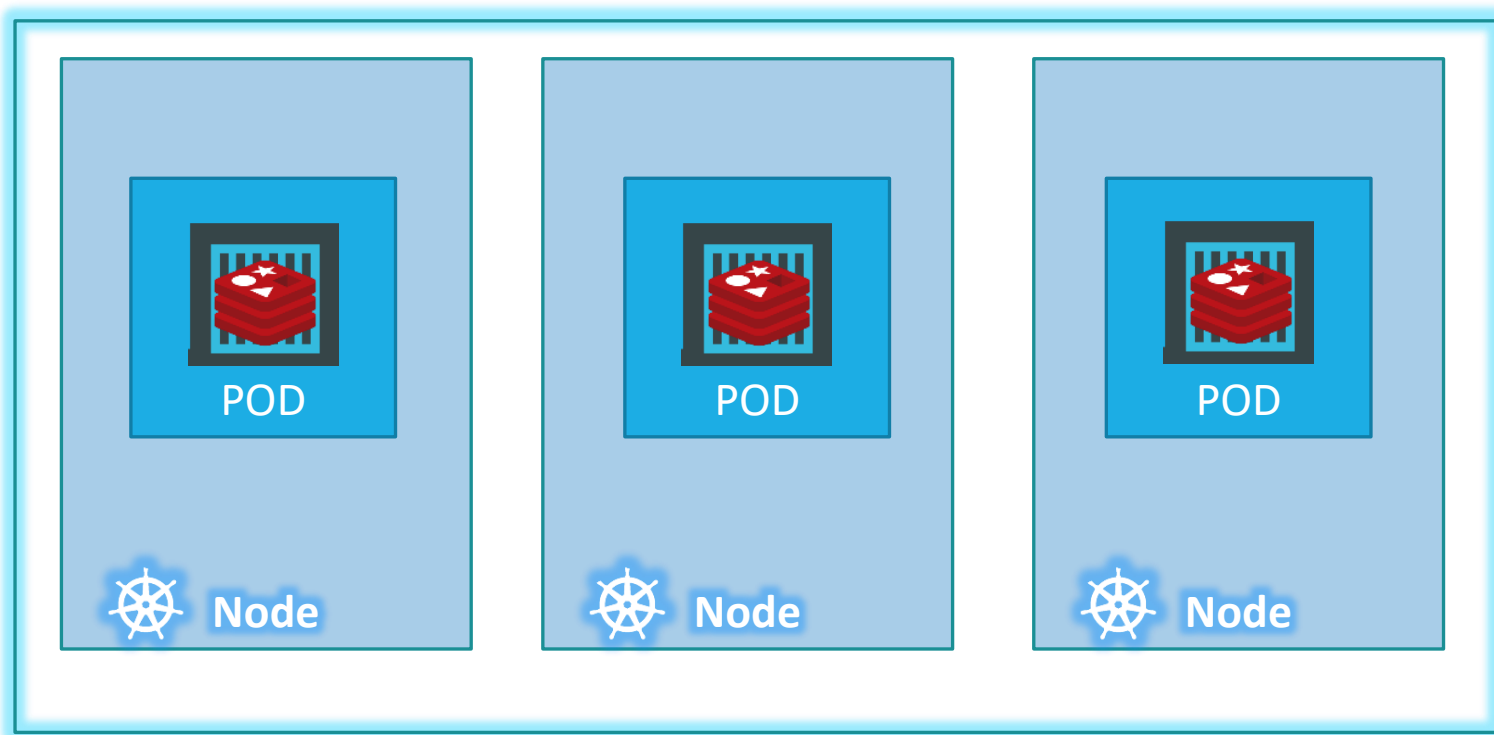

# POD

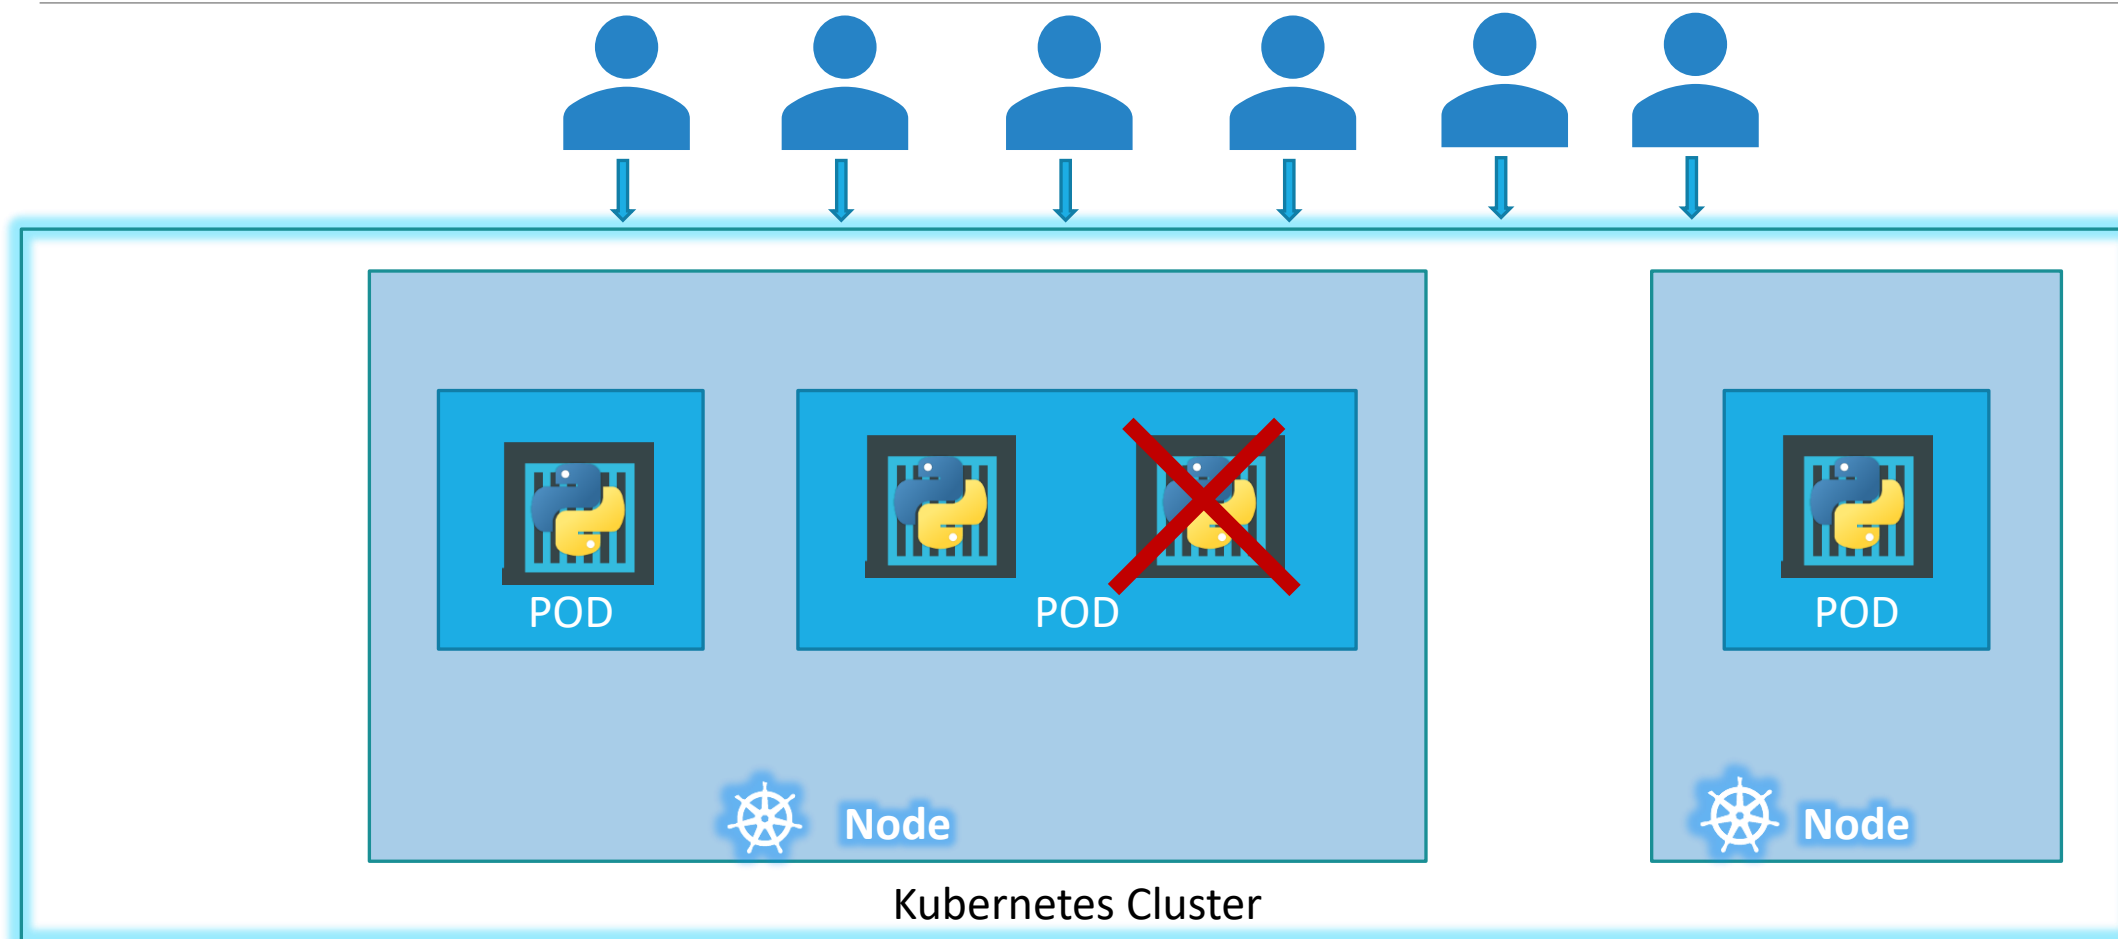

# Multi-Container PODs

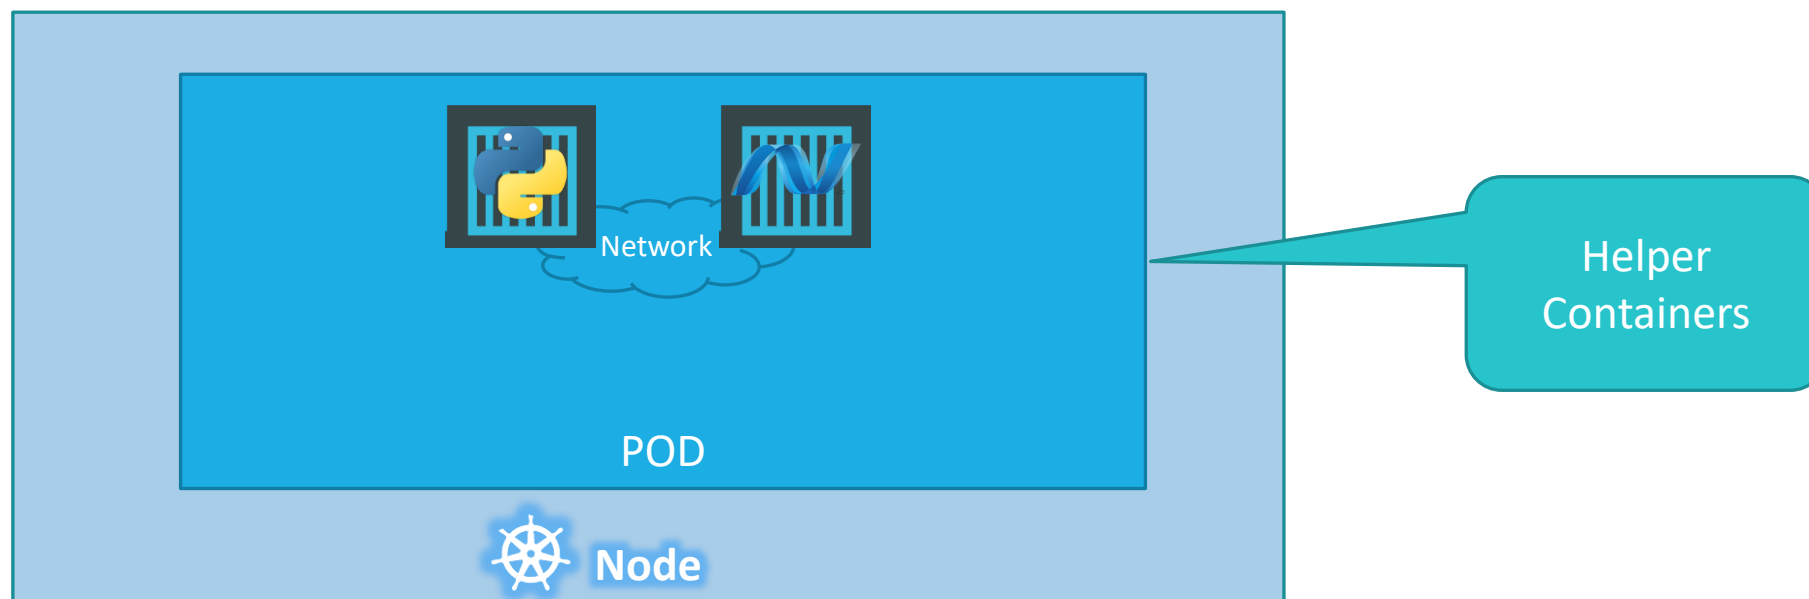

# PODs Again!



Note: I am avoiding networking and load balancing details to keep explanation simple.

# kubectl

```
kubectl run nginx --image nginx
```


```
kubectl get pods
```

```
C:\Kubernetes>kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
nginx-8586cf59-whssr	0/1	ContainerCreating	0	3s

```
C:\Kubernetes>kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
nginx-8586cf59-whssr	1/1	Running	0	8s

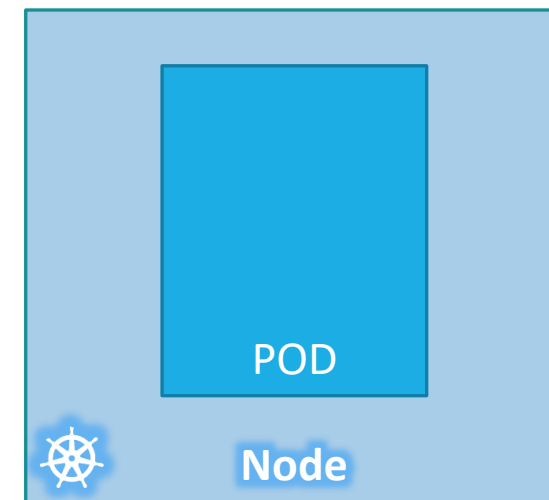

# YAML

## Introduction



# POD

With YAML

# YAML in Kubernetes

pod-definition.yml

```
apiVersion: v1      String
kind: Pod           String
```

```
metadata:
  name: myapp-pod
  labels:
    app: myapp
```



```
spec:
  containers:        List/Array
  - name: nginx-container
    image: nginx
```

1<sup>st</sup> Item in List

```
kubectl create -f pod-definition.yml
```

Kind	Version
POD	v1
Service	v1
ReplicaSet	apps/v1
Deployment	apps/v1

# Commands

```
> kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
myapp-pod	1/1	Running	0	20s



```
> kubectl describe pod myapp-pod
```

```
Name:          myapp-pod
Namespace:     default
Node:          minikube/192.168.99.100
Start Time:    Sat, 03 Mar 2018 14:26:14 +0800
Labels:        app=myapp
               name=myapp-pod
Annotations:   <none>
Status:        Running
IP:            10.244.0.24
Containers:
  nginx:
    Container ID:  docker://830bb56c8c42a86b4bb70e9c1488fae1bc38663e4918b6c2f5a783e7688b8c9d
    Image:         nginx
    Image ID:      docker-pullable://nginx@sha256:4771d09578c7c6a65299e110b3ee1c0a2592f5ea2618d23e4ffe7a4cab1ce5de
    Port:          <none>
    State:         Running
      Started:     Sat, 03 Mar 2018 14:26:21 +0800
    Ready:         True
    Restart Count: 0
    Environment:   <none>
    Mounts:
      /var/run/secrets/kubernetes.io/serviceaccount from default-token-x95w7 (ro)
Conditions:
  Type            Status
  Initialized      True
  Ready           True
  PodScheduled    True
Events:
  Type    Reason            Age   From          Message
  ----    -
  Normal  Scheduled         34s   default-scheduler  Successfully assigned myapp-pod to minikube
  Normal  SuccessfulMountVolume 33s   kubelet, minikube  MountVolume.SetUp succeeded for volume "default-token-x95w7"
  Normal  Pulling           33s   kubelet, minikube  pulling image "nginx"
  Normal  Pulled            27s   kubelet, minikube  Successfully pulled image "nginx"
  Normal  Created           27s   kubelet, minikube  Created container
  Normal  Started           27s   kubelet, minikube  Started container
```


# Replication Controller

# High Availability

---

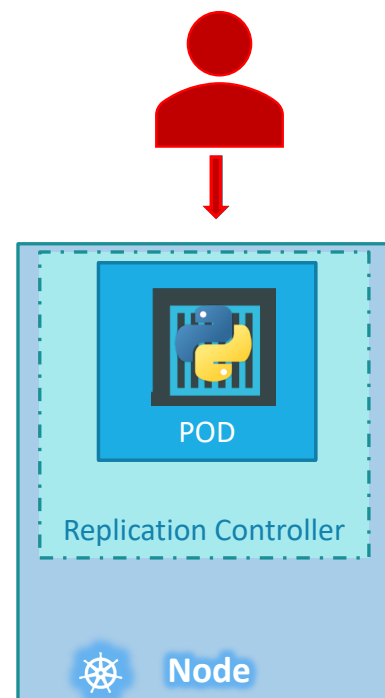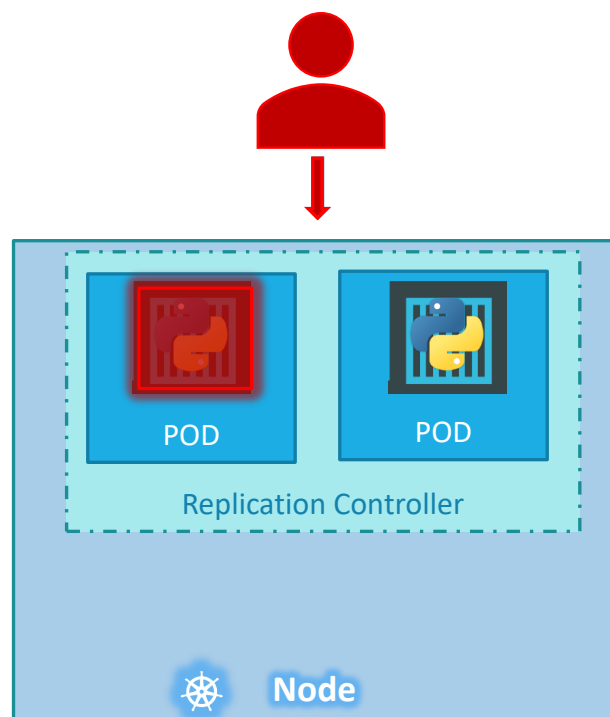

# Load Balancing & Scaling

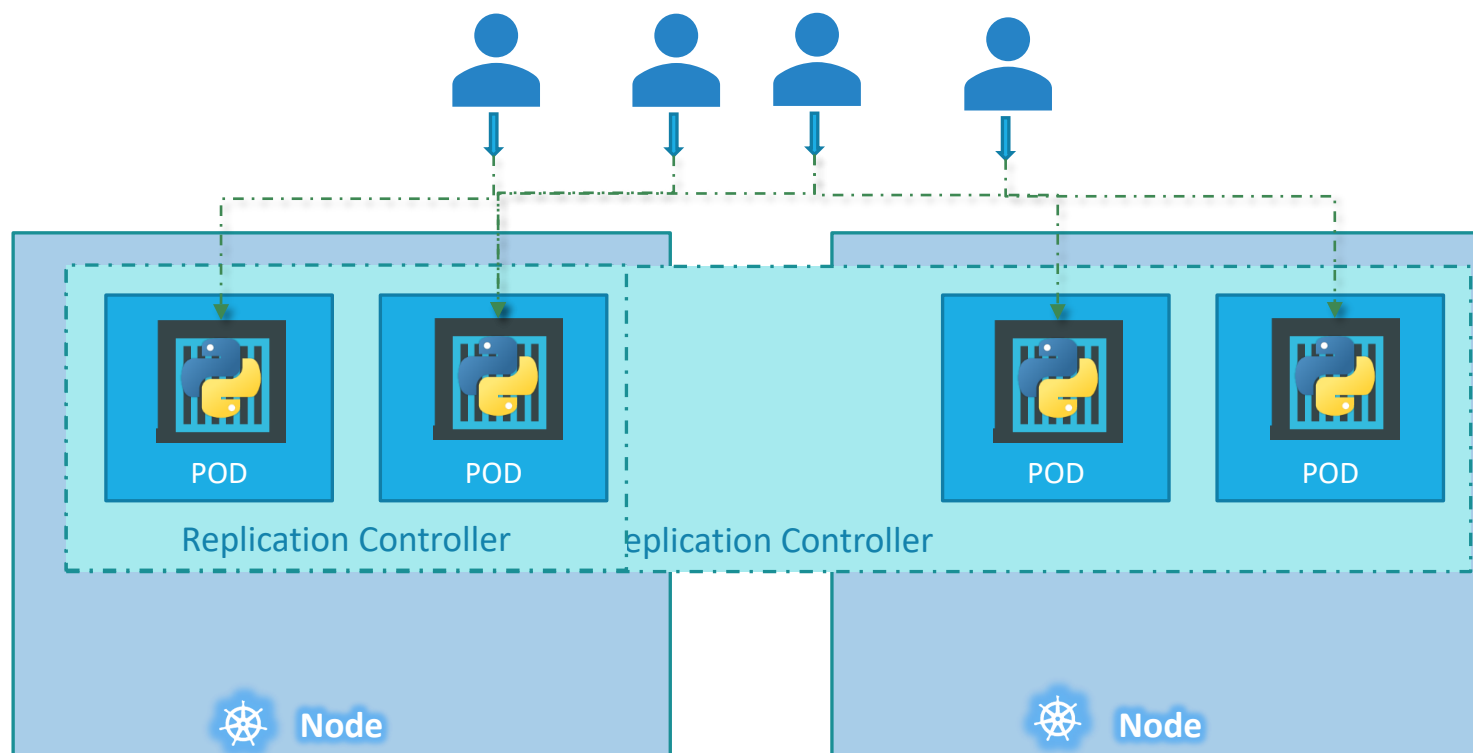

---

Replication Controller

Replica Set



rc-definition.yml

```
apiVersion: v1
kind: ReplicationController
metadata:
  name: myapp-rc
  labels:
    app: myapp
    type: front-end
spec:
  template:
    spec:
      containers:
        - name: myapp
          image: myapp
  replicas: 3
```

Diagram illustrating the Replication Controller (RC) and its Pods:

- The **spec** field is labeled "Replication Controller".
- The **template** field is labeled "Replication Controller".
- The **template.spec** field is labeled "POD".
- The **template.spec.containers** field is labeled "POD".
- The **replicas** field is labeled "3".

pod-definition.yml

```
apiVersion: v1
kind: Pod
metadata:
  name: myapp-pod
  labels:
    app: myapp
    type: front-end
spec:
  containers:
    - name: nginx-container
      image: nginx
```

```
> kubectl create -f rc-definition.yml
replicationcontroller "myapp-rc" created
```

```
> kubectl get replicationcontroller
```

NAME	DESIRED	CURRENT	READY	AGE
myapp-rc	3	3	3	19s

```
> kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
myapp-rc-4lvk9	1/1	Running	0	20s
myapp-rc-mc2mf	1/1	Running	0	20s
myapp-rc-px9pz	1/1	Running	0	20s





## replicaset-definition.yml

```
apiVersion: apps/v1
kind: ReplicaSet
metadata:
  name: myapp-repl
  labels:
    app: myapp
    type: front-end
spec:
  template:
    POD
  replicas: 3
  selector:
    matchLabels:
      type: front-end
```

error: unable to recognize "replicaset-definition.yml": no matches for /, Kind=ReplicaSet

## pod-definition.yml

```
apiVersion: v1
kind: Pod
labels:
  app: myapp
  type: front-end
spec:
  containers:
    - name: nginx-container
      image: nginx
```

```
> kubectl create -f replicaset-definition.yml
```

```
replicaset "myapp-replicaset" created
```

```
> kubectl get replicaset
```

NAME	DESIRED	CURRENT	READY	AGE
myapp-replicaset	3	3	3	19s

```
> kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
myapp-replicaset-9ddl9	1/1	Running	0	45s
myapp-replicaset-9jtpx	1/1	Running	0	45s
myapp-replicaset-hq84m	1/1	Running	0	45s


# Labels and Selectors

replicaset-definition.yml

```
selector:  
  matchLabels:  
    tier: front-end
```


pod-definition.yml

```
metadata:  
  name: myapp-pod  
  labels:  
    tier: front-end
```

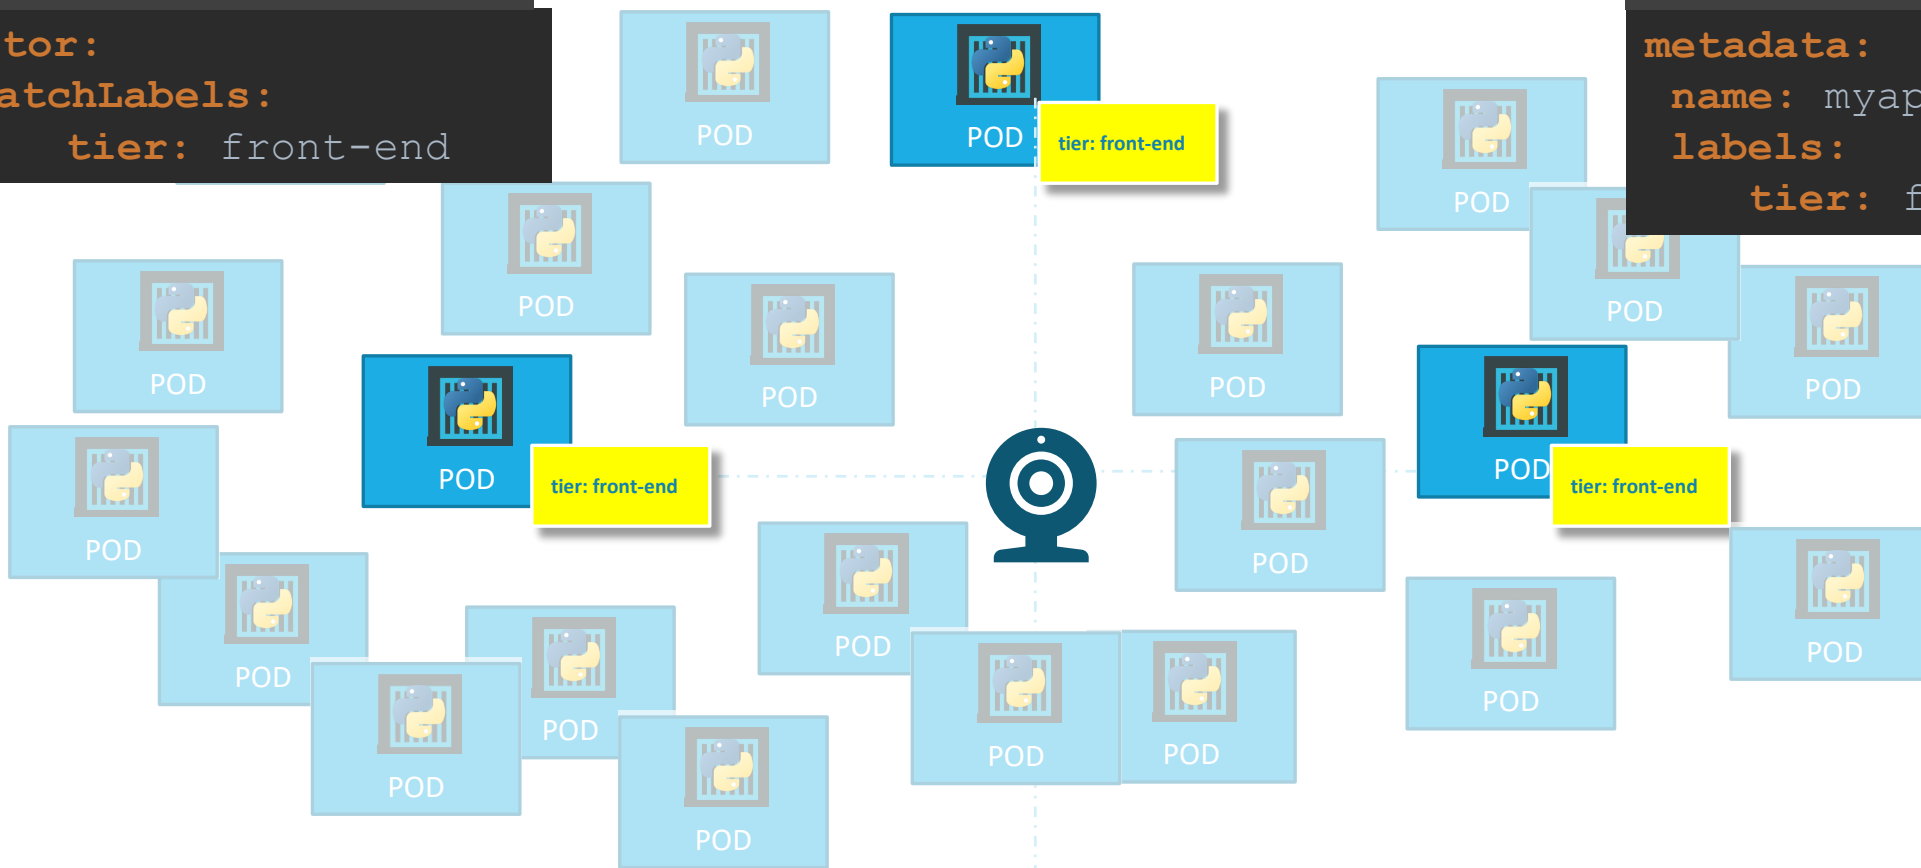

replicaset-definition.yml

```
apiVersion: apps/v1
kind: ReplicaSet
metadata:
  name: myapp-replicaset
  labels:
    app: myapp
    type: front-end
spec:
  template:
    metadata:
      name: myapp-pod
      labels:
        app: myapp
        type: front-end
    spec:
      containers:
        - name: nginx-container
          image: nginx
  replicas: 3
  selector:
    matchLabels:
      type: front-end
```

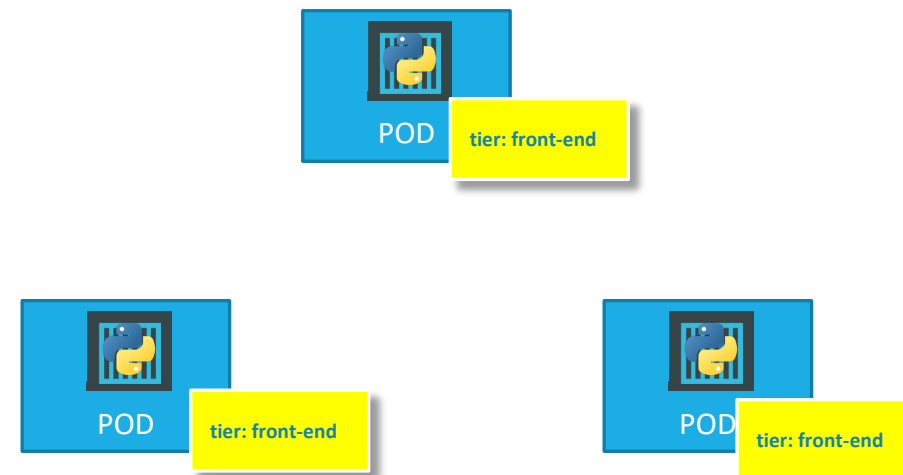

# Scale

```
> kubectl replace -f replicaset-definition.yml
```

```
> kubectl scale --replicas=6 -f replicaset-definition.yml
```

```
> kubectl scale --replicas=6 replicaset myapp-replicaset
```

↓  
TYPE

↓  
NAME

replicaset-definition.yml

```
apiVersion: apps/v1
kind: ReplicaSet
metadata:
  name: myapp-replicaset
  labels:
    app: myapp
    type: front-end
spec:
  template:
    metadata:
      name: myapp-pod
      labels:
        app: myapp
        type: front-end
    spec:
      containers:
        - name: nginx-container
          image: nginx
  replicas: 6
  selector:
    matchLabels:
      type: front-end
```

# commands

---

```
> kubectl create -f replicaset-definition.yml
```

```
> kubectl get replicaset
```

```
> kubectl delete replicaset myapp-replicaset
```

\*Also deletes all underlying PODs

```
> kubectl replace -f replicaset-definition.yml
```

```
> kubectl scale --replicas=6 -f replicaset-definition.yml
```

# Demo

---

ReplicaSet

---



## ReplicaSet as an Horizontal Pod Autoscaler Target

<https://kubernetes.io/docs/concepts/workloads/controllers/replicaset/#replicaset-as-an-horizontal-pod-autoscaler-target>

# Deployment



# Deployment

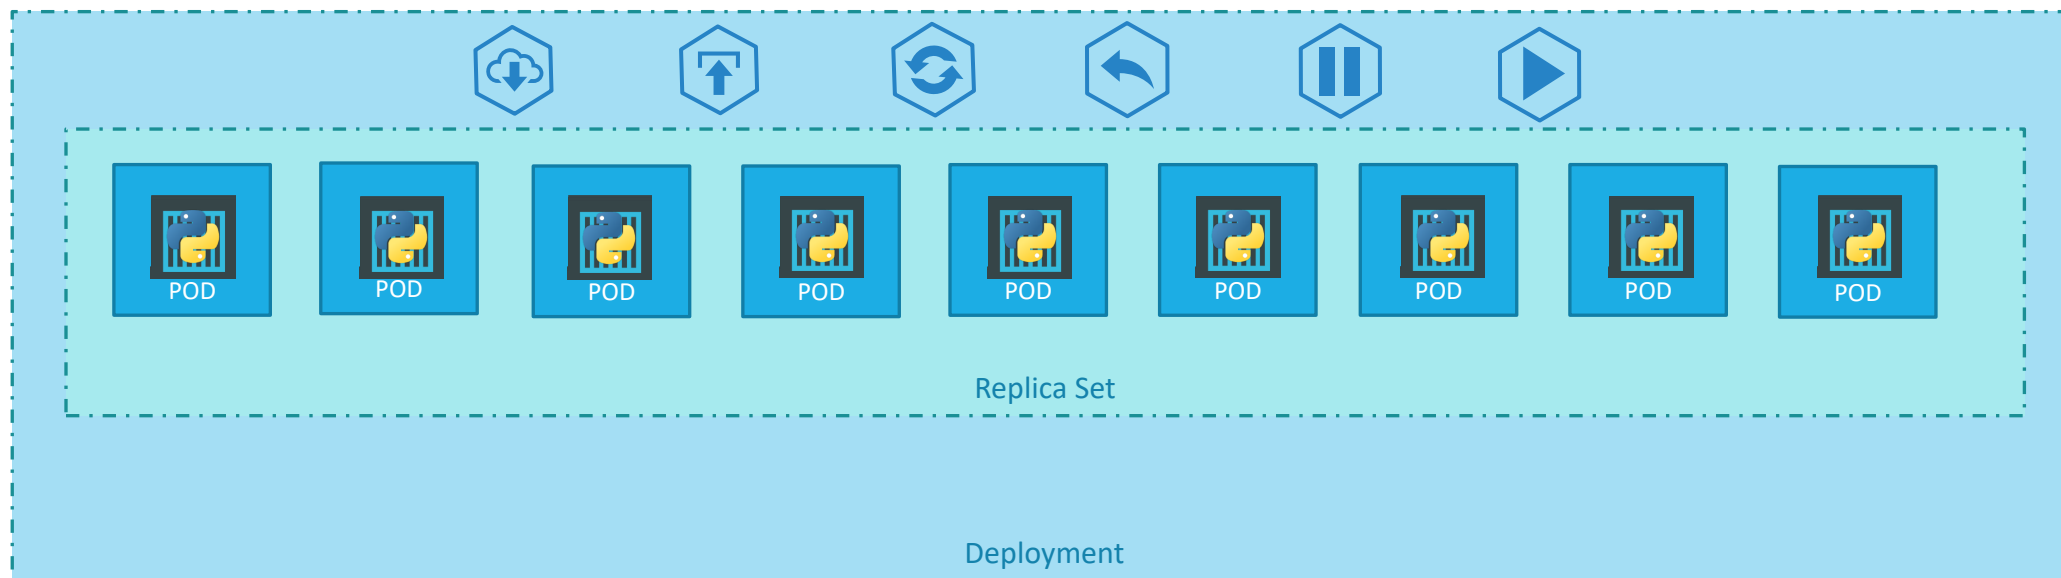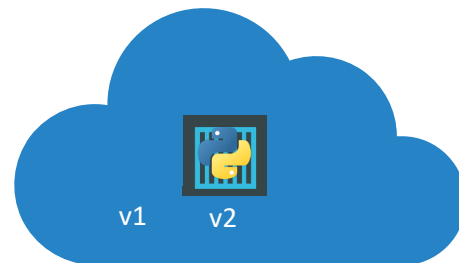



# Definition

```
> kubectl create -f deployment-definition.yml
```

```
deployment "myapp-deployment" created
```

```
> kubectl get deployments
```

NAME	DESIRED	CURRENT	UP-TO-DATE	AVAILABLE	AGE
myapp-deployment	3	3	3	3	21s

```
> kubectl get replicaset
```

NAME	DESIRED	CURRENT	READY	AGE
myapp-deployment-6795844b58	3	3	3	2m

```
> kubectl get pods
```

NAME	READY	STATUS	RESTARTS	AGE
myapp-deployment-6795844b58-5rbj1	1/1	Running	0	2m
myapp-deployment-6795844b58-h4w55	1/1	Running	0	2m
myapp-deployment-6795844b58-lfjvh	1/1	Running	0	2m

```
deployment-definition.yml
```

```
apiVersion: apps/v1
```

```
kind: Deployment
```

```
metadata:
```

```
  name: myapp-deployment
```

```
  labels:
```

```
    app: myapp
```

```
    type: front-end
```

```
spec:
```

```
  template:
```

```
    metadata:
```

```
      name: myapp-pod
```

```
      labels:
```

```
        app: myapp
```

```
        type: front-end
```

```
    spec:
```

```
      containers:
```

```
        - name: nginx-container
```

```
          image: nginx
```

```
replicas: 3
```

```
selector:
```

```
  matchLabels:
```

```
    type: front-end
```

# commands

---

```
> kubectl get all
```

NAME	DESIRED	CURRENT	UP-TO-DATE	AVAILABLE	AGE
deploy/myapp-deployment	3	3	3	3	9h

NAME	DESIRED	CURRENT	READY	AGE
rs/myapp-deployment-6795844b58	3	3	3	9h

NAME	READY	STATUS	RESTARTS	AGE
po/myapp-deployment-6795844b58-5rbjl	1/1	Running	0	9h
po/myapp-deployment-6795844b58-h4w55	1/1	Running	0	9h
po/myapp-deployment-6795844b58-lfj hv	1/1	Running	0	9h

# Demo

---

Deployment

# Demo


---

Deployment

# Networking 101


# Kubernetes Networking - 101

- IP Address is assigned to a POD

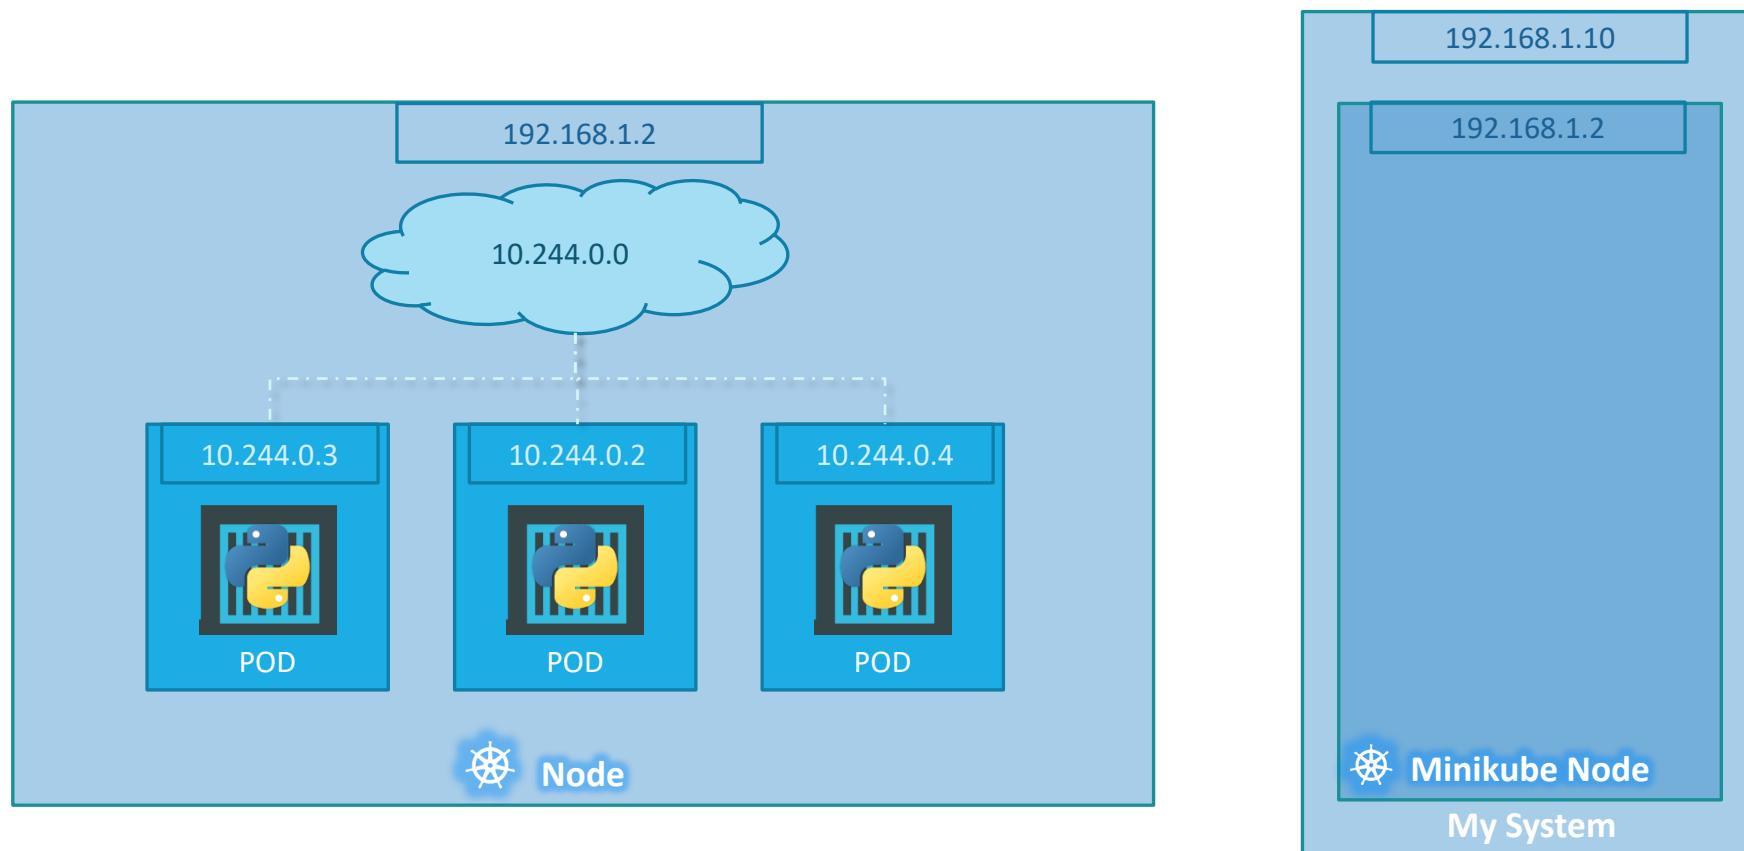


# Cluster Networking

- All containers/PODs can communicate to one another without NAT
- All nodes can communicate with all containers and vice-versa without NAT

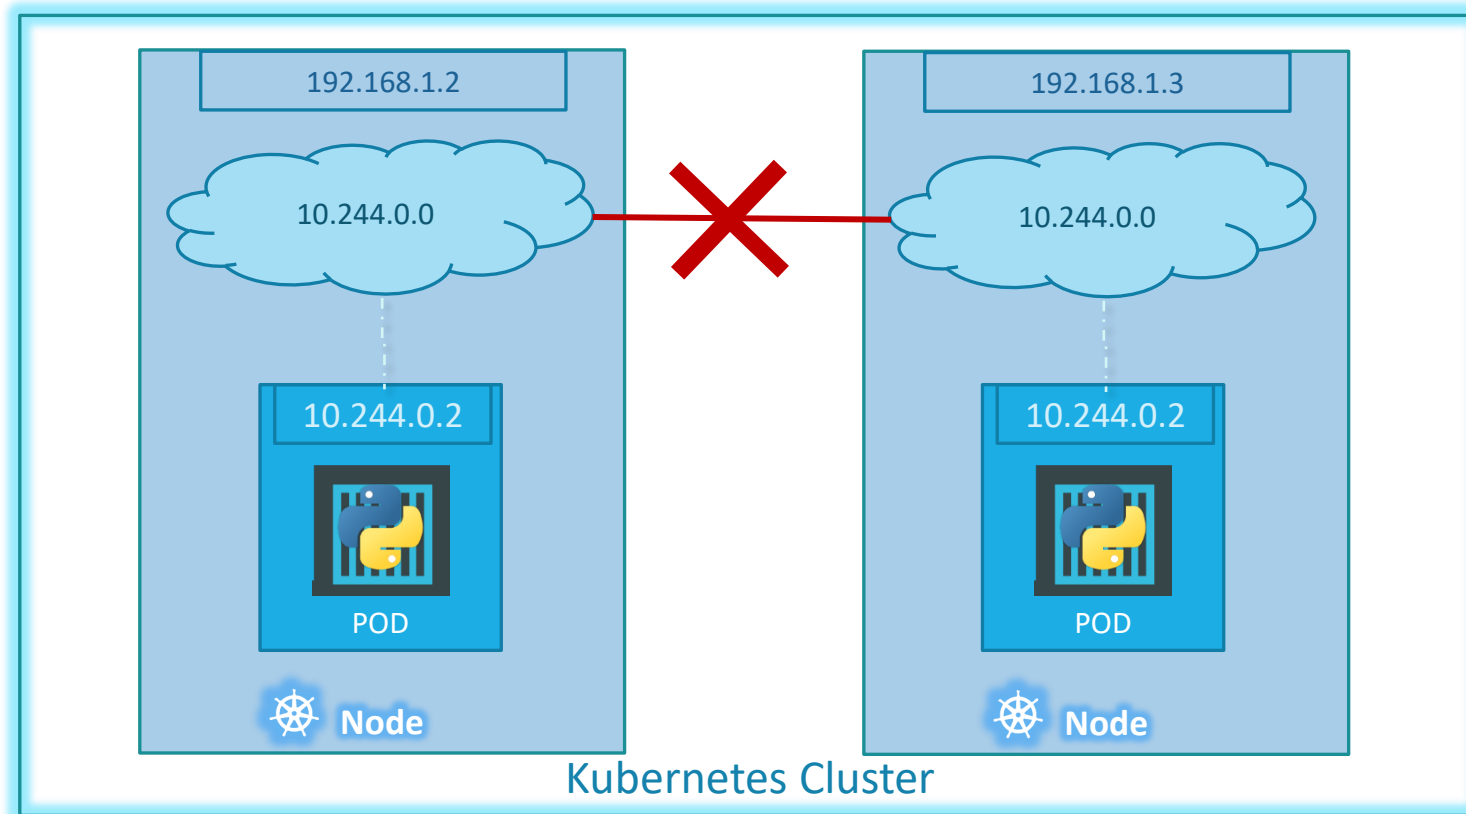



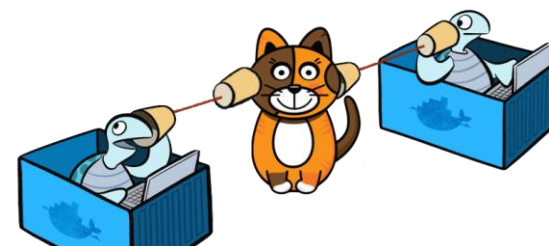

# Cluster Networking Setup

## (3/4) Installing a pod network

You **MUST** install a pod network add-on so that your pods can communicate with each other.

The network must be deployed before any applications. Also, kube-dns, an internal helper service, will not start up before a network is installed. kubeadm only supports Container Network Interface (CNI) based networks (and does not support kubenet).

Several projects provide Kubernetes pod networks using CNI, some of which also support Network Policy. See the [add-ons page](#) for a complete list of available network add-ons. IPv6 support was added in CNI v0.6.0. CNI bridge and local-ipam are the only supported IPv6 network plugins in 1.9.

**Note:** kubeadm sets up a more secure cluster by default and enforces use of RBAC. Please make sure that the network manifest of choice supports RBAC.

You can install a pod network add-on with the following command:

```
kubectl apply -f <add-on.yaml>
```

**NOTE:** You can install **only one** pod network per cluster.

Choose one...

Calico

Canal

Flannel

Kube-router

Romana

Weave Net


Refer to the Calico documentation for a [kubeadm quickstart](#), a [kubeadm installation guide](#), and other resources.

**Note:**

- In order for Network Policy to work correctly, you need to pass `--pod-network-cidr=192.168.0.0/16` to `kubeadm init`.
- Calico works on `amd64` only.

```
kubectl apply -f https://docs.projectcalico.org/v3.0/getting-started/kubernetes/installation/hosted/kubeadm/1.7/calico.yaml
```

# Cluster Networking

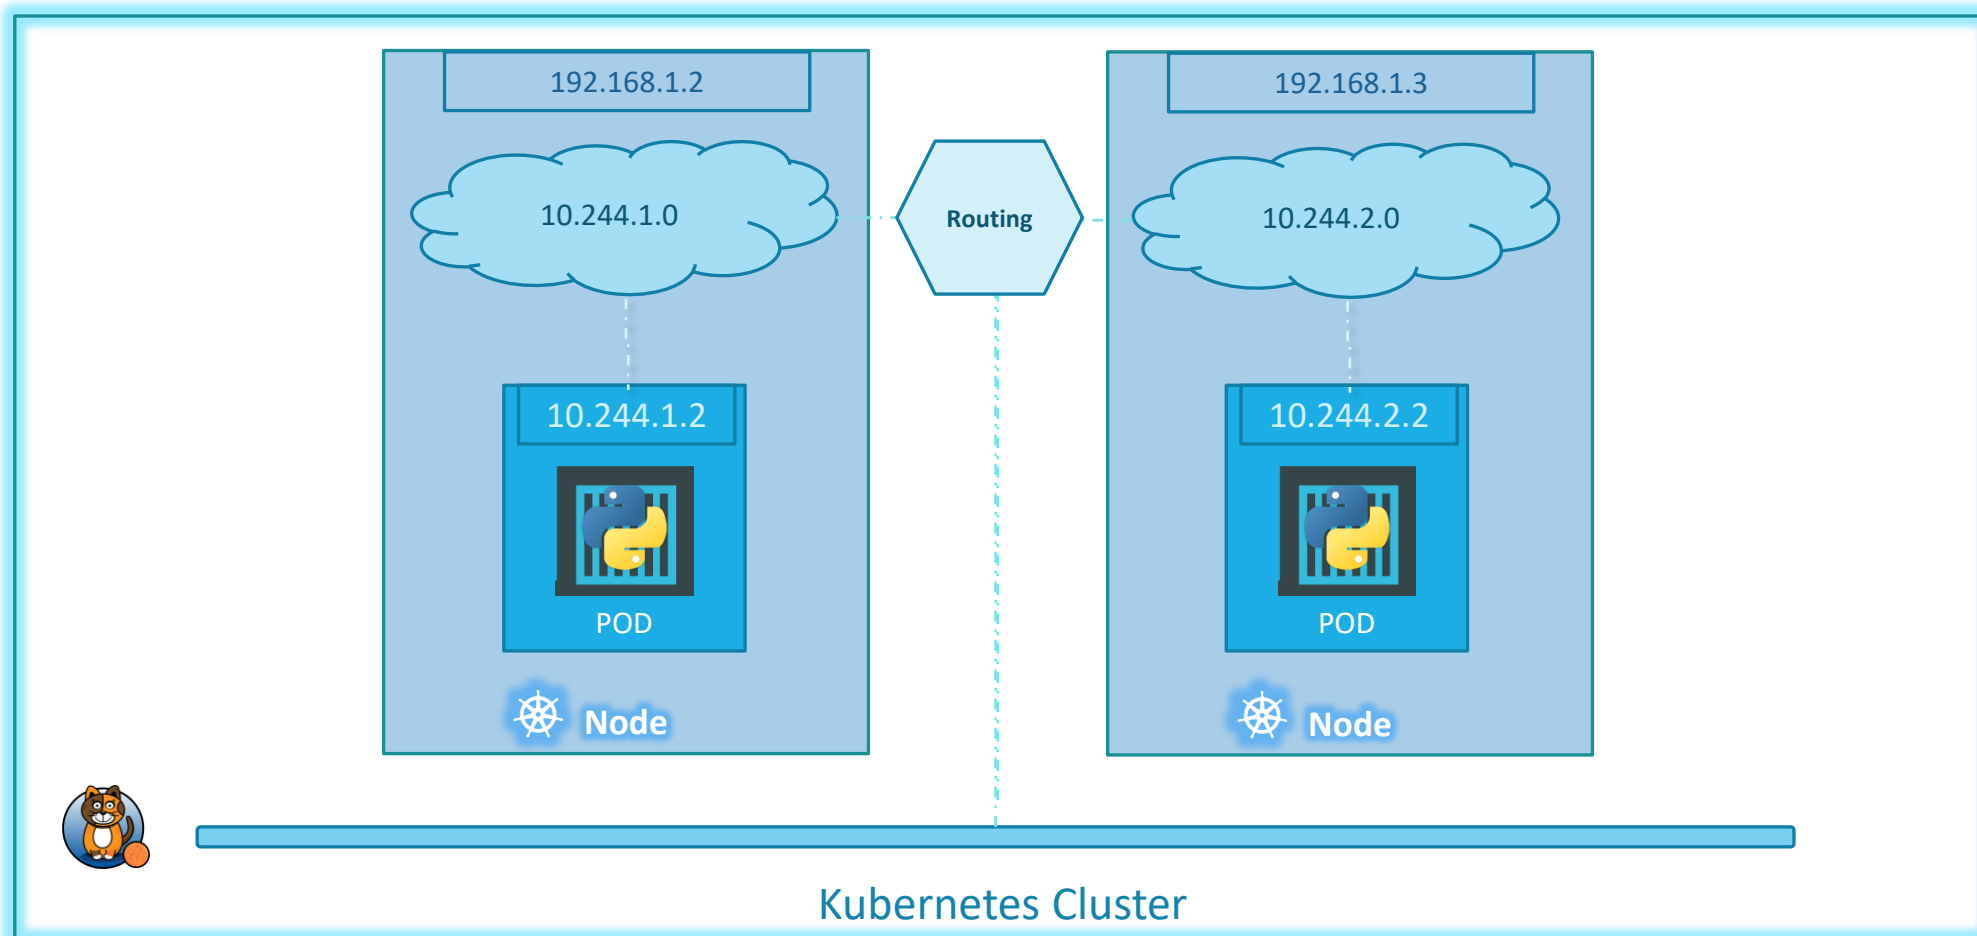


# Demo

---


Networking




Services

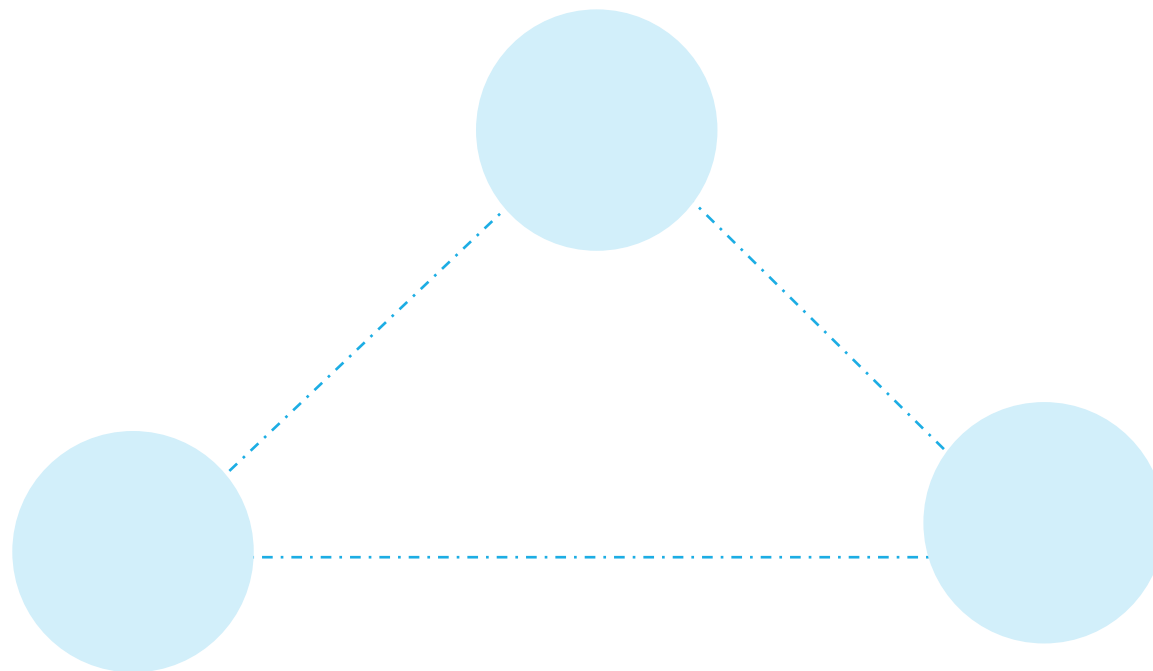

# Services

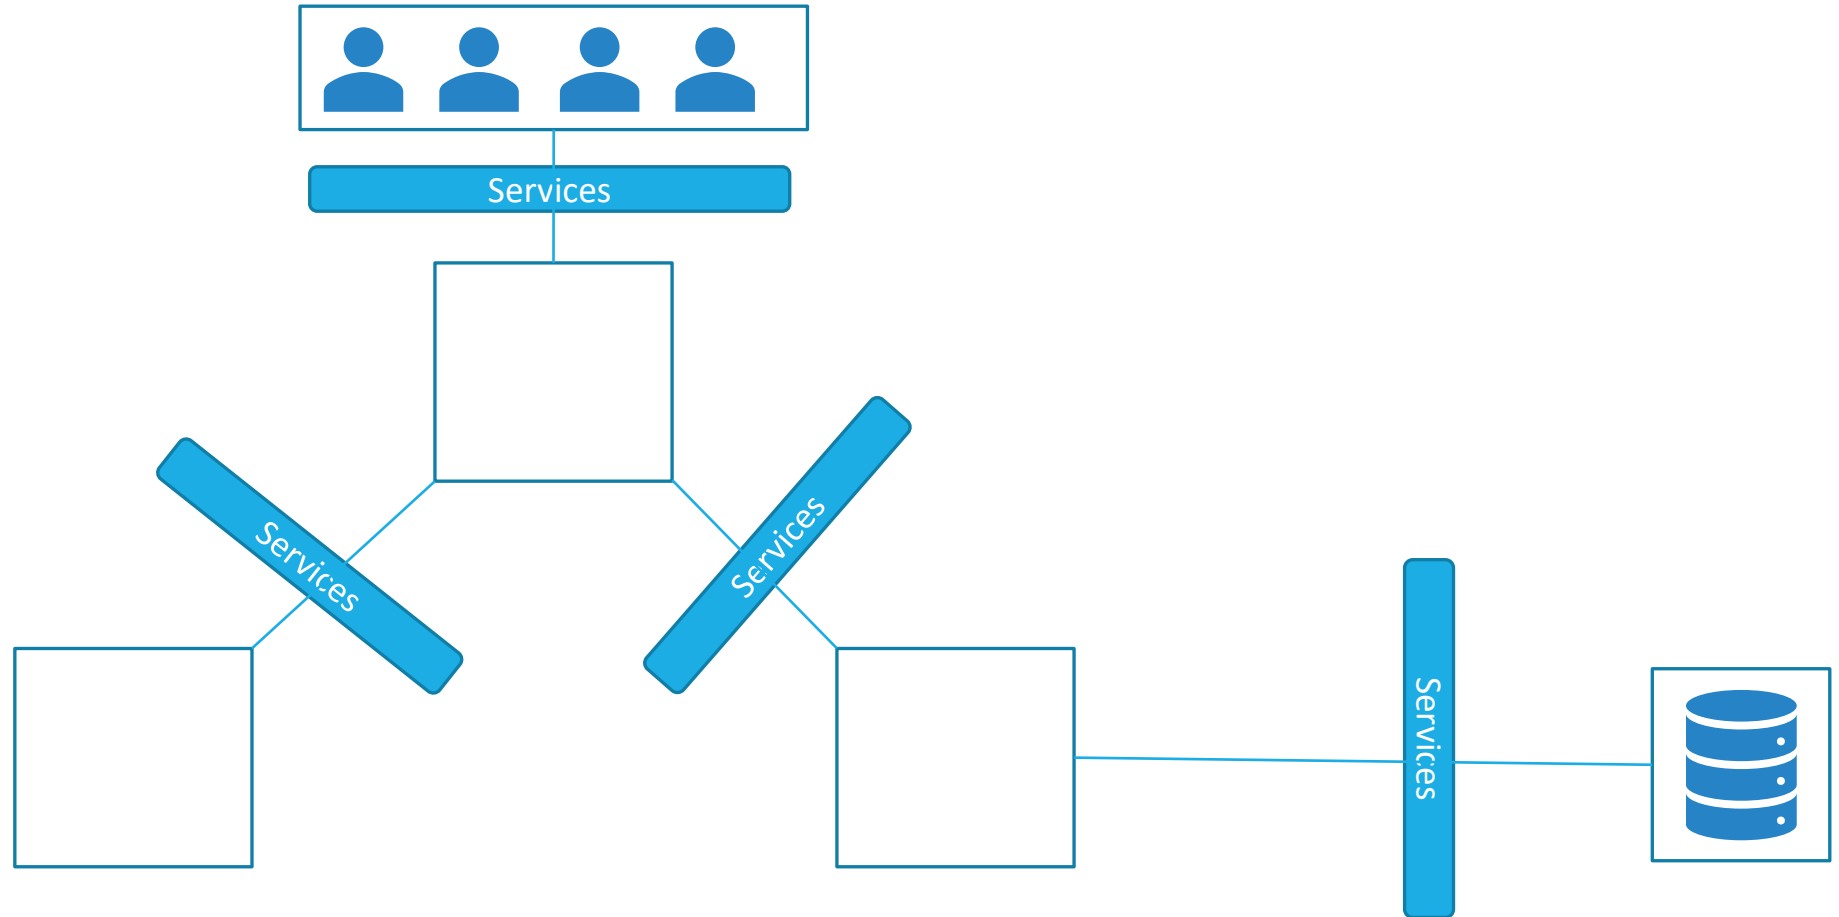


# Service

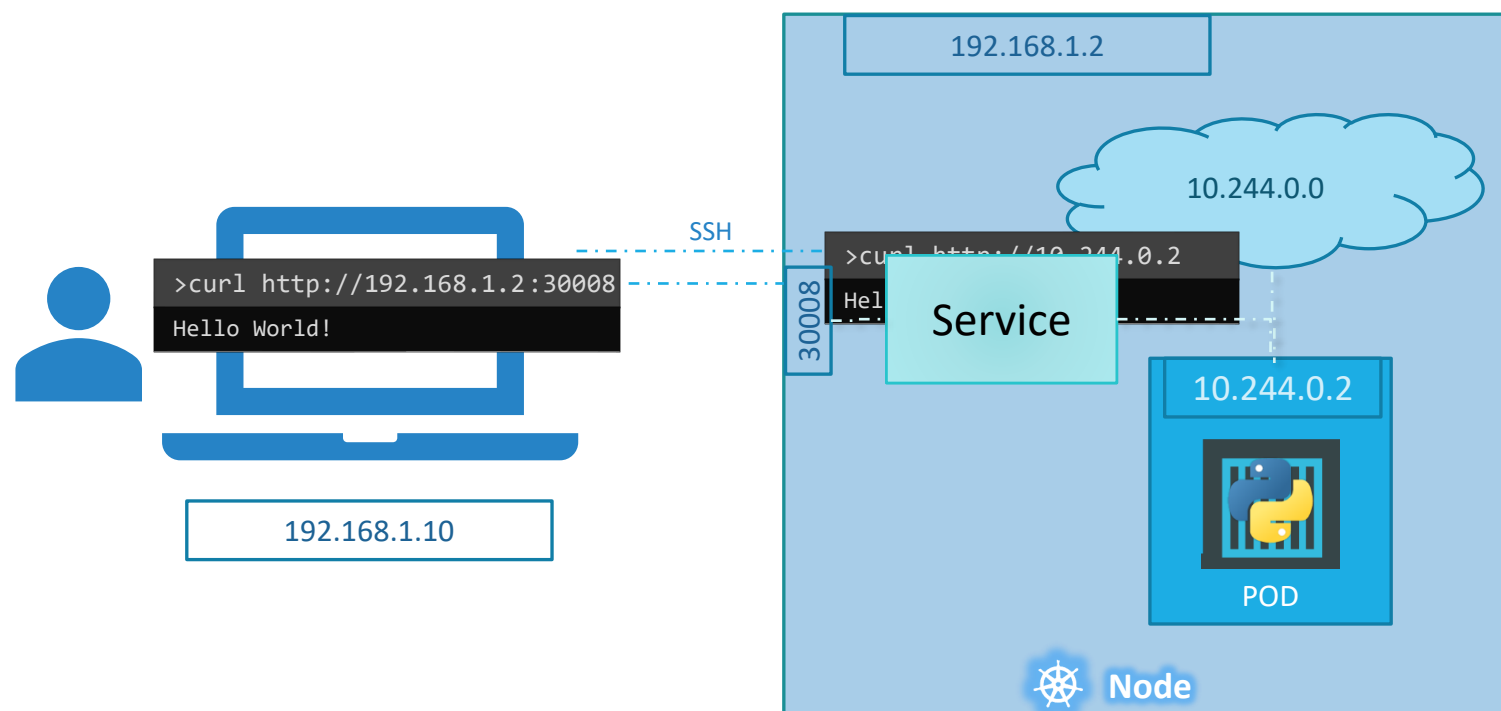


# Services Types


---

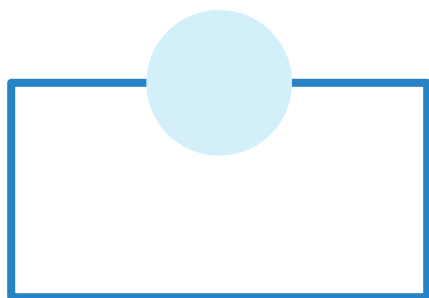

NodePort

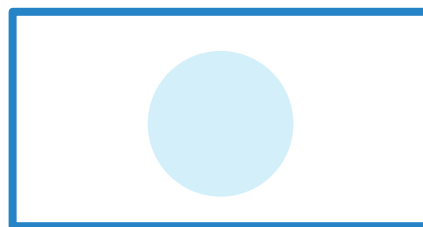


ClusterIP

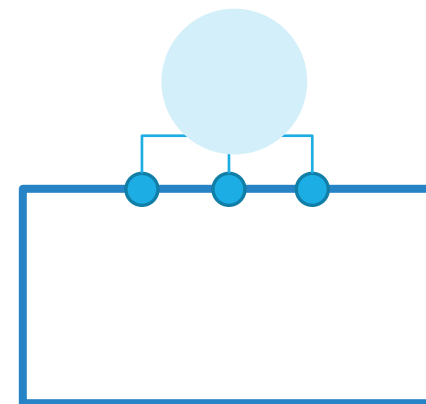


LoadBalancer




# NodePort

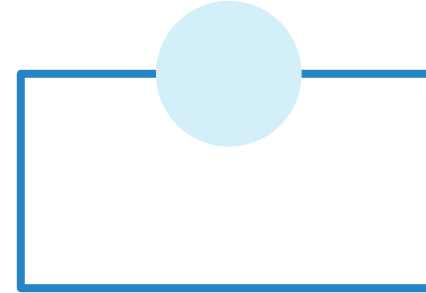


# Service - NodePort

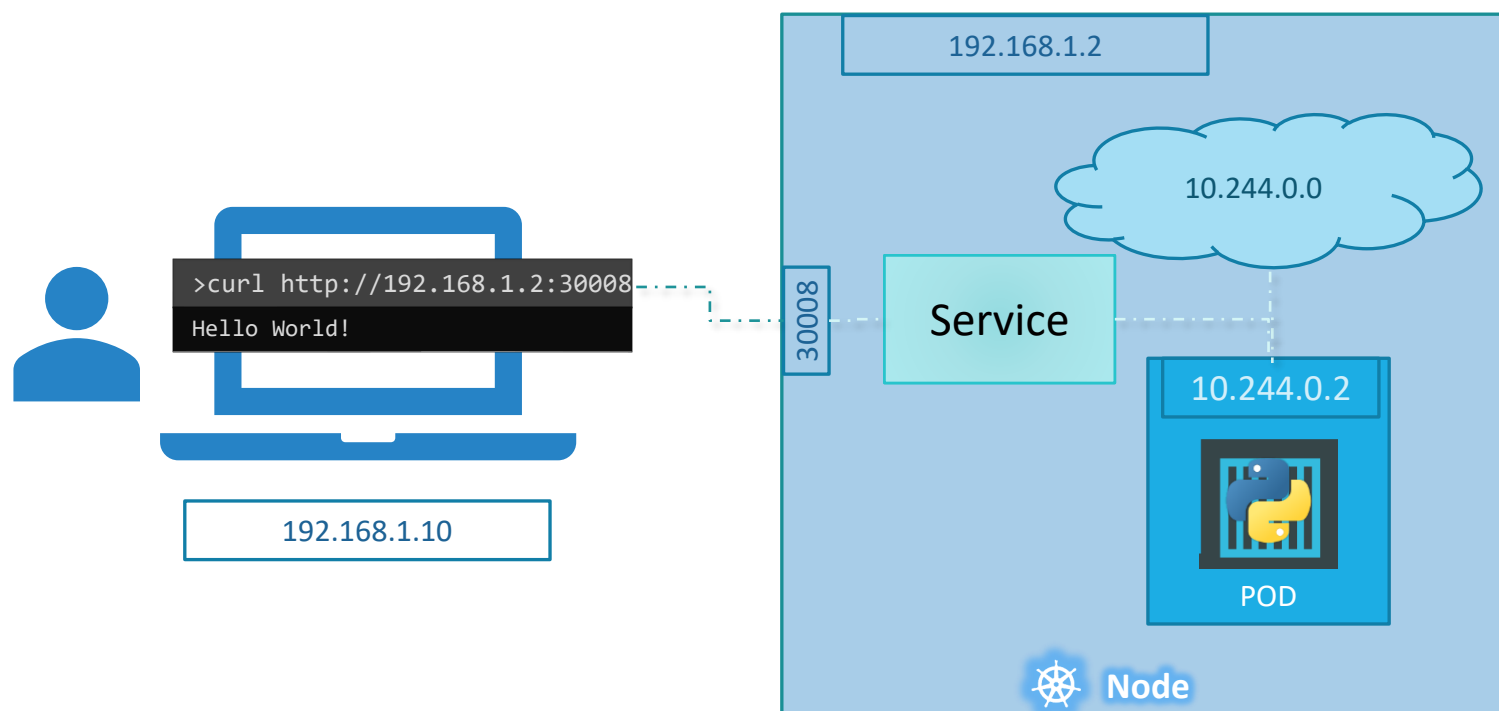

# Service - NodePort

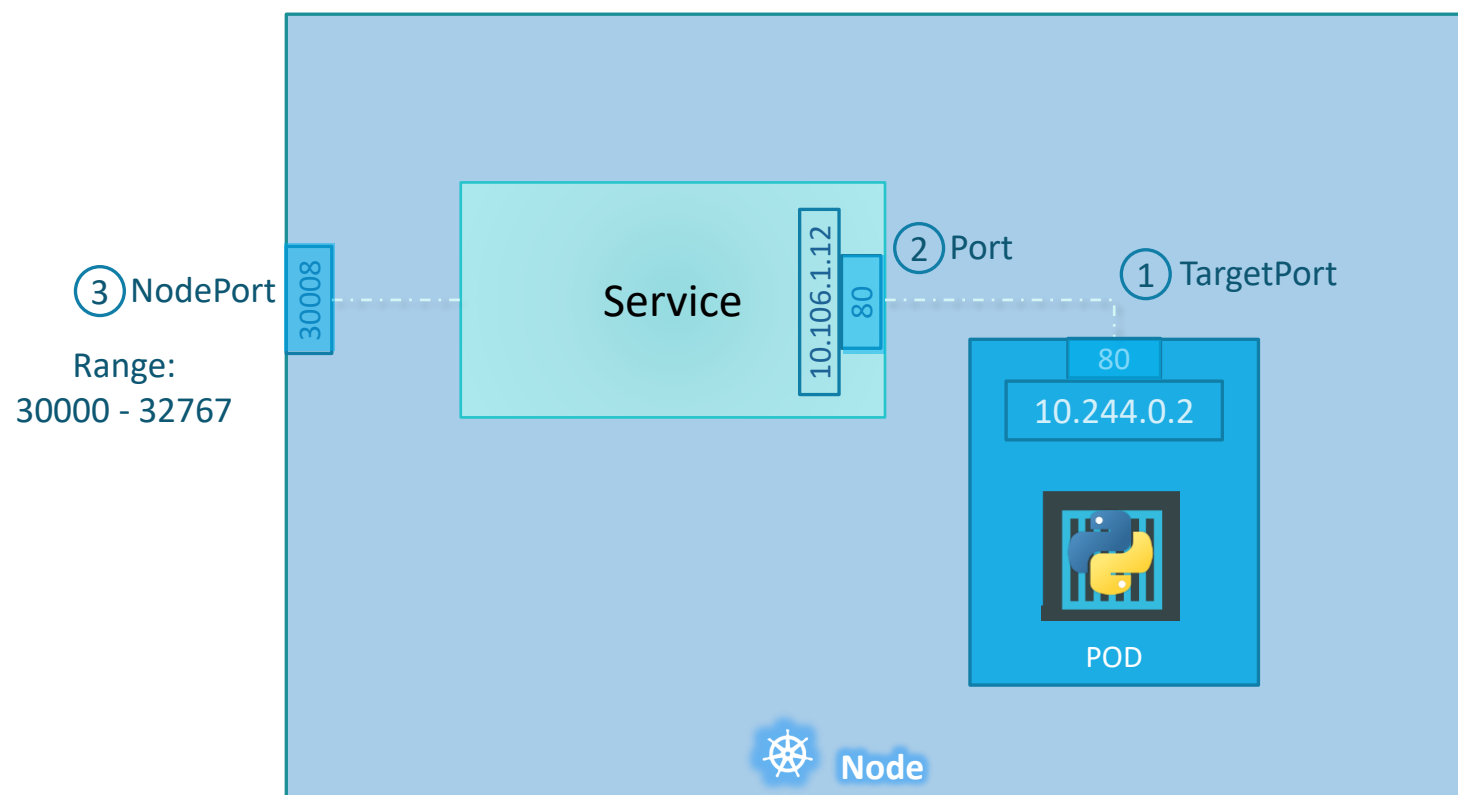

# Service - NodePort

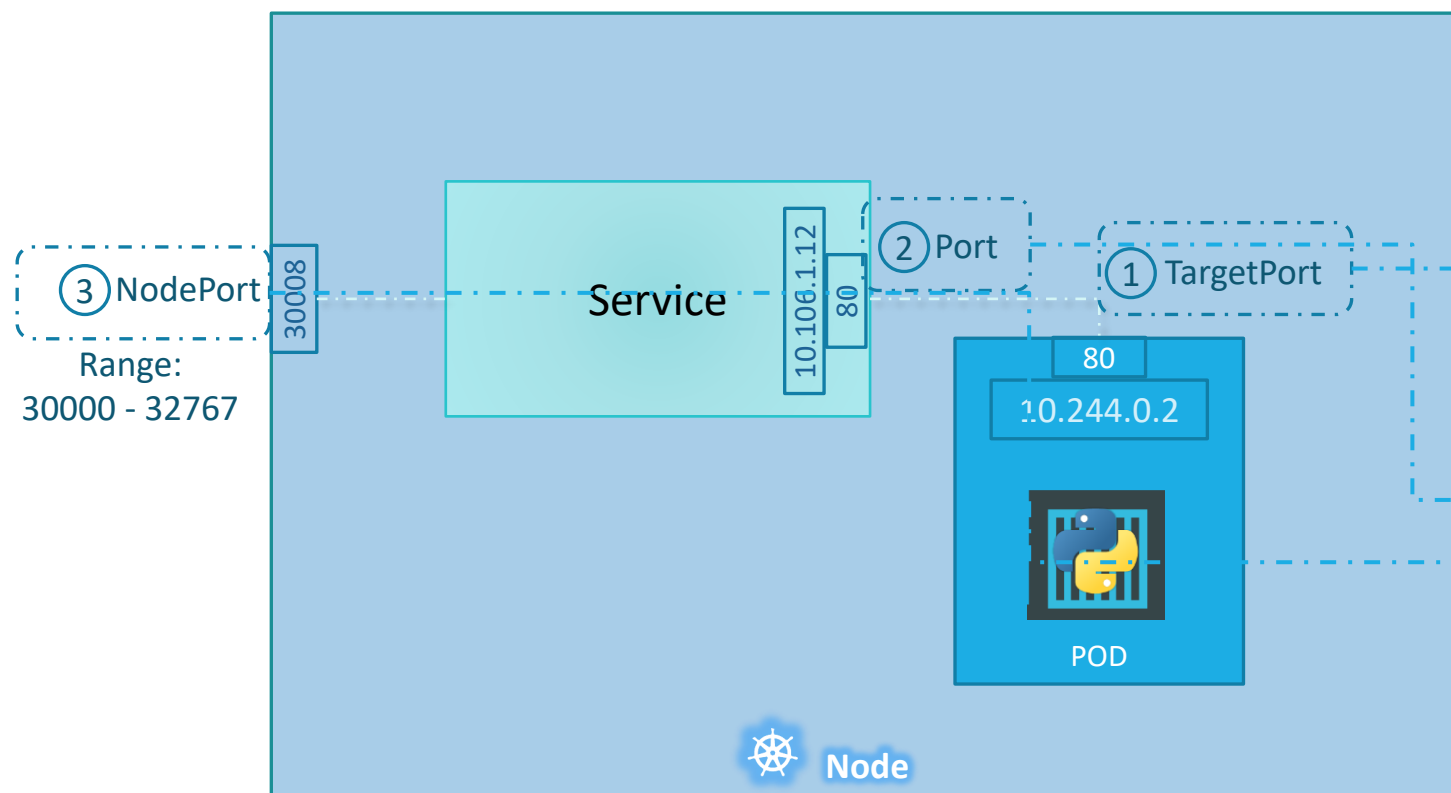

```
service-definition.yml

apiVersion: v1
kind: Service
metadata:
  name: myapp-service
spec:
  type: NodePort
  ports:
    - targetPort: 80
      *port: 80
      nodePort: 30008
```

# Service - NodePort

service-definition.yml

```
apiVersion: v1
kind: Service
metadata:
  name: myapp-service
spec:
  type: NodePort
  ports:
    - targetPort: 80
      port: 80
      nodePort: 30008
  selector:
```

pod-definition.yml

```
> kubectl create -f service-definition.yml
```

```
service "myapp-service" created
```

```
> kubectl get services
```


NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
kubernetes	ClusterIP	10.96.0.1	<none>	443/TCP	16d
myapp-service	NodePort	10.106.127.123	<none>	80:30008/TCP	5m

```
app: myapp
```


```
> curl http://192.168.1.2:30008
```

```
<html>
<head>
<title>Welcome to nginx!</title>
<style>
  body {
    width: 35em;
    margin: 0 auto;
    font-family: Tahoma, Verdana, Arial, sans-serif;
  }
</style>
</head>
<body>
```

# Service - NodePort

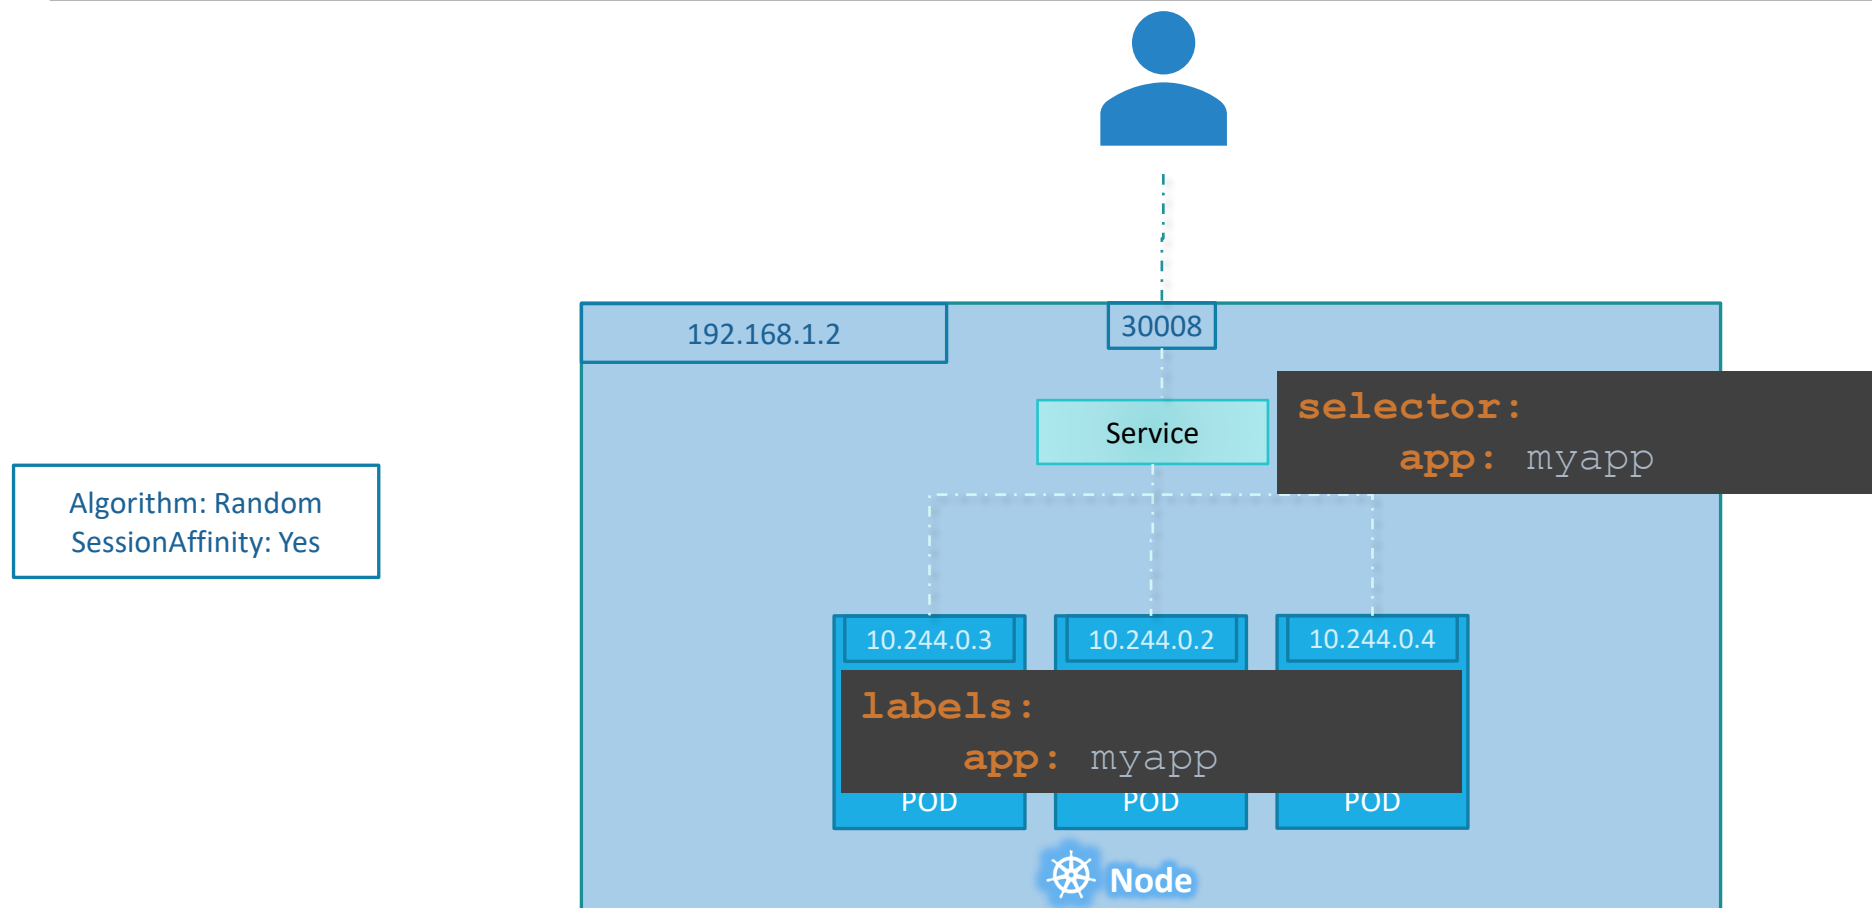

# Service - NodePort

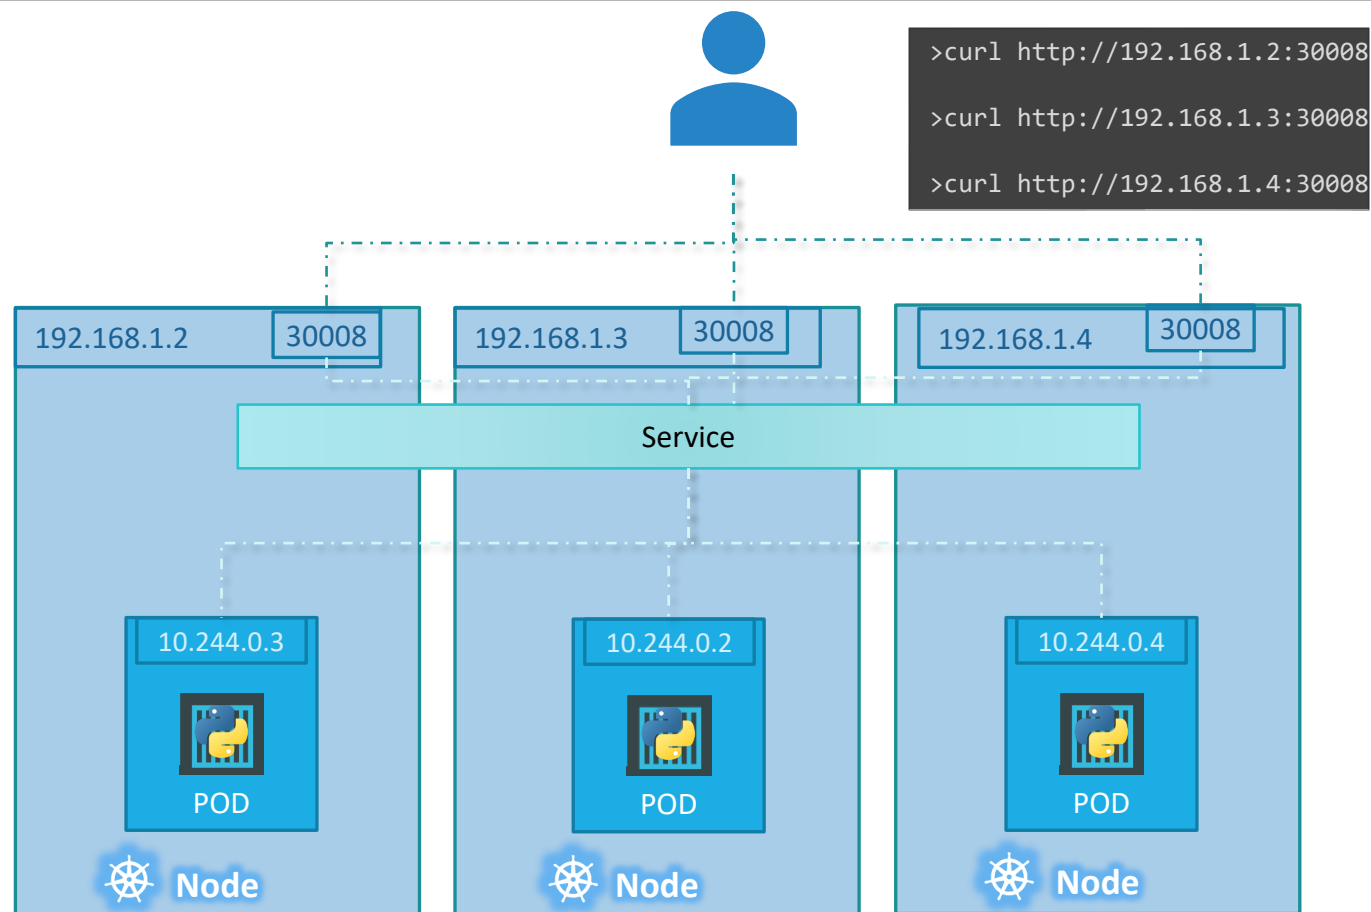


# Demo

---


Service - NodePort



# ClusterIP

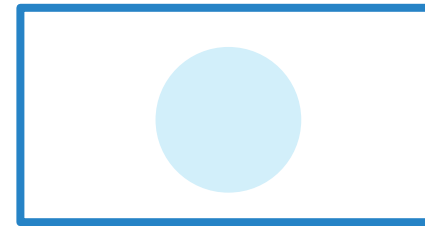

# ClusterIP

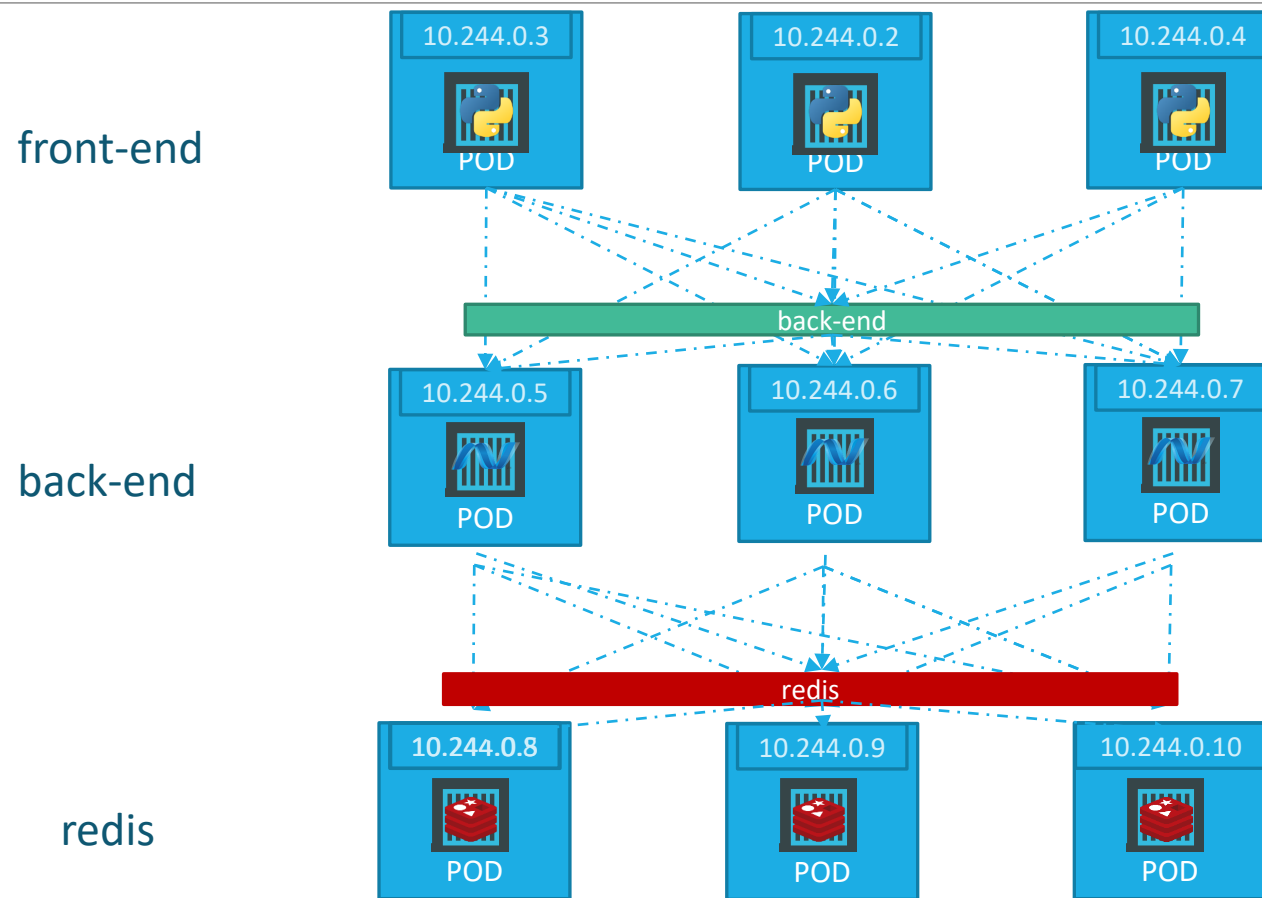

service-definition.yml

```
apiVersion: v1
kind: Service
metadata:
  name: back-end
spec:
  type: ClusterIP
  ports:
    - targetPort: 80
      port: 80
  selector:
```

pod-definition.yml

```
> kubectl create -f service-definition.yml
```

```
service "back-end" created
```

```
> kubectl get services
```

NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
kubernetes	ClusterIP	10.96.0.1	<none>	443/TCP	16d
back-end	ClusterIP	10.106.127.123	<none>	80/TCP	2m

```
  app: myapp
```

```
  type: back-end
```

```
spec:
```

```
  containers:
```

```
    - name: nginx-container
```

```
      image: nginx
```

# Demo

---

Service - NodePort

# References

---

<https://kubernetes.io/docs/concepts/services-networking/dns-pod-service/>

# Deployment

Updates and Rollback

# Rollout and Versioning



Revision 1



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0



nginx:1.7.0

Revision 2



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1



nginx:1.7.1

# Rollout Command

```
> kubectl rollout status deployment/myapp-deployment
```

```
Waiting for rollout to finish: 0 of 10 updated replicas are available...  
Waiting for rollout to finish: 1 of 10 updated replicas are available...  
Waiting for rollout to finish: 2 of 10 updated replicas are available...  
Waiting for rollout to finish: 3 of 10 updated replicas are available...  
Waiting for rollout to finish: 4 of 10 updated replicas are available...  
Waiting for rollout to finish: 5 of 10 updated replicas are available...  
Waiting for rollout to finish: 6 of 10 updated replicas are available...  
Waiting for rollout to finish: 7 of 10 updated replicas are available...  
Waiting for rollout to finish: 8 of 10 updated replicas are available...  
Waiting for rollout to finish: 9 of 10 updated replicas are available...  
deployment "myapp-deployment" successfully rolled out
```


```
> kubectl rollout history deployment/myapp-deployment
```

```
deployments "myapp-deployment"  
REVISION  CHANGE-CAUSE  
1          <none>  
2          kubectl apply --filename=deployment-definition.yml --record=true
```




# Deployment Strategy

Recreate

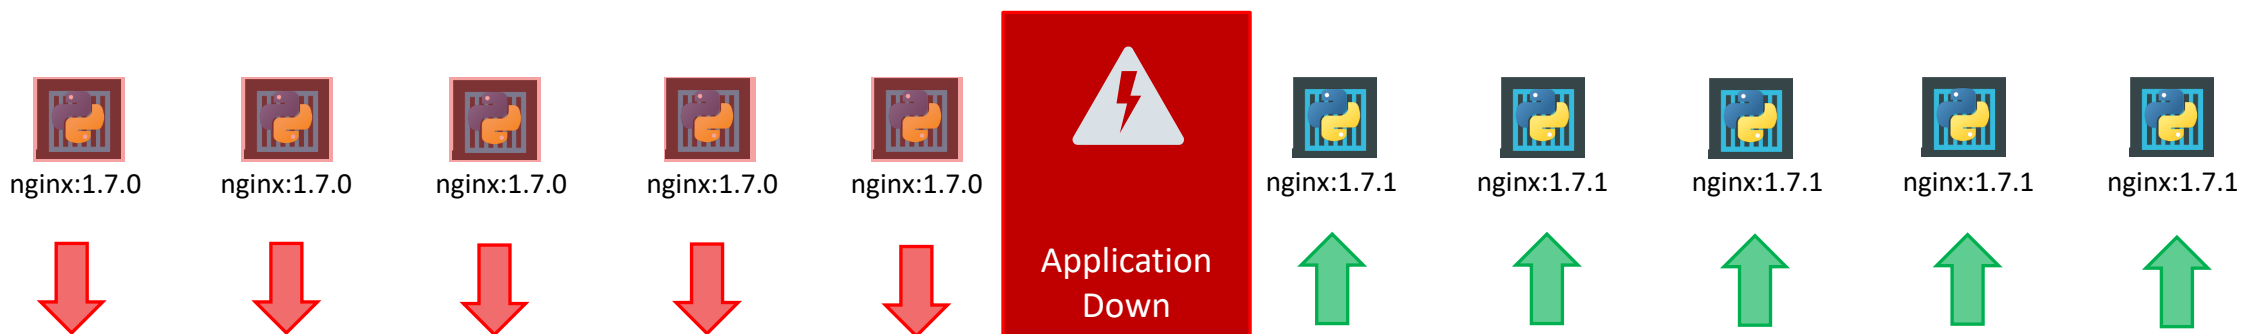

Rolling Update

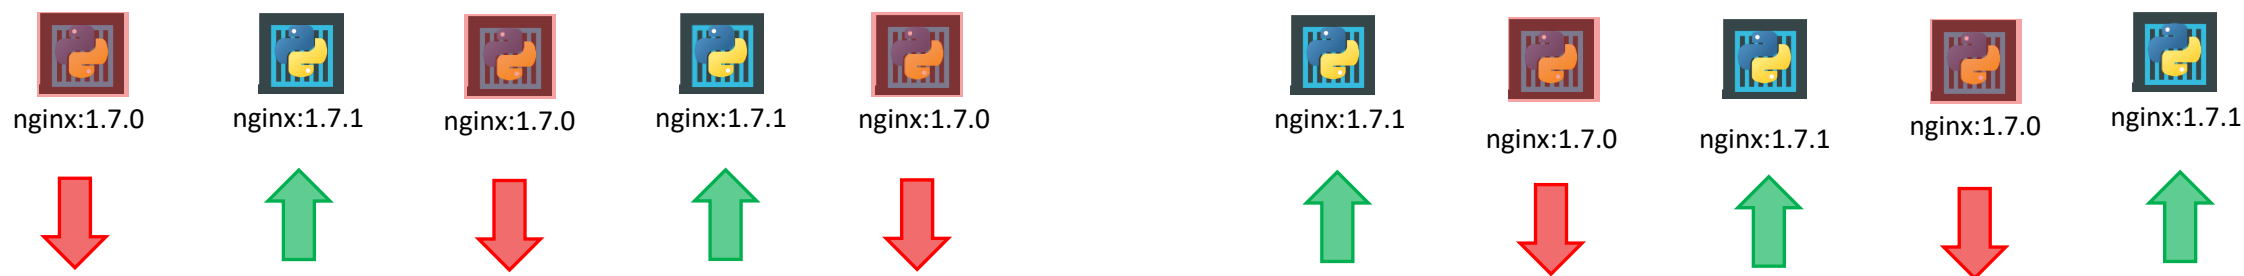



# Kubectl apply

```
> kubectl apply -f deployment-definition.yml  
deployment "myapp-deployment" configured
```

```
> kubectl set image deployment/myapp-deployment \  
    nginx=nginx:1.9.1  
deployment "myapp-deployment" image is updated
```

deployment-definition.yml

```
apiVersion: apps/v1  
kind: Deployment  
metadata:  
  name: myapp-deployment  
  labels:  
    app: myapp  
    type: front-end  
spec:  
  template:  
    metadata:  
      name: myapp-pod  
      labels:  
        app: myapp  
        type: front-end  
    spec:  
      containers:  
        - name: nginx-container  
          image: nginx:1.7.1  
  replicas: 3  
  selector:  
    matchLabels:  
      type: front-end
```


```
C:\Kubernetes>kubectl describe deployment myapp-deployment
Name:          myapp-deployment
Namespace:     default
CreationTimestamp: Sat, 03 Mar 2018 17:01:55 +0800
Labels:        app=myapp
               type=front-end
Annotations:   deployment.kubernetes.io/revision=2
               kubectl.kubernetes.io/last-applied-configuration={"apiVersion":"apps/v1", "kind": "Deployment", "metadata": {"name": "myapp-deployment", "namespace": "default", "annotations": {"deployment.kubernetes.io/revision": "2"}, "labels": {"app": "myapp", "type": "front-end"}}, "spec": {"replicas": 5, "selector": {"matchLabels": {"app": "myapp", "type": "front-end"}}, "strategy": {"type": "Recreate"}, "template": {"metadata": {"labels": {"app": "myapp", "type": "front-end"}}, "spec": {"containers": [{"name": "nginx-container", "image": "nginx:1.7.1", "ports": [], "environment": [], "mounts": []}], "volumes": []}}}
Selector:      type=front-end
Replicas:      5 desired | 5 updated | 5 total | 5 available | 0 unavailable
StrategyType:   Recreate
MinReadySeconds: 0
Pod Template:
  Labels:  app=myapp
           type=front-end
  Containers:
    nginx-container:
      Image:      nginx:1.7.1
      Port:       <none>
      Environment: <none>
      Mounts:     <none>
      Volumes:    <none>
  Conditions:
    Type           Status    Reason
    ----           -
    Available      True     MinimumReplicasAvailable
    Progressing    True     NewReplicaSetAvailable
    OldReplicaSets: <none>
    NewReplicaSet:  myapp-deployment-54c7d6ccc (5/5 replicas created)
  Events:
    Type     Reason          Age    From          Message
    ----     -
    Normal   ScalingReplicaSet   11m    deployment-controller Scaled up replica set myapp-deployment-6795844b58 to 5
    Normal   ScalingReplicaSet    1m    deployment-controller Scaled down replica set myapp-deployment-6795844b58 to 0
    Normal   ScalingReplicaSet   56s    deployment-controller Scaled up replica set myapp-deployment-54c7d6ccc to 5
```

# Recreate

```
C:\Kubernetes>kubectl describe deployment myapp-deployment
Name:          myapp-deployment
Namespace:     default
CreationTimestamp: Sat, 03 Mar 2018 17:16:53 +0800
Labels:        app=myapp
               type=front-end
Annotations:   deployment.kubernetes.io/revision=2
               kubectl.kubernetes.io/last-applied-configuration={"apiVersion":"apps/v1", "kind": "Deployment", "metadata": {"name": "myapp-deployment", "namespace": "default", "annotations": {"deployment.kubernetes.io/revision": "2"}, "labels": {"app": "myapp", "type": "front-end"}}, "spec": {"replicas": 5, "selector": {"matchLabels": {"app": "myapp", "type": "front-end"}}, "strategy": {"type": "RollingUpdate"}, "template": {"metadata": {"labels": {"app": "myapp", "type": "front-end"}}, "spec": {"containers": [{"name": "nginx-container", "image": "nginx:1.7.1", "ports": [], "environment": [], "mounts": []}], "volumes": []}}}
Selector:      type=front-end
Replicas:      5 desired | 5 updated | 6 total | 4 available | 2 unavailable
StrategyType:   RollingUpdate
MinReadySeconds: 0
RollingUpdateStrategy: 25% max unavailable, 25% max surge
Pod Template:
  Labels:  app=myapp
           type=front-end
  Containers:
    nginx-container:
      Image:      nginx
      Port:       <none>
      Environment: <none>
      Mounts:     <none>
      Volumes:    <none>
  Conditions:
    Type           Status    Reason
    ----           -
    Available      True     MinimumReplicasAvailable
    Progressing    True     ReplicaSetUpdated
    OldReplicaSets: myapp-deployment-67c749c58c (1/1 replicas created)
    NewReplicaSet:  myapp-deployment-7d57dbdb8d (5/5 replicas created)
  Events:
    Type     Reason          Age    From          Message
    ----     -
    Normal   ScalingReplicaSet   1m    deployment-controller Scaled up replica set myapp-deployment-67c749c58c to 5
    Normal   ScalingReplicaSet    1s    deployment-controller Scaled up replica set myapp-deployment-7d57dbdb8d to 2
    Normal   ScalingReplicaSet    1s    deployment-controller Scaled down replica set myapp-deployment-67c749c58c to 4
    Normal   ScalingReplicaSet    1s    deployment-controller Scaled up replica set myapp-deployment-7d57dbdb8d to 3
    Normal   ScalingReplicaSet    0s    deployment-controller Scaled down replica set myapp-deployment-67c749c58c to 3
    Normal   ScalingReplicaSet    0s    deployment-controller Scaled up replica set myapp-deployment-7d57dbdb8d to 4
    Normal   ScalingReplicaSet    0s    deployment-controller Scaled down replica set myapp-deployment-67c749c58c to 2
    Normal   ScalingReplicaSet    0s    deployment-controller Scaled up replica set myapp-deployment-7d57dbdb8d to 5
    Normal   ScalingReplicaSet    0s    deployment-controller Scaled down replica set myapp-deployment-67c749c58c to 1
```

# RollingUpdate

# Upgrades

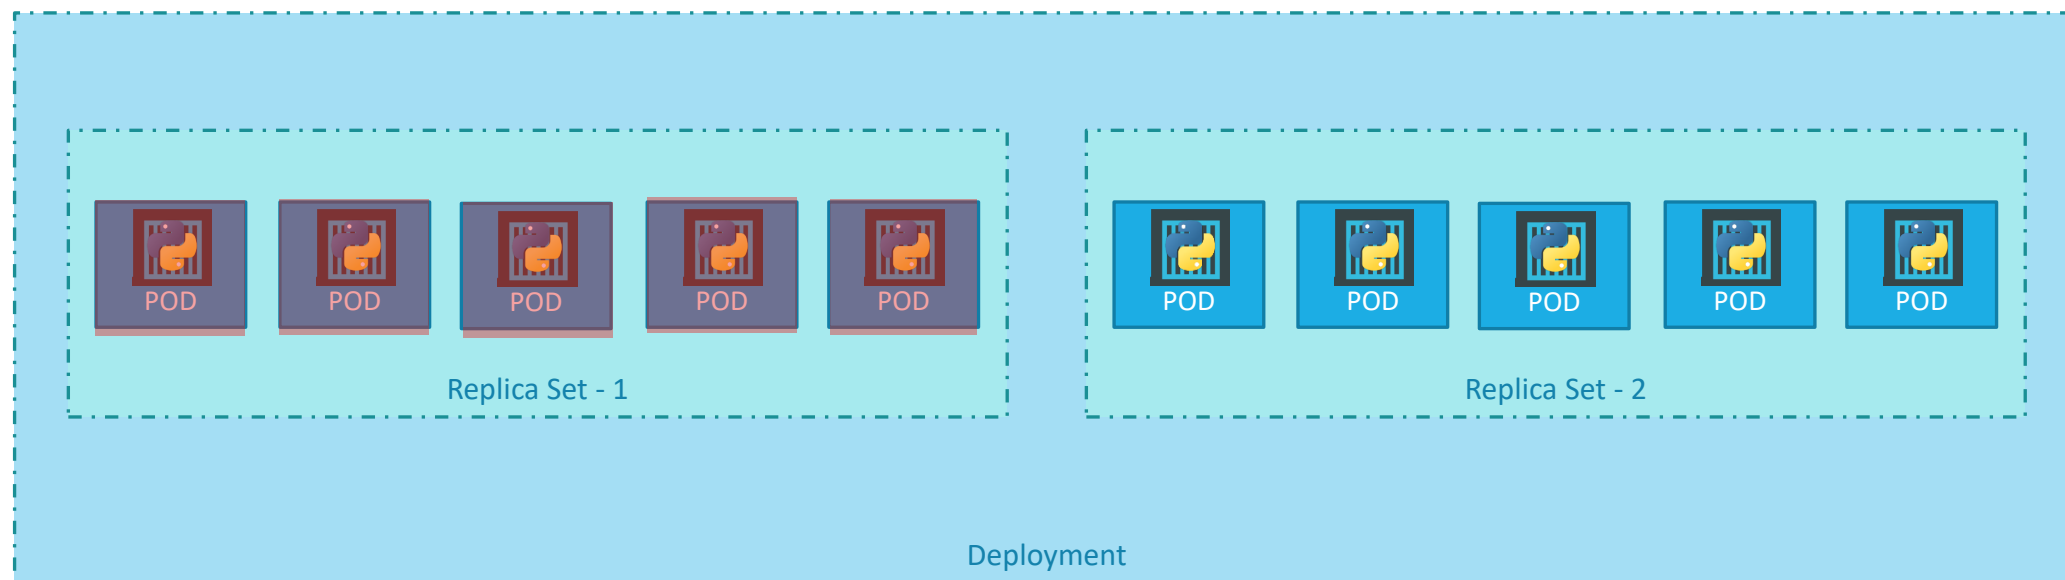

```
> kubectl get replicaset
```

NAME	DESIRED	CURRENT	READY	AGE
myapp-deployment-67c749c58c	0	0	0	22m
myapp-deployment-7d57dbdb8d	5	5	5	20m

# Rollback

```
> kubectl get replicaset
```

NAME	DESIRED	CURRENT	READY	AGE
myapp-deployment-67c749c58c	0	0	0	22m
myapp-deployment-7d57dbdb8d	5	5	5	20m

```
> kubectl get replicaset
```


NAME	DESIRED	CURRENT	READY	AGE
myapp-deployment-67c749c58c	5	5	5	22m
myapp-deployment-7d57dbdb8d	0	0	0	20m



POD



POD



POD



POD



POD

Replica Set - 1




POD



POD



POD



POD



POD

Replica Set - 2

Deployment

```
> kubectl rollout undo deployment/myapp-deployment
```

```
deployment "myapp-deployment" rolled back
```

# kubectl run

---

```
> kubectl run nginx --image=nginx  
deployment "nginx" created
```

# Summarize Commands

---

Create

```
> kubectl create -f deployment-definition.yml --record=true
```

Get

```
> kubectl get deployments
```

Update

```
> kubectl apply -f deployment-definition.yml
```

```
> kubectl set image deployment/myapp-deployment nginx=nginx:1.9.1
```

Status

```
> kubectl rollout status deployment/myapp-deployment
```

```
> kubectl rollout history deployment/myapp-deployment
```

Rollback

```
> kubectl rollout undo deployment/myapp-deployment
```