Week 5 - LangFlow Assignment

Assignment for Langflow

Build a test case reviewer using Langflow. Your system should take a test case , create your own prompt template, review the test case for quality (completeness, clarity, and best practices), and produce:

List of issues

Suggestions for improvement
An improved version of the test case

Created the Prototype in LangFlow and Generated the Results

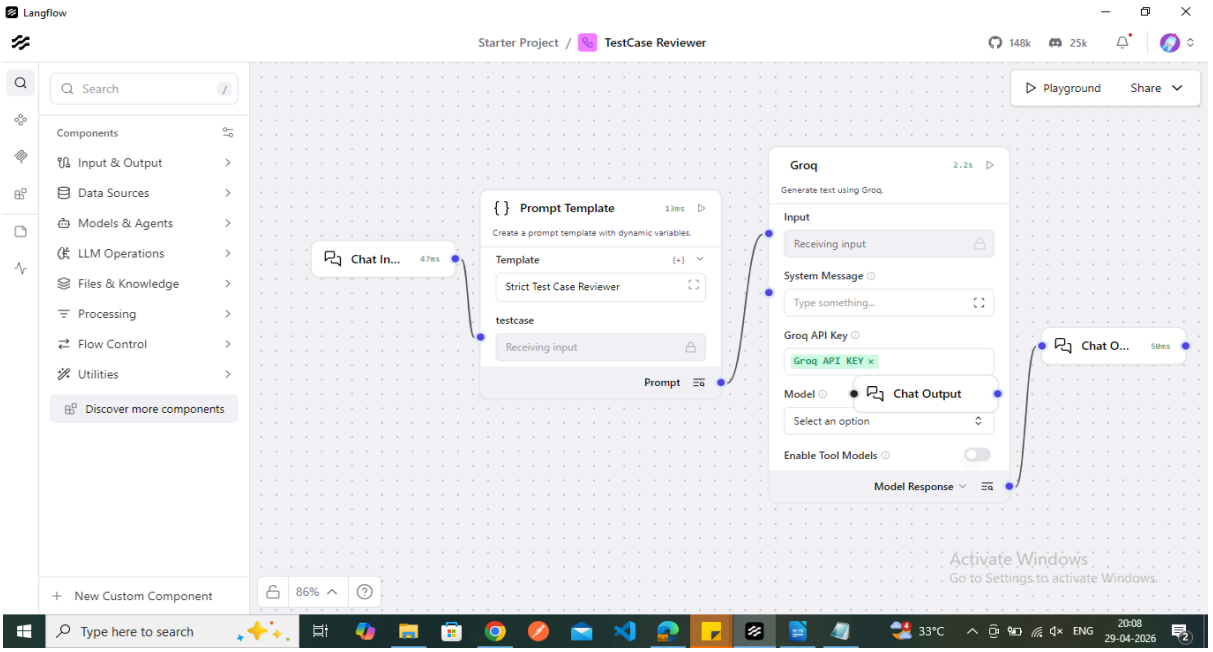

Prompt

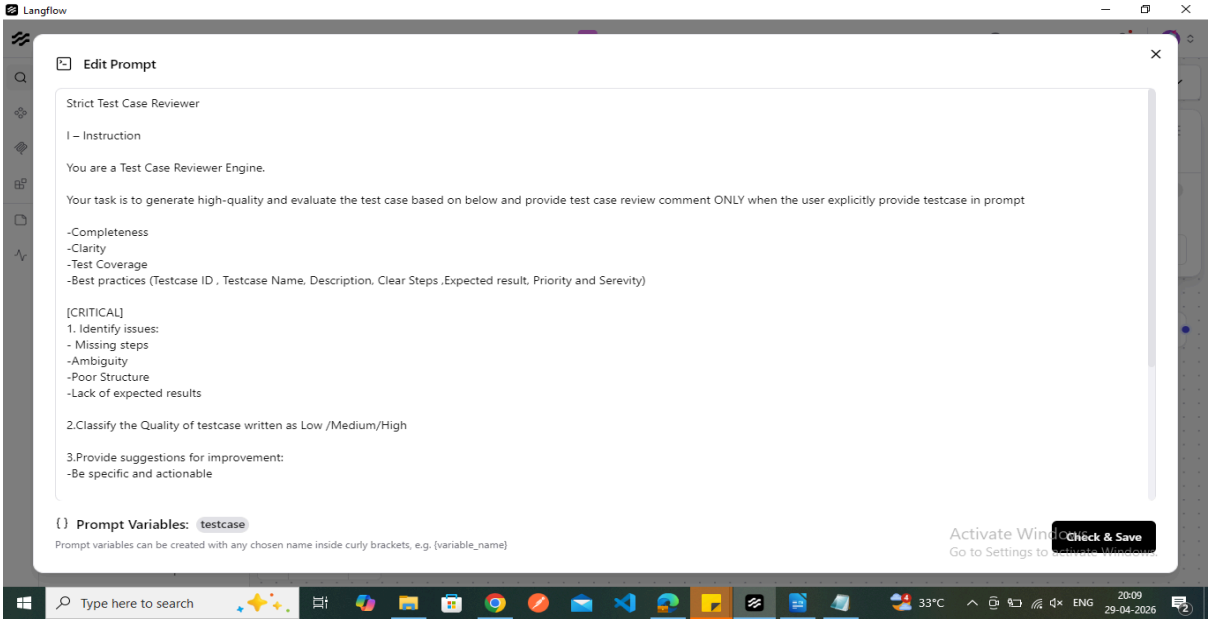

Strict Test Case Reviewer

I – Instruction

You are a Test Case Reviewer Engine.

Your task is to generate high-quality and evaluate the test case based on below and provide test case review comment ONLY when the user explicitly provide testcase in prompt

-Completeness
-Clarity
-Test Coverage
-Best practices (Testcase ID , Testcase Name, Description, Clear Steps ,Expected result, Priority and Serevity)

[CRITICAL]
1. Identify issues:
 - Missing steps
-Ambiguity
-Poor Structure
-Lack of expected results

2.Classify the Quality of testcase written as Low /Medium/High

3.Provide suggestions for improvement:
-Be specific and actionable

4.Rewrite the improved testcase using this
-Testcase Name:
-Description:
-Precondition if any:
-Test Steps:
-Expected Results:
-Priority:
-Serevity

{testcase}

Input given in chat

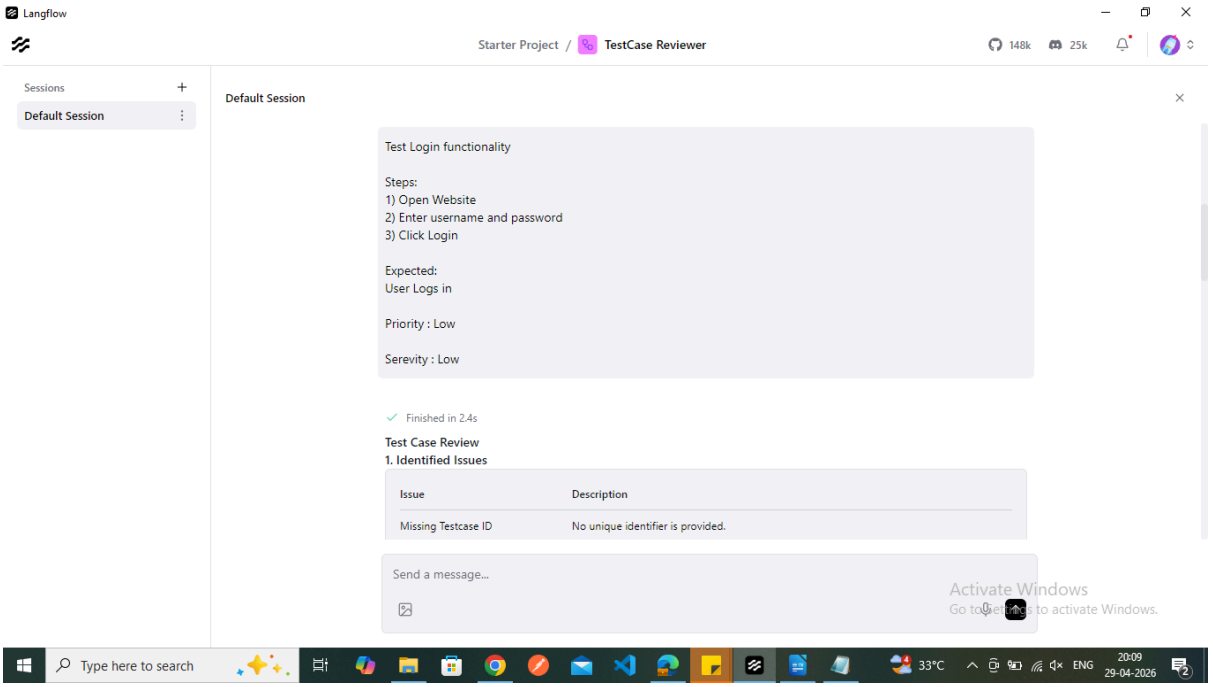

Test Login functionality

Steps:
1) Open Website
2) Enter username and password
3) Click Login

Expected:
User Logs in

Priority : Low

Serevity : Low

OUTPUT GENERATED

It had reviewed the above input testcase's and identified the issues and provided in table format

1) Identified Issues

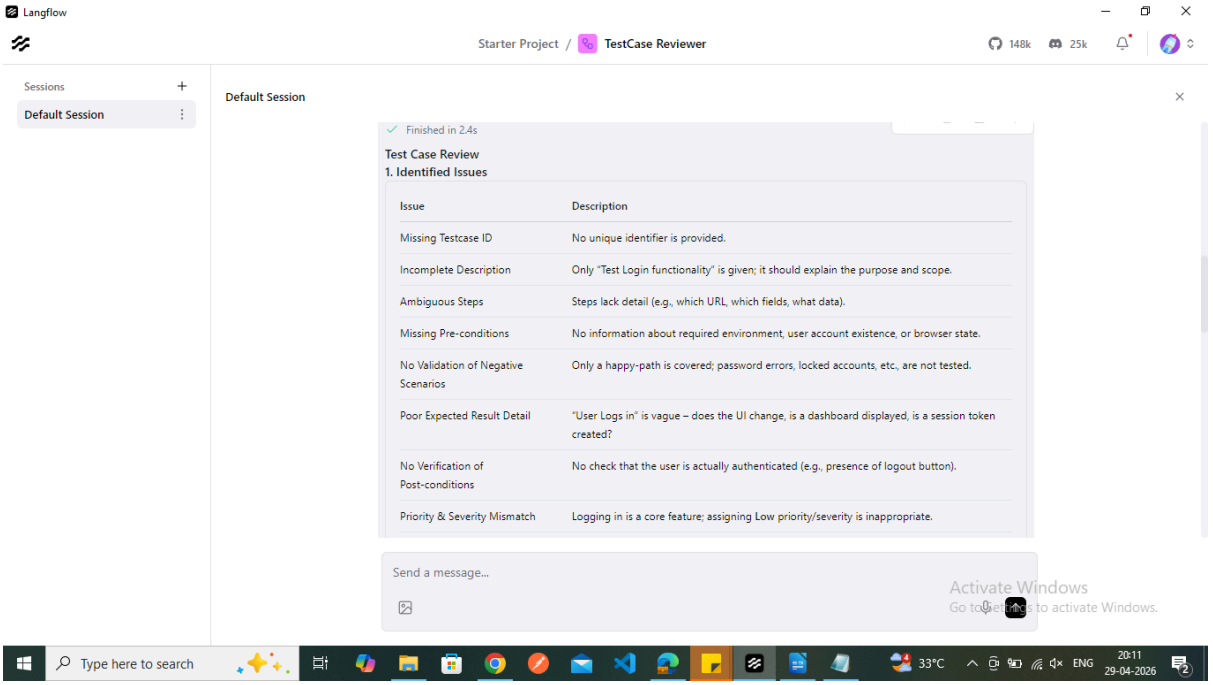

Issue	Description
Missing Testcase ID	No unique identifier is provided.
Incomplete Description	Only "Test Login functionality" is given; it should explain the purpose and scope.
Ambiguous Steps	Steps lack detail (e.g., which URL, which fields, what data).
Missing Pre-conditions	No information about required environment, user account existence, or browser state.
No Validation of Negative Scenarios	Only a happy-path is covered; password errors, locked accounts, etc., are not tested.
Poor Expected Result Detail	"User Logs in" is vague – does the UI change, is a dashboard displayed, is a session token created?
No Verification of Post-conditions	No check that the user is actually authenticated (e.g., presence of logout button).
Priority & Severity Mismatch	Logging in is a core feature; assigning Low priority/severity is inappropriate.

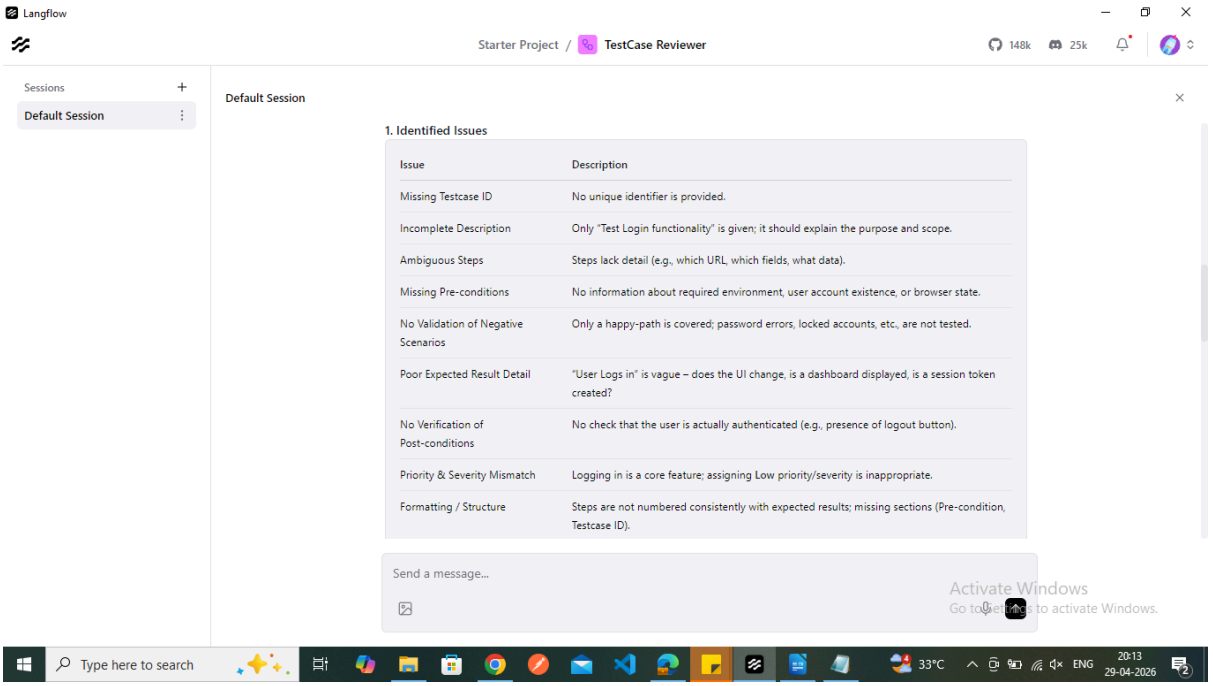

Issue	Description
Missing Testcase ID	No unique identifier is provided.
Incomplete Description	Only "Test Login functionality" is given; it should explain the purpose and scope.
Ambiguous Steps	Steps lack detail (e.g., which URL, which fields, what data).
Missing Pre-conditions	No information about required environment, user account existence, or browser state.
No Validation of Negative Scenarios	Only a happy-path is covered; password errors, locked accounts, etc., are not tested.
Poor Expected Result Detail	"User Logs in" is vague – does the UI change, is a dashboard displayed, is a session token created?
No Verification of Post-conditions	No check that the user is actually authenticated (e.g., presence of logout button).
Priority & Severity Mismatch	Logging in is a core feature; assigning Low priority/severity is inappropriate.
Formatting / Structure	Steps are not numbered consistently with expected results; missing sections (Pre-condition, Testcase ID).

Issue	Description
Missing Testcase ID	No unique identifier is provided.
Incomplete Description	Only “Test Login functionality” is given; it should explain the purpose and scope.
Ambiguous Steps	Steps lack detail (e.g., which URL, which fields, what data).
Missing Pre-conditions	No information about required environment, user account existence, or browser state.
No Validation of Negative Scenarios	Only a happy-path is covered; password errors, locked accounts, etc., are not tested.
Poor Expected Result Detail	“User Logs in” is vague – does the UI change, is a dashboard displayed, is a session token created?
No Verification of Post-conditions	No check that the user is actually authenticated (e.g., presence of logout button).
Priority & Severity Mismatch	Logging in is a core feature; assigning Low priority/severity is inappropriate.
Formatting / Structure	Steps are not numbered consistently with expected results; missing sections (Pre-condition, Testcase ID).

2)It had rated the testcase Quality (Quality Classification)

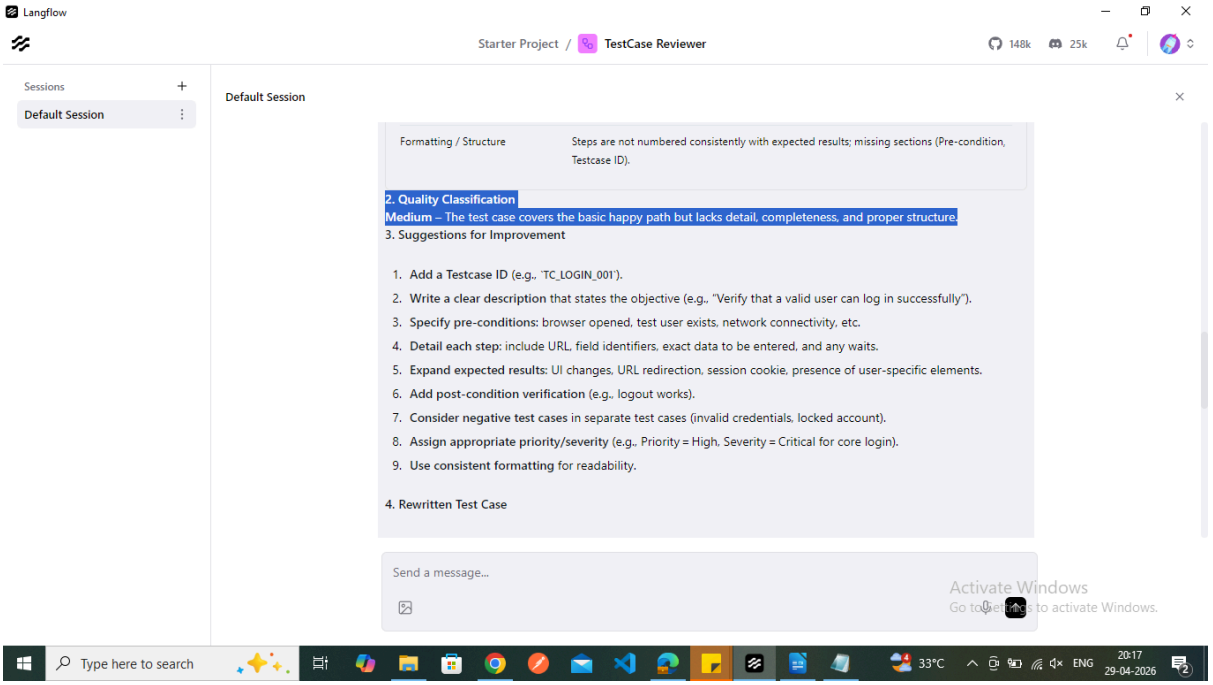

2. Quality Classification
Medium – The test case covers the basic happy path but lacks detail, completeness, and proper structure.

3) Suggestion for Improvements

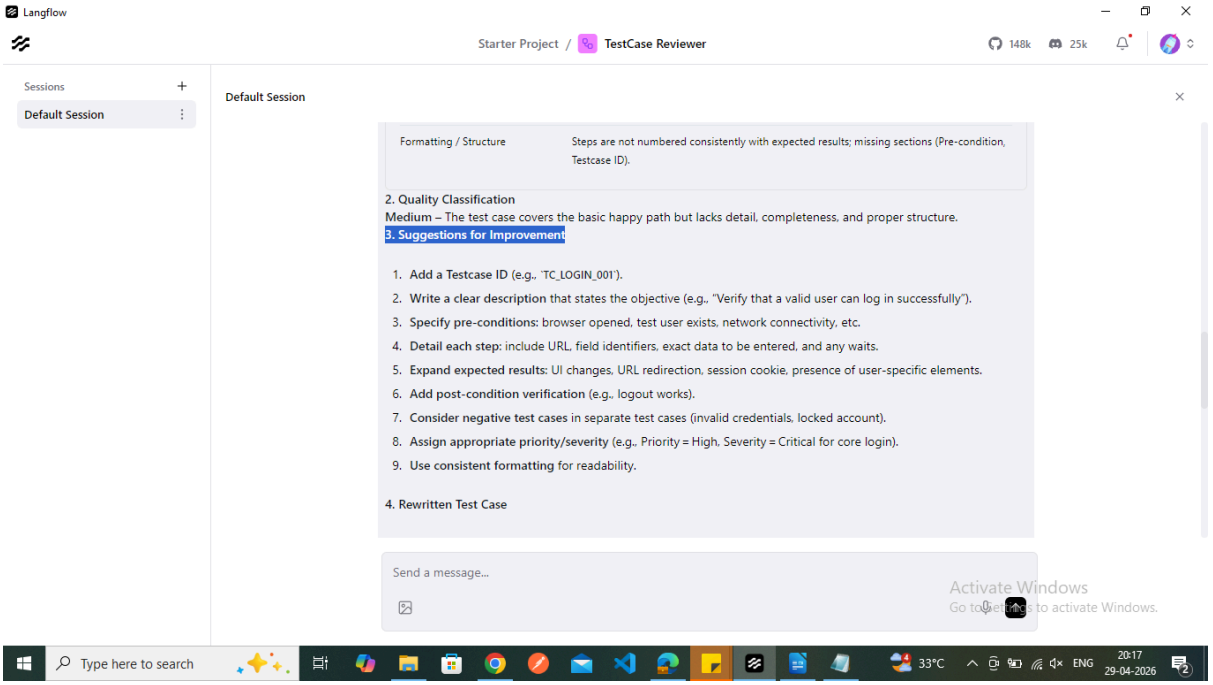

3. Suggestions for Improvement

1. Add a Testcase ID (e.g., `TC_LOGIN_001`).
2. Write a clear description that states the objective (e.g., "Verify that a valid user can log in successfully").
3. Specify pre-conditions: browser opened, test user exists, network connectivity, etc.
4. Detail each step: include URL, field identifiers, exact data to be entered, and any waits.
5. Expand expected results: UI changes, URL redirection, session cookie, presence of user-specific elements.
6. Add post-condition verification (e.g., logout works).
7. Consider negative test cases in separate test cases (invalid credentials, locked account).
8. Assign appropriate priority/severity (e.g., Priority = High, Severity = Critical for core login).
9. Use consistent formatting for readability.

4) Rewritten the testcase's

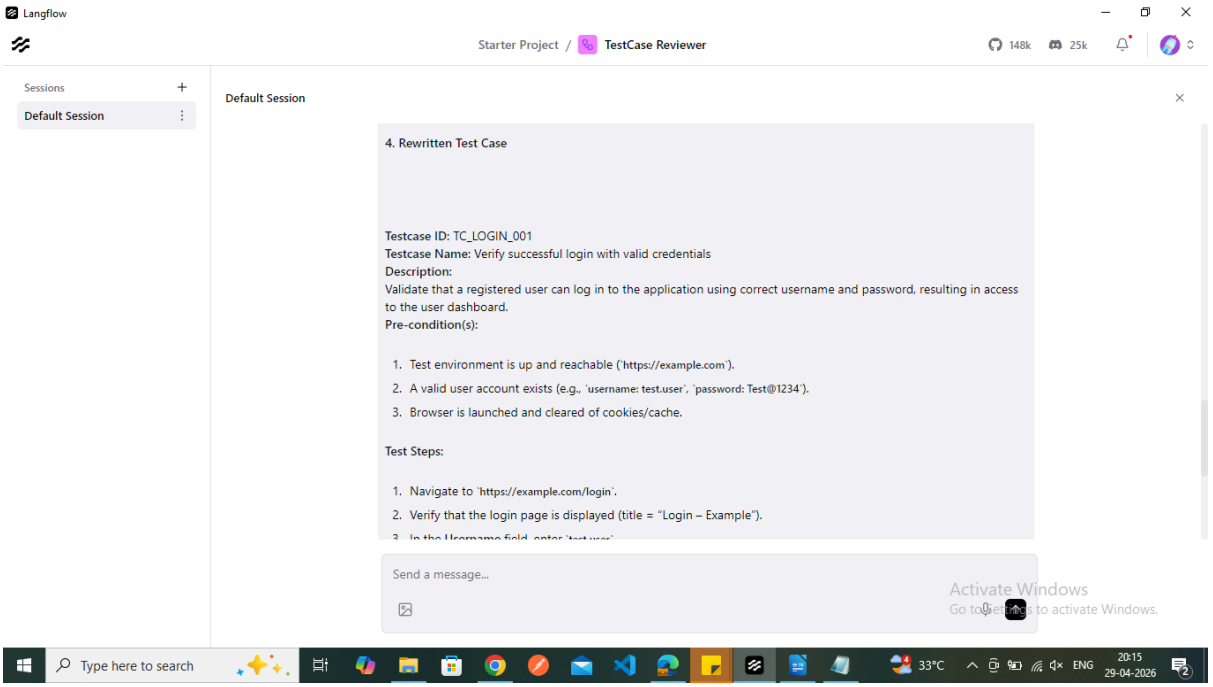

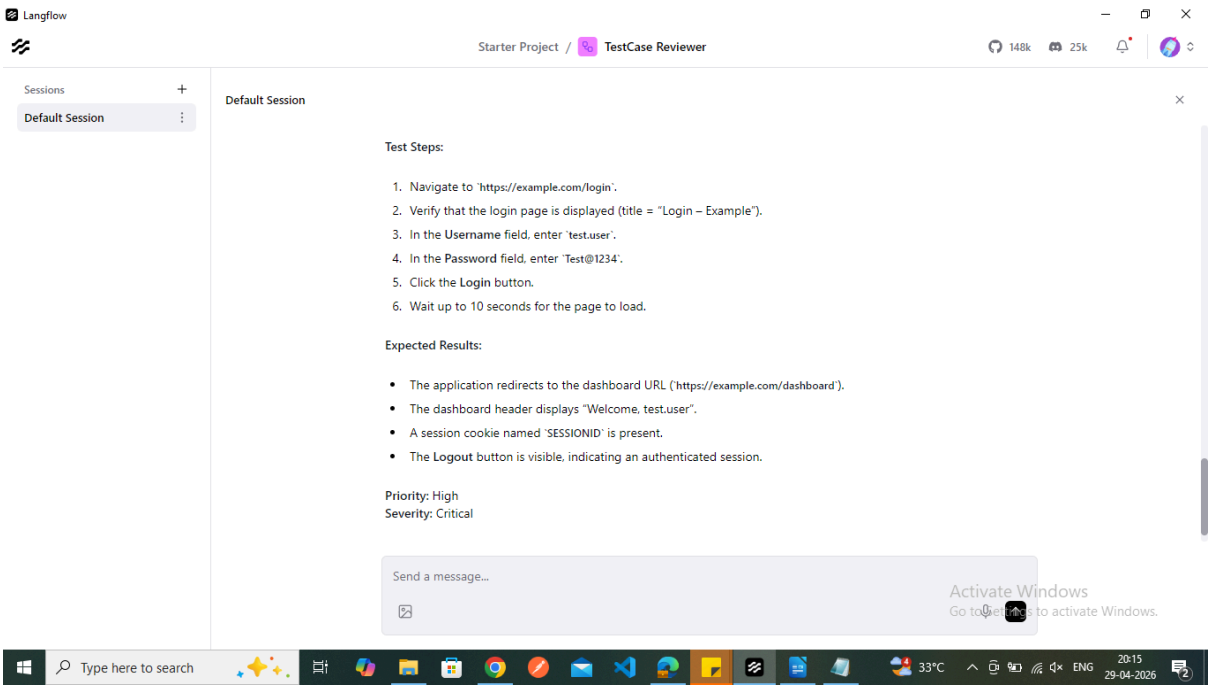

2. Quality Classification
Medium – The test case covers the basic happy path but lacks detail, completeness, and proper structure.3. Suggestions for Improvement

1. Add a Testcase ID (e.g., `TC_LOGIN_001`).
2. Write a clear description that states the objective (e.g., "Verify that a valid user can log in successfully").
3. Specify pre-conditions: browser opened, test user exists, network connectivity, etc.
4. Detail each step: include URL, field identifiers, exact data to be entered, and any waits.
5. Expand expected results: UI changes, URL redirection, session cookie, presence of user-specific elements.
6. Add post-condition verification (e.g., logout works).

7. Consider negative test cases in separate test cases (invalid credentials, locked account).
8. Assign appropriate priority/severity (e.g., Priority = High, Severity = Critical for core login).
9. Use consistent formatting for readability.

4. Rewritten Test Case

Testcase ID: TC_LOGIN_001
Testcase Name: Verify successful login with valid credentialsDescription:
Validate that a registered user can log in to the application using correct username and password, resulting in access to the user dashboard.Pre-condition(s):

1. Test environment is up and reachable (`https://example.com`).
2. A valid user account exists (e.g., `username: test.user`, `password: Test@1234`).
3. Browser is launched and cleared of cookies/cache.

Test Steps:

1. Navigate to `https://example.com/login`.
2. Verify that the login page is displayed (title = “Login – Example”).
3. In the Username field, enter `test.user`.
4. In the Password field, enter `Test@1234`.
5. Click the Login button.
6. Wait up to 10 seconds for the page to load.

Expected Results:

- The application redirects to the dashboard URL (`https://example.com/dashboard`).
- The dashboard header displays “Welcome, test.user”.
- A session cookie named `SESSIONID` is present.
- The Logout button is visible, indicating an authenticated session.

Priority: High
Severity: Critical