Home Assignments

1.

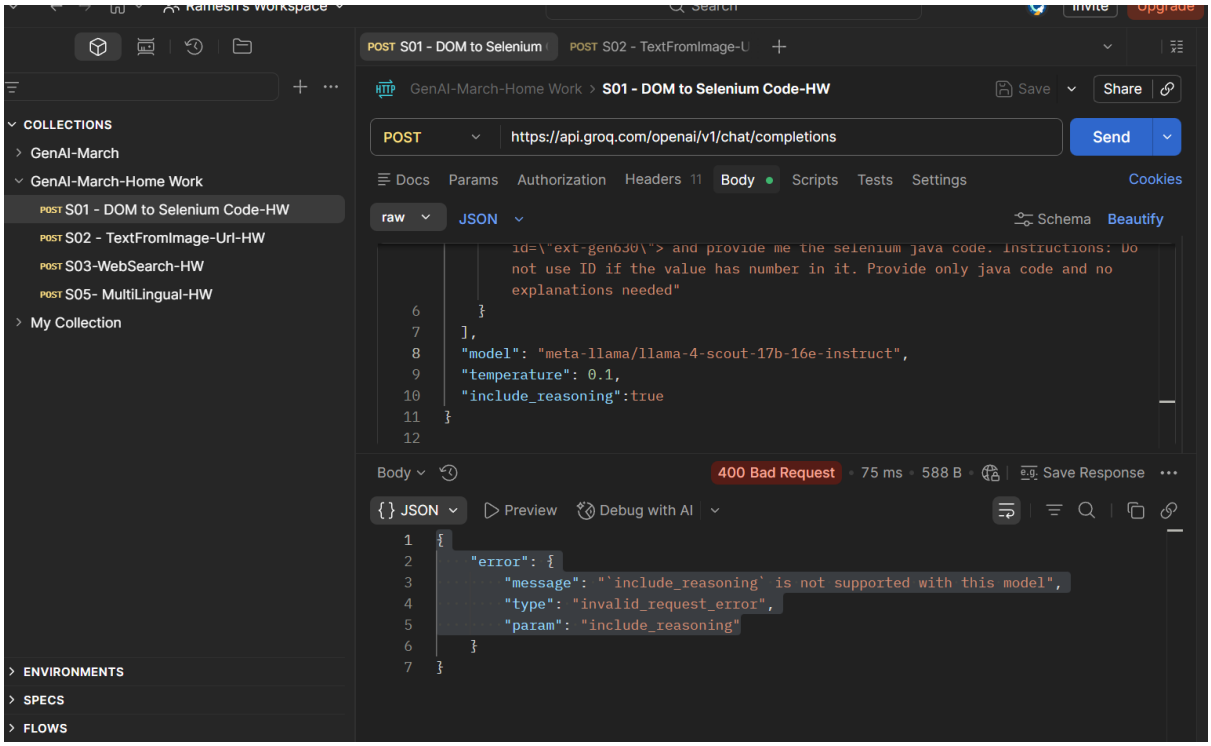

Changed the model and executed

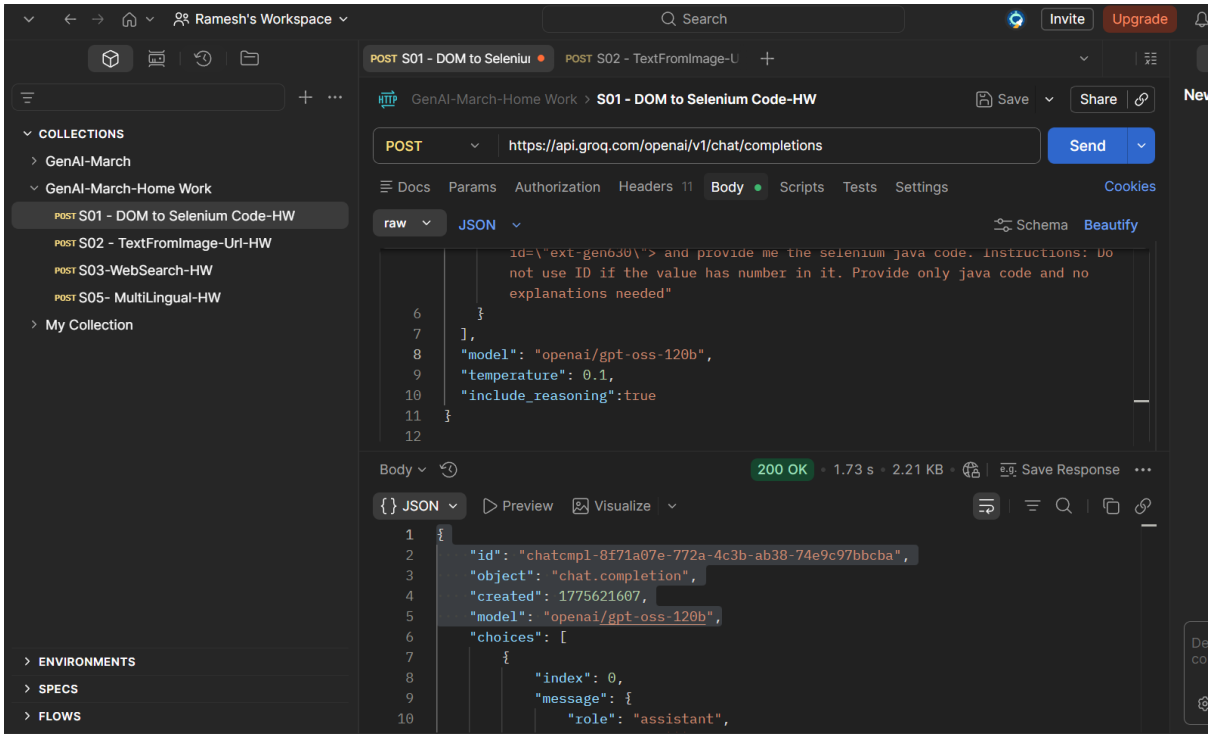

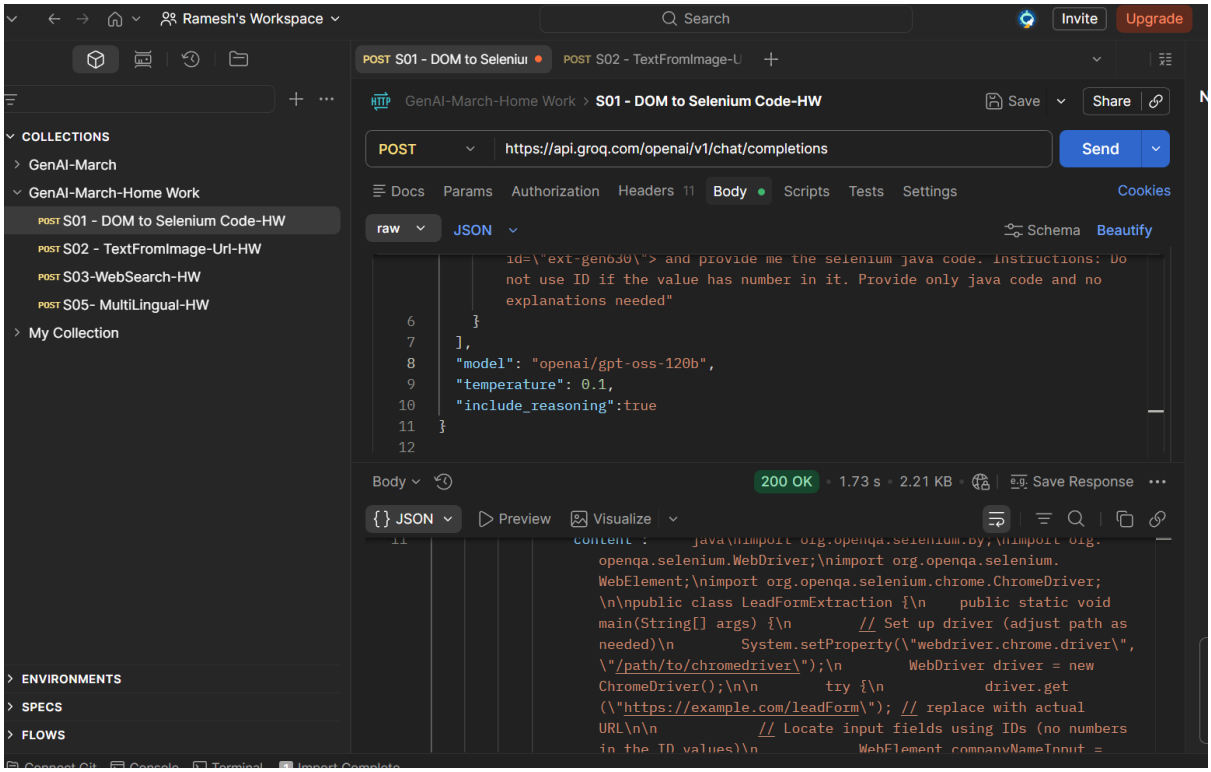

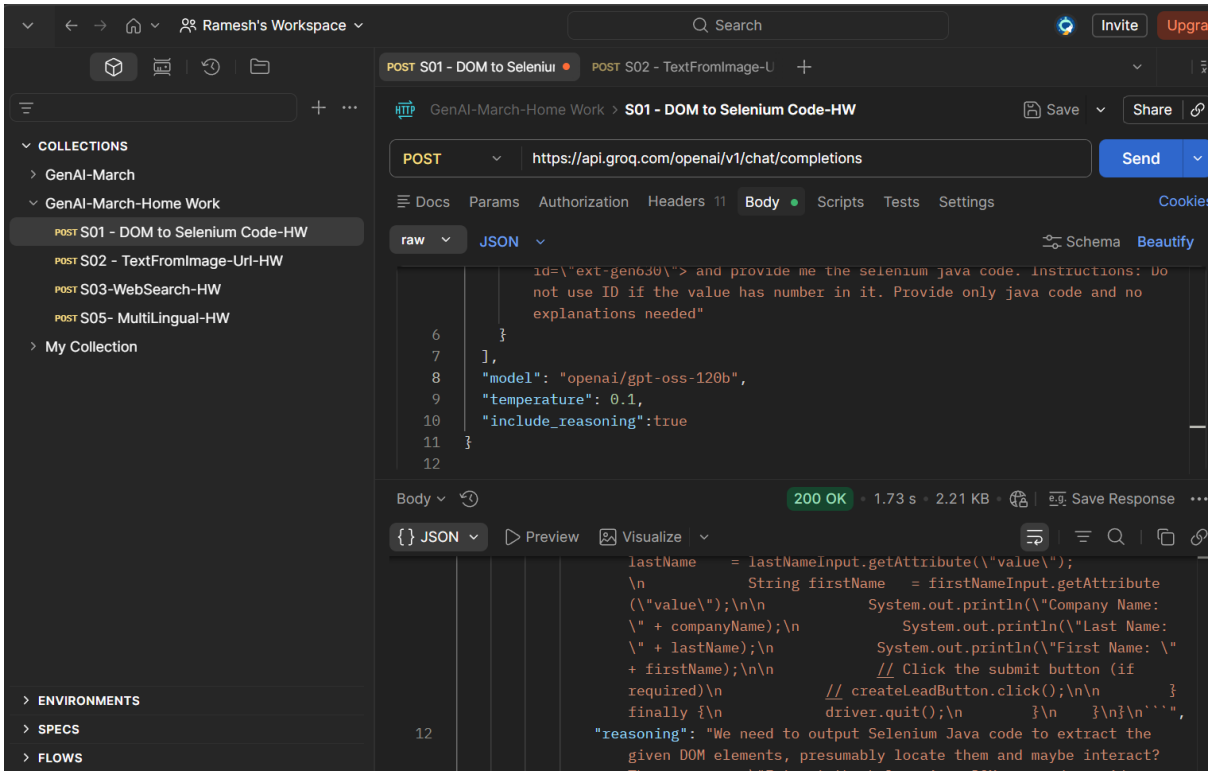

{

"id": "chatcmpl-8f71a07e-772a-4c3b-ab38-74e9c97bbcba",

"object": "chat.completion",

"created": 1775621607,

"model": "openai/gpt-oss-120b",

"choices": [

{

"index": 0,

"message": {

"role": "assistant",

"content": "```java\nimport org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\nimport org.openqa.selenium.WebElement;\nimport org.openqa.selenium.chrome.ChromeDriver;\n\npublic class LeadFormExtraction {\n public static void main(String[] args) {\n // Set up driver (adjust path as needed)\n System.setProperty(\"webdriver.chrome.driver\", \"/path/to/chromedriver\");\n WebDriver driver = new ChromeDriver();\n\n try {\n driver.get(\"https://example.com/leadForm\"); // replace with actual URL\n\n // Locate input fields using IDs (no numbers in the ID values)\n WebElement companyNameInput = driver.findElement(By.id(\"createLeadForm_companyName\"));\n WebElement lastNameInput = driver.findElement(By.id(\"createLeadForm_lastName\"));\n WebElement firstNameInput = driver.findElement(By.id(\"createLeadForm_firstName\"));\n\n // Locate the submit button without using its numeric ID\n WebElement createLeadButton = driver.findElement(\n By.cssSelector(\"input.smallSubmit[value='Create Lead']\"));\n\n // Example: retrieve values (or interact as needed)\n String companyName = companyNameInput.getAttribute(\"value\");\n String lastName = lastNameInput.getAttribute(\"value\");\n String firstName = firstNameInput.getAttribute(\"value\");\n\n System.out.println(\"Company Name: \" + companyName);\n System.out.println(\"Last Name: \" + lastName);\n System.out.println(\"First Name: \" + firstName);\n\n // Click the submit button (if required)\n // createLeadButton.click();\n\n } finally {\n driver.quit();\n }\n }\n}\n```",

"reasoning": "We need to output Selenium Java code to extract the given DOM elements, presumably locate them and maybe interact? The user says \"Extract the below given DOM ... and provide me the selenium java code. Instructions: Do not use ID if the value has number in it. Provide only java code and no explanations needed\". So we need to write Java code that locates these elements without using IDs that contain numbers. The IDs: createLeadForm_companyName, createLeadForm_lastName, createLeadForm_firstName, ext-gen630. The last ID has number. So we must not use ID for that element. For others, IDs have no numbers? They have letters and underscores, but no numbers. So we can use ID for those three, but not for the submit button. For the submit button, we can locate by class and value maybe.\n\nWe need to \"Extract the below given DOM\". Possibly they want to get the elements and maybe get their attributes? Usually \"extract\" could mean locate and maybe get text/value. Provide code that finds them and maybe prints something.\n\nWe'll produce Java code using Selenium WebDriver. Use By.id for first three, By.cssSelector for submit button using class and value.\n\nWe'll not include explanations, only code.\n\nWe'll include imports, driver initialization placeholder.\n\nLet's produce:\n\nWebDriver driver = new ChromeDriver();\ndriver.get(\"url\");\nWebElement companyName = driver.findElement(By.id(\"createLeadForm_companyName\"));\nWebElement lastName = driver.findElement(By.id(\"createLeadForm_lastName\"));\nWebElement firstName = driver.findElement(By.id(\"createLeadForm_firstName\"));\nWebElement createLeadBtn = driver.findElement(By.cssSelector(\"input.smallSubmit[value='Create Lead']\"));\n\nThen maybe extract attributes: getAttribute(\"value\") etc.\n\nWe'll just locate.\n\nProvide only code."

},

"logprobs": null,

```
        "finish_reason": "stop"
      }
    ],
    "usage": {
      "queue_time": 0.042803111,
      "prompt_tokens": 227,
      "prompt_time": 0.010181288,
      "completion_tokens": 716,
      "completion_time": 1.5149455490000001,
      "total_tokens": 943,
      "total_time": 1.525126837,
      "completion_tokens_details": {
        "reasoning_tokens": 369
      }
    },
    "usage_breakdown": null,
    "system_fingerprint": "fp_8a618bed98",
    "x_groq": {
      "id": "req_01knnmq2qvfcp8q1dbhfcv55aq",
      "seed": 1076446845
    },
    "service_tier": "on_demand"
}
```


2.

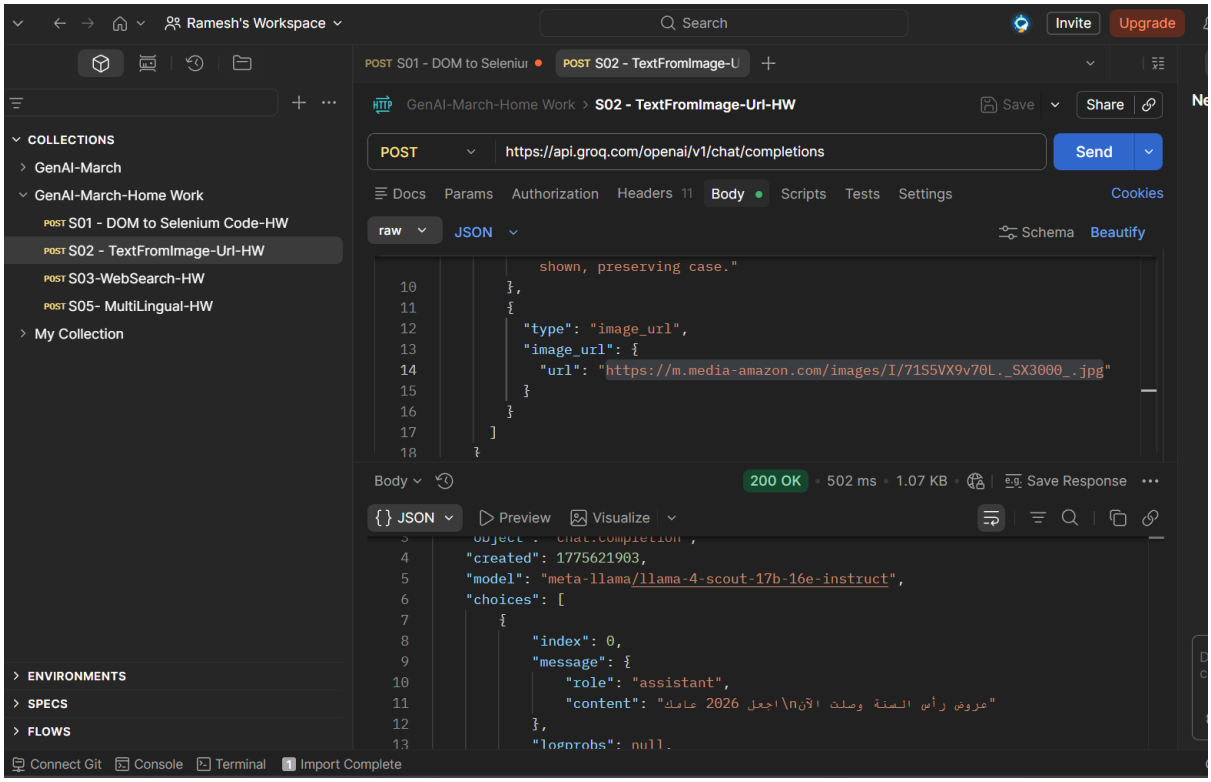

3.

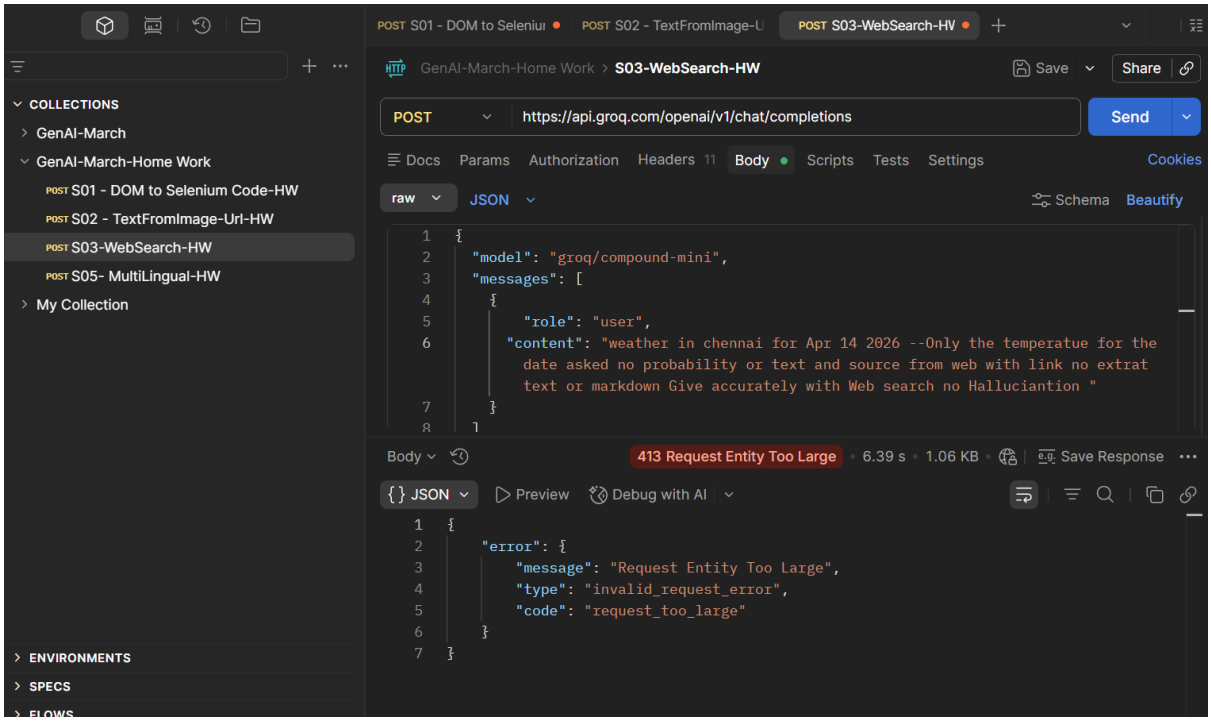

Since the ouput shows error, updating the model to process large request and verifying

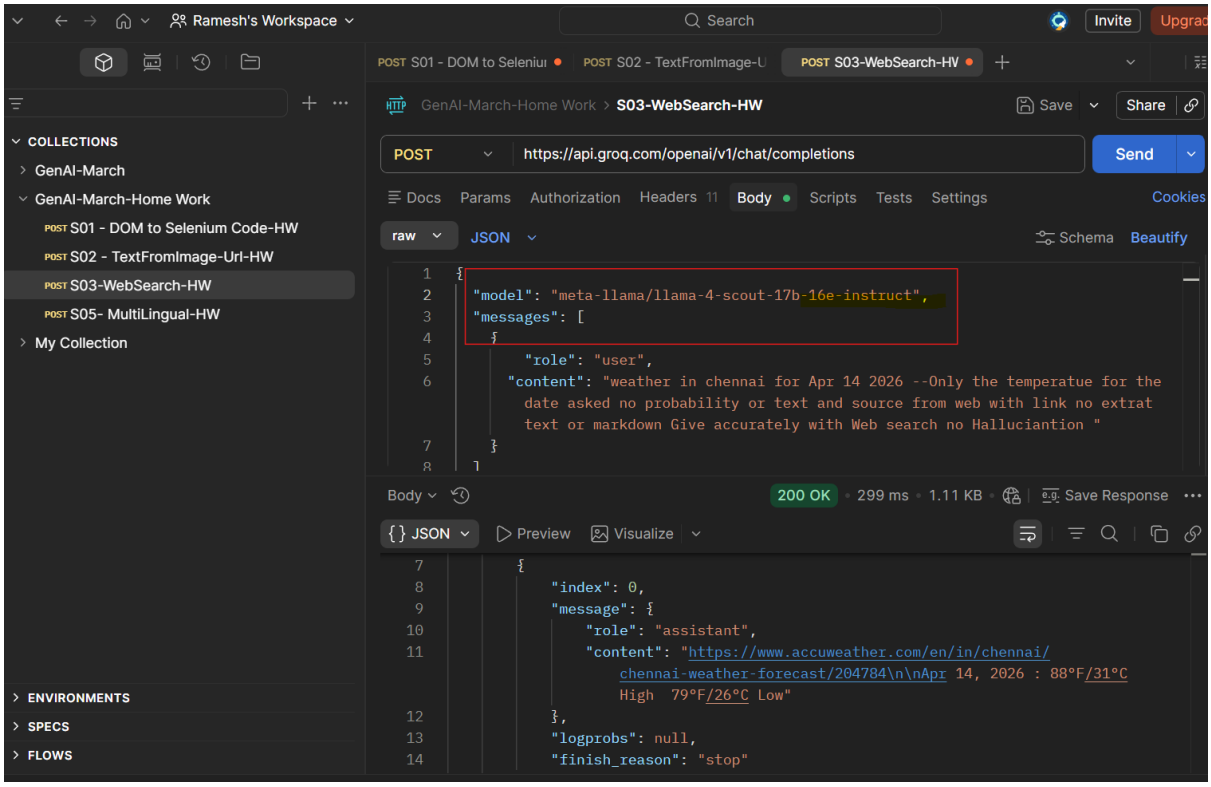

4.

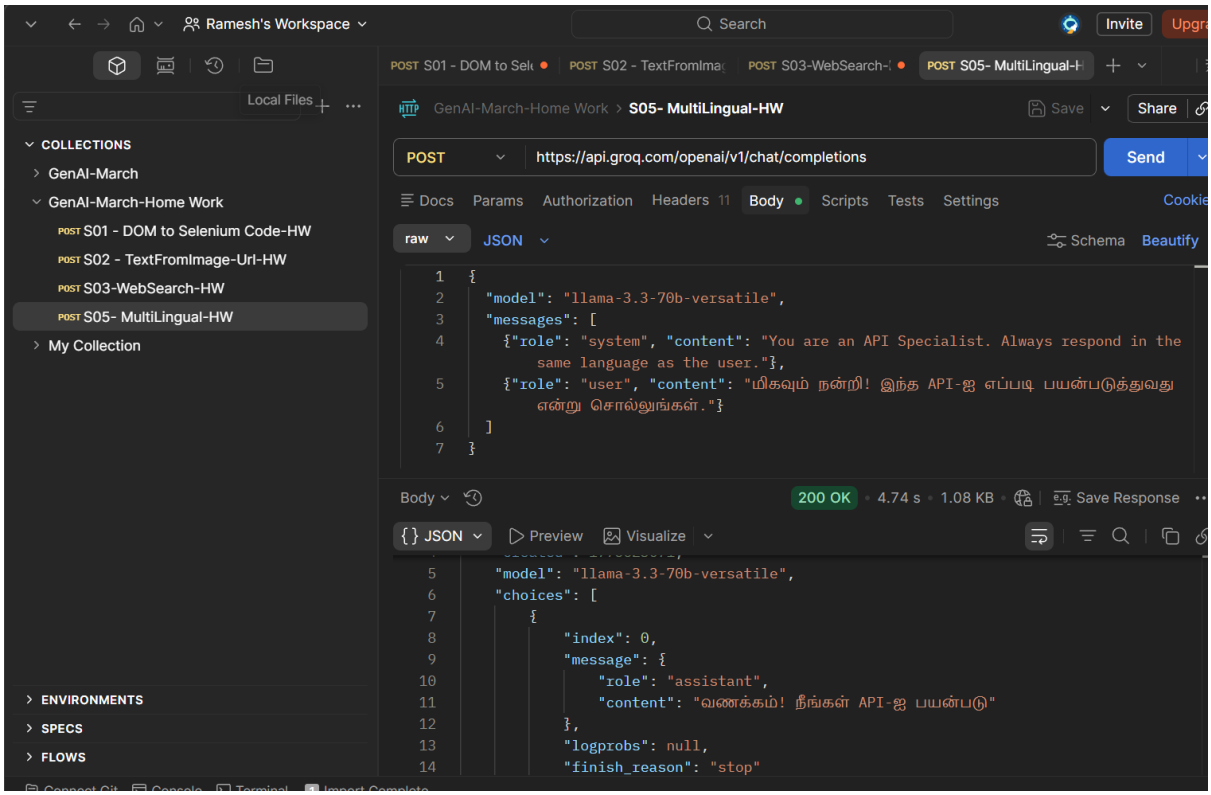

Tried with Malayalam

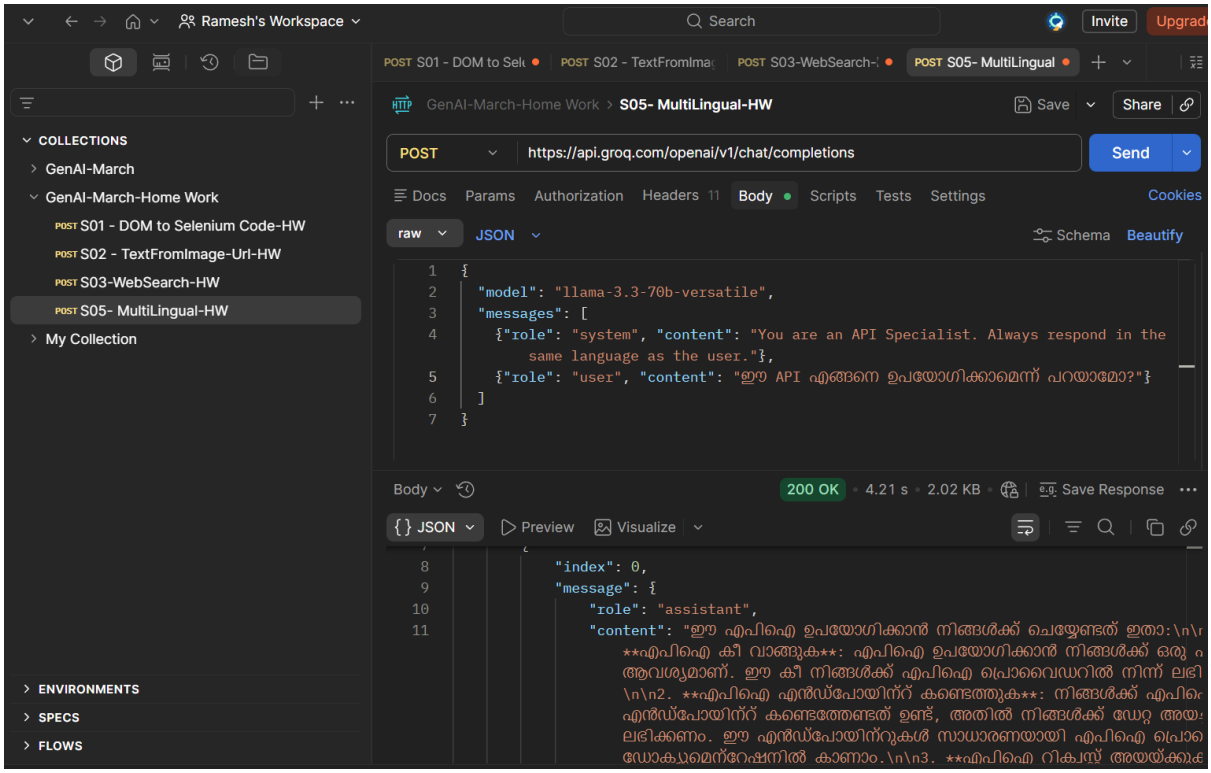
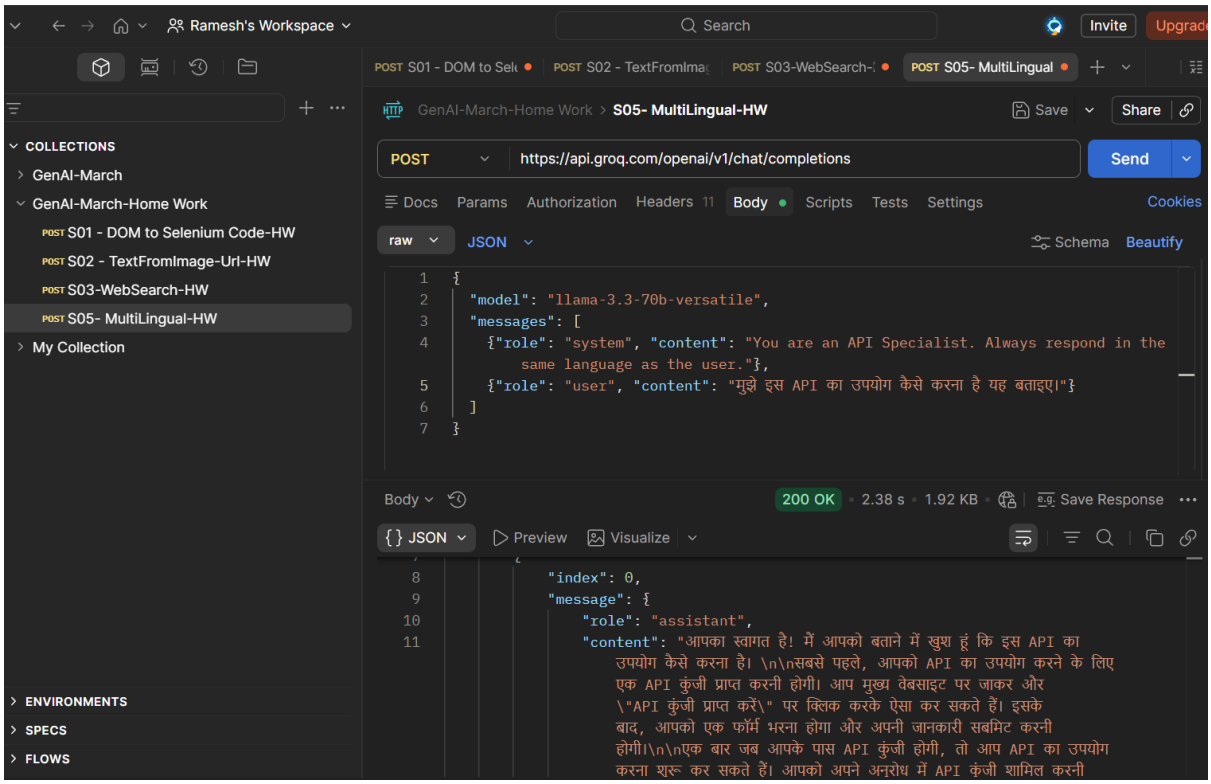
Tried with Hindi