

All


The mixed graph shows the monthly revenue of a company over five months. Answer the following questions.

What is the average monthly revenue over the five months?

If the company plans to increase its revenue by 8% in the next month (June), what will the revenue be for June?

What is the cumulative revenue for the first three months?

Revenue (₹ in lakhs)



Answer

(Please choose a correct answer)

- ☐ ₹56.8 lakhs, ₹65.88 lakhs, ₹163 lakhs
- ☐ ₹57.2 lakhs, ₹66.04 lakhs, ₹164 lakhs
- ☐ ₹55.6 lakhs, ₹63.55 lakhs, ₹162 lakhs

All

7. Data Interpretation: Fruit

MCQ UNSOLVED

The table below shows the amounts (in grams) of fiber, vitamin C, iron, and calcium per 100 grams of various fruits. Each fruit is identified by its category and a codename. The table contains missing values.

Additional Facts:

- Both F1 and F2 (citrus) have higher vitamin C content than any berry or tropical fruit.
- All missing values for fiber (in grams) are non-zero multiples of 2.
- All missing values for iron and calcium (in mg) are non-zero multiples of 0.5.
- F5 contains the highest amount of iron among all fruits.
- F3 has double the calcium content of F4.

Minimum how many fruits have a higher fiber content than F2?

Fruit Category	Codename	Fiber (g)	Vitamin C (mg)	Iron (mg)	Calcium (mg)
Citrus	F1	3	40	0.5	
Citrus	F2	4	50		35
Berry	F3		60	1.2	30
Berry	F4	5		1	28
Tropical	F5		25		40
Tropical	F6	6	30	0.8	

Answer

(Please choose a correct answer)

☐ 1

☐ 2


All

The chart below shows the price data for six shares - P, Q, R, S, T, and U as a candlestick plot for a particular day.

1. Bullish shares are shown in green (closing price > opening price).
2. Bearish shares are shown in red (closing price < opening price).
3. The vertical axis represents the price in rupees.

Daily Share Price Variability (SPV) is defined as $(\text{Day's High Price} - \text{Day's Low Price}) / \text{Average of Opening and Closing Prices}$.

Which share had the highest percentage difference between its day's high and low price?

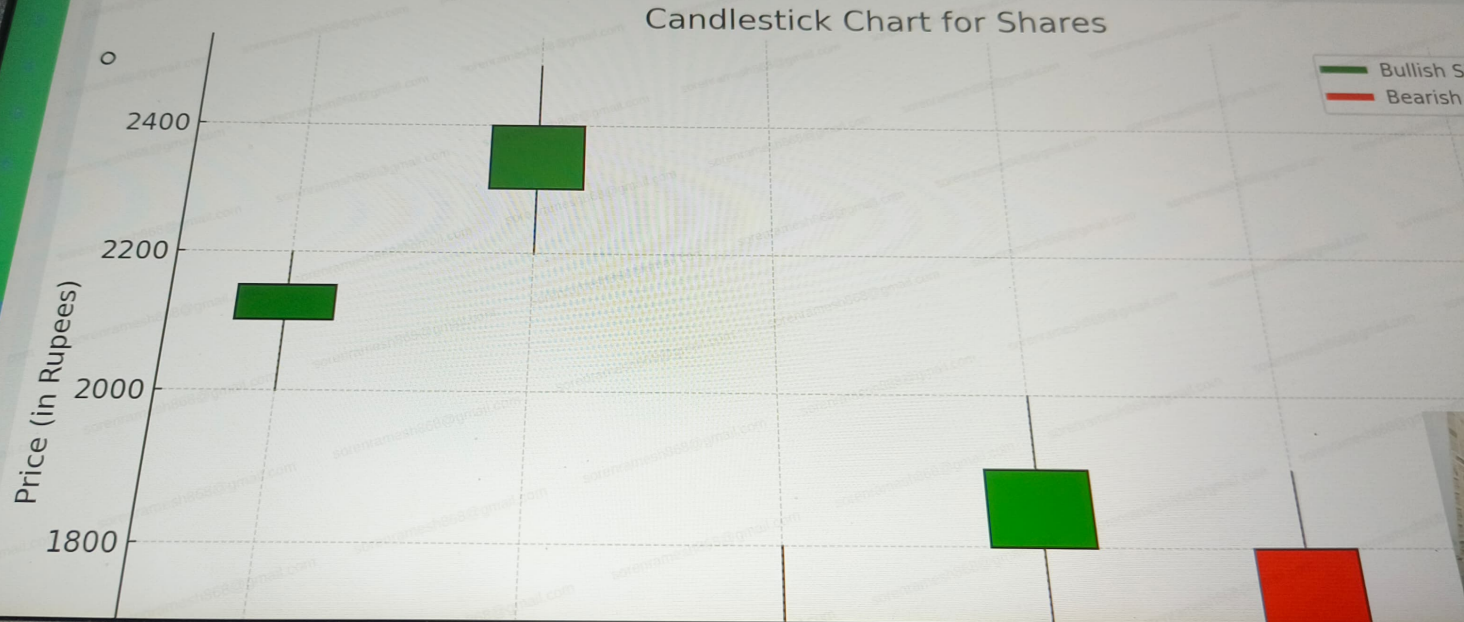

All

1. Quantitative Aptitude: Ratio & Proportions

MCQ UNSOLVED

1

Consider a concentrated solution that is diluted through a three-stage process. In each stage, 10% of the solution's volume is replaced with water. After the completion of this process, what would be the remaining strength of the original strong solution in the vessel?

2

3

Answer

(Please choose a correct answer)

4

CLEAR

5

☐ 72.90%☐ 70%☐ 71.90%☐ 68.90%

All

2. Qualitative Ability: Smallest Perfect

MCQ

UNSOLVED

The height of a cylinder is 4 cm more than its radius, which is one more than the smallest perfect number. The cylinder is melted to form a cone whose radius is just half that of the cylinder. Find the Height (in cm) of the cone.

2

3

Answer

(Please choose a correct answer)

CLEAR

4

5

☐ 142☐ 132☐ 192☐ None of these

All 3. Quantitative: Weight of New Man

MCQ UNSOLVED

The average weight of 5 men decreases by 2 kg when one of them weighing 80 kg is replaced by a new man. What is the weight of the new man?

Answer

(Please choose a correct answer)

CLEAR

4

5

☐ 70 kg☐ 72 kg☐ 68 kg☐ 65 kg

4. Quantitative Aptitude: Score Drop

MCQ UNSOLVED

Aditya scored 125 marks in Mathematics and 50% of the maximum marks in English. He scored m marks in Science. His overall percentage across the three subjects is 60%. Additionally, if his Science score had been 20% higher, his overall **percentage** would have increased to 64.5%. Determine the **value of M** , if the maximum possible scores in all the subjects are the same.

Answer

(Please choose a correct answer)

CLEAR

5

☐ 125☐ 130☐ 135☐ None of the above

All



5

What does it take to be a good person? What makes someone a good doctor, therapist or parent? What guides policy-makers to make wise and moral decisions? Many believe that empathy — the capacity to experience the feelings of others, and particularly others' suffering — is essential to all of these roles. I argue that this is a mistake, often a tragic one.

Empathy acts like a spotlight, focusing one's attention on a single individual in the here and now. This can have positive effects, but it can also lead to short-sighted and unfair moral actions. And it is subject to bias — both laboratory studies and anecdotal experiences show that empathy flows most for those who look like us, who are attractive and who are non-threatening and familiar.

When we appreciate that skin color does not determine who we should care about, for example, or that a crisis such as climate change has great significance — even though it is an abstract threat — we are transcending empathy. A good policy maker makes decisions using reason, aspiring toward the sort of fairness and impartiality empathy doesn't provide. Empathy isn't just a reflex, of course. We can choose to empathize and stir empathy for others. But this flexibility can be a curse. Our empathy can be exploited by others, as when cynical politicians tell stories of victims of rape or assault and use our empathy for these victims to stoke hatred against vulnerable groups, such as undocumented immigrants.

According to the author, when do we **"transcend empathy"** (Paragraph 3)?

Answer

(Please choose a correct answer)

- ☐ When we 'feel with' another person, identify with them and sense the abstract threats they're experiencing.
- ☐ When we give up our sense of individuality and identify with those belonging to other groups, genders, tribes, nations, races, or classes.
- ☐ When distinctions of ethnicity, religion, and other identity badges determine our ability to experience the suffering of others.
- ☐ When we pay attention to the emotions of people who differ from us in terms of ethnicity, nationality, and the like.

Having an issue with this question? [Report](#)

[CONTINUE TO SUBMISSION PAGE](#)



1. solve ladder

44m 43s left

Coding UNSOLVED

Given two words (*beginWord* and *endWord*), and a dictionary's word list, find the length of shortest transformation sequence from *beginWord* to *endWord*, such that:

1. Only one letter can be changed at a time.
2. Each transformed word must exist in the word list. Note that *beginWord* is *not* a transformed word.

Help

All



1

2

Note:

- Return 0 if there is no such transformation sequence.
- All words have the same length.
- All words contain only lowercase alphabetic characters.
- You may assume no duplicates in the word list.
- You may assume *beginWord* and *endWord* are non-empty and are not the same.

Constraints

- $1 \leq N \times M \leq 10^6$
- $1 \leq \text{matrix}[i][j] \leq 10^5$

Sample Input 1

```
beginWord = "hit",
endWord = "cog",
wordList = ["hot","dot","dog","lot","log","cog"]
```

Output

5

Explanation

```
C++
1 > #include <bits/stdc++.h>
2
3
4
5
6
7
8
9
10 /* Complete the 'solveLadder' function below.
11 *
12 * The function is expected to return an INTEGER.
13 * The function accepts following parameters:
14 * 1. STRING beginWord
15 * 2. STRING endWord
16 * 3. STRING ARRAY wordList
17 */
18
19 int solveLadder(string beginWord, string endWord, vector<string>
wordList) {
20     // Write your code here
21
22
23 }
24
25
26 > int main() {--
```

Test Results

Custom Input

RUN CODE



33m 55s
left



As we all know Rex loves to eat. So, he went to a shop and bought exactly n food items for himself. The food items which he bought consist of three types of food represented by characters '1', '2' and '3'. You will be given a string of length n consisting of these characters representing the food items that he bought. Now, Rex is not sure which item he should start to eat with. He comes up with a plan to select one item which he should start. Rex can perform the following things with these n food items:

- he can pick any two different kinds of food items and convert them into a single food item of the type which he has not picked.
- he can pick two items of the same kind and convert them into a single food item of the same kind which he has picked.

He will do this till only one single food item is left. You need to find the distinct number of options possible at the end that he can get.

Input Format

- The one and only line contain a string of length n .

Constraints

- $1 \leq |s| \leq 250$
- $s[i] \in \{1, 2, 3\}$

Output Format

- Return the integer as asked in the problem statement.

Sample Input 1

212

Sample Output

C++

```
1 > #include <bits/stdc++.h>
2
3
4 /*
5  * Complete the 'findDistinctOptions' function below.
6  *
7  * The function is expected to return an INTEGER.
8  * The function accepts STRING s as parameter.
9  */
10
11
12
13
14
15 int findDistinctOptions(string s) {
16     // Write your code here
17
18
19
20 }
21
22 > int main() {--
```

Test Results

Custom Input

RUN CODE

>> N



He will do this till only one single food item is left. You need to find the distinct number of options possible at the end that he can get.

Input Format

- The one and only line contain a string of length n .

Constraints

- $1 \leq |s| \leq 250$
- $s[i] \in \{'1','2','3'\}$

Output Format

- Return the integer as asked in the problem statement.

Sample Input 1

Output

tion

s not matter.

firstly: 22->2 and then 21->3

convert: 21->3->32->1

ossible {3,1}

C++

```
10 * The function is expected to return an INTEGER.
11 * The function accepts STRING s as parameter.
12 */
13
14
15 set<string> memo;
16 set<char> res;
17
18 void reduce(string s){
19     if(s.length()==1){
20         res.insert(s[0]);
21         return;
22     }
23     if(memo.count(s)) return;
24     memo.insert(s);
25     for(int i{}; i<s.length(); i++){
26         for(int j=i+1; j<s.length(); j++){
27             string nxt = "";
28             char c;
29             if(s[i]==s[j]){
30                 c=s[i];
31             }else {
32                 c = '6'-(s[i]-'0') - (s[j]-'0');
33             }
34             for(int k{}; k<s.length(); k++){
35                 if(k!=i and k!=j){
36                     nxt += c;
37                 }
38                 nxt+=c;
39                 sort(nxt.begin(),nxt.end());
40                 reduce(nxt);
41             }
42         }
43     }
44 }
45
46 int findDistinctOptions(string s) {
```



Test Results

Custom Input

RUN CODE

» NEXT QU

Ln 52, Co



24m 26s
left



Help

All



Sample Input 1

212

Sample Output

2

Explanation

Here **order** does **not** matter.

Rex can **convert** firstly: 22->2 and then 21->3

Secondly, he can **convert**: 21->3->32->1

So two options possible {3,1}

Sample Input 2

222213

Sample Output 2

3

Explanation

Counts: 1 → 2 times (even), 2 → 4 times (even), 3 → 1 time (odd)

Since not all counts are same parity (mix of even & odd), Rex can finally reduce it to any of {1, 2, 3}, hence answer is 3.

The possible distinct solutions are:

1)

2223213 (22, 2, 21, 33)

C++

```
10 * The functi
11 * The functi
12 *
13 */
14
15 set<string>
16 set<char> re
17
18 void reduce(
19     if(s.len
20         res.
21         retu
22     }
23     if(memo
24     memo.ins
25     for(int
26         for
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43 }
44 }
45
46 int findDi
```

Test Results



Sample Input 2

20m tes
left

222213



Sample Output 2

3

Help

Explanation

Counts: 1 → 2 times (even), 2 → 4 times (even), 3 → 1 time (odd)

Since not all counts are same parity (mix of even & odd), Rex can finally reduce it to any of {1, 2, 3}, hence answer is 3.

The possible distinct solutions are:

1)

2223213 (22, 2, 21, 33)

3322

32

1

2)

2222133 (1, 23, 23, 22)

1112

112

12

3

3)

2222133 (22, 22, 33, 1)

2231

22

C++

```
45
46 int findDistinctOptions(string s) {
47     // Write your code here
48     // memo.clear();
49     // res.clear();
50     // sort(s.begin(), s.end());
51     // reduce(s);
52     // return res.size();
53     int c1{}, c2{}, c3{};
54     for(char c:s){
55         if(c=='1') c1++;
56         else if(c=='2') c2++;
57         else if(c=='3') c3++;
58     }
59     int o = (c1&1) + (c2&1) + (c3&1);
60     if((c1>0)+(c2>0)+(c3>0)==1){
61         return 1;
62     }
63     if(o==3) return 3;
64     return 2;
65 }
66
67 > int main() {--
```

Test Results

Custom Input

Testcase #1



Passed

Testcase #2



Testcase #3



Description

Testcase passed! Th
output.

0.00s

Eval Time

Input

Problem Statement

You know Rex loves to eat. So, he went to a shop and bought exactly n food items for himself. The food items which he bought consist of three types of food represented by characters '1', '2' and '3'. You will be given a string of length n consisting of these characters representing the food items that he bought. Now, Rex is not sure which item he should start with. He comes up with a plan to select one item which he should start. Rex can do the following things with these n food items:

1. Pick any two different kinds of food items and convert them into a single food item of the type which he has not picked.

2. Pick two items of the same kind and convert them into a single food item of the kind which he has picked.

3. If only one single food item is left. You need to find the distinct number of food items at the end that he can get.

Input

The first line contains a string of length n .

Output

Print the number of food items as asked in the problem statement.

C++

```

7  /*
8  * Complete the 'findDistinctOptions' function below.
9  *
10 * The function is expected to return an INTEGER.
11 * The function accepts STRING s as parameter.
12 *
13 */
14
15
16 int findDistinctOptions(string s) {
17     int c1{}, c2{}, c3{};
18     for(char c:s){
19         if(c=='1') c1++;
20         else if(c=='2') c2++;
21         else if(c=='3') c3++;
22     }
23     int o = (c1&1) + (c2&1) + (c3&1);
24     int d = (c1>0)+(c2>0)+(c3>0);
25     if(c1%2==c2%2 and c2%2==c3%2) return 1;
26     return d;
27 }
28
29 > int main() {--

```



Ln 26, Col 10 C++

Test Results

Custom Input

RUN CODE

> NEXT QUESTION

Testcase #10



Passed

Testcase #11



Description

Testcase passed! The solution's output matches the expected output.

0.00s

Eval Time

0s

CPU

0kB

Memory

Testcase #12



Input