

1. Section #1

1 2 3 4 5 6 7 8

Next

Question 1

Revisit Later

How to Attempt?

Sell Gold

You have N ornaments made of gold placed in a row. You have been given an array of N positive integers representing the base price of each ornament. Each day, you can choose to sell either the leftmost or the rightmost gold ornament. If you sell an ornament on the K^{th} day, its price becomes K times its base price. Your task is to find and return an integer value representing the maximum amount you can earn by selling all of these gold ornaments.

Note: You sell exactly one gold ornament each day.

Input Specification:

input1 : An integer value N representing the number of gold ornaments.

input2 : An integer array of size N representing the base price of each ornament.

Output Specification:

Return an integer value representing the maximum amount you can earn by selling all of the gold ornaments.

Attempted: 1/8

CPP

Compiler: g++ 5.4.0

```
1 #include<stdio.h>
2 #include<string.h>
3 // Read only region start
4
5 int sellGold(int input1,int input2[])
6 {
7     // Read only region end
8     // Write code and remove the below exception.
9     |
10 }
```

☐ Use Custom Input



Compile and Test

Submit Code

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190



1. Section #1

< 1 2 3 4 5 6 7 8

[Previous](#) [Next Section](#)**Vowel Permutation**

You are given a string *S* and your task is to find and return the count of permutations formed by fixing the positions of the vowels present in the string.

Note:

- Ensure the result is non-negative.
- If there are no consonants then return 0.

Input Specification:

input1 : A string *S*

Output Specification:

Return an integer value representing the count of permutations formed by fixing the positions of the vowels present in the string.

Example 1:

input1 : ABC

Output : 2

Attempted: 1/8

CPP

Compiler: g++ 5.4.0

```
1 #include<stdio.h>
2 #include<string.h>
3 // Read only region start
4
5 int vowelPermutation(char* input1)
6 {
7     // Read only region end
8     // Write code and remove the below exception.
9     throw "Function vowelPermutation(char* input1) not implemented. ";
10 }
```

☐ Use Custom Input[Compile and Test](#)[Submit Code](#)

1. Section #1

You are a secret agent on a mission, and need to encode various messages using the ASCII values of characters. Due to resource constraints, you can send only those messages with a total ASCII sum equal to or less than a specified threshold **N**. You need to remove characters from the end of the string to maintain the sum accordingly. Your task is to find and return the encoded string, or return an empty string, if it is not possible to meet the condition.

Input Specification:

input1 : A string value S, representing the encoded message.
input2 : An integer value N, representing the threshold value.

Output Specification:

Return a string value representing the encoded string, or an empty string if it is not possible to meet the condition.

Example 1:

input1 : AlohoMora
input2 : 584

Output : AlohoM

Explanation:

Attempted: 8/8
Compiler: g++ 5.4.0

```
1 #include<bits/stdc++.h>
2 using namespace std;
3 // Read only region start
4
5 char* encodeMessage(char* input1,int input2)
6 {
7     // Read only region end
8     // Write code and remove the below exception.
9     throw "Function encodeMessage(char* input1,int input2) not implemented. ";
10 }
```

IntelliSense has loaded

☐ Use Custom Input

Compile and Test Submit Code

2. Section #2
1 2 3 4 5 6 7 8 9 10
Previous Section Next

Question 1

Revisit Later

Select an option

Clear Response

What will be the output of the following program?

```
1 public class Main {  
2     public static void main(String[] args) {  
3         System.out.println(Recur(6));  
4     }  
5     public static int Recur(int num){  
6         if(num==2) return 2;  
7         if(num==1) return 1;  
8         return Recur(num-1)*Recur(num-2);  
9     }  
10 }
```

- ☐ 16
- ☐ 32
- ☐ 30
- ☐ 18

2. Section #2

1 2 3 4 5 6 7 8 9 10

Previous Next

Question 3

Revisit Later

Select an option

Clear Response

What will be the output of the depicted program?

```
1 class Main {  
2     public static void increment(int number) {  
3         number++;  
4         System.out.println("Inside function: " + number);  
5     }  
6  
7     public static void main(String[] args) {  
8         int number = 5;  
9         increment(number);  
10        System.out.println("After function: " + number);  
11    }  
12 }
```

Analyze the given choices and select the correct option.

☐ Inside function: 6
After function: 6

☐ Inside function: 6
After function: 5


☐ Inside function: 5
After function: 5

☐ Inside function: 5
After function: 6

Next →

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

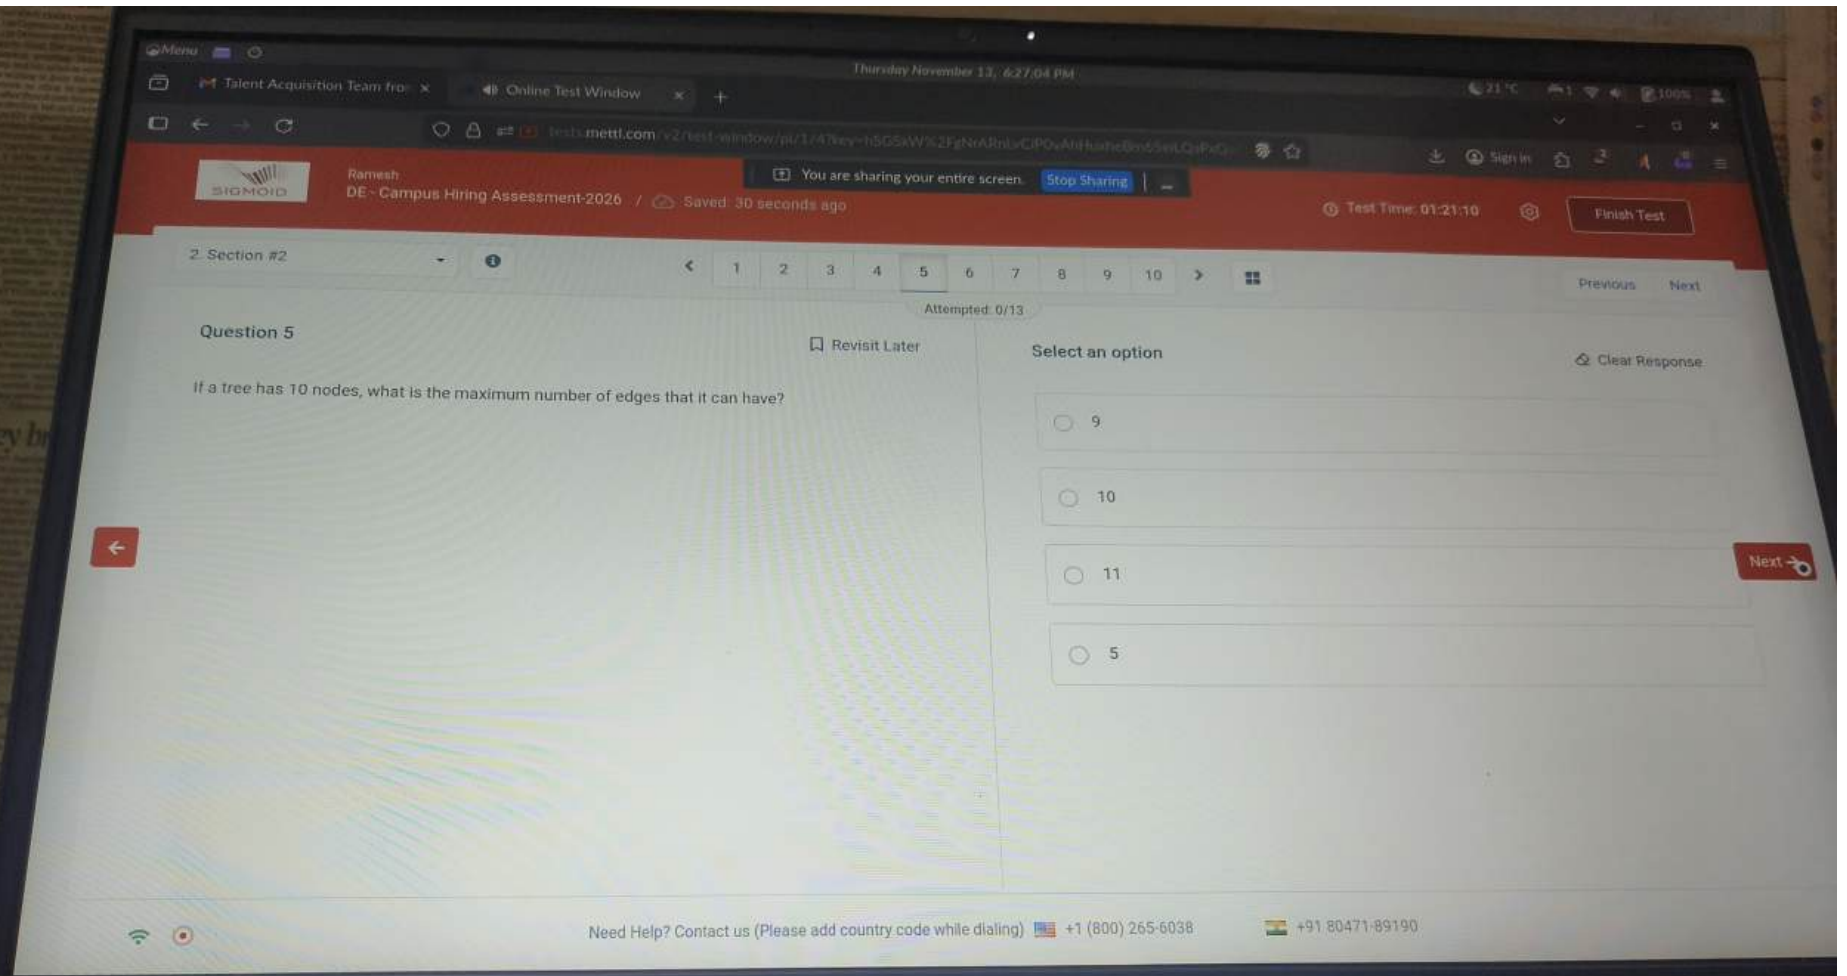



Ramesh

DE - Campus Hiring Assessment-2026 / Saved: 30 seconds ago

You are sharing your entire screen.

Stop Sharing

Test Time: 01:21:07

Finish Test

2. Section #2

1 2 3 4 5 6 7 8 9 10

Previous Next

Attempted: 0/13

Question 6

Revisit Later

Select an option

Clear Response

A sorted list of ten numbers is given as $A\{0,1,2,3,4,5,6,8,9,10\}$. The requirement is to find the first missing element index, in this case 7 is the missing element.

Select the correct binary search algorithm for the above requirement.

- ☐ 1. Divide the list in two equal parts.
2. Compare the index of each element.
3. Return the missing index of element.
- ☐ 1. Divide the list in two equal parts.
2. If both are same, the missing element is in the right side list.
3. If both are different, the missing element is in the left side array.
4. Repeat the step until the missing element is found.
5. Return the index of element.
- ☐ 1. Compare the middle value and middle index.
2. If both are same, the missing element is in the right side list.
3. If both are different, the missing element is in the left side array.
4. Find the missing element.
5. Return the index of element.

Next



Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190



Ramesh

DE - Campus Hiring Assessment-2026 / Saved: 30 seconds ago

You are sharing your entire screen.

Stop Sharing

Test Time: 01:21:04

Finish Test

2. Section #2

< 1 2 3 4 5 6 7 8 9 10 >

Previous Next

Attempted: 0/13

Question 7

Revisit Later

Select an option

Clear Response

Stack is a distinct type of list where the operations are performed at one end of the stack.

Determine:

- 1) What is the principle under which stack operations take place?
- 2) Which method cannot be performed in stack?

- ☐ 1) Continuous allocation
2) Accessing the top element in stack
- ☐ 1) Dynamic distribution
2) Removing an element from the stack
- ☐ 1) Last in first out
2) Replace an element in stack
- ☐ 1) First in first out
2) Insert an element in stack

Next



Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

2. Section #2

1 2 3 4 5 6 7 8 9 10

Attempted: 0/13

Question 9

Revisit Later

Select an option

Clear Response

Insertion of a node in a circular linked list requires modification of at the least;

☐ 1 pointer

☐ 2 pointers

☐ 3 pointers

☐ No pointer



Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190



Ramesh

DE - Campus Hiring Assessment-2026 / Saved: 30 seconds ago

You are sharing your entire screen.

Stop Sharing

Test Time: 01:20:58



Finish Test

2. Section #2



<

4

5

6

7

8

9

10

11

12

13

>



Previous

Next

Attempted: 0/13

Question 10

Revisit Later

Select an option

Clear Response

Analyze the following sets M and N:

 $M = \{12, 56, 47, 89, 35, 67\}$ $N = \{14, 89, 35, 47, 90, 25\}$

Determine:

(i) The value of $M \oplus N$ (ii) The value of M_c (Complement of M)

- ☐ (i) $\{12, 56, 67, 14, 90, 25\}$
(ii) $\{-12, -56, -47, -89, -35, -67\}$

- ☐ (i) $\{12, 56, 67, 14, 90, 25\}$
(ii) All Natural numbers except $\{12, 56, 47, 89, 35, 67\}$

- ☐ (i) $\{89, 35, 47\}$
(ii) All Whole numbers except $\{12, 56, 47, 89, 35, 67\}$

- ☐ (i) $\{89, 35, 47\}$
(ii) $\{-12, -56, -47, -89, -35, -67\}$

Next



Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190



Remesh

DE - Campus Hiring Assessment-2026

Saved: 30 seconds ago

You are sharing your entire screen.

Stop Sharing

Test Time: 01:20:48

Finish Test

2. Section #2

4

5

6

7

8

9

10

11

12

13

Attempted: 0/13

Previous Next

Question 11

Revisit Later

Select an option

Clear Response

You have 10 people of different ages. The ages are given in the form of an array as (23,13,19,8,18,22,45,47,51,5). You need to perform sorting of this array using selection sort. What will be the worst case complexity visualised while performing this sort?

☐ $O(n)$ ☐ $O(n^2)$ ☐ $O(\log n)$ ☐ $O(2n)$

Next

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190



Ramesh

DE - Campus Hiring Assessment 2026 / Saved: 30 seconds ago

You are sharing your entire screen. [Stop Sharing](#)

Test Time: 01:20:45

[Finish Test](#)

2. Section #2



4

5

6

7

8

9

10

11

12

13

[Previous](#)[Next](#)

Attempted: 0/13

Question 12

[Revisit Later](#)

Select an option

[Clear Response](#)

Which sorting technique improves insertion sort by comparing elements separated by a gap of several positions?

☐ Shell sort☐ Radix sort☐ Bucket sort☐ Quick sort[Next](#)

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

Question 13

[Revisit Later](#)

Select an option

[Clear Response](#)

Assuming $f(n)$ as a function that returns the factorial of a number n , if $f(n)$ is implemented tail recursively and the compiler is capable of optimizing tail recursion, what would be the maximum depth of the call stack, at any given time, created by the call $f(10)$?

☐ 10

☐ 11

☐ 1

☐ 2



Need Help? Contact us (Please add country code while dialing) [+1 \(800\) 265-6038](#)

[+91 80471-89190](#)

Question 8

Revisit Later

Select an option

Clear Response

Five people, P, Q, R, S, and T, are sitting in a row facing the same direction. Q is not sitting at either end. Both P and T are sitting adjacent to R. How many different seating arrangements of people are possible considering the given conditions?

☐ 2

☐ 3

☐ 4

☐ 5

AGA fanatics
oup' rumours

Haris leads Trump
40% to 42% in US
polls since, India poll

Trump now says
Democracy
is the best

st Silicon

a court
er wire

Thursday November 13, 6:38:10 PM

Talent Acquisition Team from: Online Test Window

test.mettl.com/v2/test-window/pl/2/1?key=H5Q5zVFN2FgNARdLvCfPOwAlt5ndwBnw5eBQdPvQ

You are sharing your entire screen. Stop Sharing

Test Time: 01:10:04

Finish Test

Ramesh DE - Campus Hiring Assessment-2026 / Saved: 0 seconds ago

Previous Next

3. Section #3

Attempted: 5/18

Clear Response

Question 10

Revisit Later

Select an option

A man sells a pen at 20% profit and a pencil at 33.33% profit. The selling price of the pen is thrice that of the pencil. If the selling prices of the pen and the pencil are interchanged, what would be his profit percent on selling 1 pencil?

☐ 66.67%

☐ 100%

☐ 300%

☐ 400%

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038 +91 80471-89190

ends: Trump's MAGA fanatics
& 'White House coup' rumours



ood hawties against Silicon

British accepts court
job quotas after un...

Thursday November 13, 6:38:16 PM

Online Test Window

Talent Acquisition Team from: x

mettl.com

You are sharing your entire screen. Stop Sharing

Test Time: 01:09:57

Finish Test

Previous Next

3. Section #3

Attempted: 5/18

Clear Response

Question 10

Revisit Later

A man sells a pen at 20% profit and a pencil at 33.33% profit. The selling price of the pen is thrice that of the pencil. If the selling prices of the pen and the pencil are interchanged, what would be his profit percent on selling 1 pencil?

Select an option

- ☐ 66.67%
- ☐ 100%
- ☐ 300%
- ☐ 400%

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038 +91 80471-89190

3 Section #3

9 10 11 12 13 14 15 16 17 18

Previous Next

Attempted: 8/18

Question 15

Revisit Later

Select an option

Clear Response

An error 2% in excess is made while measuring the side of a square. The percentage of error in the calculated area of the square is:

☐ A) 2%

☐ B) 2.02%

☒ C) 4%

☐ D) 4.04%

Next

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

Thursday November 13, 4:44:31 PM

20 °C 100%

New

Talent Acquisition Team

Online Test Window

You are sharing your entire screen.

Stop Sharing

Test Time: 01:03:43

Finish Test



DE - Campus Hiring Assessment-2026 / Saved: 30 seconds ago

Previous Next

3. Section #3

9 10 11 12 13 14 15 16 17 18

Attempted: 8/18

Question 16

Revisit Later

Select an option

Clear Response

A man has some hens and cows. If the number of heads be 48 and the number of feet equals 140, the number of hens will be

☒ A) 22

☐ B) 23

☐ C) 24

☐ D) 26



Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

Trump's 36-40% in US
White House coup' rumours



News leads Trump
44% to 42% in US
poll race, finds poll

The White House has been rocked by a series of reports that a coup is being planned against President Trump. The reports, which have been circulating for several days, claim that a group of senior officials, including members of the military and intelligence agencies, are plotting to overthrow the president. The White House has denied the reports, saying they are "unfounded and untrue".

wood hawties against Silicon Valley



The Woodhams family, who have lived in the same house for over 100 years, are facing a battle with Silicon Valley. The family claims that a tech giant has offered them a large sum of money to sell the house, but they are refusing the offer. They say the house has a special history and they want to keep it in the family.

Bdesh accepts court ruling
job quotas after unrest, etc

The Bangladesh government has accepted a court ruling that it must implement job quotas for different ethnic groups. This decision comes after a period of unrest and protests in the country. The ruling is seen as a step towards addressing long-standing issues of ethnic discrimination in the workplace.

Democrats race from Bl

The Democratic Party is facing a tough race for the White House. With several strong candidates, the party is trying to unite behind a single nominee. The race is expected to be one of the closest in US history.

The White House has been rocked by a series of reports that a coup is being planned against President Trump. The reports, which have been circulating for several days, claim that a group of senior officials, including members of the military and intelligence agencies, are plotting to overthrow the president. The White House has denied the reports, saying they are "unfounded and untrue".

The Woodhams family, who have lived in the same house for over 100 years, are facing a battle with Silicon Valley. The family claims that a tech giant has offered them a large sum of money to sell the house, but they are refusing the offer. They say the house has a special history and they want to keep it in the family.

The Bangladesh government has accepted a court ruling that it must implement job quotas for different ethnic groups. This decision comes after a period of unrest and protests in the country. The ruling is seen as a step towards addressing long-standing issues of ethnic discrimination in the workplace.

Online Test Window

Talent Acquisition Team from: mettl.com

You are sharing your entire screen. Stop Sharing

Test Time: 01:02:07

Finish Test

SIGMOID

Ramesh

DE - Campus Hiring Assessment-2026 / Saved: 60 seconds ago

8 9 10 11 12 13 14 15 16 17

Attempted: 10/18

Previous Next

Clear Response

3 Section #3

Revisit Later

Question 13

State which of the two statements is a logical conclusion to the situation given.
Situation: A student is consistently getting low marks in mathematics.
Courses of Action:
The student should be provided with extra tutoring or special classes for mathematics.
The student should be advised to stop studying mathematics altogether.

Select an option

☐ a) if only 1 follows

☐ b) if only 2 follows

☐ c) if either 1 or 2 follows

☐ d) if neither 1 nor 2 follows

☐ e) if both 1 and 2 follow

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190



is Joe trends: Trump's MAGA fanatics
'death' & 'White House coup' rumours



Hardly ready to cheer
40% to 45% in US
polls since, Biden just

Trump now says
Democrats 'stole'
race from him

Hollywood bewties against Silicon Valley



British accepts court ruling
job quotas after unrest, co

Thursday November 13, 6:46:25 PM

Talent Acquisition Team from x Online Test Window x +

tests.mettl.com/v2/test/window/p/22118?key=H5Q5Wn2FgNtAPnuCPQuAnkuxheBn65etLQm4x

You are sharing your entire screen. Stop Sharing

Test Time: 01:01:53 Finish Test

Previous

3. Section #3

Attempted: 10/18

Question 14

In the following question, there are two given statements followed by two conclusions. Assuming the given statements to be true, decide which of the given conclusions logically follows.

Statements:
All fruits are sweet.
All sweet things are healthy.

Conclusions:
All fruits are healthy.
Some healthy things are fruits.

Select an option

☐ a) only conclusion 1 follows.

☐ b) only conclusion 2 follows

☐ c) either 1 or 2 follows

☐ d) neither 1 nor 2 follows

☐ e) both 1 and 2 follow

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038 +91 80471-89190

3. Section #3

Attempted: 12/18

The table below shows the distribution of male associates, female associates, and managers (including both male and female) across various departments of ABC Ltd. Associates and managers together form the total number of employees in each department.

Department	Percentage of male associates out of total male associates at ABC Ltd.	Percentage of female associates out of total female associates at ABC Ltd.	Percentage of managers out of total managers at ABC Ltd.
A	10%	12%	20%
B	5%	7%	14%
C	8%	13%	10%
D	7%	11%	12%
E	3%	17%	6%
F	25%	4%	4%
G	19%	7%	20%
H	13%	18%	8%
I	6%	5%	2%
J	4%	6%	4%
Total	2500	2000	100

Select an option

Clear Response

- ☐ 147
- ☐ 146
- ☐ 145
- ☐ 144

In department C, if 30% of the managers attended a meeting that included 20% of the male associates and 40% of the female associates, what is the total number of attendees in the meeting?



3. Section #3



9

10

11

12

13

14

15

16

17

18



Attempted: 13/18

Question 16

Revisit Later

Select an option

A man has some hens and cows. If the number of heads be 48 and the number of feet equals 140, the number of hens will be:

☒ A) 22

☐ B) 23

☐ C) 24

☐ D) 26



Question 5

In a certain code language, 'FIRE' is coded as 'GRIF' and 'RARE' is coded as 'SRAF'. How is 'TREE' coded in the same language?

[Revisit Later](#)

Select an option

☐ UEFR☐ UREF☐ USFF☐ UERF



3. Section #3

Attempted: 14/18

Question 6

In a certain code language, 'RYAN REYNOLDS' is coded as 'RYR' and 'CHRIS PRATT' is coded as 'CHP'.
How is 'HENRY CAVILL' coded in the same language?

Revisit Later

Select an option

☐ HEC

☐ EHC

☐ RYH

☐ CHR

3. Section #3



1

2

3

4

5

6

7

8

9

10



Attempted: 14/18

Question 7

In a certain code language, 'KITE' is coded as 'LKUG' and 'TASK' is coded as 'UCTM'. How is 'CODE' coded in the same language?

Revisit Later

Select an option

☐ DQEG☐ DRCH☐ DQGL☐ CREG

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

trends: Trump's MAGA fanatics
& 'White House coup' rumours



Martha leads Trump
64% to 42% in US
polls race, finds poll

Trump now says
Democrats 'stole'
race from Biden

Good hawties against Silicon Valley

Bdesh accepts court ruling to
job quotas after unrest, cases

WHAT

CALC

A

1 Section #1

1 2 3 4 5 6 7 8

Previous Next

You are given a string array of length N . Your task is to find and return an integer value representing the maximum permutation count of the strings after removing all the vowels from every element in the string array.

Note:

- Consider all the letters in the string as different (if the word is "doll", then consider both 'l's as different)
- If there are no permutable characters then return 0.
- The string consists of both uppercase and lowercase characters.

Input Specification:

input1 : A string array of length N .
input2 : An integer N , representing the size of the string array.

Output Specification:

Return an integer value representing the maximum permutation count of the string elements.

Example 1:

input1 : (hello,ccbc,aaeiou)
input2 : 3

CPP

Compiler: g++ 5.4.0

```
1 #include<bits/stdc++.h>
2 using namespace std;
3 // Read only region start
4
5 int maxPermutationValue(char* input1[],int input2)
6 {
7     // Read only region end
8     // Write code and remove the below exception.
9     throw "Function maxPermutationValue(char* input1[],int input2) not implemented";
10 }
```

☐ Use Custom Input

1

Compile and Test

Submit Code



Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

Trump's MAGA fanatics
House coup' rumours



Harris leads Trump
efforts to 42% in US
poll race, finds poll

Trump now says
Democrats 'steal'
race from

ties against Silicon Val

in accepts court rule
quotas after unrest

Thursday November 12, 7:05:33 PM

Talent Acquisition Team fra... Online Test Window

test.mettl.com/v2/test-window/p/CD/3/8ey-B5GSAWYK2F6NnARnLzGEPDvAnHxozBm4S=4LQv...

You are sharing your entire screen. Stop Sharing

Test Time: 00:42:41

Finish Test

Ramesh DE - Campus Hiring Assessment-2026 / Saved: 30 seconds ago

Section #1

1 2 3 4 5 6 7 8

Previous Next

you are given a string array of length **N**. your task is to find and return an integer value representing the maximum permutation count of the strings after removing all the vowels from every element in the string array.

Note:

- Consider all the letters in the string as different (if the word is "doll", then consider both 'l's as different).
- If there are no permutable characters then return 0.
- The string consists of both uppercase and lowercase characters.

Input Specification:

input1 : A string array of length N.
input2 : An integer N, representing the size of the string array.

Output Specification:

Return an integer value representing the maximum permutation count of the string elements.

Example 1:

input1 : {hello,ccbc,aaeiou}
input2 : 3

Attempted: 8/8

Compiler: g++ 5.4.0

```
1 #include<bits/stdc++.h>
2 using namespace std;
3 // Read only region start
4
5 int maxPermutationValue(char* input1[],int input2)
6 {
7     // Read only region end.
8     // Write code and remove the below exception.
9     string ans="";
10    int n = input2;
11
12    for(int i{}; i<n; i++){
13        for(int j{}; j<input1[i][j]; j++){
14            char c = input1[i][j];
15            if(!(c == 'a' || c == 'e' || c == 'i' || c == 'o' || c == 'u'
16              || c == 'A' || c == 'E' || c == 'I' || c == 'O' || c == 'U')){
17                ans += c;
18            }
19        }
20    }
```

☐ Use Custom Input

Compile and Test

Submit Code

1. Section #1

Lisa and Mark run a fundraising campaign where they collect monthly donations over a span of N months. To effectively manage the donations, they decide to:

- Split the monthly donations, stored in an integer array A , into two equal groups.
- One group is allocated for long-term projects, while the other is used for immediate expenses.
- The group allocated for long-term projects then becomes the new array for further division in the subsequent steps.
- The process continues until the donations can no longer be split into two equal groups.

Your task is to determine the maximum number of times the donations can be divided into two equal groups before the process terminates.

Note:

- They can use either of the groups for long-term projects or immediate expenses after each division.
- The order of the elements cannot be changed.

Input Specification:

input1 : An integer value N representing the number of months for which donations were collected.

input2 : An integer array A representing the donations collected in each month.

Attempted: 8/8

C++

Compiler: g++ 5.4.0

```
1 #include<bits/stdc++.h>
2 using namespace std;
3 // Read only region start
4
5 int maximumSplits(int input1,int input2[])
6 {
7     // Read only region end
8     // Write code and remove the below exception.
9     throw "Function maximumSplits(int input1,int input2[]) not implemented. ";
10 }
```

IntelliSense has loaded

☐ Use Custom Input

Compile and Test

Submit Code

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

1. Section #1

Jill works in a company that takes care of their employees very well. They make sure that the cafeteria is closest to the employees. The office floor is in the form of an $N \times M$ matrix. Each block either represents a work area 'W' or a cafeteria 'C'. An employee has been given access to order if the cafeteria is in either of the directions (up, down, right or left) to their work area. But if the employee's work area is not connected to any cafeteria, they have to walk and get their orders. Your task is to find and return an integer value representing the number of workspaces where the employees have to walk to get their food.

Note: '0' in the matrix can represent empty blocks, which are neither work area nor cafeteria.

Input Specification:

input1 : An integer value N representing the number of rows in matrix.
input2 : An integer value M representing the number of columns in matrix.
input3 : A string array representing the markings of work area and cafeteria.

Output Specification:

Return an integer value representing the number of workspaces where the employees have to walk to get their own food.

Example 1:

input 1 : 4
input 2 : 5

Attempted: 8/8
C++ Compiler: g++ 5.4.0
1 #include<bits/stdc++.h>
2 using namespace std;
3 // Read only region start
4
5 int cafeteria(int input1,int input2,char* input3[])
6 {
7 // Read only region end
8 // Write code and remove the below exception.
9 throw "Function cafeteria(int input1,int input2,char* input3[]) not implement
10 }

☐ Use Custom Input

Compile and Test

Submit Code

Need Help? Contact us (Please add country code while dialing) +1 (800) 265-6038

+91 80471-89190

1. Section #1

Every month Mike goes to the supermarket to buy groceries for the entire month. This time he is travelling out of the town, so he thought to give this task to his 3 sons. He called them up separately and gave them the list of items. Each son made a note in the list L_1 , L_2 and L_3 respectively, with each having N_1 , N_2 and N_3 items. Each grocery items are represented by an English alphabet like 'A', 'B' and so on. When they all reached the supermarket, they realized that everyone's list is not the same, there are some extra items and some missing items in each son's list. After discussion they decided to buy only those items which are present in at least two list out of the three. Your task is to help them find and return a string array representing the final sorted array of items in ascending order that they have bought. If no items were bought, then return -1 as a string array.

Input Specification:

input1 : An integer value N_1 representing the number of items in L_1 .
input2 : An integer value N_2 representing the number of items in L_2 .
input3 : An integer value N_3 representing the number of items in L_3 .
input4 : A string array L_1 representing the items in list 1.
input5 : A string array L_2 representing the items in list 2.
input6 : A string array L_3 representing the items in list 3.

Output Specification:

Return a string array representing the final sorted array of items in ascending order that they have bought. If no items were bought, then return -1 as an array.

C++

Compiler: g++ 5.4.0

```

1 #include<bits/stdc++.h>
2 using namespace std;
3 // Read only region start
4
5 //Assume following return types while writing the code for this question.
6 struct Result{
7     char* output1[100];
8 };
9
10 Result shoppingList(int input1,int input2,int input3,char* input4[],char* input5[
11 {
12     // Read only region end
13     // Write code and remove the below exception.
14     throw "Function shoppingList(int input1,int input2,int input3,char* input4[
15 }
    
```

☐ Use Custom Input

?

Compile and Test

Submit C