Deliverable [1]

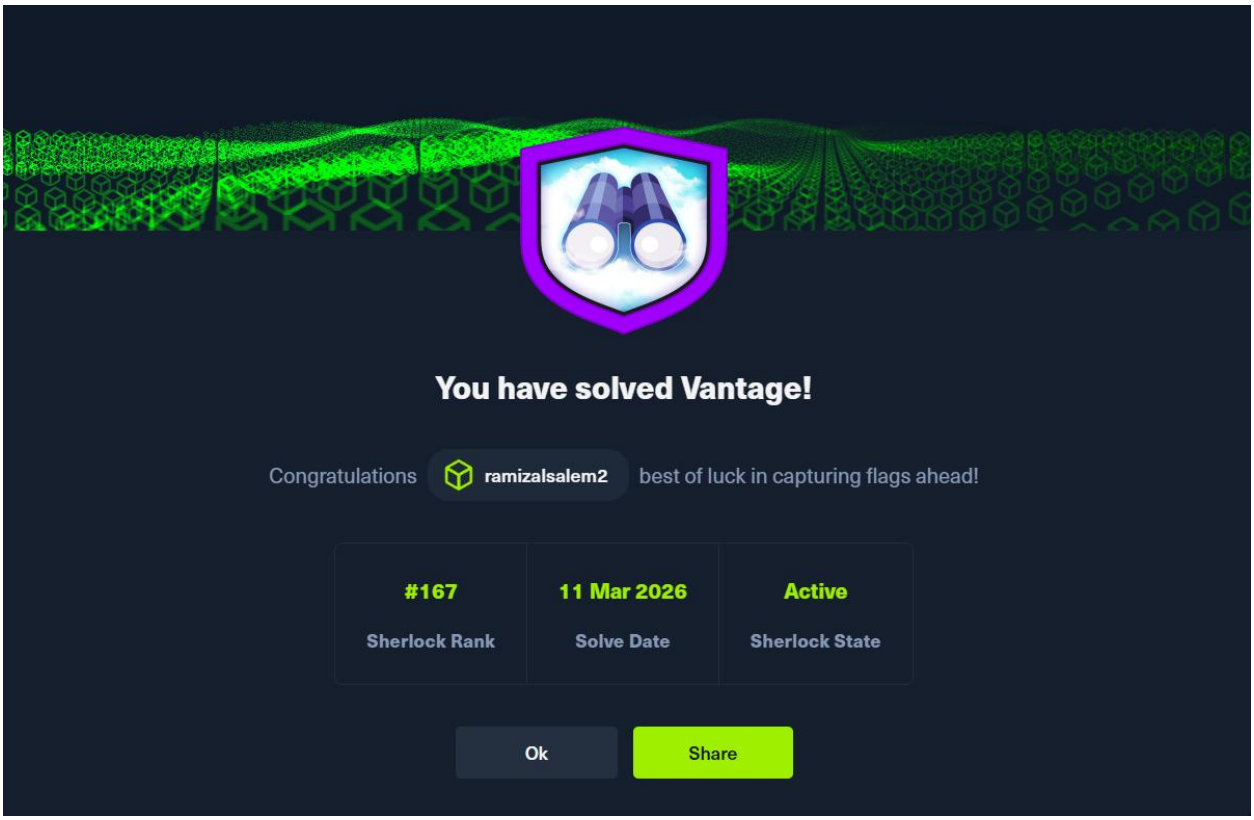

Deliverable [2]

Sherlock name: Vantage
Link: https://app.hackthebox.com/sherlocks/Vantage?tab=play_sherlock

Deliverable [3]

The First thing we are doing here is getting the task files and unzip it using the provided password.

```
┌──(ramiz㉿ras)-[~/Desktop/HTB/sherlocks/Vantage]
└─$ unzip Vantage.zip
Archive:  Vantage.zip
   creating: Vantage/
[Vantage.zip] Vantage/.DS_Store password:
  inflating: Vantage/.DS_Store
  inflating: Vantage/controller.2025-07-01.pcap
  inflating: Vantage/web-server.2025-07-01.pcap

┌──(ramiz㉿ras)-[~/Desktop/HTB/sherlocks/Vantage]
└─$ ls
Vantage  Vantage.zip
```

We find to .pcap files

```
┌──(ramiz㉿ras)-[~/…/HTB/sherlocks/Vantage/Vantage]
└─$ ls
controller.2025-07-01.pcap  web-server.2025-07-01.pcap
```

Task 1

We can answer this question by opening the pcap file, then we filter for the http requests

http

No.	Time	Source	Destination	Protocol	Length	Info
306	50.855524	117.200.21.26	157.230.81.229	HTTP	181	GET / HTTP/1.1
311	50.856569	157.230.81.229	117.200.21.26	HTTP	596	HTTP/1.1 200 OK (text/html)
317	50.857570	117.200.21.26	157.230.81.229	HTTP	181	GET / HTTP/1.1
319	50.858448	157.230.81.229	117.200.21.26	HTTP	596	HTTP/1.1 200 OK (text/html)
322	50.859387	117.200.21.26	157.230.81.229	HTTP	181	GET / HTTP/1.1
324	50.860255	157.230.81.229	117.200.21.26	HTTP	596	HTTP/1.1 200 OK (text/html)
327	50.862597	117.200.21.26	157.230.81.229	HTTP	181	GET / HTTP/1.1
329	50.862597	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
332	50.863570	157.230.81.229	117.200.21.26	HTTP	596	HTTP/1.1 200 OK (text/html)
334	50.863627	157.230.81.229	117.200.21.26	HTTP	596	HTTP/1.1 200 OK (text/html)
397	51.076179	117.200.21.26	157.230.81.229	HTTP	187	GET / HTTP/1.1
401	51.077049	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1

And the tool that used appears in the user agent, for example here, is ffuf because it's known to do fuzzing, and we can also see the version of the tool

```
▸ Frame 306: 181 bytes on wire (1448 bits), 181 bytes captured (1448 bits)
▸ Linux cooked capture v2
▸ Internet Protocol Version 4, Src: 117.200.21.26, Dst: 157.230.81.229
▸ Transmission Control Protocol, Src Port: 64661, Dst Port: 80, Seq: 220, Ack: 6809, Len: 109
▾ Hypertext Transfer Protocol
  ▸ GET / HTTP/1.1\r\n
    Host: demo.vantage.tech\r\n
    User-Agent: Fuzz Faster U Fool v2.1.0-dev\r\n
    Accept-Encoding: gzip\r\n
    \r\n
    [Response in frame: 311]
    [Full request URI: http://demo.vantage.tech/]
```

Task 1

What tool did the attacker use to fuzz the web server ? (Format- include version e.g, nmap@7.80)

ffuf@2.1.0

Submit Task

Task 2

For this we need to filter for the http requests

http.request

No.	Time	Source	Destination	Protocol	Length	Info
20240	81.691407	117.200.21.26	157.230.81.229	HTTP	185	GET / HTTP/1.1
20245	81.698264	117.200.21.26	157.230.81.229	HTTP	179	GET / HTTP/1.1
20250	81.705930	117.200.21.26	157.230.81.229	HTTP	185	GET / HTTP/1.1
20257	81.717057	117.200.21.26	157.230.81.229	HTTP	186	GET / HTTP/1.1
20258	81.717057	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20265	81.721307	117.200.21.26	157.230.81.229	HTTP	183	GET / HTTP/1.1
20270	81.728563	117.200.21.26	157.230.81.229	HTTP	186	GET / HTTP/1.1
20275	81.737190	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20280	81.748169	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20283	81.748173	117.200.21.26	157.230.81.229	HTTP	183	GET / HTTP/1.1
20288	81.749373	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20293	81.750028	117.200.21.26	157.230.81.229	HTTP	181	GET / HTTP/1.1
20296	81.750050	117.200.21.26	157.230.81.229	HTTP	188	GET / HTTP/1.1
20307	81.753280	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20312	81.754997	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20317	81.761177	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20322	81.770870	117.200.21.26	157.230.81.229	HTTP	182	GET / HTTP/1.1
20330	81.790652	117.200.21.26	157.230.81.229	HTTP	181	GET / HTTP/1.1

But here, because many requests have the same length. I tried to search for something different, we can see the subdomain cloud

20419	81.835890	117.200.21.26	157.230.81.229	HTTP	180	GET / HTTP/1.1
20661	91.257060	117.200.21.26	157.230.81.229	HTTP	675	GET / HTTP/1.1
20666	91.260902	10.116.0.3	10.116.0.4	HTTP	785	GET / HTTP/1.1
20677	91.527722	117.200.21.26	157.230.81.229	HTTP	685	GET /dashboard/ HTTP/1.1
20681	91.528926	10.116.0.3	10.116.0.4	HTTP	795	GET /dashboard/ HTTP/1.1
20696	91.784970	117.200.21.26	157.230.81.229	HTTP	713	GET /dashboard/auth/login/?next=/dashboard/ HTTP/1.1
20700	91.785942	10.116.0.3	10.116.0.4	HTTP	823	GET /dashboard/auth/login/?next=/dashboard/ HTTP/1.1
20717	92.166342	117.200.21.26	157.230.81.229	HTTP	684	GET /dashboard/i18n/js/horizon+openstack_dashboard/ HTTP/1.1
20722	92.169349	10.116.0.3	10.116.0.4	HTTP	794	GET /dashboard/i18n/js/horizon+openstack_dashboard/ HTTP/1.1
20758	92.820358	117.200.21.26	157.230.81.229	HTTP	656	GET /dashboard/header/?next=/dashboard/ HTTP/1.1

```
▸ Frame 20661: 675 bytes on wire (5400 bits), 675 bytes captured (5400 bits)
▸ Linux cooked capture v2
▸ Internet Protocol Version 4, Src: 117.200.21.26, Dst: 157.230.81.229
▸ Transmission Control Protocol, Src Port: 64819, Dst Port: 80, Seq: 1, Ack: 1, Len: 603
▾ Hypertext Transfer Protocol
  ▾ GET / HTTP/1.1\r\n
      Request Method: GET
      Request URI: /
      Request Version: HTTP/1.1
    Host: cloud.vantage.tech\r\n
    Connection: keep-alive\r\n
    Upgrade-Insecure-Requests: 1\r\n
    User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/137.0.0.0
    Sec-Purpose: prefetch;prerender\r\n
    Purpose: prefetch\r\n
```

```
0050  54 50 2f 31 2e 31 0d
0060  6f 75 64 2e 76 61 6e
0070  0d 0a 43 6f 6e 6e 65
0080  65 70 2d 61 6c 69 76
0090  65 2d 49 6e 73 65 63
00a0  73 74 73 3a 20 31 0d
00b0  6e 74 3a 20 4d 6f 7a
00c0  28 4d 61 63 69 6e 74
00d0  6c 20 4d 61 63 20 4f
00e0  5f 37 29 20 41 70 70
00f0  35 33 37 2e 33 36 20
0100  69 6b 65 20 47 65 63
0110  65 2f 31 33 37 2e 30
0120  72 69 2f 35 33 37 2e
0130  75 72 70 6f 73 65 3a
```

HTTP Host (http.host), 26 bytes | Packets: 21650 · Displayed: 3741 (17.3%) | Profile: Default

Task 2

Which subdomain did the attacker discover?

cloud

Submit Task

Task 3

Here I find a way to solve this question, first we're filtering for the POST requests

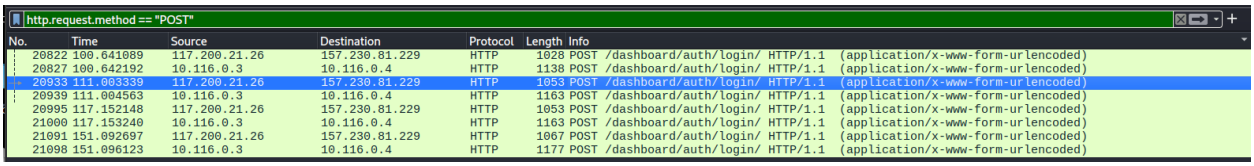

http.request.method == "POST"

No.	Time	Source	Destination	Protocol	Length	Info
20822	100.641089	117.200.21.26	157.230.81.229	HTTP	1028	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20827	100.642192	10.116.0.3	10.116.0.4	HTTP	1138	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20933	111.003339	117.200.21.26	157.230.81.229	HTTP	1053	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20939	111.004563	10.116.0.3	10.116.0.4	HTTP	1163	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20995	117.152148	117.200.21.26	157.230.81.229	HTTP	1053	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
21000	117.153240	10.116.0.3	10.116.0.4	HTTP	1163	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
21091	151.092697	117.200.21.26	157.230.81.229	HTTP	1067	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
21098	151.096123	10.116.0.3	10.116.0.4	HTTP	1177	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)

Now as I searching here, I realized that the when there's a failed attempt there's no sessionID so here the in the first two, there's no sessionID, and there's in the third one.

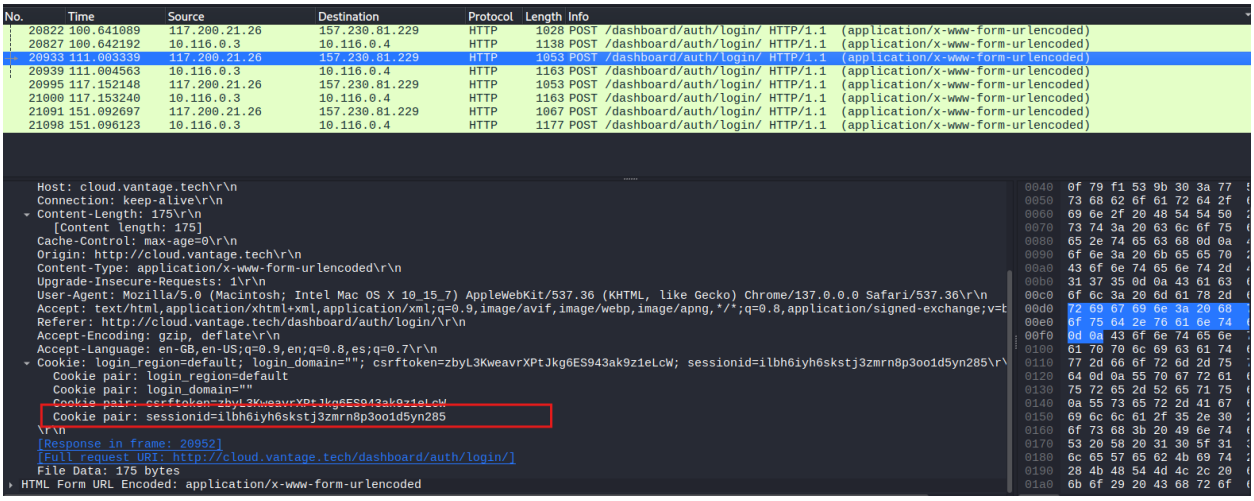

No.	Time	Source	Destination	Protocol	Length	Info
20822	100.641089	117.200.21.26	157.230.81.229	HTTP	1028	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20827	100.642192	10.116.0.3	10.116.0.4	HTTP	1138	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20933	111.003339	117.200.21.26	157.230.81.229	HTTP	1053	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20939	111.004563	10.116.0.3	10.116.0.4	HTTP	1163	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
20995	117.152148	117.200.21.26	157.230.81.229	HTTP	1053	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
21000	117.153240	10.116.0.3	10.116.0.4	HTTP	1163	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
21091	151.092697	117.200.21.26	157.230.81.229	HTTP	1067	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)
21098	151.096123	10.116.0.3	10.116.0.4	HTTP	1177	POST /dashboard/auth/login/ HTTP/1.1 (application/x-www-form-urlencoded)

```
Host: cloud.vantage.tech\r\n
Connection: keep-alive\r\n
Content-Length: 175\r\n
    [Content length: 175]
Cache-Control: max-age=0\r\n
Origin: http://cloud.vantage.tech\r\n
Content-Type: application/x-www-form-urlencoded\r\n
Upgrade-Insecure-Requests: 1\r\n
User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10_15_7) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/137.0.0.0 Safari/537.36\r\n
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b
Referer: http://cloud.vantage.tech/dashboard/auth/login/\r\n
Accept-Encoding: gzip, deflate\r\n
Accept-Language: en-GB,en-US;q=0.9,en;q=0.8,es;q=0.7\r\n
Cookie: login_region=default; login_domain=""; csrftoken=zbyL3KweavrXPtJkg6ES943ak9z1eLcW; sessionid=ilbh6iyh6skstj3zmrn8p3oo1d5yn285\r\
    Cookie pair: login_region=default
    Cookie pair: login_domain=""
    Cookie pair: csrftoken=zbyL3KweavrXPtJkg6ES943ak9z1eLcW
    Cookie pair: sessionid=ilbh6iyh6skstj3zmrn8p3oo1d5yn285
\r\n
[Response in frame: 20952]
[Full request URI: http://cloud.vantage.tech/dashboard/auth/login/]
File Data: 175 bytes
HTML Form URL Encoded: application/x-www-form-urlencoded
```

so the answer of this question is 3.

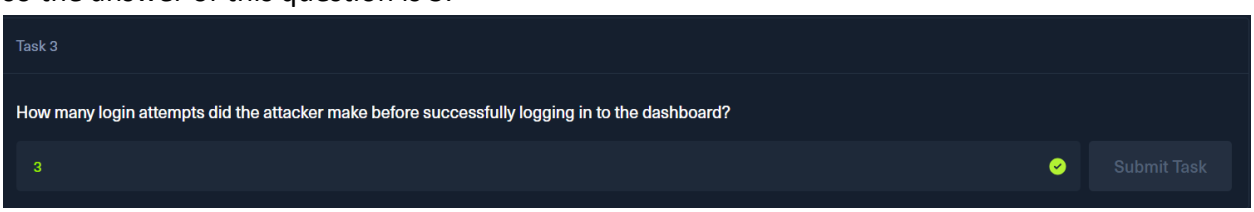

Task 3

How many login attempts did the attacker make before successfully logging in to the dashboard?

3

Submit Task

Task 4

To know the file name that there's referring to, I searched for it. I found the official documentation, they mentioned it.

https://docs.openstack.org/api-quick-start/api-quick-start.html

To remove the **openstack** client, run this command:

```
$ sudo pip uninstall python-openstackclient
```

Before you can issue client commands, you must download and source the **openrc** file to set environment variables.

For complete information about the OpenStack clients, including how to source the **openrc** file, see OpenStack End User Guide, OpenStack Administrator Guide, and OpenStack Command-Line Interface Reference.

So I searched in the packets for this name , and we can see here that he's getting the file

Packet details | String | openrc

Options: Narrow & Wide | Case sensitive | Backwards | Multiple occurrences

No.	Time	Source	Destination	Protocol	Length	Info
21242	172.556939	198.235.24.166	157.230.81.229	TCP	64	51290 → 80 [SYN] Seq=0 Win=65535 Len=0 MSS=1460
21243	172.556975	157.230.81.229	198.235.24.166	TCP	64	80 → 51290 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
21244	172.634876	198.235.24.166	157.230.81.229	TCP	62	51290 → 80 [RST] Seq=1 Win=0 Len=0
21245	173.667726	117.200.21.26	157.230.81.229	TCP	84	64827 → 80 [SYN] Seq=0 Win=65535 Len=0 MSS=1452 WS=64 TSval=293
21246	173.667768	157.230.81.229	117.200.21.26	TCP	80	80 → 64827 [SYN, ACK] Seq=0 Ack=1 Win=65160 Len=0 MSS=1460 SACK
21247	173.668222	117.200.21.26	157.230.81.229	HTTP	769	GET /dashboard/project/api_access/openrc/ HTTP/1.1
21248	173.668252	157.230.81.229	117.200.21.26	TCP	72	80 → 64826 [ACK] Seq=1 Ack=698 Win=64512 Len=0 TSval=2603702438
21249	173.668555	10.116.0.3	10.116.0.4	TCP	80	39212 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM TSval
21250	173.669147	10.116.0.4	10.116.0.3	TCP	80	80 → 39212 [SYN, ACK] Seq=0 Ack=1 Win=65160 Len=0 MSS=1460 SACK
21251	173.669178	10.116.0.3	10.116.0.4	TCP	72	39212 → 80 [ACK] Seq=1 Ack=1 Win=64256 Len=0 TSval=3573022590 T

```
▸ Frame 21247: 769 bytes on wire (6152 bits), 769 bytes captured (6152 bits)
▸ Linux cooked capture v2
▸ Internet Protocol Version 4, Src: 117.200.21.26, Dst: 157.230.81.229
▸ Transmission Control Protocol, Src Port: 64826, Dst Port: 80, Seq: 1, Ack: 1, Len: 697
▾ Hypertext Transfer Protocol
  ▾ GET /dashboard/project/api_access/openrc/ HTTP/1.1\r\n
      Request Method: GET
      Request URI: /dashboard/project/api_access/openrc/
      Request Version: HTTP/1.1
    Host: cloud.vantage.tech\r\n
    Connection: keep-alive\r\n
```

And here is the time 2025-07-01 09:40:29, in the Frame layer

```
UTC Arrival Time: Jul  1, 2025 09:40:29.954083000 UTC
```

Task 4

When did the attacker download the OpenStack API remote access config file? (UTC)

2025-07-01 09:40:29 ✓ Submit Task

Task 5

In order to solve this task we've to move to the other pcap that we've.
attacker first interact with the API, here we know the attacker IP and we need to apply it in the filter, and we can already see the answer.

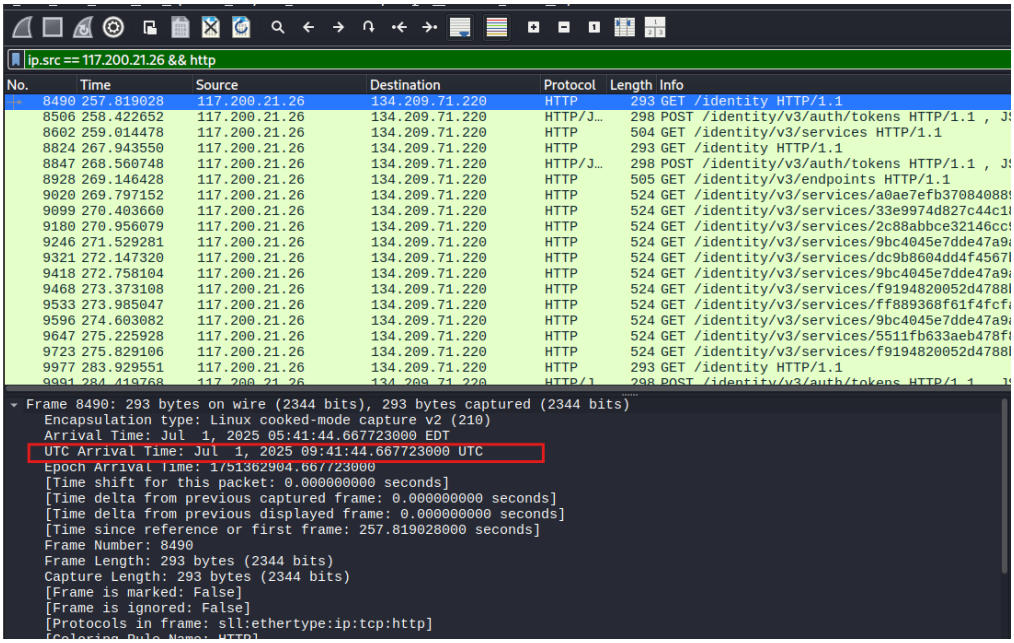

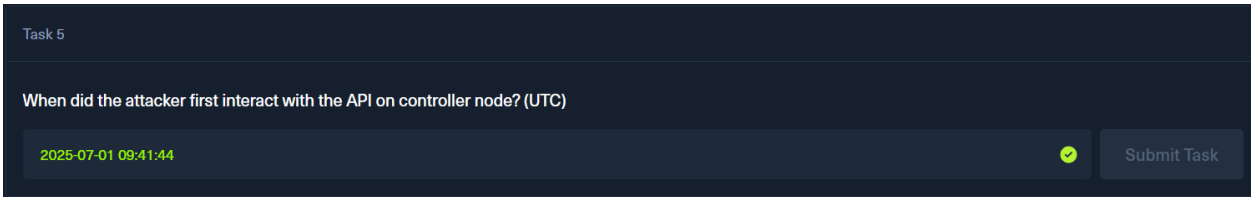

Task 6

Here I searched for projects, and the first one is the default, and the following is it's id, where the attacker tried to modify it appears in the PUT

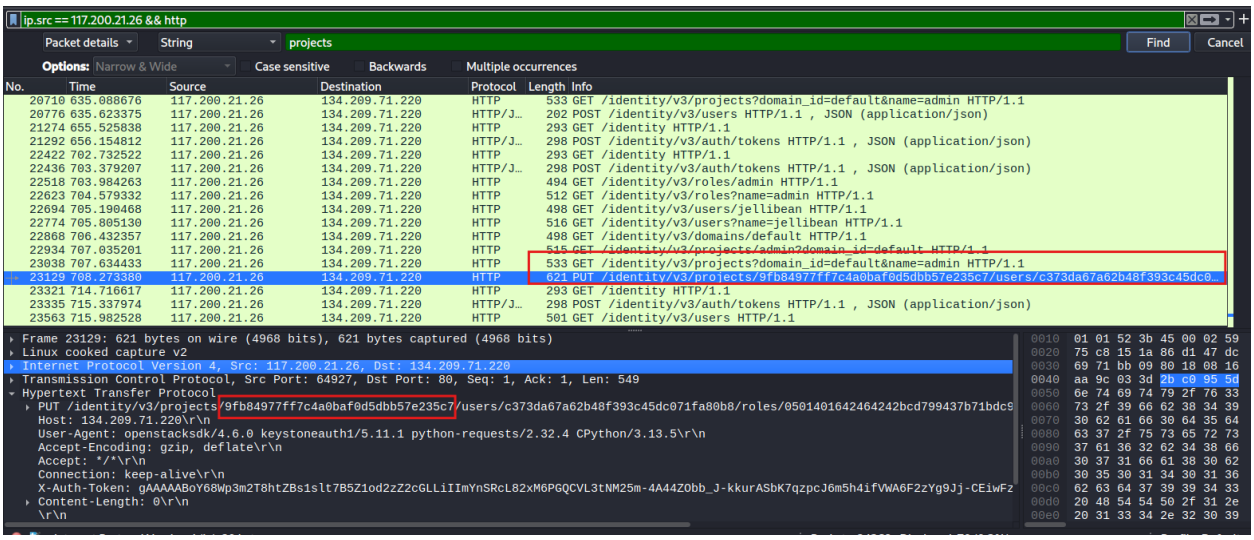

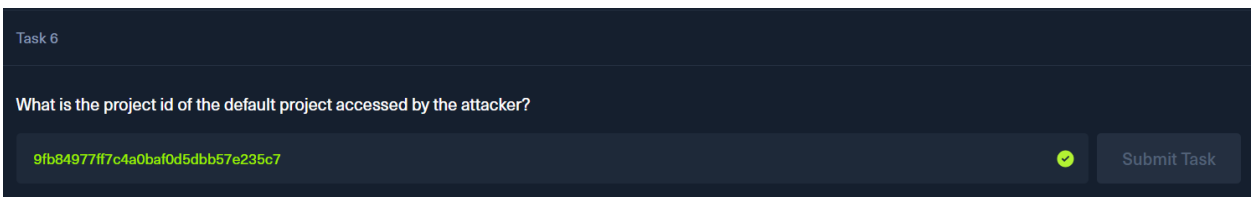

Task 7

The answer is keystone, find more here

https://docs.openstack.org/api-ref/identity/v3/

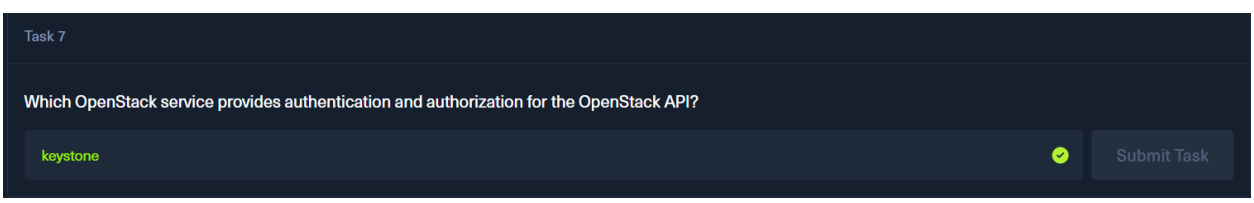

Task 8

Here we can filter for packets contains swift, and then in the json after exploring, we can see the URL

http contains "swift"

No.	Time	Source	Destination	Protocol	Length	Info
4996	161.728870	134.209.71.220	134.209.71.220	HTTP/J…	3896	HTTP/1.1 200 OK , JSON (application/json)
5470	162.386122	134.209.71.220	134.209.71.220	HTTP/J…	3896	HTTP/1.1 200 OK , JSON (application/json)
5605	162.712096	134.209.71.220	134.209.71.220	HTTP/J…	3896	HTTP/1.1 200 OK , JSON (application/json)
8676	259.048037	134.209.71.220	117.200.21.26	HTTP/J…	2298	HTTP/1.1 200 OK , JSON (application/json)
9516	273.394781	134.209.71.220	117.200.21.26	HTTP/J…	562	HTTP/1.1 200 OK , JSON (application/json)
9758	275.856365	134.209.71.220	117.200.21.26	HTTP/J…	562	HTTP/1.1 200 OK , JSON (application/json)
10180	285.092693	134.209.71.220	117.200.21.26	HTTP/J…	2616	HTTP/1.1 200 OK , JSON (application/json)
10773	301.072496	134.209.71.220	134.209.71.220	HTTP/J…	3840	HTTP/1.1 200 OK , JSON (application/json)
11174	301.582536	134.209.71.220	134.209.71.220	HTTP/J…	3973	HTTP/1.1 200 OK , JSON (application/json)
18151	531.310614	134.209.71.220	117.200.21.26	HTTP/J…	2899	HTTP/1.1 200 OK , JSON (application/json)
23640	716.030474	134.209.71.220	117.200.21.26	HTTP/J…	2919	HTTP/1.1 200 OK , JSON (application/json)
4196	160.692683	134.209.71.220	134.209.71.220	HTTP/J…	3404	HTTP/1.1 201 CREATED , JSON (application/json)
4518	160.891800	134.209.71.220	134.209.71.220	HTTP/J…	3901	HTTP/1.1 201 CREATED , JSON (application/json)
4666	161.526027	134.209.71.220	134.209.71.220	HTTP/J…	3901	HTTP/1.1 201 CREATED , JSON (application/json)
4741	161.592430	134.209.71.220	134.209.71.220	HTTP/J…	3901	HTTP/1.1 201 CREATED , JSON (application/json)
4889	161.678272	134.209.71.220	134.209.71.220	HTTP/J…	3978	HTTP/1.1 201 CREATED , JSON (application/json)
5378	162.303750	134.209.71.220	134.209.71.220	HTTP/J…	3664	HTTP/1.1 201 CREATED , JSON (application/json)
8590	258.471895	134.209.71.220	117.200.21.26	HTTP/J…	965	HTTP/1.1 201 CREATED , JSON (application/json)
8914	268.600500	134.209.71.220	117.200.21.26	HTTP/J…	965	HTTP/1.1 201 CREATED , JSON (application/json)
10059	284.462201	134.209.71.220	117.200.21.26	HTTP/J…	965	HTTP/1.1 201 CREATED , JSON (application/json)
10556	299.330458	134.209.71.220	117.200.21.26	HTTP/J…	965	HTTP/1.1 201 CREATED , JSON (application/json)
10987	301.494683	134.209.71.220	134.209.71.220	HTTP/J…	3978	HTTP/1.1 201 CREATED , JSON (application/json)

```
    String value: fa462e9eb3174b5d9af61ea50e8f23cb
    Key: id
    [Path: /token/catalog/[]/endpoints/[]/id]
  Member: interface
    [Path with value: /token/catalog/[]/endpoints/[]/interface:public]
    [Member with value: interface:public]
    String value: public
    Key: interface
    [Path: /token/catalog/[]/endpoints/[]/interface]
  Member: region_id
    [Path with value: /token/catalog/[]/endpoints/[]/region_id:RegionOne]
    [Member with value: region_id:RegionOne]
    String value: RegionOne
    Key: region_id
    [Path: /token/catalog/[]/endpoints/[]/region_id]
  Member: url
    [Path with value: /token/catalog/[]/endpoints/[]/url:http://134.209.71.220:8080/v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7]
```

Task 8

What is the endpoint URL of the swift service?

http://134.209.71.220:8080/v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7

Submit Task

Task 9

We already know the container is running on port 8080 so I will filter on it

You will find 5 but the different ones are 3

17139	500.586411	117.200.21.26	134.209.71.220	HTTP	551	GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/employee-data/employee-details.csv HTTP/1.1
14522	398.999876	117.200.21.26	134.209.71.220	HTTP	542	GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/employee-data?format=json HTTP/1.1
16398	476.212102	117.200.21.26	134.209.71.220	HTTP	543	GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/user-data/user-details.csv HTTP/1.1
13907	380.356599	117.200.21.26	134.209.71.220	HTTP	538	GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/user-data?format=json HTTP/1.1
12892	360.430825	117.200.21.26	134.209.71.220	HTTP	528	GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7?format=json HTTP/1.1

You can Follow TCP stream on each of them, but the answer here is 3

```
GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/employee-data/employee-details.csv HTTP/1.1
Host: 134.209.71.220:8080
User-Agent: openstacksdk/4.6.0 keystoneauth1/5.11.1 python-requests/2.32.4 CPython/3.13.5
Accept-Encoding: gzip, deflate
Accept: */*
Connection: keep-alive
X-Auth-Token: gAAAAABoY65KvXpV8oA0UUQgE0J_8KHhEG5VjVwYVqUPhVFRGVJkLi470SpJCKWQwiHFfPzsk_3xVWXS3duowo_SHB79tuxC
Q0TdMuT68rgxFcVmyF3OEzmEzXF87P2d27vMuhy7BrghAxU0FXUiHijr9ZumkKF8pfZTAHG-fEvWc1cUyiuinbE
```

Task 9

How many containers were discovered by the attacker?

3

Submit Task

Task 10

From the previous task, we saw the following packet

```
16398 476.212102   117.200.21.26   134.209.71.220   HTTP   543 GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/user-data/user-details.csv HTTP/1.1
```

which we will find inside it, when the attacker downloaded it

```
Frame 16398: 543 bytes on wire (4344 bits), 543 bytes captured (4344 bits)
    Encapsulation type: Linux cooked-mode capture v2 (210)
    Arrival Time: Jul  1, 2025 05:45:23.060797000 EDT
    UTC Arrival Time: Jul  1, 2025 09:45:23.060797000 UTC
    Epoch Arrival Time: 1751363123.060797000
    [Time shift for this packet: 0.000000000 seconds]
    [Time delta from previous captured frame: 0.000000000 seconds]
    [Time delta from previous displayed frame: 0.000000000 seconds]
    [Time since reference or first frame: 476.212102000 seconds]
```

Task 11

From task 9 we found this

```
16398 476.212102   117.200.21.26   134.209.71.220   HTTP   543 GET /v1/AUTH_9fb84977ff7c4a0baf0d5dbb57e235c7/user-data/user-details.csv HTTP/1.1
```

we can follow tcp stream, we will find this file, just count the names and they are 28

```
Full Name,Email,Phone Number
John Doe,john.doe@example.com,(123) 456-7890
Jane Smith,jane.smith@example.com,(234) 567-8901
Alice Johnson,a.johnson@example.com,(345) 678-9012
Bob Brown,b.brown@example.com,(456) 789-0123
Charlie Davis,c.davis@example.com,(567) 890-1234
Diana Wilson,d.wilson@example.com,(678) 901-2345
Ethan Moore,e.moore@example.com,(789) 012-3456
Fiona Taylor,f.taylor@example.com,(890) 123-4567
George Wilson,g.wilson@example.com,(901) 234-5678
Helen Adams,h.adams@example.com,(012) 345-6789
Ian Lee,i.lee@example.com,(123) 456-7890
Julia Smith,j.smith@example.com,(234) 567-8901
Kevin Miller,k.miller@example.com,(345) 678-9012
Laura Evans,l.evans@example.com,(456) 789-0123
Michael Thomas,m.thomas@example.com,(567) 890-1234
Natalie Wilson,n.wilson@example.com,(678) 901-2345
Oliver Johnson,o.johnson@example.com,(789) 012-3456
Penny Davis,p.davis@example.com,(890) 123-4567
Quinn Lee,q.lee@example.com,(901) 234-5678
Rachel Moore,r.moore@example.com,(012) 345-6789
Simon Evans,s.evans@example.com,(123) 456-7890
Tara Wilson,t.wilson@example.com,(234) 567-8901
Uma Johnson,u.johnson@example.com,(345) 678-9012
Vivian Lee,v.lee@example.com,(456) 789-0123
William Thomas,w.thomas@example.com,(567) 890-1234
Xander Wilson,x.wilson@example.com,(678) 901-2345
Yara Johnson,y.johnson@example.com,(789) 012-3456
Zoe Lee,z.lee@example.com,(890) 123-4567
```

Task 11

How many user records are in the sensitive user data file?

28 ✓ Submit Task

Task 12 & Task 13

These two tasks are connected to each other's

so in order to find the created user, we need to filter for POST requests along with requests that contain users

```
http.request.method == "POST" && http contains "users"
No.   Time        Source        Destination     Protocol  Length  Info
20776 635.623375  117.200.21.26 134.209.71.220  HTTP/J…   202     POST /identity/v3/users HTTP/1.1 , JSON (application/json)
```

we find this one.

for the username we can find it in the json file, jellibean

```
▾ Member: name
    [Path with value: /user/name:jellibean]
    [Member with value: name:jellibean]
    String value: jellibean
    Key: name
    [Path: /user/name]
```

Task 12

For persistence, the attacker created a new user with admin privileges. What is the username of the new user?

jellibean ✓ Submit Task

And the password is P@$$word

```
▾ Member: password
    [Path with value: /user/password:P@$$word]
    [Member with value: password:P@$$word]
    String value: P@$$word
```

Task 14

To find the MITRE tactic id search for

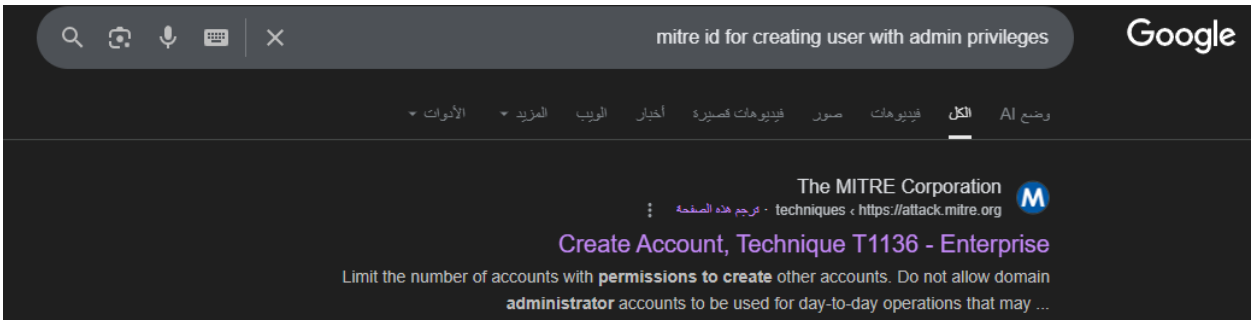

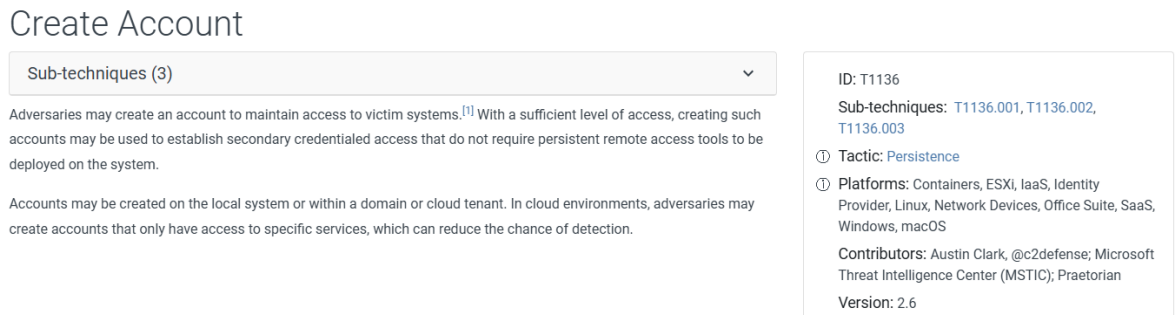

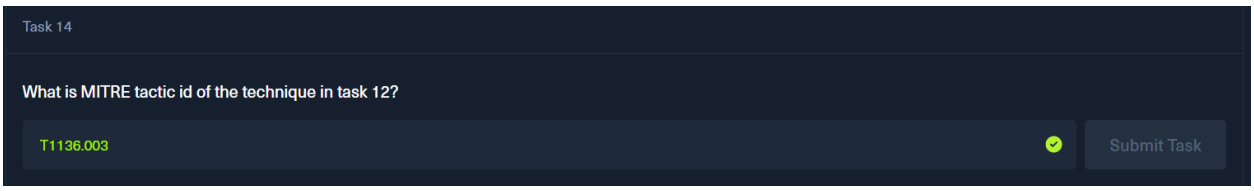

Something I have learnt:

• For me I learnt how to search deeply in the packets, here I was applying filters on my own and trying all different filters and strings to reach the information.

• Second, I have learnt about MITRE ids and how can I search for an ID that related to a specific attack, for example creating an account to maintain access on the victim device.

• For the third, there’s nothing actually.