


HDB / ATLAS

The city. Decoded.

USER & PROJECT GUIDE

A map-first view of Singapore resale prices, with linked trends, town comparisons and the transactions behind the numbers.

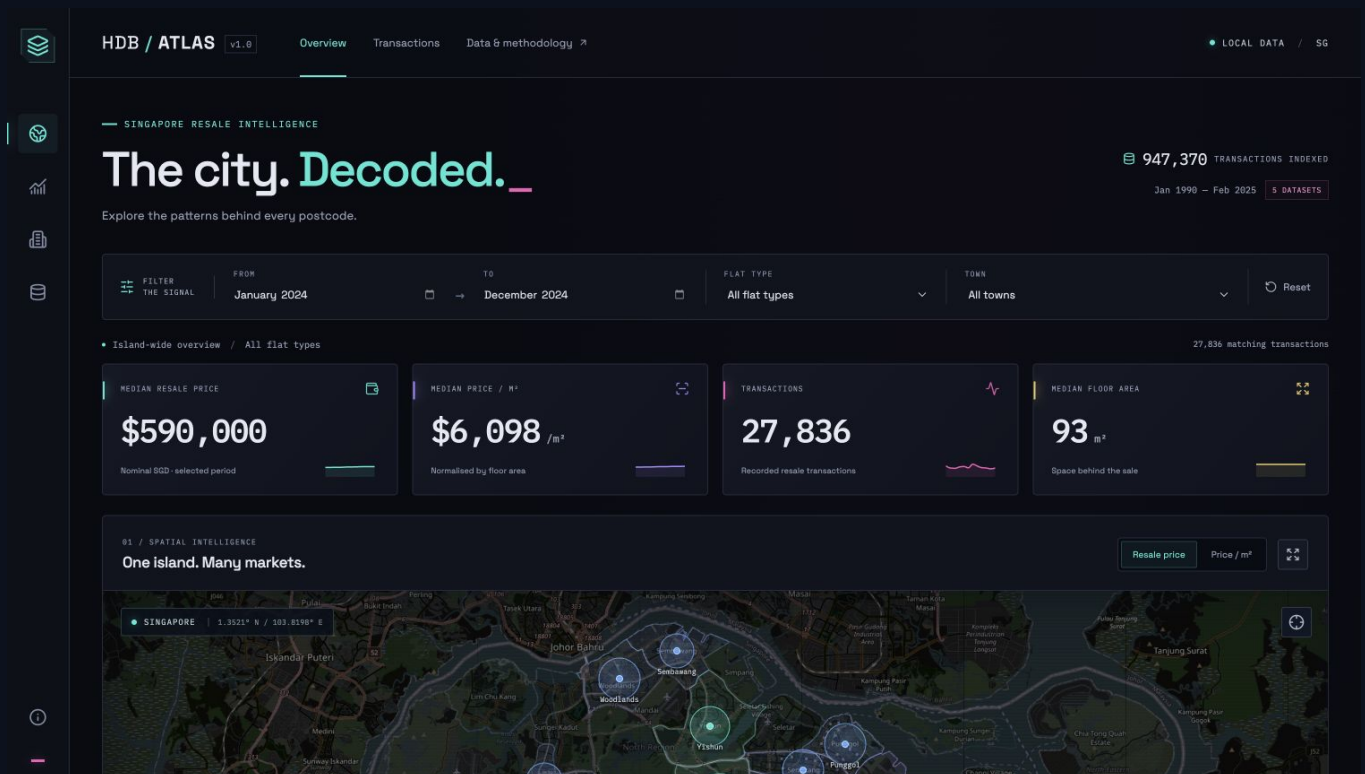


One island. Many markets.

Use location to compare historical transactions, then inspect the homes behind each aggregate.



Follow the signal.

Choose a comparable set of homes before interpreting differences in price.

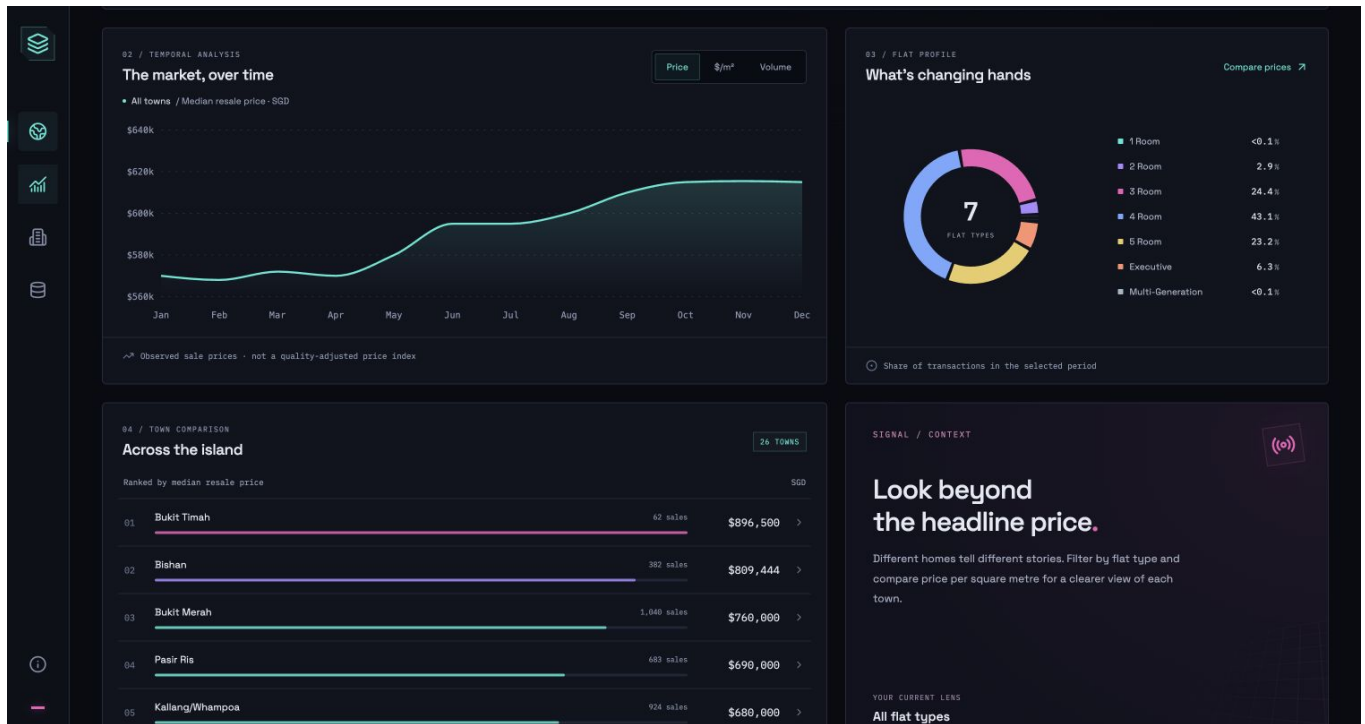

Every sale has a story.

Trace aggregate patterns back to the source records.

MONTH	TOWN / ADDRESS	FLAT TYPE	STOREY	AREA	LEASE FROM	REMAINING LEASE	RESALE PRICE	PRICE / M ²
Dec 2024	Yishun 628 Yishun St 81	Executive Maisonette	07 TO 09	146 m ²	1988	62.3 yrs	\$990,000	\$6,781

Know your data.

Coverage, exact calculations and the qualifications needed for sound comparisons.

Period	Rows	Date basis
1990-1999	287,196	Approval
2000-Feb 2012	369,651	Approval
Mar 2012-Dec 2014	52,203	Registration
2015-2016	37,153	Registration
2017-Feb 2025	201,167	Registration
TOTAL	947,370	Five local CSVs

Exact medians, individual transactions

The median price is calculated over matching sale prices. Price per m² is computed for *each transaction* before taking its median. Median area is calculated independently. Subgroup medians are never averaged. Duplicate-looking source rows are preserved.

2024 baseline	Value

Run it. Keep it current.

The application runs locally with React, Leaflet, Recharts, Python and SQLite.

Start the app

Requirements: Node.js 20.19+ (or 22.12+) and Python 3.9+. Run these commands from the project root:

```
npm install
npm run build
npm start
```

Open <http://127.0.0.1:8000>. The first start imports root CSVs if the database is absent. Stop with Ctrl+C. Set HDB_PYTHON if interpreter discovery fails. Use `npm start -- --port 8001` for another port.

Refresh data safely

Stop the server. Replace source CSVs with non-overlapping files, then import and restart. The importer preserves every row, so overlapping versions would double-count. Invalid rows abort the import and leave the old database intact.

```
npm run import
npm test
npm start
```

<