

كلية هندسة الذكاء الاصطناعي
FACULTY OF ARTIFICIAL INTELLIGENCE ENGINEERING

الجامعة السورية الخاصة
SPU
SYRIAN PRIVATE UNIVERSITY

Simplifying Scientific Text

Author
Raneem Rabih

Supervised by
Dr. Riad Sonbol
Eng. Wissam Al-Sahli

Damascus, 2026

Project Problem and Objective

Scientific and biomedical texts can be difficult for non-specialist readers to understand.

Specialized terminology, complex sentence structure and statistical language can obscure findings. Simplification must retain important facts, negation and uncertainty.

CLEF 2026 SimpleText

Task 1.1: sentence-level scientific text simplification

Project objective

Extend SPU_DeepSimplify with parameter-efficient fine-tuning (PEFT) and a final ensemble using the source sentence and two candidates.

Problem Framing

Framing item	Project definition
Task type	Conditional text generation for biomedical sentence simplification
Input and output	Original scientific sentence to a simpler English version preserving its core meaning
Users and affected	Non-specialist readers and health/science communicators using published research
Costlier error	Meaning changes, such as reversing negation or an effect, changing numbers, or removing uncertainty
Metric and threshold	Project target: SARI at least 47.00 under matched evaluation conditions. Evaluation remains pending.
Baseline	Published SPU_DeepSimplify: SARI 45.00. Re-run on the same local data for a matched local comparison.
Test-set size	Raw local test: 1,512 sentences from 117 documents. Final filtered count and confidence interval pending.

Evaluation Metrics

Metric	Meaning	Interpretation
SARI	Compares additions, deletions and retained content against the source and reference simplifications.	Higher indicates stronger reference-supported simplification. Primary project measure.
BLEU	Measures reference n-gram overlap with modified precision and a brevity penalty.	Higher indicates more lexical agreement. A valid paraphrase can use different wording.
FKGL	Estimates an English reading grade from sentence length and syllable information.	Lower indicates a lower estimated reading grade.
FKGL change	Output FKGL minus source FKGL.	A negative change indicates an improvement in this readability estimate.

Output Transformation Measures

Measure	What it describes
Compression ratio	Output word count divided by source word count. Values below 1 indicate shorter text.
Sentence splits	Output sentence count relative to the source sentence count.
Levenshtein similarity	Normalized edit-based similarity. Higher values indicate less surface change.
Exact copies	Proportion of outputs identical to the source under evaluation normalization.
Additions proportion	Words introduced relative to the source.
Deletions proportion	Source words removed from the output.
Lexical complexity	Estimated difficulty of the output vocabulary under the evaluator lexical feature.

Previous System and CLEF Result

45.00


Final SARI on Codabench

CLEF 2026 SimpleText Task 1.1
Main pipeline: 44.91 SARI
After selective post-processing: 45.00 SARI

Both named models use inference without task-specific fine-tuning.

Stage	Published component
Terminology	MedSimplify source-term hints
Planning	Llama 3.1 8B produces a JSON plan
Strategy	Rules choose rephrase, split, delete or keep
Execution	Llama 3.3 70B generates the output
Output checks	Validation, fallback and selective revision

Previous System Workflow

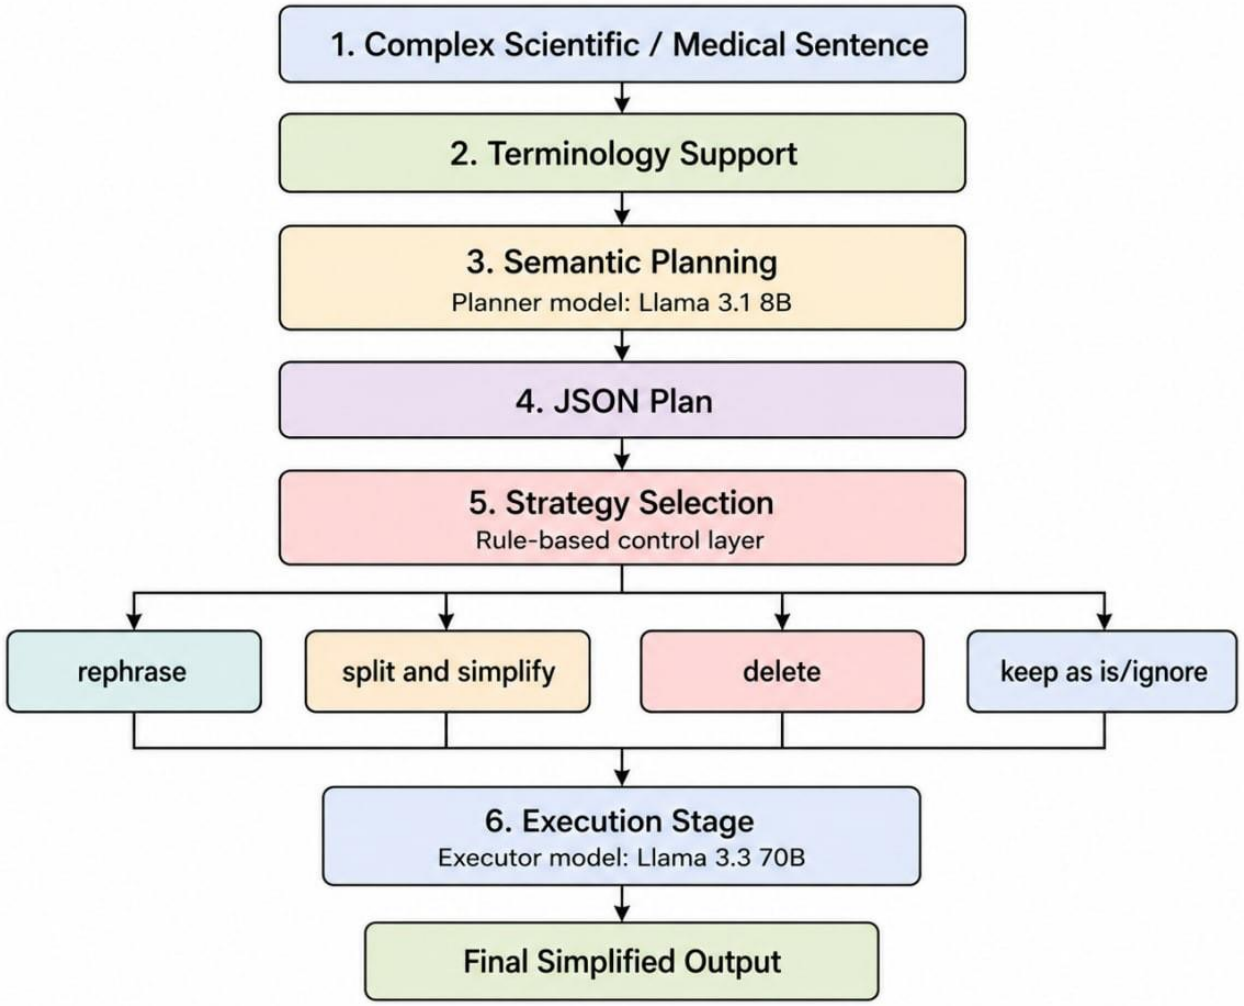

Terminology support

Source-grounded terminology hints inform the planning and execution stages.

Planning and control

A structured plan guides rule-based strategy selection before generation.

The paper also describes validation, fallback and selective post-processing.

Comparison: Writerslogic

Multi-Candidate LLM Simplification and Stacked Complexity Spotting

Comparison field	Study details
Scope and input/output	Tasks 1.1 and 1.2. Sentence: source with 5-7 examples, five candidates, then one selected output. Document: complete abstract to simplified text.
Workflow and models	1. Use an English few-shot prompt with seven examples. 2. Claude Sonnet 4 generates five candidates at temperatures 0, 0.3, 0.5, 0.7 and 1. GPT-4o-mini supports development. 3. Score source-word retention (40%), compression (25%), lexical simplicity (20%) and PLS vocabulary (15%). Penalize exact copies. The selector requires no training. 4. Llama 3.3 70B directly simplifies documents through merging, splitting and reordering. 5. A local Qwen3-8B alternative uses multiple prompts and text-feature selection.
Sentence results	SARI 47.43. Claude Sonnet 4 produces five candidates, followed by rule-based selection.
Document results	SARI 43.96. Llama 3.3 70B directly simplifies the document.
Strengths	Diverse candidates, an explicit selector and few-shot guidance for the simplification style.
Limitations	Surface rules do not independently verify meaning. Document outputs remove substantial content. API use adds cost and reproduction difficulty. No separate scores for GPT-4o-mini or Qwen3-8B.

Comparison: FOSU-YZH (1/2)

Statistics-Aware Prompting for Task 1.1

Comparison field	Study details
Scope and input/output	Task 1.1 only. A source sentence, with local context for some candidates, produces four candidates and one selected simplification.
Workflow and models	1. Generate a DeepSeek-V4-Pro default, a DeepSeek-chat alternative, a local-context version and a cautious version preserving uncertainty. 2. Reject empty outputs, unsuitable lengths and outputs longer than two sentences. 3. Score compression, removal of statistical notation, avoidance of copying and plain wording. 4. Keep the default unless another candidate exceeds a score margin. Use temperature 0 without fine-tuning. 5. Apply the complete four-candidate pipeline to the main English portion. Use a simpler path for the remaining data.

Comparison: FOSU-YZH (2/2)

Statistics-Aware Prompting for Task 1.1

Comparison field	Study details
Sentence results	SARI 47.01 with simple_original and 46.23 with simple_auto. Four DeepSeek candidates and conservative rule-based selection.
Document results	No Task 1.2 participation or document result.
Strengths	Candidates address simplification, context and cautious wording. The selector changes the default only when it finds a sufficient gain.
Limitations	No independent semantic audit. Statistical interpretation depends on the LLM. Selection gains are small. The full four-candidate setting covers the main English portion only.

Comparison: ELiRF-UPV (1/2)

Decoupling Action Prediction and Controlled Generation

Comparison field	Study details
Scope and input/output	Tasks 1.1 and 1.2. Sentences within document context receive action labels, followed by simplified sentences or a reconstructed document.
Action planning	Use a RoBERTa-large action planner. English Cochrane-auto contains 1,085 documents and 14,719 sentences. Represent sequential sentences using <sent> and a sentence pooler. Binary Copy, Delete and Rephrase branches feed a fusion head for Copy/Delete/Rephrase/Split/Merge_B/Merge_I. Train five seeds, average scores and CRF parameters, and decode with Viterbi. Use 512-token sliding windows with four-sentence overlap.
Generation and adaptation	Compare prompted Gemma 4 31B with and without actions against SFT/PEFT versions of BART and FLAN-T5. Use new action tokens and dual conditioning in the encoder and decoder prefix. Copy returns the source directly and Delete returns empty sentence output. Keep merge blocks together during document reconstruction.
Preference training	Apply DPO to FLAN-T5 only. The SFT model generates four alternatives with diverse beam search. A BERT-CRF aligner and rules evaluate action adherence and produce chosen/rejected pairs.

Comparison: ELiRF-UPV (2/2)

Decoupling Action Prediction and Controlled Generation

Comparison field	Study details
Sentence results	Official SARI 46.36 using Gemma 4 31B without action conditioning.
Document results	Official SARI 46.22 using Gemma 4 31B without a planner action plan.
Strengths	Explicit separation of planning and generation. Studies action tokens, split/merge behavior and DPO. Reports planner evaluation separately.
Limitations	Planner accuracy and benefits vary. Local training results do not generalize equally to the official evaluation. No independent factual guarantee or separate score for every execution step.

Comparison: AIIRLab (1/2)

Ensemble and Multi-Agent Pipelines for Scientific Text Simplification

Comparison field	Study details
Scope and input/output	Tasks 1.1 and 1.2. Sentence: source with gist/action guidance, or source alone, produces alternatives and a final sentence. Document: abstract to plain-language summary.
Sentence workflow	1. Extract a gist with AllenNLP semantic role labeling and fallback rules. Store subject, predicate, outcome, quantity and uncertainty as prefixes. 2. Use a supervised Ministral 8B simplifier and its DPO-adapted version with meaning/action guidance. 3. Generate an independent few-shot candidate with Gemma 4 31B. 4. Llama 3.1 70B receives the source, up to 600 context characters and all three candidates. It may rewrite the alternatives.
Training and output constraints	SFT uses gist, operation and position information. DPO uses a reference-based chosen response and a synthetic rejected response that reverses a finding or removes uncertainty. The reward considers meaning, readability, operation and risk. Candidate clipping and keeping only an initial sentence can remove facts. The paper does not fully clarify how every test action is assigned.

Comparison: AIIRLab (2/2)

Ensemble and Multi-Agent Pipelines for Scientific Text Simplification

Comparison field	Study details
Document alternatives	Compare a five-agent Gemma process (general reader, clarification, medical review, deduplication, final simplification), an APIO Add/Keep/Delete approach, a Llama 3.1 8B word/sentence/coherence pipeline, and a direct baseline preserving findings and numbers. Document settings include numbered batches and output-length limits. The Llama sentence agent rewrites sentences longer than 30 words. The direct baseline targets 65% of source length and applies a 72% post-processing ceiling.
Sentence results	Ensemble SARI 46.24 with simple_original and 45.08 with simple_auto. Llama 3.1 70B combines the SFT, DPO and Gemma alternatives.
Document results	SARI 42.67 with original references for the direct Llama baseline. SARI 42.21 with automatic references for Gemma APIO with one example and one call.
Strengths	Gist guidance for key information. Compares SFT, DPO, prompting, ensembles and document agents.
Limitations	Many model calls. Higher SARI does not give the best FKGL. Document agents do not beat the baseline and can expand text. An LLM medical-review role does not independently guarantee factual accuracy. No isolated score for every agent.

Comparison: DUTH (1/2)

Grounded Biomedical Text Simplification

Comparison field	Study details
Scope and input/output	Tasks 1.1 and 1.2. Sentence to simplified sentence. Documents use direct simplification or reconstruction from ordered simplified sentences, length checks and fallback.
Workflow and models	1. Use Gemma-2-9B-IT with grounded prompts for findings, numbers, comparisons and uncertainty. 2. EasySplit encourages simple words and appropriate sentence splitting. 3. For documents, compare direct generation with sentence reconstruction. Check the output/source length ratio and fall back to direct simplification where necessary. 4. Lightly clean repetition and vocabulary. No simplifier fine-tuning. 5. Explore Qwen2.5-7B/14B, Gemma-3-12B, Llama-3-8B and Gemma-2-9B. Additional settings include a plain selector, candidate bank, majority selection, a DeBERTa selector, guarded prompts and lexical baselines.

Comparison: DUTH (2/2)

Grounded Biomedical Text Simplification

Comparison field	Study details
Sentence results	SARI 46.09 with grounded Gemma-2-9B-IT and light output cleaning.
Document results	SARI 46.16 with Gemma-2-9B-IT and plain post-processing.
Strengths	Source-grounded guidance for numerical findings and uncertainty. Hybrid processing, specialist detection and fallback options.
Limitations	Instructions do not prove factual preservation. Lexical retrieval can miss paraphrased evidence. Some thresholds and best-run processing details remain incomplete. Results describe full configurations, without isolating every stage or each exploratory model.

Comparison: NIL-UCM (1/2)

Prompting, Fine-Tuning and Multi-Agent Architectures

Comparison field	Study details
Scope and input/output	Tasks 1.1 and 1.2. Sentence to simpler text or a Copy/Delete outcome. Document abstract to PLS, sometimes with dictionary definitions.
Sentence alternatives	Compare role-based zero-shot prompts, the same idea with six few-shot examples, and action classification followed by execution. Actions are Copy, Delete, Rephrase and Split. Copy and Delete need no second generation, and Merge is excluded. Models include Mistral-7B-Instruct, Llama-3.1-8B-Instruct and Gemma 2, with quantized versions of some models.
Document alternatives	Compare direct prompts, two Cochrane examples, Cochrane writing guidelines, guidelines with University of Michigan Plain Language Medical Dictionary definitions, SARI-operation prompts, and LoRA adaptation of Llama/Mistral on 849 abstract-PLS pairs. LoRA uses rank 64 and three epochs. A multilingual variant adds output-language guidance.
Multi-agent workflow	1. Generate four drafts with DeepSeek V4 Flash, Gemini 2.5 Flash Lite, Mistral Small 4 and Llama 3.3 70B. 2. Llama 3.3 70B selects a draft based on style and readability. 3. Gemini reviews facts and readability in separate roles. 4. Mistral Small 4 revises the text for at most three rounds.

Comparison: NIL-UCM (2/2)

Prompting, Fine-Tuning and Multi-Agent Architectures

Comparison field	Study details
Sentence results	SARI 45.51 with role-based zero-shot Llama prompting, without examples or prior action classification.
Document results	SARI 45.34 with the role-based multi-agent pipeline. The result describes the complete system rather than individual agents.
Strengths	Broad comparison of prompting, examples, planning, adaptation and agents. Separates factual review from readability review.
Limitations	Mainly SARI-based assessment without human evaluation. Different and stronger agent models confound architecture and model capability. The limited LoRA configurations did not improve performance.

Comparison: FOSU_cr

Reference-Guided Few-Shot Biomedical Simplification

Comparison field	Study details
Scope and input/output	Tasks 1.1 and 1.2. A batch of 15 numbered source sentences or a full abstract, with three real examples, produces simplified text followed by statistical-expression removal.
Workflow and models	1. Select the first three Cochrane examples in BioCLEAR references that meet source/summary length rules. This is fixed example selection rather than per-input retrieval. 2. Prompt DeepSeek-V3/deepseek-chat as a PLS writer, with examples, style rules and statistical-removal guidance. Use temperature 0.3 and a 200-300-word document target. 3. Use regular expressions to remove RR, MD, OR, HR, CI, p-values, I-squared and evidence-certainty descriptions. 4. Clean empty brackets and spacing. No fine-tuning.
Sentence results	Local average SARI 43.50. The paper does not report a separate official sentence score.
Document results	Official SARI 48.85 with simple_original and 47.97 with simple_auto. DeepSeek-V3, three Cochrane examples and regex post-processing.
Strengths	Simple pipeline without training. An ablation examines the effect of the example source.
Limitations	Removing certainty descriptions can lose medical distinctions. Examples come from local evaluation references, which affects interpretation. No independent medical audit.

Comparison: SPU_DeepSimplify (1/2)

A Planning-Based Approach to Scientific Text Simplification

Comparison field	Study details
Scope and input/output	Task 1.1 only. A source sentence, MedSimplify hints and optional next-sentence context for planning produce a JSON analysis, a selected strategy and simplified output.
Workflow and models	1. Detect source terminology and obtain MedSimplify hints. 2. Llama 3.1 8B analyzes simplicity, terminology, structure, statistics, repetition and context needs, producing JSON. 3. Rules select Rephrase, Split_and_simplify, Delete or Keep_as_is. 4. Llama 3.3 70B carries out terminology-aware generation for the selected operation. 5. Validate output and apply fallback where necessary. 6. Selectively re-simplify about 3,661 identical or near-copy outputs, aiming near Grade 8. Reject unsuitable revisions and retain the earlier version. Both named models run inference only, without fine-tuning.

[2] CLEF SimpleText 2026. Scores use each study's data, level and references.

Comparison: SPU_DeepSimplify (2/2)

A Planning-Based Approach to Scientific Text Simplification

Comparison field	Study details
Sentence results	Final SARI 45.00 after selective post-processing. Main pipeline SARI 44.91 in the team paper.
Document results	No Task 1.2 participation or document experiment.
Strengths	Traceable terminology, planning, rules, execution and validation stages. Smaller planner and larger executor, with selective revision.
Limitations	Planner or rule errors can choose unsuitable actions. Operational checks do not establish semantic correctness. No ablation isolates MedSimplify, the planner or each strategy. Available comparison covers the main and post-processed systems, with a small SARI gain.

[2] CLEF SimpleText 2026. Scores use each study's data, level and references.

Comparison: Plan-Guided Simplification

Plan-Guided Text Simplification with Extended Contexts

Comparison field	Study details
Method and models	Use oracle actions extracted from alignment or predicted actions from pgdyn-plan. Compare fine-tuned BART-base with prompted Qwen2.5 7B/14B/32B and Gemma-3-27B using three examples. Process one to five paragraphs and reconstruct the document.
Data	Newsela-auto: 18,820 document pairs derived from 1,882 articles at multiple reading levels.
Best settings and results	Best SARI 51.5 with Qwen 32B, an oracle plan and one paragraph. Predicted-plan settings report SARI 47.4 with one paragraph and 47.0 with five paragraphs. Action agreement with oracle increases from 82% to 89.5% as context grows.
Evaluation	SARI for simplification, SMART for reference similarity and FKGL for readability. A CRF aligner and micro-recall compare executed actions with oracle actions.
Interpretation	Additional context and plan adherence depend on the model and processing strategy. Oracle plans require reference alignment. Newsela results use different data and conditions from biomedical SimpleText.

[15] Studies beyond the shared task. Scores use each study's data, level and references.

Comparison: JEBS

A Fine-grained Biomedical Lexical Simplification Task

Comparison field	Study details
Method and models	Identify jargon, classify Substitution/Explanation/Generalization/Exemplification/Omission, then generate a replacement. Detection compares rules, BERT, BioBERT, XLM-R, DeBERTa and Llama3. Classification uses BERT/DeBERTa. Generation uses Llama3-8B, Llama4 Scout and GPT-4o-mini with one or three examples. A combined pipeline uses DeBERTa, BERT and Llama3.
Data	PLABA: 400 abstracts, 10,314 term occurrences and 21,595 manually annotated simplifications.
Best settings and results	Detection F1 is 0.4317 and classification F1 is 0.3588 for DeBERTa/BERT-NER configurations. GPT-4o-mini with three examples performs best overall in generation, while Llama4 performs better for explanation and generalization. No complete-system SARI score.
Evaluation	F1 for detection and operation classification, with several annotator-comparison schemes. Human evaluation of generation covers simplicity, accuracy, completeness and conciseness, using 48 examples per operation and version.
Interpretation	Lexical subtasks isolate terminology handling. Their scores do not directly evaluate complete sentence simplification.

[17] Studies beyond the shared task. Scores use each study's data, level and references.

Comparison: Jargon-Aware Prompting

Medical Text Simplification with Jargon Guidance

Comparison field	Study details
Method and models	Fine-tune BERT, RoBERTa, BioBERT and PubMedBERT for jargon detection and study cross-dataset transfer. Use Llama-3.1-8B and Medicine-Llama3-8B for simplification without additional simplifier training. Compare direct prompting, detected jargon, reference jargon and reference operations. Generate sentences and reconstruct abstracts.
Data	MedReadMe and PLABA for detection. Simplification evaluation: 300 PLABA abstracts containing 3,315 sentences.
Best settings and results	Llama-3.1-8B with reference operations: SARI 32.26 and FKGL 15.36. Direct prompting: SARI 29.87 and FKGL 13.53. Best PLABA detection: RoBERTa-large, F1 46.70%.
Evaluation	SARI, BLEU, BERTScore and FKGL for summaries. Entity/token F1 for detection. Human assessment of meaning, simplicity and fluency with three raters and five abstracts per rater.
Interpretation	Reference-operation guidance uses oracle information. A SARI increase can accompany a higher estimated reading grade. Explicit jargon guidance does not consistently improve all quality dimensions.

[18] Studies beyond the shared task. Scores use each study's data, level and references.

Comparison: Taming CATS

Instruction Fine-Tuning with Control Tokens

Comparison field	Study details
Method and models	Compute reference attributes and add control tokens for readability or word/character length ratios. Fine-tune each attribute separately. Compare Llama, Mistral and Qwen models from 1B to 14B, using LoRA above 4B. No separate action planner.
Data	Med-EASi (medical), SimPA (administrative), WikiLarge (encyclopedic) and Newsela (news). Custom 80/10/10 splits with attribute stratification and sampling.
Best settings and results	Expanded evaluation: SARI 67.78 on SimPA using Llama-13B with FKGL control. Main medical result: SARI 52.18 on Med-EASi using Mistral-7B with Dale-Chall control. Qwen3-1.7B reaches 52.09 on Med-EASi with character-ratio control.
Evaluation	SARI and LENS for simplification quality. MAE for target-control error. BLEU, BERTScore and COMET for similarity.
Interpretation	Evaluation uses the study's own splits rather than the CLEF test. SARI gains do not always coincide with LENS gains. Model size alone does not determine controllability or quality.

[14] Studies beyond the shared task. Scores use each study's data, level and references.

Comparison: Let's Simplify Step by Step

Multilingual Proficiency-Controlled Sentence Simplification

Comparison field	Study details
Method and models	Build a CEFR transition matrix from validation experiments and plan a path with dynamic programming. Select three semantically similar examples and simplify gradually with conversation history. Prompt Llama-3-8B, Gemma-2-9B and Mistral-7B. Use CEFR classifiers for level evaluation and trained mT5-base as a baseline.
Data	CEFR-SP for English and README++ for Arabic, English, French, Hindi and Russian.
Best settings and results	README-EN exact accuracy 46.46% with Llama using planning/history without semantic selection. Adjacent accuracy 96.46% with Gemma in that design. Full Llama system: exact accuracy 37.37%, STS 69.90%. Planning reduces steps by 22-42% versus visiting all levels.
Evaluation	Exact accuracy, adjacent-level accuracy, RMSE and Spearman correlation for target proficiency. STS and BERTScore for similarity, plus human level/meaning assessment. No SARI score.
Interpretation	The reported accuracy values concern target proficiency. They are different measures from reference-based simplification SARI.

[16] Studies beyond the shared task. Scores use each study's data, level and references.

Comparison: AgentSimp

Collaborative Document Simplification Using Multi-Agent Systems

Comparison field	Study details
Method and models	Prepare document guidance and structure, split paragraphs, simplify and review, explain figurative language and jargon, then reconstruct and check the document. Assign roles to GPT-3.5/GPT-4 without additional training. Compare sequential/parallel communication and direct/incremental reconstruction with direct models and trained Llama2-7B/Mistral-7B baselines.
Data	Newsela: 200 documents. GuoFeng: 100 English literary texts.
Best settings and results	Best Newsela SARI 41.58 and D-SARI 30.72 with GPT-4, sequential communication and incremental reconstruction. Direct GPT-4: SARI 33.61. Fine-tuned Mistral-7B: 37.20, compared with 33.73 without training.
Evaluation	Document SARI and D-SARI, BARTScore and FKGL. Human evaluation and LLM-based evaluation.
Interpretation	Results concern documents. Some review roles do not improve SARI. API costs limit evaluation size.

[19] Studies beyond the shared task. Scores use each study's data, level and references.

Provisional Research Gap

Benchmark gains can coexist with less readable outputs.

The selected studies already explore prompting, adaptation, planning and ensembles. Their results leave the benefit of combining a PEFT branch with our own planning pipeline unresolved.

Project research question

Can complementary PEFT and planning-based candidates improve SPU_DeepSimplify under a matched evaluation while preserving source meaning and supporting easier reading?

Sources: [2], [3], [5], [13], [14], [18] and [19]. Research direction remains provisional.

Proposed Ensemble System

PEFT-based branch

Train a small set of adapter weights with LoRA or QLoRA using paired examples. The adapted model generates Candidate A.

Planning-based branch

Run SPU_DeepSimplify to generate Candidate B. Possible refinements concern terminology, planning, rules, validation or selective revision.


Final ensemble

A larger language model receives the source sentence and both candidates. It either selects one candidate unchanged or generates a new source-grounded simplification.

Compare each branch, any documented prior-system refinements and the final ensemble under the same evaluation conditions.

Design basis: [2], [3], [5], [7] and [8]. Proposed architecture with no new reported result.

Proposed System Workflow

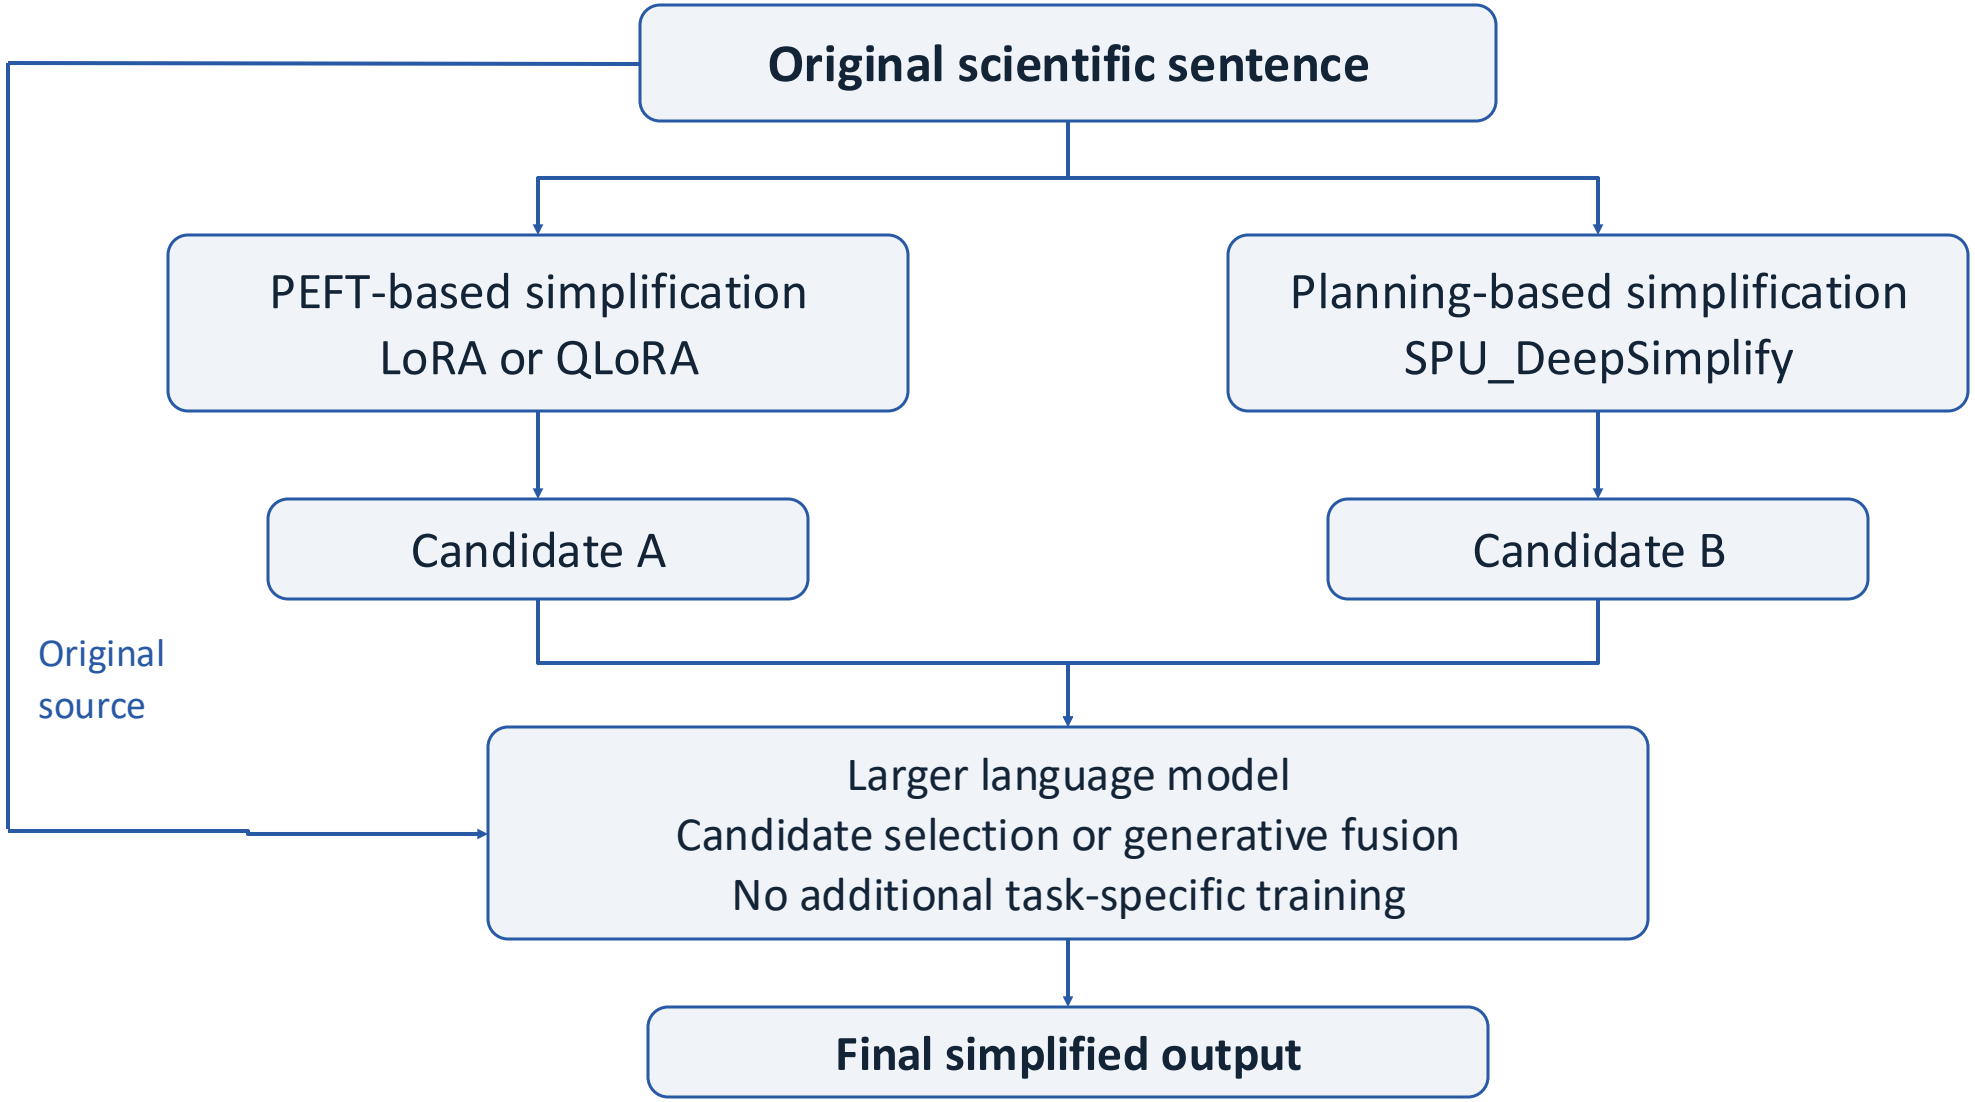

Proposed inference architecture. PEFT adaptation precedes inference; the final selection/fusion choice remains open.

Development Data

Split	Sentence rows	Documents	Role
Training	11,510	849	Supervised PEFT adaptation
Validation	1,697	119	Development decisions and checkpoint selection
Local test	1,512	117	Reserved local model assessment
Total	14,719	1,085	Three supplied development splits

The aligned simplified text supplies the training target and evaluation reference.

Sources: [20] Cochrane-auto and [21] supplied CSV files. Raw counts before project-specific filtering.

Development File Columns

Column	Description
pair_id	Document-pair identifier linking an abstract and its plain-language summary
para_id	Source paragraph identifier
sent_id	Source sentence identifier within the paragraph
complex	Original scientific or biomedical sentence
label	Aligned operation: rephrase, split, merge, delete, ignore or none
simple	Serialized list of aligned reference simplification segments
simp_sent_id	Identifier(s) of aligned simplified segments
doc_pos	Relative sentence position: one-based ordinal divided by document length
doc_quint	Document-position quintile, encoded from 1 to 5
doc_len	Number of source sentences in the document

Sources: [20], [21]. The three sentence CSV files share these ten columns.

Official Codabench Input File

sentences_src.json

Field	Description
pair_id	Document or document-pair identifier
source	Dataset source or evaluation collection
language	Source sentence language code
para_id	Paragraph identifier
sent_id	Sentence identifier within the paragraph
complex	Original sentence to simplify

No reference simplification or prediction field

Sources: [2] and [22] supplied sentences_src.json. The file contains source input only.

Official Input Collections

Collection	Source records
Cochrane-auto 2026	3,679
Cochrane full 2026	35,970
Cochrane-auto 2025	4,293
Cochrane-auto validation	1,697
Cochrane-auto test	1,512
Medline	1,010
SimpleText2024	648
Total	48,809

20,259

English records
11 languages in total

3,679 sentences from 175 documents belong to Cochrane-auto 2026.

The complete JSON also includes local validation and test sources. Input count and scoring cohort require separate descriptions.

Sources: [21], [22]. The complete JSON combines collections and languages.

References (1/3)

[1] J. Bakker, L. Ermakova, and J. Kamps. Overview of the CLEF 2026 SimpleText Task 1 Simplify Scientific Text. CLEF 2026 Working Notes, 2026.

[2] R. Rabih, R. Sonbol, and W. Alsohle. SPU_DeepSimplify at the CLEF 2026 SimpleText Track A Planning-Based Approach to Scientific Text Simplification. CLEF 2026 Working Notes, 2026.

[3] D. Condrey. Writerslogic at the CLEF 2026 SimpleText Track Multi-Candidate LLM Simplification and Stacked Complexity Spotting. CLEF 2026 Working Notes, 2026.

[4] Z. Yang, H. Qi, and Y. Yi. FOSU-YZH-Group at the SimpleText 2026 Track Statistics-Aware Prompting for Task 1.1 and Exploratory Overgeneration Detection for Task 2. CLEF 2026 Working Notes, 2026.

[5] E. Hawkins, K. Zbinden, E. Fitzgerald, and B. Mansouri. AIIRLab Systems at SimpleText CLEF 2026 Ensemble and Multi-Agent Pipelines for Scientific Text Simplification. CLEF 2026 Working Notes, 2026.

[6] A. Vaswani et al. Attention Is All You Need. Advances in Neural Information Processing Systems, 2017. https://arxiv.org/abs/1706.03762

[7] E. J. Hu et al. LoRA Low-Rank Adaptation of Large Language Models. International Conference on Learning Representations, 2022. Preprint first released in 2021. https://arxiv.org/abs/2106.09685

[8] T. Dettmers, A. Pagnoni, A. Holtzman, and L. Zettlemoyer. QLoRA Efficient Finetuning of Quantized LLMs. 2023. https://arxiv.org/abs/2305.14314

[9] R. Rabih. Simplifying Scientific Text Using Large Language Models. Previous semester graduation project report, Syrian Private University, 2026.

Reference numbering follows the project report.

References (2/3)

[10] G. Arampatzis and A. Arampatzis. DUTH at CLEF 2026 SimpleText Grounded Biomedical Text Simplification and Evidence-Guided Overgeneration Detection. CLEF 2026 Working Notes, 2026.

[11] R. Chen, Y. Yang, H. Zhang, and L. Kong. FOSU_cr at the CLEF 2026 SimpleText Track A Reference-Guided Few-Shot Prompting Approach for Biomedical Text Simplification. CLEF 2026 Working Notes, 2026.

[12] M. Hurtado, V. Ahuir, A. Molina, and M.-J. Castro-Bleda. ELiRF-UPV at SimpleText 2026 Decoupling Action Prediction and Controlled Generation for Text Simplification. CLEF 2026 Working Notes, 2026.

[13] S. Conde, P. Folgueira, and A. Díaz. NIL-UCM at the CLEF 2026 SimpleText Track Prompting, Fine-Tuning, and Multi-Agent Architectures for Biomedical Text Simplification. CLEF 2026 Working Notes, 2026.

[14] H. Hubarava and Y. Gao. Taming CATS Controllable Automatic Text Simplification through Instruction Fine-Tuning with Control Tokens. Proceedings of READIxTSAR at LREC 2026, pp. 26-48, 2026. https://lrec.elra.info/lrec2026-ws-readixtsar-03

[15] P. Mathas, J. Bakker, and J. Kamps. Plan-Guided Text Simplification with Extended Contexts. Proceedings of READIxTSAR at LREC 2026, pp. 121-129, 2026. https://lrec.elra.info/lrec2026-ws-readixtsar-09

[16] J. Zhang, X. Y. Qiu, L. Lu, Z. Huang, Y. Hu, Y. Wu, and J. Lu. Let's Simplify Step by Step Guiding LLM Towards Multilingual Unsupervised Proficiency-Controlled Sentence Simplification. Findings of EACL 2026, pp. 5274-5290, 2026. https://aclanthology.org/2026.findings-eacl.279/

[17] W. Xia, I. Unde, B. Ondov, and D. Demner-Fushman. JEBS A Fine-grained Biomedical Lexical Simplification Task. Findings of ACL 2025, pp. 17654-17666, 2025. https://aclanthology.org/2025.findings-acl.907/

Reference numbering follows the project report.

References (3/3)

[18] T. Papandreou, J. Bakker, and J. Kamps. Medical Text Simplification From Jargon Detection to Jargon-Aware Prompting. Proceedings of TSAR 2025, pp. 36-46, 2025. https://aclanthology.org/2025.tsar-1.3/

[19] D. Fang, J. Qiang, X. Ouyang, Y. Zhu, Y. Yuan, and Y. Li. Collaborative Document Simplification Using Multi-Agent Systems. Proceedings of COLING 2025, pp. 897-912, 2025. https://aclanthology.org/2025.coling-main.60/

[20] J. Bakker and J. Kamps. Cochrane-auto An Aligned Dataset for the Simplification of Biomedical Abstracts. Proceedings of TSAR 2024, pp. 41-51, 2024. https://aclanthology.org/2024.tsar-1.5/

[21] Project development data. cochraneauto_sents_train.csv, cochraneauto_sents_val.csv, and cochraneauto_sents_test.csv. Supplied Cochrane-auto sentence files. Counts and schemas reported before project-specific filtering.

[22] CLEF SimpleText 2026. sentences_src.json. Supplied source-only input file used for the SPU_DeepSimplify Codabench submission. File contents inspected for this report.

[23] W. Xu, C. Napoles, E. Pavlick, Q. Chen, and C. Callison-Burch. Optimizing Statistical Machine Translation for Text Simplification. Transactions of the Association for Computational Linguistics, vol. 4, pp. 401-415, 2016. https://aclanthology.org/Q16-1029/

[24] K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu. Bleu a Method for Automatic Evaluation of Machine Translation. Proceedings of ACL 2002, pp. 311-318, 2002. https://aclanthology.org/P02-1040/

[25] J. P. Kincaid, R. P. Fishburne Jr., R. L. Rogers, and B. S. Chissom. Derivation of New Readability Formulas for Navy Enlisted Personnel. Research Branch Report 8-75, 1975. https://stars.library.ucf.edu/istlibrary/56/

Reference numbering follows the project report.