Student Name: Ranjeet Kumar Sharma

Batch: June

Course: Data Analytics with AI

Assignment: SQL JOINS Assignment

Submission Date:- 04-08-2026

Email_id: Ranjeet Kumar (Sharma)

➔ **Write the Question and Answers.**

Table 1: Customers

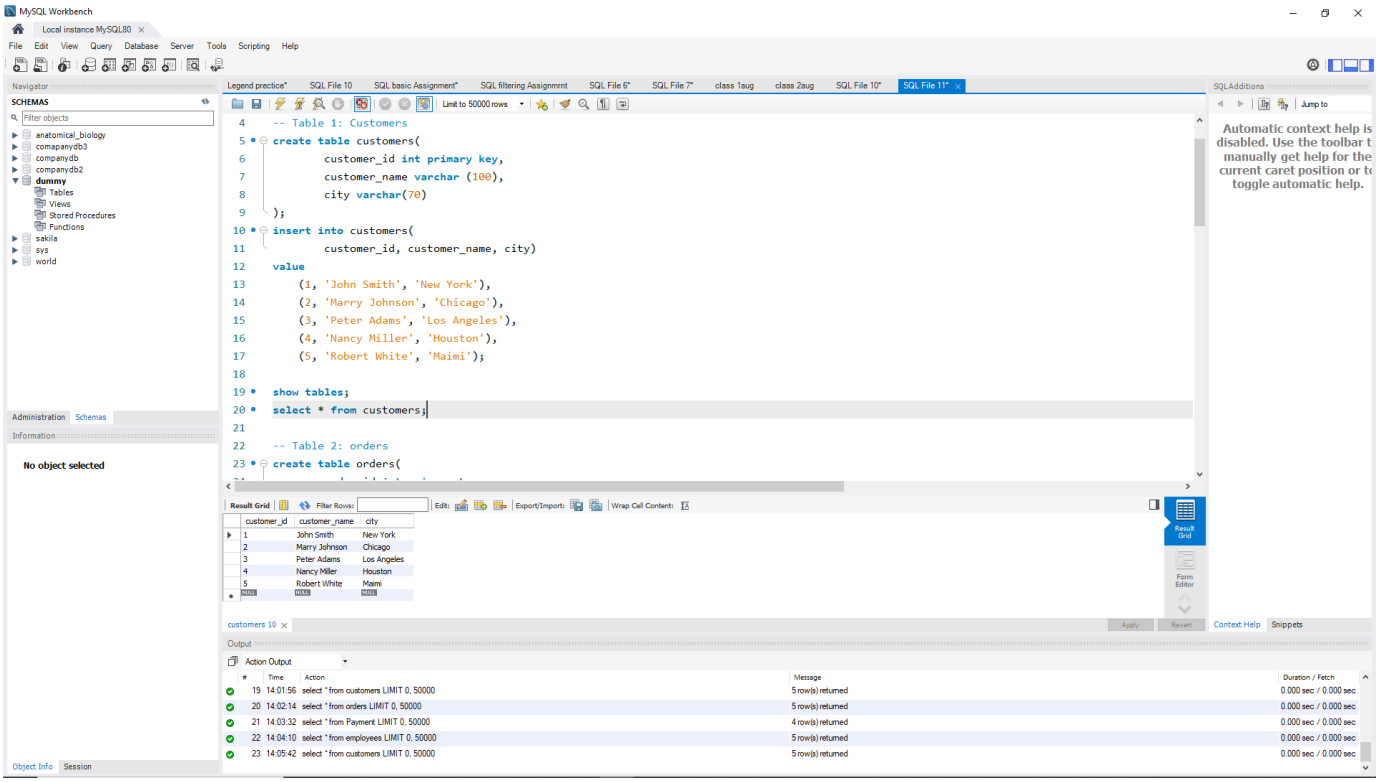


Table 2: Orders

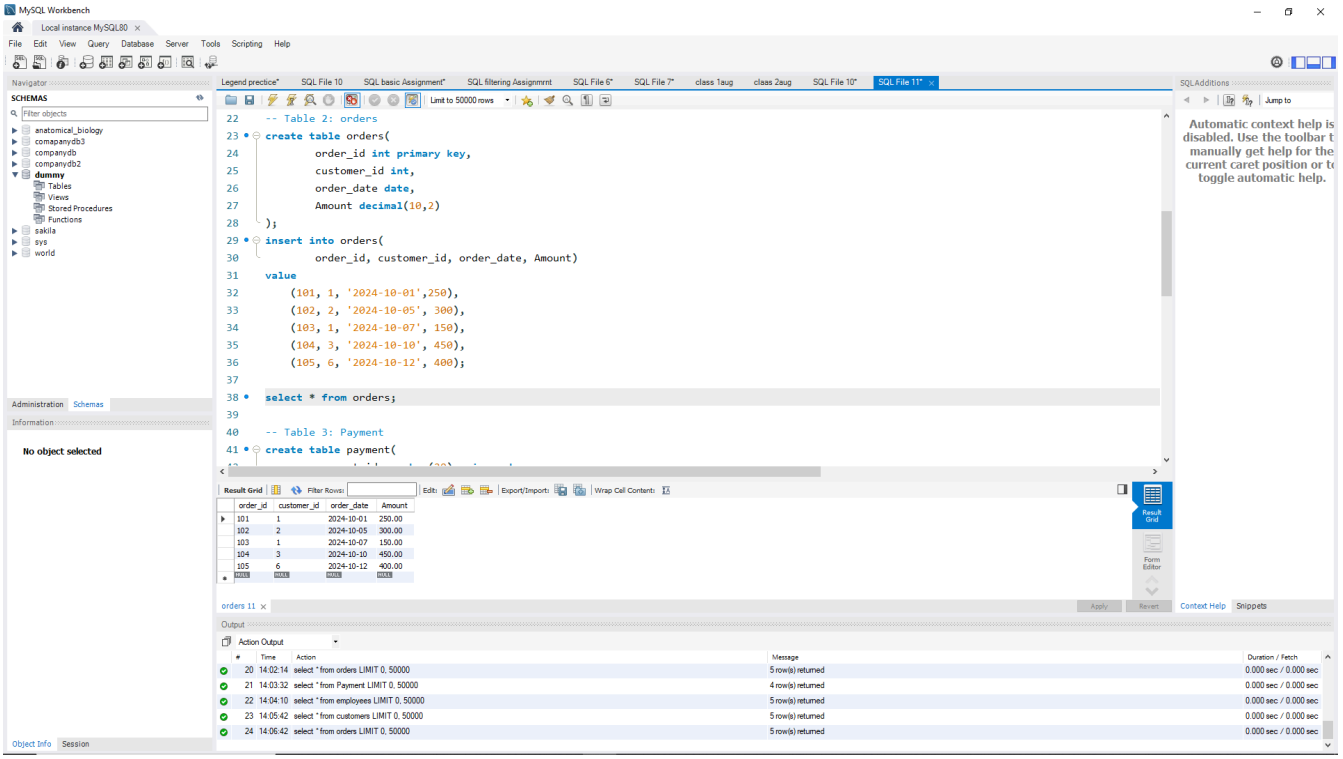


Table 3: Payments



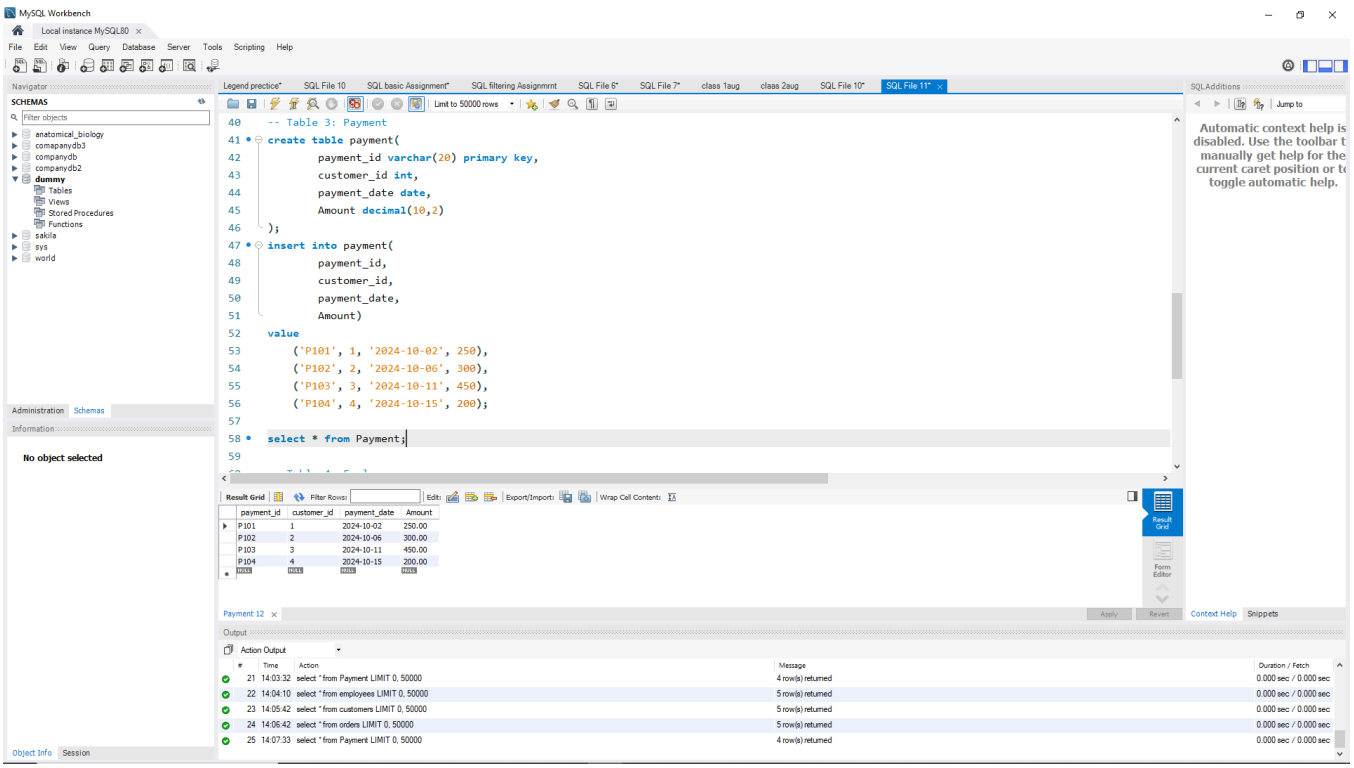


Table 4: Employees

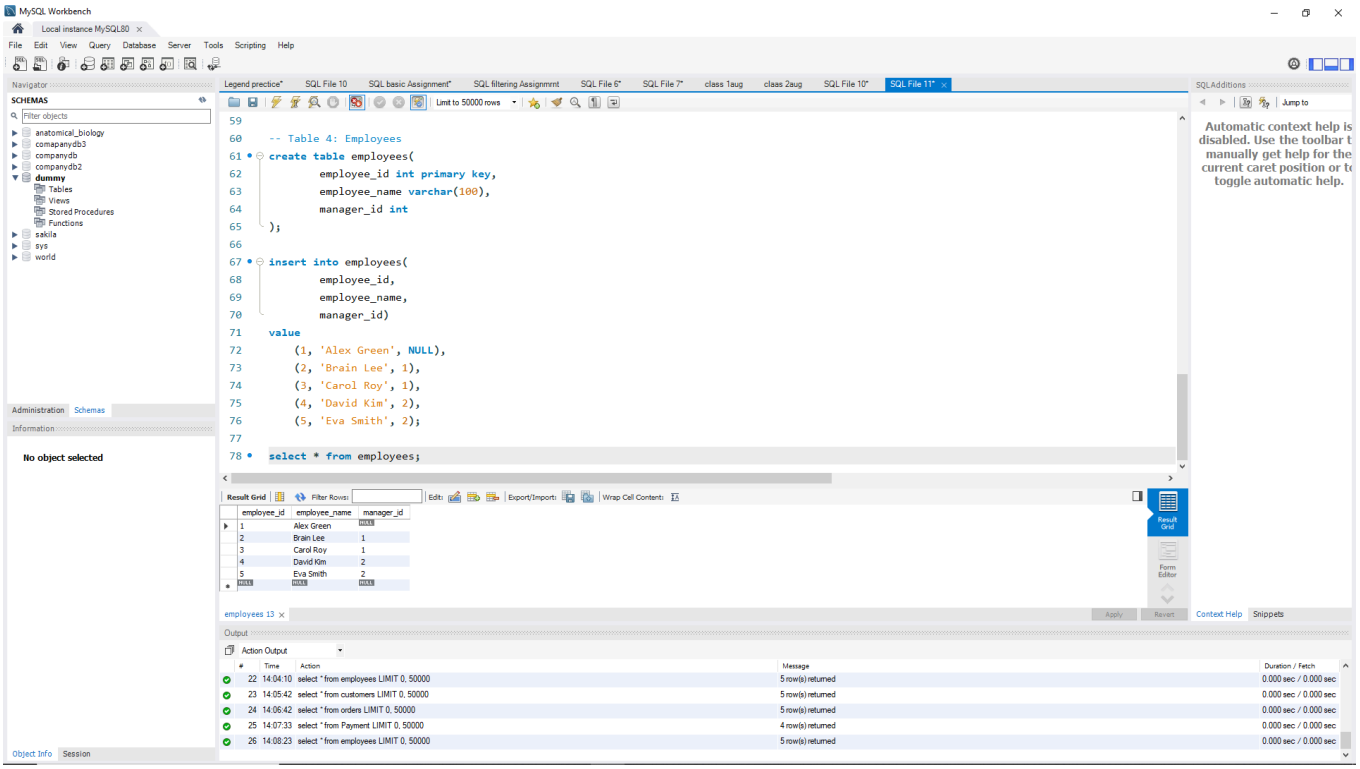


1. Retrieve all customers who have placed at least one order.

Ans:- select * from customers inner join orders
on customers.customer_id = orders.customer_id;

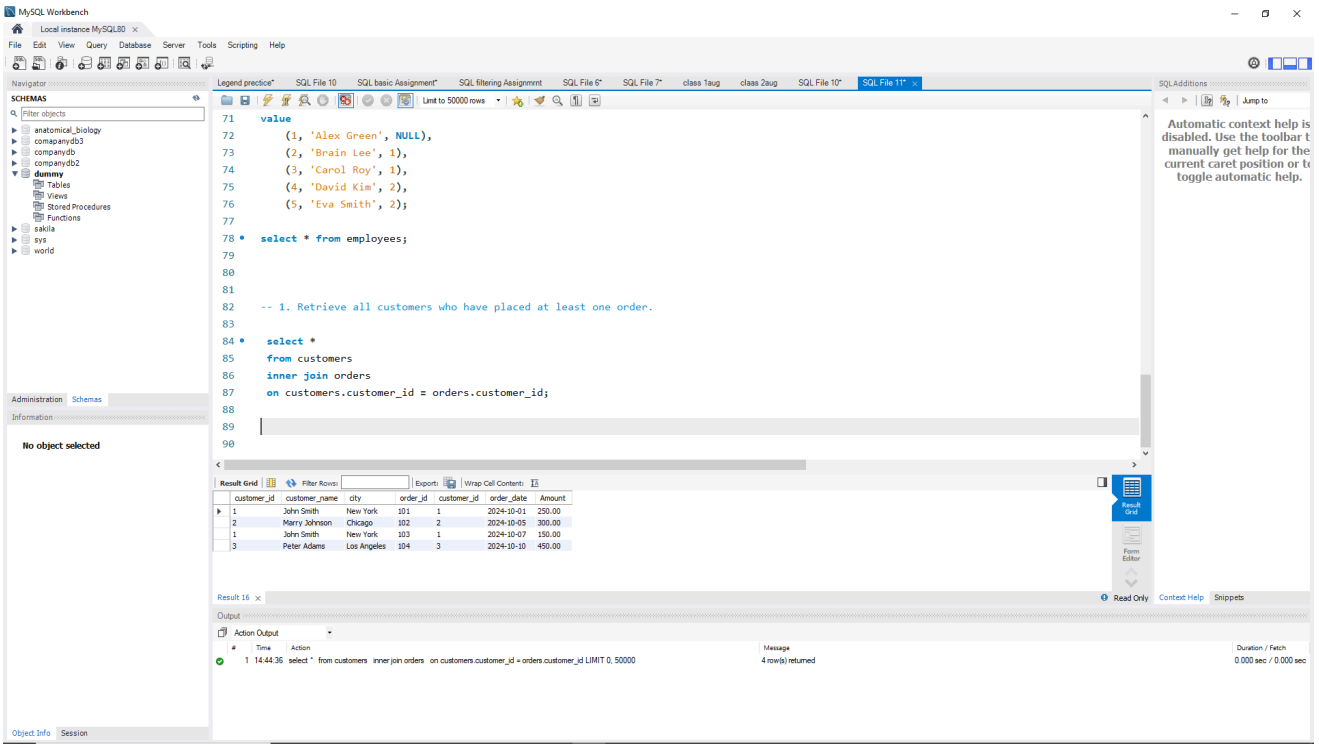


2. Retrieve all customers and their orders, including customers who have not placed Any orders.

Ans:- select * from customers left join orders
on customers.customer_id = orders.customer_id;

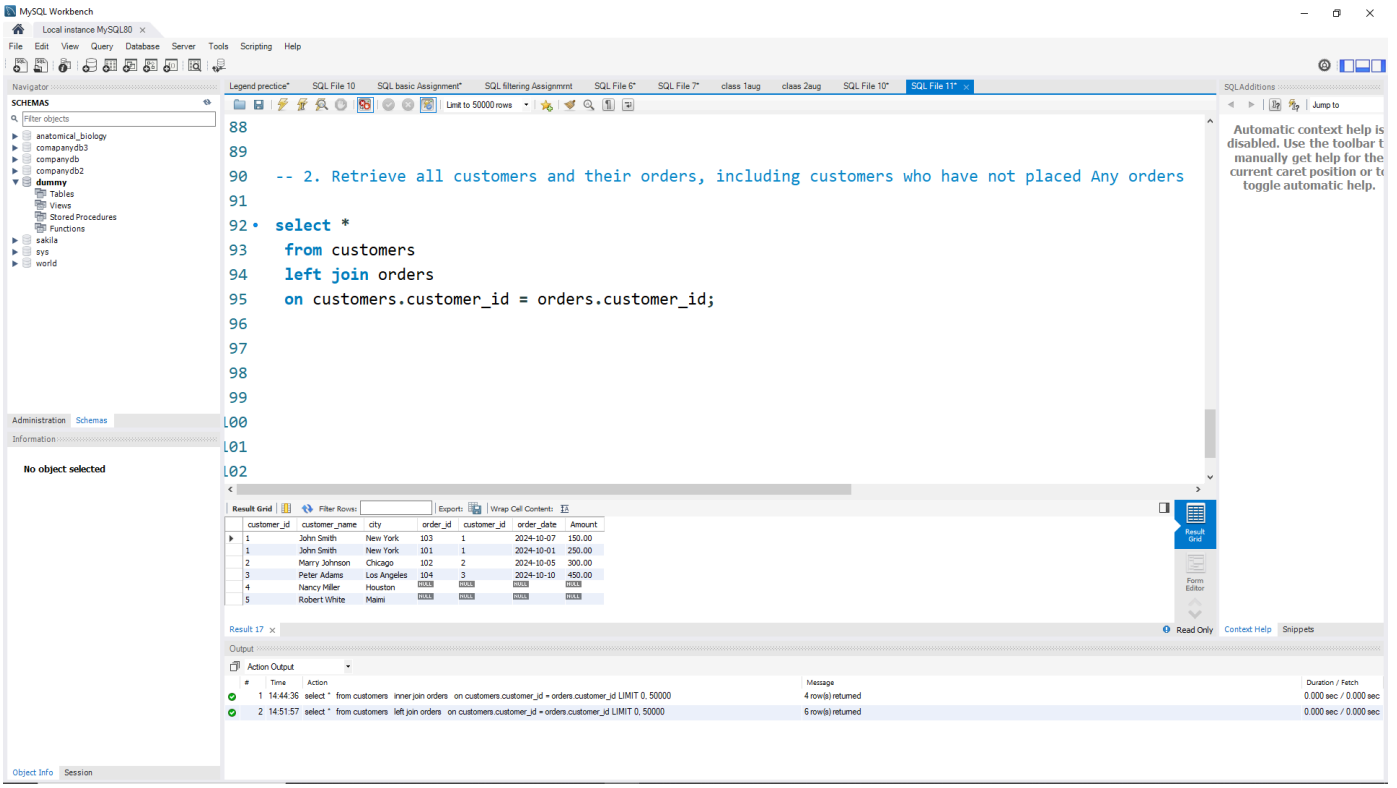


3. Retrieve all orders and their corresponding customers, including orders placed by unknown customers.

Ans:- select * from orders right join customers
on orders.customer_id = customers.customer_id;

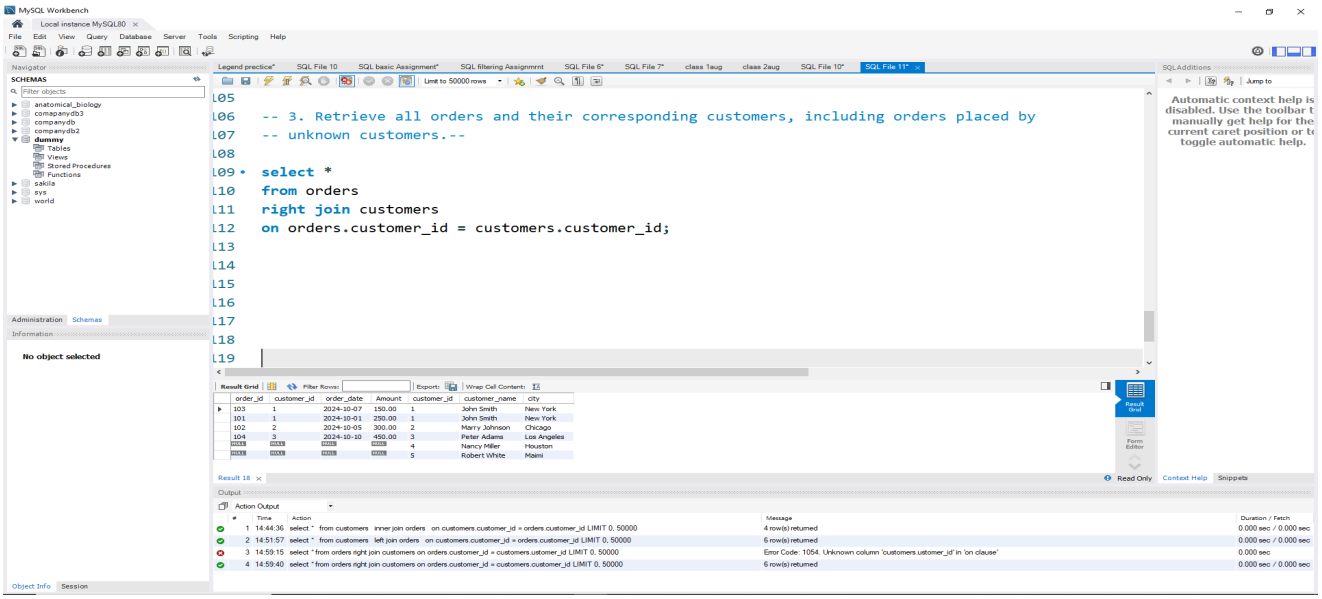


4. Display all customers and orders, whether matched or not .

Ans:- select * from customers c left join orders o on c.customer_id =o.customer_id
union
select * from customers c right join orders o on c.customer_id = o.customer_id;

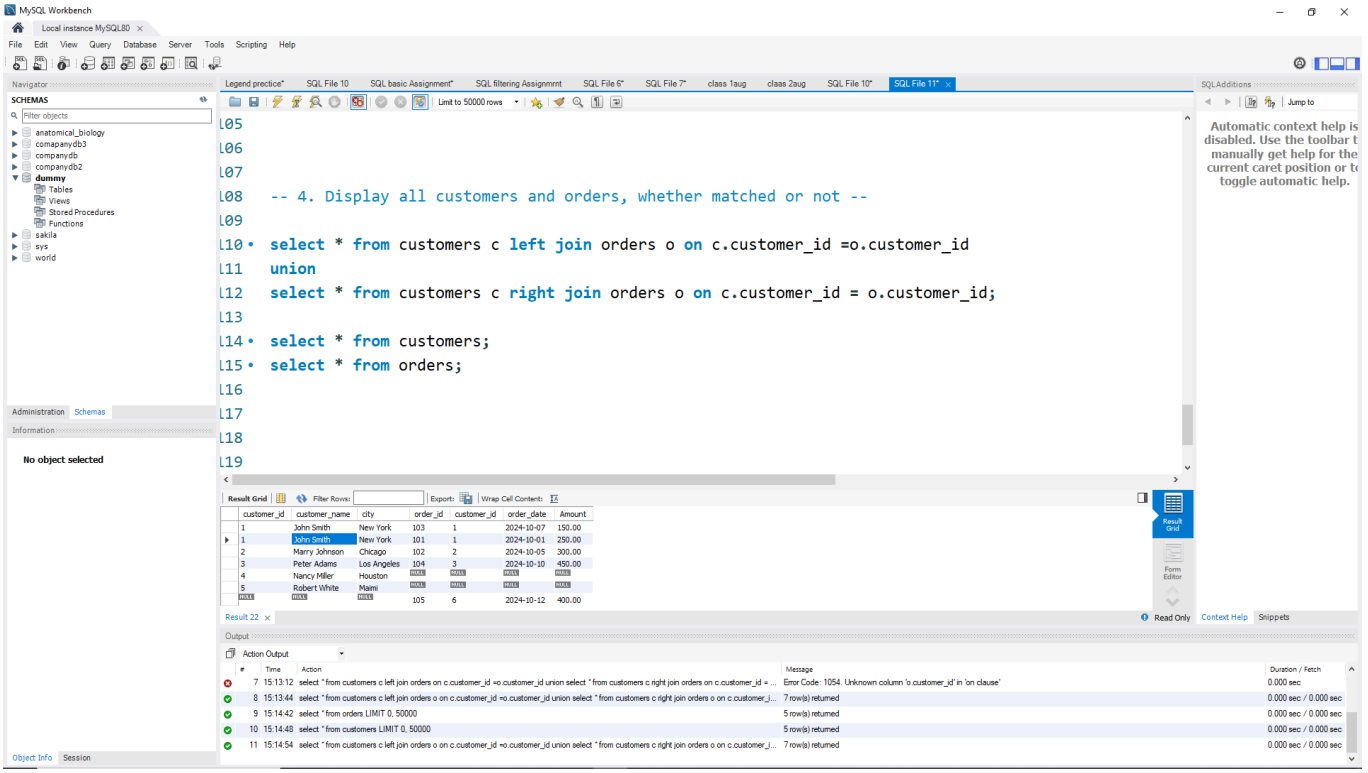

5. Find customers who have not placed any orders.


Ans:-select *
from customers c
left join orders o
on c.customer_id = o.customer_id
where o.customer_id
is null;

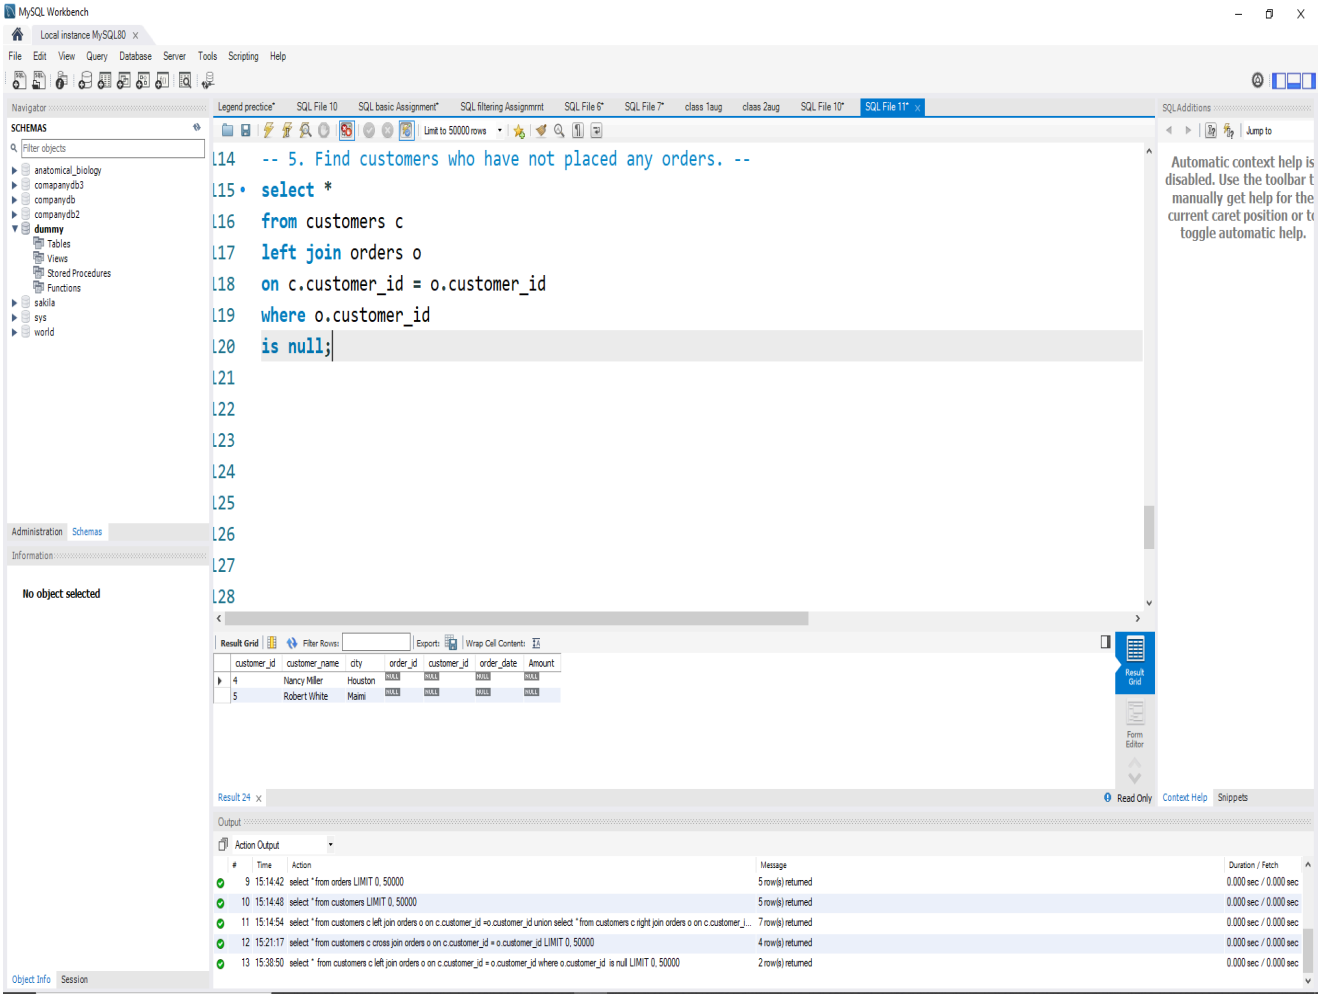

6. Retrieve customers who made payments but did not place any orders.


Ans:-

```
select *
from customers c
inner join payment p
on c.customer_id = p.customer_id
left join orders o
on c.customer_id = o.customer_id
where o.customer_id
is null;
```

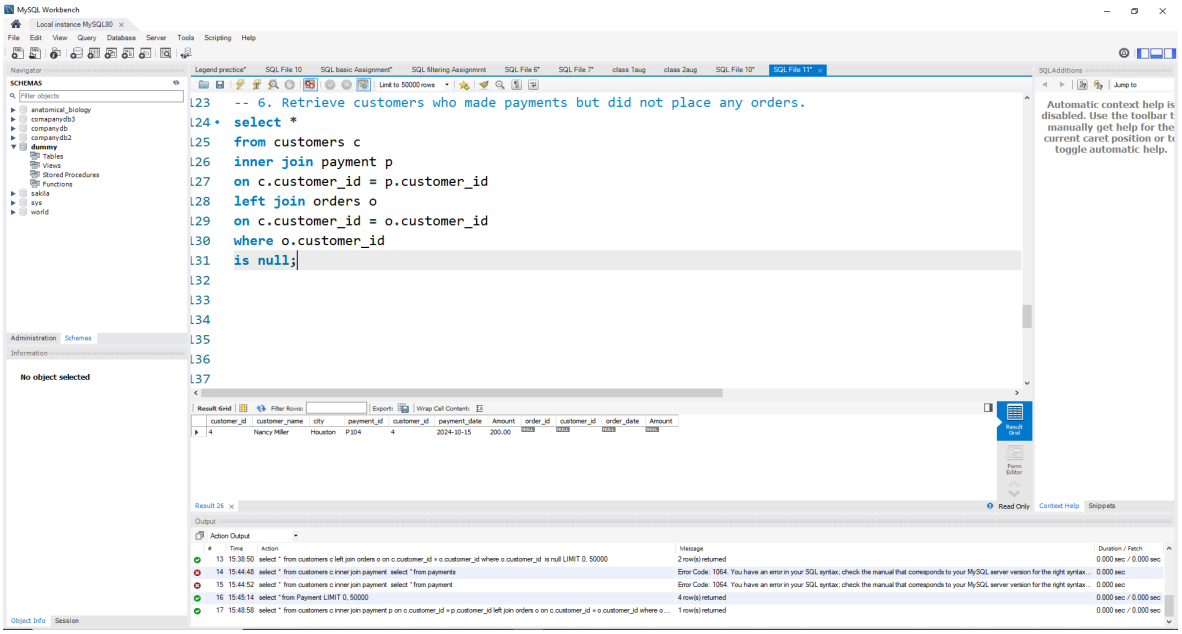


7. Generate a list of all possible combinations between Customers and Orders.

Ans:- select *
from customers c
cross join orders o;

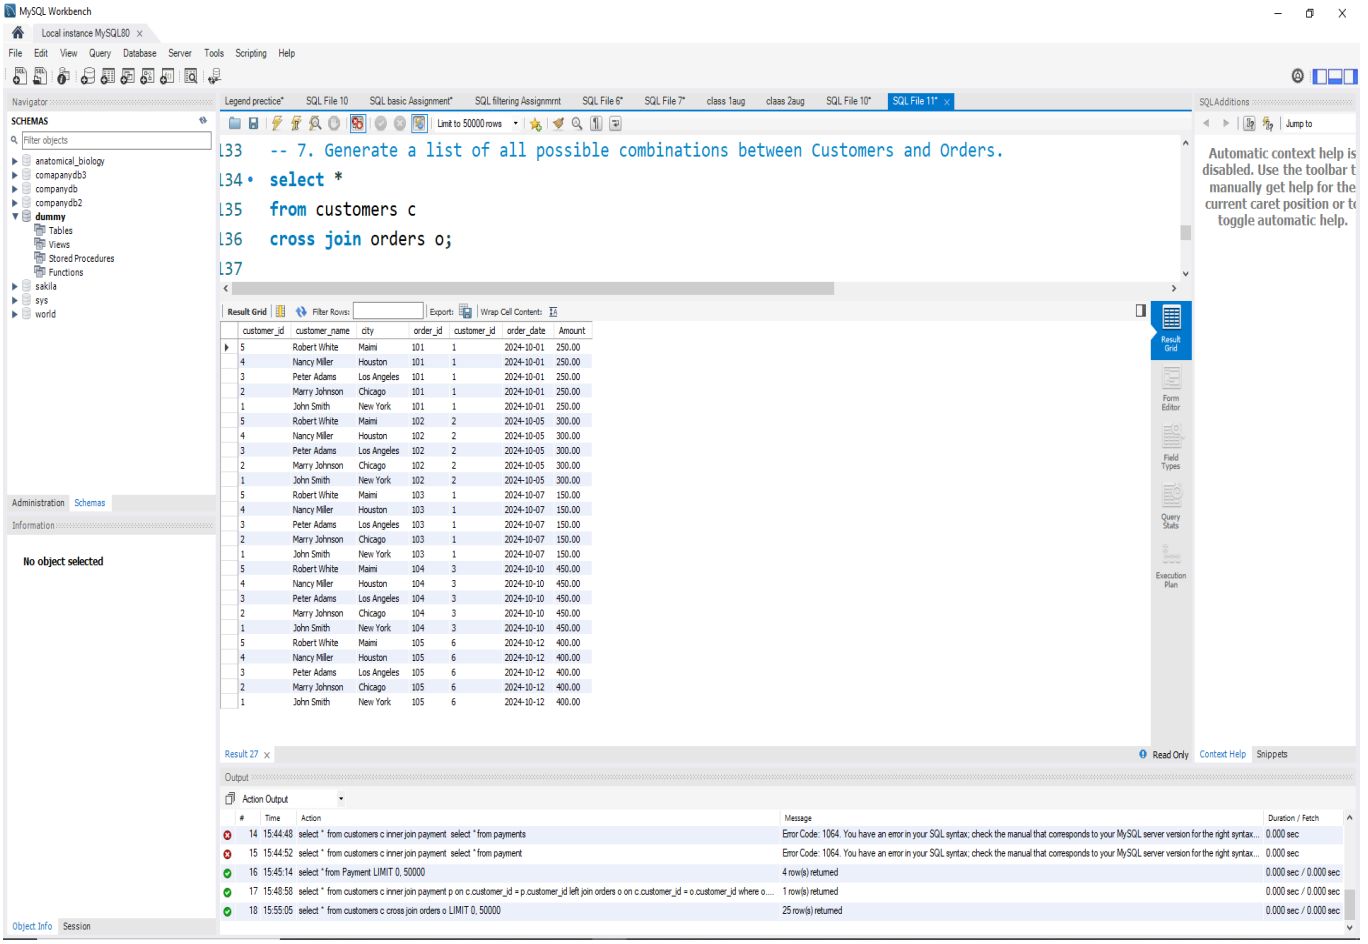


8. Show all customers along with order and payment amounts in one table.

Ans:- select *
from customers c
left join orders o
on c.customer_id = o.customer_id
left join payment p
on c.customer_id = p.customer_id;

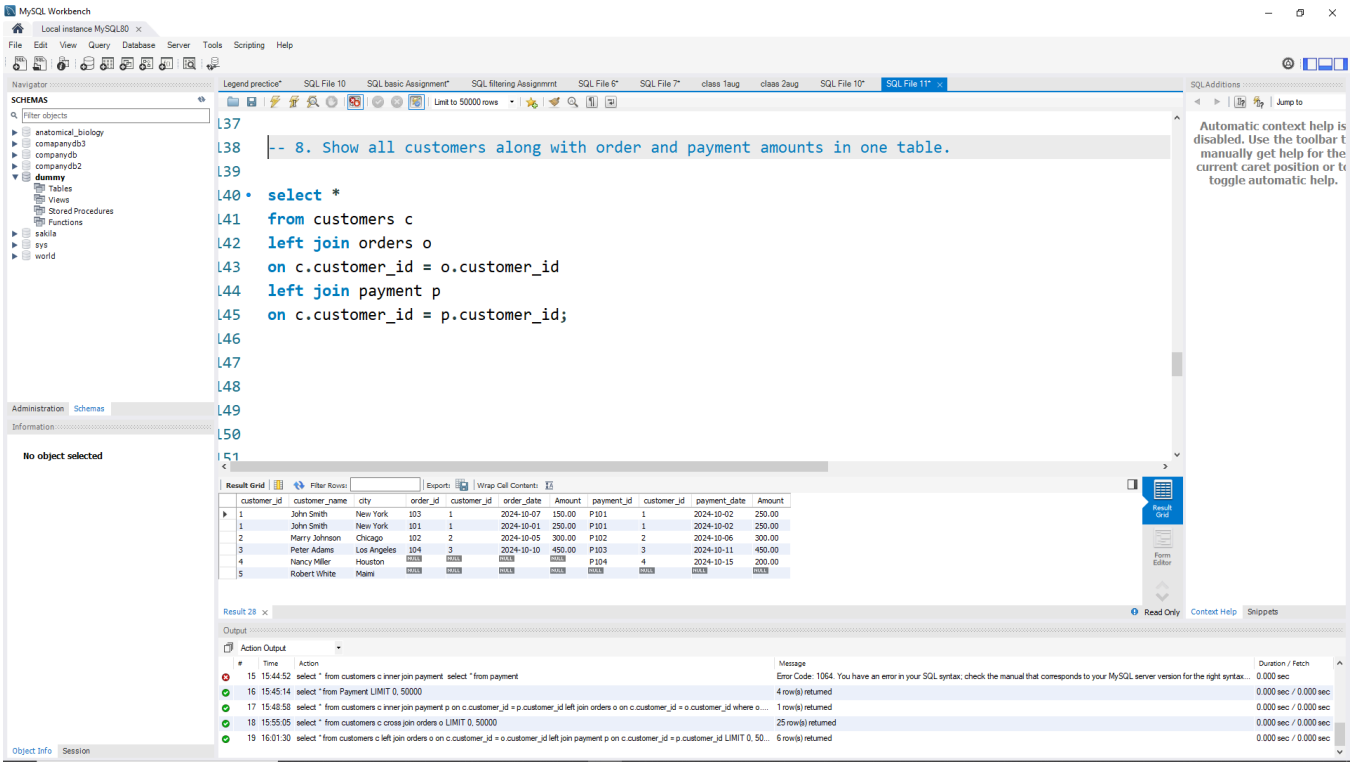

9. Retrieve all customers who have both placed orders and made payments.

Ans:- select *
from customers c
inner join orders o
on c.customer_id = o.customer_id
inner join payment p
on c.customer_id = p.customer_id;

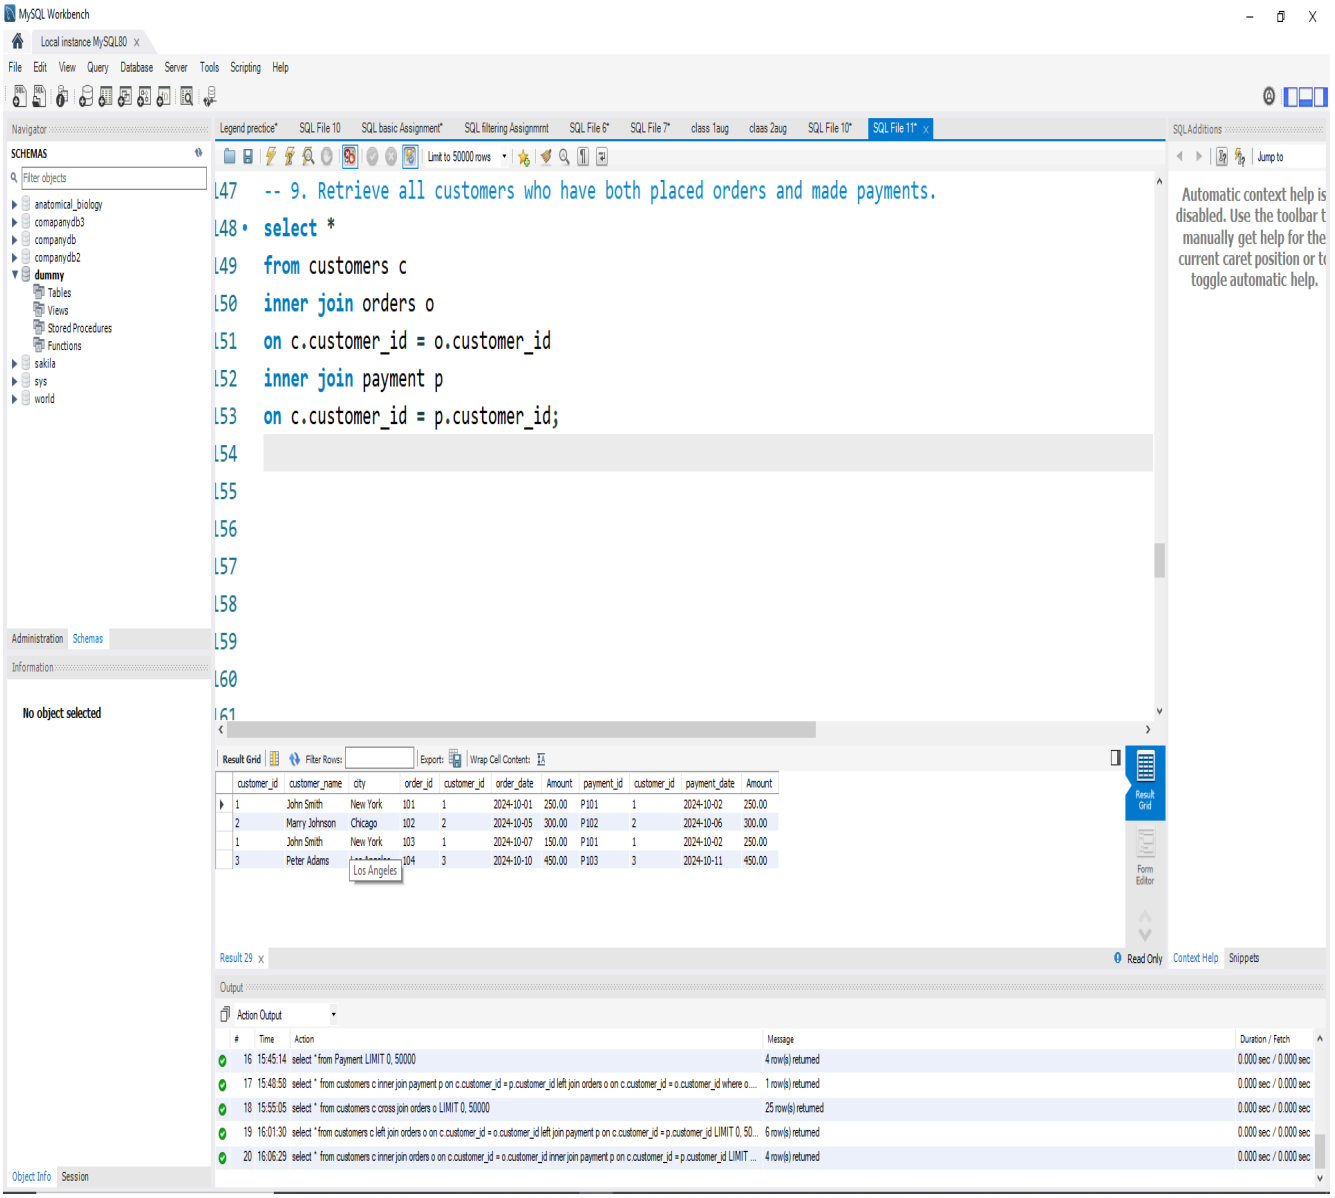
MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
SCHEMAS
Filter objects
anatomical_biology
comapanydb3
companydb
companydb2
dummy
Tables
Views
Stored Procedures
Functions
sakila
sys
world
Administration Schemas
Information
No object selected
Object Info Session
Legend prectice* SQL File 10 SQL basic Assignment* SQL filtering Assignmnt SQL File 6* SQL File 7* class 1aug class 2aug SQL File 10* SQL File 11*
Limit to 50000 rows
-- 9. Retrieve all customers who have both placed orders and made payments.
select *
from customers c
inner join orders o
on c.customer_id = o.customer_id
inner join payment p
on c.customer_id = p.customer_id;
Result Grid Filter Rows: Export: Wrap Cell Content:
customer_id customer_name city order_id customer_id order_date Amount payment_id customer_id payment_date Amount
1 John Smith New York 101 1 2024-10-01 250.00 P101 1 2024-10-02 250.00
2 Marry Johnson Chicago 102 2 2024-10-05 300.00 P102 2 2024-10-06 300.00
1 John Smith New York 103 1 2024-10-07 150.00 P101 1 2024-10-02 250.00
3 Peter Adams 104 3 2024-10-10 450.00 P103 3 2024-10-11 450.00
Los Angeles
Result 29
Read Only
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
16 15:45:14 select * from Payment LIMIT 0, 50000 4 row(s) returned 0.000 sec / 0.000 sec
17 15:48:58 select * from customers c inner join payment p on c.customer_id = p.customer_id left join orders o on c.customer_id = o.customer_id where o.... 1 row(s) returned 0.000 sec / 0.000 sec
18 15:55:05 select * from customers c cross join orders o LIMIT 0, 50000 25 row(s) returned 0.000 sec / 0.000 sec
19 16:01:30 select * from customers c left join orders o on c.customer_id = o.customer_id left join payment p on c.customer_id = p.customer_id LIMIT 0, 50... 6 row(s) returned 0.000 sec / 0.000 sec
20 16:06:29 select * from customers c inner join orders o on c.customer_id = o.customer_id inner join payment p on c.customer_id = p.customer_id LIMIT ... 4 row(s) returned 0.000 sec / 0.000 sec