

R Markdown and Leaflet

Ranjit Subudhi

6/26/2019


```
library(leaflet)
library(mapview)
```

```
new_icon <- awesomeIcons(
  icon = 'ios-close',
  iconColor = 'black',
  library = 'ion',
  markerColor = "red"
)

content <- paste(sep = "<br/>",
  "<b>Konark </b>",
  "Sun Temple",
  "Odisha, India"
)

my_map <- leaflet() %>%
  addTiles() %>%
  addAwesomeMarkers(lat = 19.8876, lng = 86.0945,
    icon = new_icon,
    popup = "Good Coffee at the local CCD") %>%
  addPopups(lat = 19.8876, lng = 86.0945, content,
    options = popupOptions(closeButton = FALSE)
  )

my_map
```

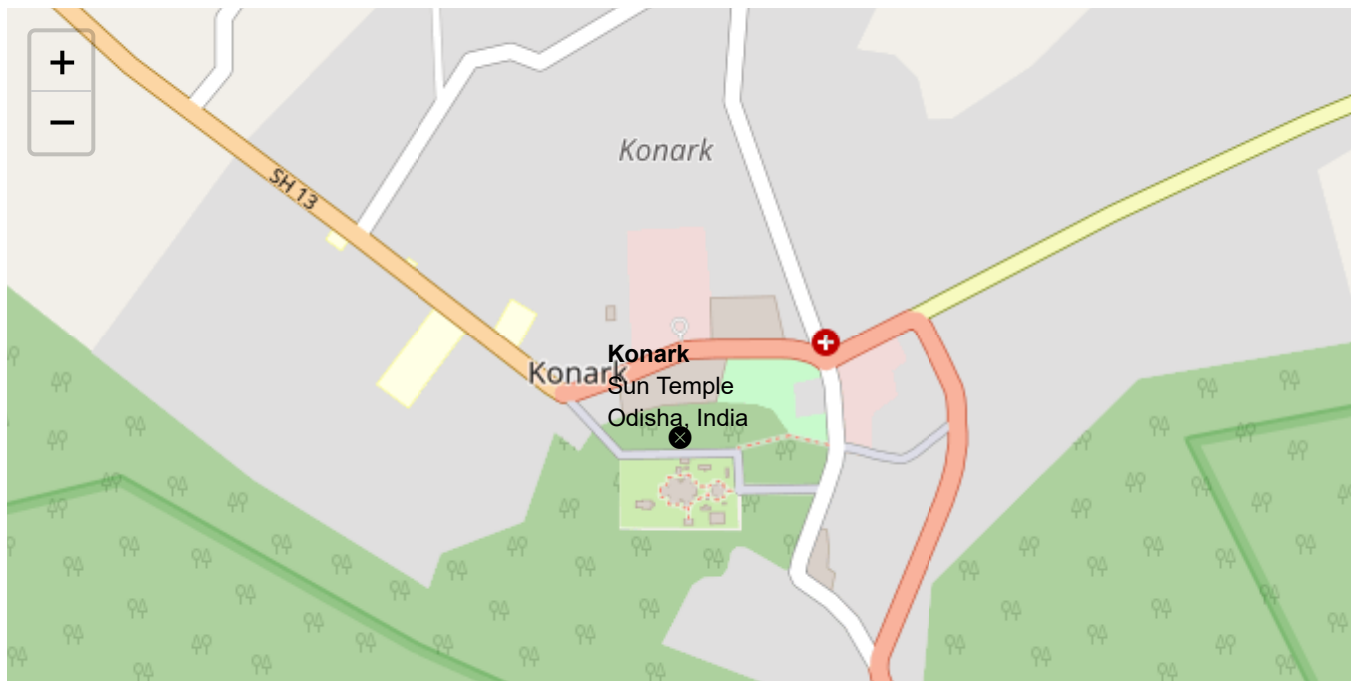



Leaflet (<http://leafletjs.com>) | © OpenStreetMap (<http://openstreetmap.org>) contributors, CC-BY-SA
(<http://creativecommons.org/licenses/by-sa/2.0/>)