Web Programming Project

Name: Himanshu Yadav

Reg. No.: 24BDS0225

Project Name:

Cinetrack


Project topic:

A Movie/Show Watchlist website

With pages-

1. **Home page-** Browse/search movies & shows
2. **Watchlist-** Your saved items with status (Want to Watch / Watching / Watched)
3. **Details-** Individual movie/show detail page
4. **About-** Simple about page with the react components used

Project workflow:

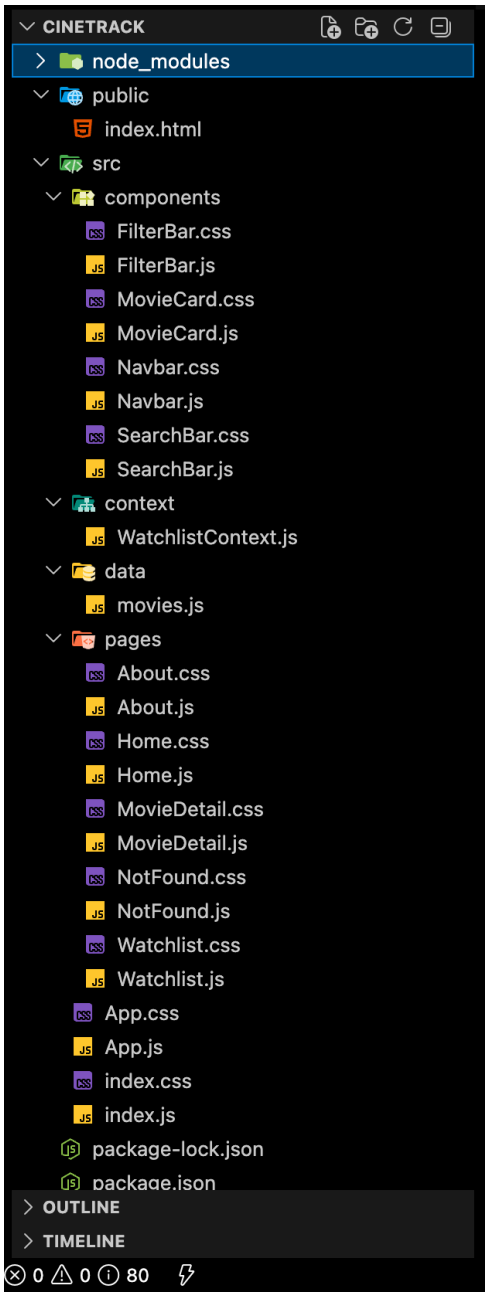

Folder: Cinetrack [Main]

File: package.json

```
{
  "name": "cinetrack",
  "version": "1.0.0",
  "private": true,
  "dependencies": {
    "ajv": "^8.18.0",
    "prop-types": "^15.8.1",
    "react": "^18.2.0",
    "react-dom": "^18.2.0",
    "react-router-dom": "^6.21.0",
    "react-scripts": "5.0.1"
  },
  "scripts": {
    "start": "react-scripts start",
    "build": "react-scripts build",
    "predeploy": "npm run build",
    "deploy": "gh-pages -d build"
  },
  "homepage": ".",
  "browserslist": {
    "production": [
      ">0.2%",
      "not dead",
      "not op_mini all"
    ],
    "development": [
      "last 1 chrome version",
      "last 1 firefox version",
      "last 1 safari version"
    ]
  }
}
```

File: public/index.html [Folder- cinetrack-> public]

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1" />
    <title>CineTrack</title>
    <link rel="preconnect" href="https://fonts.googleapis.com" />
    <link href="https://fonts.googleapis.com/css2?
family=DM+Sans:ital,wght@0,300;0,400;0,500;0,600;1,400&family=DM+Serif+Display&dis
play=swap" rel="stylesheet" />
  </head>
  <body>
    <noscript>You need to enable JavaScript to run this app.</noscript>
    <div id="root"></div>
  </body>
</html>
```

Folder- src

File: src/index.js

```
import React from 'react';
import ReactDOM from 'react-dom/client';
import './index.css';
import App from './App';

const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

File: src/index.css

```
*, *::before, *::after {
  box-sizing: border-box;
  margin: 0;
  padding: 0;
}

:root {
  --white: #ffffff;
  --off-white: #f8f8f6;
  --gray-50: #f4f4f2;
  --gray-100: #e8e8e5;
  --gray-200: #d0d0cc;
  --gray-400: #9a9a96;
  --gray-600: #5e5e5a;
  --gray-800: #2c2c2a;
  --gray-900: #1a1a18;
  --accent: #1a1a18;
  --accent-light: #f0f0ee;
  --red: #c0392b;
  --green: #2e7d52;
  --amber: #b85c00;
  --blue: #1a5fa8;
  --font-sans: 'DM Sans', sans-serif;
  --font-serif: 'DM Serif Display', serif;
  --radius-sm: 6px;
  --radius-md: 10px;
  --radius-lg: 16px;
  --shadow-sm: 0 1px 3px rgba(0,0,0,0.06), 0 1px 2px rgba(0,0,0,0.04);
  --shadow-md: 0 4px 12px rgba(0,0,0,0.08), 0 2px 4px rgba(0,0,0,0.04);
```

```
}

body {
  font-family: var(--font-sans);
  background: var(--off-white);
  color: var(--gray-900);
  font-size: 15px;
  line-height: 1.6;
  -webkit-font-smoothing: antialiased;
}

a {
  color: inherit;
  text-decoration: none;
}

button {
  font-family: var(--font-sans);
  cursor: pointer;
  border: none;
  background: none;
}

input, select {
  font-family: var(--font-sans);
}

img {
  max-width: 100%;
  display: block;
}

::-webkit-scrollbar { width: 5px; }
::-webkit-scrollbar-track { background: transparent; }
::-webkit-scrollbar-thumb { background: var(--gray-200); border-radius: 99px; }
```

File: src/App.js

```
import React from 'react';
import { BrowserRouter as Router, Routes, Route } from 'react-router-dom';
import { WatchlistProvider } from './context/WatchlistContext';
import Navbar from './components/Navbar';
import Home from './pages/Home';
import MovieDetail from './pages/MovieDetail';
import Watchlist from './pages/Watchlist';
import About from './pages/About';
import NotFound from './pages/NotFound';
import './App.css';

function App() {
  return (
    <WatchlistProvider>
      <Router>
        <div className="app">
          <Navbar />
          <main className="app-main">
            <Routes>
              <Route path="/" element={<Home />} />
              <Route path="/movie/:id" element={<MovieDetail />} />
              <Route path="/watchlist" element={<Watchlist />} />
              <Route path="/about" element={<About />} />
              <Route path="*" element={<NotFound />} />
            </Routes>
          </main>
          <footer className="app-footer">
            <p>CineTrack · Built with React · VIT Vellore Web Programming Project</p>
          </footer>
        </div>
      </Router>
    </WatchlistProvider>
  );
}

export default App;
```

File: src/App.css

```
.app {
  min-height: 100vh;
  display: flex;
  flex-direction: column;
}

.app-main {
  flex: 1;
}

.app-footer {
  border-top: 1px solid var(--gray-100);
  padding: 20px 24px;
  text-align: center;
  font-size: 12px;
  color: var(--gray-400);
}
```

Folder: context [cinetrack/src/context]

File: src/context/WatchlistContext.js

```
import React, { createContext, useContext, useState, useEffect } from 'react';

const WatchlistContext = createContext();

export const STATUS = {
  WANT: 'Want to Watch',
  WATCHING: 'Watching',
  WATCHED: 'Watched',
};

export const WatchlistProvider = ({ children }) => {
  const [watchlist, setWatchlist] = useState(() => {
    try {
      const saved = localStorage.getItem('cinetrack-watchlist');
      return saved ? JSON.parse(saved) : [];
    } catch {
      return [];
    }
  });

  useEffect(() => {
    localStorage.setItem('cinetrack-watchlist', JSON.stringify(watchlist));
  }, [watchlist]);

  const addToWatchlist = (movie) => {
    setWatchlist((prev) => {
      if (prev.find((m) => m.id === movie.id)) return prev;
      return [...prev, { ...movie, status: STATUS.WANT, addedAt: new Date().toISOString() }];
    });
  };

  const removeFromWatchlist = (id) => {
    setWatchlist((prev) => prev.filter((m) => m.id !== id));
  };

  const updateStatus = (id, status) => {
    setWatchlist((prev) =>
      prev.map((m) => (m.id === id ? { ...m, status } : m))
    );
  };

  const isInWatchlist = (id) => watchlist.some((m) => m.id === id);

  const getStatus = (id) => {
```

```
    const item = watchlist.find((m) => m.id === id);
    return item ? item.status : null;
  };

  return (
    <WatchlistContext.Provider
      value={{ watchlist, addToWatchlist, removeFromWatchlist, updateStatus, isInWatchlist,
getStatus }}
    >
      {children}
    </WatchlistContext.Provider>
  );
};

export const useWatchlist = () => useContext(WatchlistContext);
```

Folder: data [cinetrack/src/data]

File: src/data/movies.js

```
export const MOVIES_DATA = [
  {
    id: 1,
    title: 'Interstellar',
    type: 'Movie',
    year: 2014,
    genre: ['Sci-Fi', 'Drama'],
    rating: 8.6,
    director: 'Christopher Nolan',
    cast: ['Matthew McConaughey', 'Anne Hathaway', 'Jessica Chastain'],
    description:
      'A team of explorers travel through a wormhole in space in an attempt to ensure humanity\'s
survival.',
    poster: 'https://image.tmdb.org/t/p/w500/gEU2QniE6E77NI6lCU6MxlNBvIx.jpg',
    duration: '2h 49m',
  },
  {
    id: 2,
    title: 'The Dark Knight',
    type: 'Movie',
    year: 2008,
    genre: ['Action', 'Crime'],
    rating: 9.0,
    director: 'Christopher Nolan',
    cast: ['Christian Bale', 'Heath Ledger', 'Aaron Eckhart'],
    description:
      'Batman faces the Joker, a criminal mastermind who seeks to plunge Gotham City into
anarchy.',
    poster: 'https://image.tmdb.org/t/p/w500/qJ2tW6WMUDux911r6m7haRef0WH.jpg',
    duration: '2h 32m',
  },
  {
    id: 3,
    title: 'Inception',
    type: 'Movie',
    year: 2010,
    genre: ['Sci-Fi', 'Thriller'],
    rating: 8.8,
    director: 'Christopher Nolan',
    cast: ['Leonardo DiCaprio', 'Joseph Gordon-Levitt', 'Ellen Page'],
    description:
      'A thief who steals corporate secrets through dream-sharing technology is given the inverse
task.',
    poster: 'https://image.tmdb.org/t/p/w500/9gk7adHYeDvHkCSEqAvQNLV5Uge.jpg',
    duration: '2h 28m',
  },
  {
    id: 4,
    title: 'Game of Thrones',
```

```
    type: 'Series',
    year: 2011,
    genre: ['Drama', 'Fantasy'],
    rating: 9.2,
    director: 'David Benioff & D.B. Weiss',
    cast: ['Emilia Clarke', 'Kit Harington', 'Peter Dinklage'],
    description:
      'Nine noble families fight for control over the lands of Westeros, while an ancient enemy returns
after being dormant for thousands of years.',
    poster: 'https://m.media-amazon.com/images/M/
MV5BMTNhMDJmNmYtNDQ5OS00ODdlLWE0ZDAtZTgyYTIwNDY3OTU3XkEyXkFqcGc@._V1_
FMjpg_UX1000_.jpg',
    duration: '8 Seasons',
  },
  {
    id: 5,
    title: 'Breaking Bad',
    type: 'Series',
    year: 2008,
    genre: ['Crime', 'Drama'],
    rating: 9.5,
    director: 'Vince Gilligan',
    cast: ['Bryan Cranston', 'Aaron Paul', 'Anna Gunn'],
    description:
      'A chemistry teacher diagnosed with cancer turns to crime, producing and selling
methamphetamine.',
    poster: 'https://image.tmdb.org/t/p/w500/ggFHVNu6YYI5L9pCfOacjizRGt.jpg',
    duration: '5 Seasons',
  },
  {
    id: 6,
    title: 'Dune',
    type: 'Movie',
    year: 2021,
    genre: ['Sci-Fi', 'Adventure'],
    rating: 7.9,
    director: 'Denis Villeneuve',
    cast: ['Timothée Chalamet', 'Rebecca Ferguson', 'Zendaya'],
    description:
      'A noble family becomes embroiled in a war for control over the galaxy\'s most valuable asset.',
    poster: 'https://m.media-amazon.com/images/I/61G3TAFVdSL._AC_UF894,1000_QL80_.jpg',
    duration: '2h 35m',
  },
  {
    id: 7,
    title: 'Stranger Things',
    type: 'Series',
    year: 2016,
    genre: ['Sci-Fi', 'Horror'],
    rating: 8.7,
    director: 'The Duffer Brothers',
    cast: ['Millie Bobby Brown', 'Finn Wolfhard', 'Winona Ryder'],
    description:
      'A group of kids encounter supernatural forces and a secret government agency in their small
town.',
    poster: 'https://image.tmdb.org/t/p/w500/49WJfeN0moxb9IPfGn8AIqMGskD.jpg',
```

```
    duration: '4 Seasons',
  },
  {
    id: 8,
    title: 'The Godfather',
    type: 'Movie',
    year: 1972,
    genre: ['Crime', 'Drama'],
    rating: 9.2,
    director: 'Francis Ford Coppola',
    cast: ['Marlon Brando', 'Al Pacino', 'James Caan'],
    description:
      'The aging patriarch of an organized crime dynasty transfers control to his reluctant son.',
    poster: 'https://m.media-amazon.com/images/I/61k7Mx2IjzL._AC_UF894,1000_QL80_.jpg',
    duration: '2h 55m',
  },
  {
    id: 9,
    title: 'Oppenheimer',
    type: 'Movie',
    year: 2023,
    genre: ['Biography', 'Drama'],
    rating: 8.4,
    director: 'Christopher Nolan',
    cast: ['Cillian Murphy', 'Emily Blunt', 'Robert Downey Jr.'],
    description:
      'The story of J. Robert Oppenheimer and his role in the development of the atomic bomb.',
    poster: 'https://image.tmdb.org/t/p/w500/8Gxv8gSFCU0XGDykEGv7zR1n2ua.jpg',
    duration: '3h 0m',
  },
  {
    id: 10,
    title: 'Severance',
    type: 'Series',
    year: 2022,
    genre: ['Thriller', 'Sci-Fi'],
    rating: 8.7,
    director: 'Ben Stiller',
    cast: ['Adam Scott', 'Zach Cherry', 'Britt Lower'],
    description:
      'A thriller about a team of office workers whose memories are surgically divided between work
and personal life.',
    poster: 'https://lh5.googleusercontent.com/proxy/
Thi8tFQUx2x2gtvCEu6MqzCv26yneKQZdRjLlTvDN2ELwCnx_cDNHt2C8jLsvQJj2UOnwaFqwZFn
q6LHYaouY0aX2OKru5D8Tw',
    duration: '2 Seasons',
  },
  {
    id: 11,
    title: 'Parasite',
    type: 'Movie',
    year: 2019,
    genre: ['Thriller', 'Drama'],
    rating: 8.5,
    director: 'Bong Joon-ho',
    cast: ['Song Kang-ho', 'Lee Sun-kyun', 'Cho Yeo-jeong'],
```

```
    description:
      'A poor family schemes to become employed by a wealthy family and infiltrate their household.',
    poster: 'https://image.tmdb.org/t/p/w500/7IiTTgloJzvGI1TAYymCfbfl3vT.jpg',
    duration: '2h 12m',
  },
  {
    id: 12,
    title: 'The Bear',
    type: 'Series',
    year: 2022,
    genre: ['Drama', 'Comedy'],
    rating: 8.6,
    director: 'Christopher Storer',
    cast: ['Jeremy Allen White', 'Ebon Moss-Bachrach', 'Ayo Edebiri'],
    description:
      'A young chef from fine dining returns home to run his family\'s sandwich shop after a tragedy.',
    poster: 'https://image.tmdb.org/t/p/original/3MVHF64rlvH1eofKefIoazXwOK0.jpg',
    duration: '3 Seasons',
  },
  {
    id: 13,
    title: 'Everything Everywhere All at Once',
    type: 'Movie',
    year: 2022,
    genre: ['Sci-Fi', 'Comedy'],
    rating: 7.8,
    director: 'Daniels',
    cast: ['Michelle Yeoh', 'Stephanie Hsu', 'Ke Huy Quan'],
    description:
      'A middle-aged Chinese immigrant is swept up in an adventure spanning parallel universes.',
    poster: 'https://image.tmdb.org/t/p/w500/w3LxiVYdWWRvEVdn5RYq6jIqkb1.jpg',
    duration: '2h 19m',
  },
];
```

Folder: components [cinetrack/src/components]

File: src/components/Navbar.js

```
import React, { useState, useEffect } from 'react';
import { Link, useLocation } from 'react-router-dom';
import { useWatchlist } from '../context/WatchlistContext';
import './Navbar.css';

class NavBrand extends React.Component {
  constructor(props) {
    super(props);
    this.state = { hovered: false };
  }

  render() {
    return (
      <Link
        to="/"
        className="nav-brand"
        onMouseEnter={() => this.setState({ hovered: true })}
        onMouseLeave={() => this.setState({ hovered: false })}
      >
        <span className="nav-brand-icon">◈</span>
        <span className={`nav-brand-text ${this.state.hovered ? 'hovered' : ''}`}>
          CineTrack
        </span>
      </Link>
    );
  }
}

function Navbar() {
  const location = useLocation();
  const { watchlist } = useWatchlist();
  const [scrolled, setScrolled] = useState(false);
  const [menuOpen, setMenuOpen] = useState(false);

  useEffect(() => {
    const handleScroll = () => setScrolled(window.scrollY > 20);
    window.addEventListener('scroll', handleScroll);
    return () => window.removeEventListener('scroll', handleScroll);
  }, []);

  useEffect(() => {
    setMenuOpen(false);
  }, [location]);
```

```
  const navLinks = [
    { to: '/', label: 'Browse' },
    { to: '/watchlist', label: 'My Watchlist' },
    { to: '/about', label: 'About' },
  ];

  return (
    <nav className={`navbar ${scrolled ? 'scrolled' : ''}`}>
      <div className="navbar-inner">
        <NavBrand />

        <button
          className="menu-toggle"
          onClick={() => setMenuOpen((o) => !o)}
          aria-label="Toggle menu"
        >
          <span className={`hamburger ${menuOpen ? 'open' : ''}`} />
        </button>

        <ul className={`nav-links ${menuOpen ? 'open' : ''}`}>
          {navLinks.map(({ to, label }) => (
            <li key={to}>
              <Link
                to={to}
                className={`nav-link ${location.pathname === to ? 'active' : ''}`}
              >
                {label}
                {to === '/watchlist' && watchlist.length > 0 && (
                  <span className="nav-badge">{watchlist.length}</span>
                )}
              </Link>
            </li>
          ))}
        </ul>
      </div>
    </nav>
  );
}

export default Navbar;
```

File: src/components/Navbar.css

```
.navbar {
  position: sticky;
  top: 0;
  z-index: 100;
  background: rgba(248, 248, 246, 0.85);
  backdrop-filter: blur(12px);
  -webkit-backdrop-filter: blur(12px);
  border-bottom: 1px solid transparent;
  transition: border-color 0.2s, box-shadow 0.2s;
}

.navbar.scrolled {
  border-bottom-color: var(--gray-100);
  box-shadow: 0 1px 16px rgba(0,0,0,0.05);
}

.navbar-inner {
  max-width: 1100px;
  margin: 0 auto;
  padding: 0 24px;
  height: 60px;
  display: flex;
  align-items: center;
  justify-content: space-between;
}

.nav-brand {
  display: flex;
  align-items: center;
  gap: 8px;
  font-family: var(--font-serif);
  font-size: 20px;
  color: var(--gray-900);
}

.nav-brand-icon {
  font-size: 22px;
  line-height: 1;
  transition: transform 0.3s;
}

.nav-brand:hover .nav-brand-icon {
  transform: rotate(45deg);
}

.nav-brand-text {
```

```
  letter-spacing: -0.3px;
  transition: opacity 0.2s;
}

.nav-links {
  list-style: none;
  display: flex;
  align-items: center;
  gap: 4px;
}

.nav-link {
  display: flex;
  align-items: center;
  gap: 6px;
  padding: 6px 14px;
  border-radius: var(--radius-md);
  font-size: 14px;
  font-weight: 400;
  color: var(--gray-600);
  transition: color 0.15s, background 0.15s;
}

.nav-link:hover {
  color: var(--gray-900);
  background: var(--gray-100);
}

.nav-link.active {
  color: var(--gray-900);
  font-weight: 500;
  background: var(--gray-100);
}

.nav-badge {
  background: var(--gray-900);
  color: white;
  font-size: 11px;
  font-weight: 600;
  padding: 1px 6px;
  border-radius: 99px;
  min-width: 18px;
  text-align: center;
}

.menu-toggle {
  display: none;
  width: 36px;
  height: 36px;
  align-items: center;
  justify-content: center;
  border-radius: var(--radius-sm);
```

```
}

.hamburger,
.hamburger::before,
.hamburger::after {
  display: block;
  width: 18px;
  height: 1.5px;
  background: var(--gray-900);
  transition: all 0.2s;
}

.hamburger {
  position: relative;
}

.hamburger::before,
.hamburger::after {
  content: '';
  position: absolute;
  left: 0;
}

.hamburger::before { top: -5px; }
.hamburger::after { top: 5px; }

.hamburger.open { background: transparent; }
.hamburger.open::before { transform: rotate(45deg); top: 0; }
.hamburger.open::after { transform: rotate(-45deg); top: 0; }

@media (max-width: 600px) {
  .menu-toggle { display: flex; }

  .nav-links {
    display: none;
    position: absolute;
    top: 60px;
    left: 0;
    right: 0;
    background: var(--off-white);
    border-bottom: 1px solid var(--gray-100);
    flex-direction: column;
    padding: 12px 16px;
    gap: 4px;
  }

  .nav-links.open { display: flex; }
  .nav-link { width: 100%; padding: 10px 14px; }
}
```

File: src/components/SearchBar.js

```
import React from 'react';
import PropTypes from 'prop-types';
import './SearchBar.css';

function SearchBar({ value, onChange, placeholder }) {
  return (
    <div className="search-bar">
      <span className="search-icon">⌕</span>
      <input
        type="text"
        className="search-input"
        value={value}
        onChange={(e) => onChange(e.target.value)}
        placeholder={placeholder}
      />
      {value && (
        <button className="search-clear" onClick={() => onChange('')} aria-label="Clear
search">
          ×
        </button>
      )}
    </div>
  );
}

SearchBar.propTypes = {
  value: PropTypes.string.isRequired,
  onChange: PropTypes.func.isRequired,
  placeholder: PropTypes.string,
};

SearchBar.defaultProps = {
  placeholder: 'Search movies & shows...',
};

export default SearchBar;
```

File: src/components/SearchBar.css

```
.search-bar {
  position: relative;
  display: flex;
  align-items: center;
}

.search-icon {
  position: absolute;
  left: 14px;
  font-size: 18px;
  color: var(--gray-400);
  pointer-events: none;
  line-height: 1;
  top: 50%;
  transform: translateY(-50%);
}

.search-input {
  width: 100%;
  height: 44px;
  padding: 0 40px 0 42px;
  border-radius: var(--radius-md);
  border: 1px solid var(--gray-100);
  background: var(--white);
  font-size: 14px;
  color: var(--gray-900);
  outline: none;
  transition: border-color 0.15s, box-shadow 0.15s;
}

.search-input::placeholder {
  color: var(--gray-400);
}

.search-input:focus {
  border-color: var(--gray-400);
  box-shadow: 0 0 0 3px rgba(0,0,0,0.04);
}

.search-clear {
  position: absolute;
  right: 12px;
  width: 20px;
  height: 20px;
  border-radius: 50%;
  background: var(--gray-200);
```

```
  color: var(--gray-600);
  font-size: 14px;
  line-height: 1;
  display: flex;
  align-items: center;
  justify-content: center;
  transition: background 0.15s;
}

.search-clear:hover {
  background: var(--gray-400);
  color: white;
}
```

File: src/components/FilterBar.js

```
import React from 'react';
import PropTypes from 'prop-types';
import './FilterBar.css';

function FilterBar({ activeType, activeGenre, onTypeChange, onGenreChange, genres }) {
  const types = ['All', 'Movie', 'Series'];

  return (
    <div className="filter-bar">
      <div className="filter-group">
        {types.map((type) => (
          <button
            key={type}
            className={`filter-btn ${activeType === type ? 'active' : ''}`}
            onClick={() => onTypeChange(type)}
          >
            {type}
          </button>
        ))}
      </div>

      {genres.length > 0 && (
        <div className="filter-group genre-group">
          <button
            className={`filter-btn ${activeGenre === 'All' ? 'active' : ''}`}
            onClick={() => onGenreChange('All')}
          >
            All Genres
          </button>
          {genres.map((genre) => (
            <button
              key={genre}
              className={`filter-btn ${activeGenre === genre ? 'active' : ''}`}
              onClick={() => onGenreChange(genre)}
            >
              {genre}
            </button>
          ))}
        </div>
      )}
    </div>
  );
}

FilterBar.propTypes = {
  activeType: PropTypes.string.isRequired,
  activeGenre: PropTypes.string.isRequired,
```

```
  onTypeChange: PropTypes.func.isRequired,
  onGenreChange: PropTypes.func.isRequired,
  genres: PropTypes.arrayOf(PropTypes.string).isRequired,
};

export default FilterBar;
```

File: src/components/FilterBar.css

```
.filter-bar {
  display: flex;
  flex-direction: column;
  gap: 10px;
}

.filter-group {
  display: flex;
  flex-wrap: wrap;
  gap: 6px;
}

.filter-btn {
  padding: 5px 14px;
  border-radius: 99px;
  border: 1px solid var(--gray-200);
  font-size: 13px;
  font-weight: 400;
  color: var(--gray-600);
  background: var(--white);
  transition: all 0.15s;
  white-space: nowrap;
}

.filter-btn:hover {
  border-color: var(--gray-400);
  color: var(--gray-900);
}

.filter-btn.active {
  background: var(--gray-900);
  border-color: var(--gray-900);
  color: white;
  font-weight: 500;
}

.genre-group {
  padding-top: 2px;
}
```

File: src/components/MovieCard.js

```
import React from 'react';
import PropTypes from 'prop-types';
import { useNavigate } from 'react-router-dom';
import { useWatchlist } from '../context/WatchlistContext';
import './MovieCard.css';

const STATUS_COLORS = {
  'Want to Watch': '#1a5fa8',
  'Watching': '#b85c00',
  'Watched': '#2e7d52',
};

function MovieCard({ movie, showStatus }) {
  const navigate = useNavigate();
  const { addToWatchlist, removeFromWatchlist, isInWatchlist, getStatus } = useWatchlist();

  const inList = isInWatchlist(movie.id);
  const status = getStatus(movie.id);

  const handleToggle = (e) => {
    e.stopPropagation();
    if (inList) {
      removeFromWatchlist(movie.id);
    } else {
      addToWatchlist(movie);
    }
  };

  return (
    <article className="movie-card" onClick={() => navigate(`/movie/${movie.id}`)}>
      <div className="movie-card-poster">
        <img
          src={movie.poster}
          alt={movie.title}
          loading="lazy"
          onError={(e) => {
            e.target.src = `https://via.placeholder.com/300x450/f4f4f2/9a9a96?text=$
{encodeURIComponent(movie.title)}`;
          }}
        />
        <span className="movie-type-badge">{movie.type}</span>
        {inList && showStatus && status && (
          <span
            className="movie-status-badge"
            style={{ background: STATUS_COLORS[status] }}
          >
            {status}
```

```
          </span>
        )}
      </div>

      <div className="movie-card-body">
        <div className="movie-card-top">
          <h3 className="movie-title">{movie.title}</h3>
          <span className="movie-rating">★ {movie.rating}</span>
        </div>
        <p className="movie-meta">
          {movie.year} · {movie.genre[0]}
        </p>

        <button
          className={`watchlist-btn ${inList ? 'in-list' : ''}`}
          onClick={handleToggle}
          aria-label={inList ? 'Remove from watchlist' : 'Add to watchlist'}
        >
          {inList ? '✓ In Watchlist' : '+ Watchlist'}
        </button>
      </div>
    </article>
  );
}

MovieCard.propTypes = {
  movie: PropTypes.shape({
    id: PropTypes.number.isRequired,
    title: PropTypes.string.isRequired,
    type: PropTypes.string.isRequired,
    year: PropTypes.number.isRequired,
    genre: PropTypes.arrayOf(PropTypes.string).isRequired,
    rating: PropTypes.number.isRequired,
    poster: PropTypes.string.isRequired,
  }).isRequired,
  showStatus: PropTypes.bool,
};

MovieCard.defaultProps = {
  showStatus: false,
};

export default MovieCard;
```

File: src/components/MovieCard.css

```
.movie-card {
  background: var(--white);
  border-radius: var(--radius-lg);
  border: 1px solid var(--gray-100);
  overflow: hidden;
  cursor: pointer;
  transition: transform 0.2s ease, box-shadow 0.2s ease, border-color 0.2s;
  display: flex;
  flex-direction: column;
}

.movie-card:hover {
  transform: translateY(-3px);
  box-shadow: var(--shadow-md);
  border-color: var(--gray-200);
}

.movie-card-poster {
  position: relative;
  aspect-ratio: 2/3;
  overflow: hidden;
  background: var(--gray-50);
}

.movie-card-poster img {
  width: 100%;
  height: 100%;
  object-fit: cover;
  transition: transform 0.4s ease;
}

.movie-card:hover .movie-card-poster img {
  transform: scale(1.03);
}

.movie-type-badge {
  position: absolute;
  top: 10px;
  left: 10px;
  background: rgba(255,255,255,0.92);
  color: var(--gray-800);
  font-size: 10px;
  font-weight: 600;
  letter-spacing: 0.5px;
  text-transform: uppercase;
  padding: 3px 8px;
  border-radius: 99px;
```

```
}

.movie-status-badge {
  position: absolute;
  bottom: 10px;
  left: 10px;
  color: white;
  font-size: 10px;
  font-weight: 600;
  letter-spacing: 0.3px;
  padding: 3px 9px;
  border-radius: 99px;
}

.movie-card-body {
  padding: 14px 16px;
  display: flex;
  flex-direction: column;
  gap: 6px;
  flex: 1;
}

.movie-card-top {
  display: flex;
  justify-content: space-between;
  align-items: flex-start;
  gap: 8px;
}

.movie-title {
  font-size: 14px;
  font-weight: 500;
  color: var(--gray-900);
  line-height: 1.3;
  flex: 1;
}

.movie-rating {
  font-size: 12px;
  font-weight: 500;
  color: var(--amber);
  white-space: nowrap;
}

.movie-meta {
  font-size: 12px;
  color: var(--gray-400);
}

.watchlist-btn {
  margin-top: auto;
  padding: 7px 12px;
```

```
  border-radius: var(--radius-sm);
  font-size: 12px;
  font-weight: 500;
  border: 1px solid var(--gray-200);
  color: var(--gray-600);
  background: transparent;
  transition: all 0.15s;
  text-align: center;
}

.watchlist-btn:hover {
  background: var(--gray-900);
  color: white;
  border-color: var(--gray-900);
}

.watchlist-btn.in-list {
  background: var(--gray-50);
  color: var(--green);
  border-color: var(--gray-100);
}

.watchlist-btn.in-list:hover {
  background: #fdf2f2;
  color: var(--red);
  border-color: #f5c6c6;
}
```

Folder: pages [cinetrack/src/pages]

File: src/pages/Home.js

```
import React, { useState, useMemo } from 'react';
import MovieCard from '../components/MovieCard';
import SearchBar from '../components/SearchBar';
import FilterBar from '../components/FilterBar';
import { MOVIES_DATA } from '../data/movies';
import './Home.css';

function Home() {
  const [search, setSearch] = useState('');
  const [activeType, setActiveType] = useState('All');
  const [activeGenre, setActiveGenre] = useState('All');

  const allGenres = useMemo(() => {
    const set = new Set();
    MOVIES_DATA.forEach((m) => m.genre.forEach((g) => set.add(g)));
    return Array.from(set).sort();
  }, []);

  const filtered = useMemo(() => {
    return MOVIES_DATA.filter((movie) => {
      const matchSearch =
        movie.title.toLowerCase().includes(search.toLowerCase()) ||
        movie.genre.some((g) => g.toLowerCase().includes(search.toLowerCase()));
      const matchType = activeType === 'All' || movie.type === activeType;
      const matchGenre = activeGenre === 'All' || movie.genre.includes(activeGenre);
      return matchSearch && matchType && matchGenre;
    });
  }, [search, activeType, activeGenre]);

  return (
    <div className="home-page">
      <div className="home-hero">
        <h1 className="home-headline">
          Your personal<br />
          <span className="home-headline-serif">movie tracker.</span>
        </h1>
        <p className="home-sub">
          Browse {MOVIES_DATA.length} titles. Save what you want to watch.
        </p>
      </div>

      <div className="home-controls">
        <SearchBar value={search} onChange={setSearch} placeholder="Search titles,
genres..." />
```

```
        <FilterBar
          activeType={activeType}
          activeGenre={activeGenre}
          onTypeChange={setActiveType}
          onGenreChange={setActiveGenre}
          genres={allGenres}
        />
      </div>

      {filtered.length === 0 ? (
        <div className="empty-state">
          <p className="empty-icon">◎</p>
          <p className="empty-text">No results for "{search}"</p>
          <button className="empty-reset" onClick={() => { setSearch('');
setActiveType('All'); setActiveGenre('All'); }}>
            Clear filters
          </button>
        </div>
      ) : (
        <>
          <p className="results-count">{filtered.length} titles</p>
          <div className="movies-grid">
            {filtered.map((movie) => (
              <MovieCard key={movie.id} movie={movie} />
            ))}
          </div>
        </>
      )}
    </div>
  );
}

export default Home;
```

File: src/pages/Home.css

```
.home-page {
  max-width: 1100px;
  margin: 0 auto;
  padding: 48px 24px 64px;
}

.home-hero {
  margin-bottom: 40px;
}

.home-headline {
  font-family: var(--font-sans);
  font-size: clamp(28px, 5vw, 42px);
  font-weight: 300;
  line-height: 1.15;
  color: var(--gray-900);
  letter-spacing: -1px;
  margin-bottom: 12px;
}

.home-headline-serif {
  font-family: var(--font-serif);
  font-weight: 400;
  font-style: italic;
}

.home-sub {
  font-size: 15px;
  color: var(--gray-400);
}

.home-controls {
  display: flex;
  flex-direction: column;
  gap: 16px;
  margin-bottom: 32px;
}

.results-count {
  font-size: 13px;
  color: var(--gray-400);
  margin-bottom: 20px;
}

.movies-grid {
  display: grid;
  grid-template-columns: repeat(auto-fill, minmax(175px, 1fr));
```

```
  gap: 20px;
}

.empty-state {
  text-align: center;
  padding: 80px 24px;
}

.empty-icon {
  font-size: 40px;
  color: var(--gray-200);
  margin-bottom: 12px;
}

.empty-text {
  font-size: 16px;
  color: var(--gray-400);
  margin-bottom: 20px;
}

.empty-reset {
  padding: 8px 20px;
  border-radius: var(--radius-md);
  border: 1px solid var(--gray-200);
  font-size: 14px;
  color: var(--gray-600);
  background: var(--white);
  transition: all 0.15s;
}

.empty-reset:hover {
  background: var(--gray-900);
  color: white;
  border-color: var(--gray-900);
}

@media (max-width: 500px) {
  .movies-grid {
    grid-template-columns: repeat(2, 1fr);
    gap: 12px;
  }
}
```

File: src/pages/Watchlist.js

```
import React, { useState } from 'react';
import { Link } from 'react-router-dom';
import { useWatchlist, STATUS } from '../context/WatchlistContext';
import MovieCard from '../components/MovieCard';
import './Watchlist.css';

function Watchlist() {
  const { watchlist } = useWatchlist();
  const [activeFilter, setActiveFilter] = useState('All');

  const filters = ['All', ...Object.values(STATUS)];

  const filtered =
    activeFilter === 'All'
      ? watchlist
      : watchlist.filter((m) => m.status === activeFilter);

  const counts = {};
  Object.values(STATUS).forEach((s) => {
    counts[s] = watchlist.filter((m) => m.status === s).length;
  });

  if (watchlist.length === 0) {
    return (
      <div className="watchlist-page">
        <div className="watchlist-header">
          <h1 className="watchlist-title">My Watchlist</h1>
        </div>
        <div className="watchlist-empty">
          <p className="empty-icon">◎</p>
          <p className="empty-text">Your watchlist is empty.</p>
          <p className="empty-sub">Browse titles and hit <strong>+ Watchlist</strong> to
save them here.</p>
          <Link to="/" className="btn-browse">Browse Titles</Link>
        </div>
      </div>
    );
  }

  return (
    <div className="watchlist-page">
      <div className="watchlist-header">
        <div>
          <h1 className="watchlist-title">My Watchlist</h1>
          <p className="watchlist-count">{watchlist.length} saved titles</p>
        </div>
      </div>
```

```
      <div className="watchlist-stats">
        {Object.values(STATUS).map((s) => (
          <div key={s} className="stat-card">
            <span className="stat-num">{counts[s]}</span>
            <span className="stat-label">{s}</span>
          </div>
        ))}
      </div>


      <div className="watchlist-filters">
        {filters.map((f) => (
          <button
            key={f}
            className={`wl-filter-btn ${activeFilter === f ? 'active' : ''}`}
            onClick={() => setActiveFilter(f)}
          >
            {f}
            {f !== 'All' && counts[f] > 0 && (
              <span className="wl-count">{counts[f]}</span>
            )}
          </button>
        ))}
      </div>

      {filtered.length === 0 ? (
        <p className="watchlist-empty-filter">No titles with "{activeFilter}" status yet.</p>
      ) : (
        <div className="movies-grid">
          {filtered.map((movie) => (
            <MovieCard key={movie.id} movie={movie} showStatus />
          ))}
        </div>
      )}
    </div>
  );
}

export default Watchlist;
```

File: src/pages/Watchlist.css

```
.watchlist-page {
  max-width: 1100px;
  margin: 0 auto;
  padding: 48px 24px 80px;
}

.watchlist-header {
  display: flex;
  justify-content: space-between;
  align-items: flex-start;
  margin-bottom: 32px;
}

.watchlist-title {
  font-family: var(--font-serif);
  font-size: clamp(28px, 4vw, 38px);
  font-weight: 400;
  letter-spacing: -0.5px;
  color: var(--gray-900);
  margin-bottom: 4px;
}

.watchlist-count {
  font-size: 14px;
  color: var(--gray-400);
}

.watchlist-stats {
  display: grid;
  grid-template-columns: repeat(3, 1fr);
  gap: 12px;
  margin-bottom: 32px;
}

.stat-card {
  background: var(--white);
  border: 1px solid var(--gray-100);
  border-radius: var(--radius-md);
  padding: 16px 20px;
  display: flex;
  flex-direction: column;
  gap: 4px;
}

.stat-num {
  font-size: 28px;
  font-weight: 300;
```

```
  color: var(--gray-900);
  letter-spacing: -1px;
  line-height: 1;
}

.stat-label {
  font-size: 12px;
  color: var(--gray-400);
}

.watchlist-filters {
  display: flex;
  flex-wrap: wrap;
  gap: 6px;
  margin-bottom: 28px;
}

.wl-filter-btn {
  display: flex;
  align-items: center;
  gap: 6px;
  padding: 6px 16px;
  border-radius: 99px;
  font-size: 13px;
  border: 1px solid var(--gray-200);
  color: var(--gray-600);
  background: var(--white);
  transition: all 0.15s;
}

.wl-filter-btn:hover {
  border-color: var(--gray-400);
  color: var(--gray-900);
}

.wl-filter-btn.active {
  background: var(--gray-900);
  border-color: var(--gray-900);
  color: white;
}

.wl-count {
  background: rgba(255,255,255,0.25);
  font-size: 11px;
  padding: 1px 6px;
  border-radius: 99px;
  min-width: 18px;
  text-align: center;
}

.wl-filter-btn:not(.active) .wl-count {
  background: var(--gray-100);
```

```
  color: var(--gray-600);
}

.movies-grid {
  display: grid;
  grid-template-columns: repeat(auto-fill, minmax(175px, 1fr));
  gap: 20px;
}

.watchlist-empty {
  text-align: center;
  padding: 80px 24px;
}

.watchlist-empty-filter {
  color: var(--gray-400);
  font-size: 14px;
  padding: 40px 0;
  text-align: center;
}

.empty-icon {
  font-size: 40px;
  color: var(--gray-200);
  margin-bottom: 16px;
}

.empty-text {
  font-size: 18px;
  font-weight: 500;
  color: var(--gray-800);
  margin-bottom: 8px;
}

.empty-sub {
  font-size: 14px;
  color: var(--gray-400);
  margin-bottom: 24px;
}

.btn-browse {
  display: inline-block;
  padding: 10px 24px;
  border-radius: var(--radius-md);
  background: var(--gray-900);
  color: white;
  font-size: 14px;
  font-weight: 500;
  transition: background 0.15s;
}

.btn-browse:hover {
```

```
  background: var(--gray-800);
}

@media (max-width: 500px) {
  .movies-grid {
    grid-template-columns: repeat(2, 1fr);
    gap: 12px;
  }

  .watchlist-stats {
    grid-template-columns: repeat(3, 1fr);
    gap: 8px;
  }

  .stat-num { font-size: 22px; }
}
```

File: src/pages/MovieDetail.js

```
import React, { useState } from 'react';
import { useParams, useNavigate } from 'react-router-dom';
import { MOVIES_DATA } from '../data/movies';
import { useWatchlist, STATUS } from '../context/WatchlistContext';
import './MovieDetail.css';

function MovieDetail() {
  const { id } = useParams();
  const navigate = useNavigate();
  const movie = MOVIES_DATA.find((m) => m.id === parseInt(id));
  const { addToWatchlist, removeFromWatchlist, isInWatchlist, getStatus, updateStatus } =
useWatchlist();
  const [imgError, setImgError] = useState(false);

  if (!movie) {
    return (
      <div className="detail-not-found">
        <p>Movie not found.</p>
        <button onClick={() => navigate('/')}>Go back</button>
      </div>
    );
  }

  const inList = isInWatchlist(movie.id);
  const currentStatus = getStatus(movie.id);

  const handleToggle = () => {
    if (inList) {
      removeFromWatchlist(movie.id);
    } else {
      addToWatchlist(movie);
    }
  };

  return (
    <div className="detail-page">
      <button className="detail-back" onClick={() => navigate(-1)}>
        ← Back
      </button>

      <div className="detail-layout">
        <aside className="detail-poster">
          <img
            src={imgError ? `https://via.placeholder.com/400x600/f4f4f2/9a9a96?text=$
{encodeURIComponent(movie.title)}` : movie.poster}
            alt={movie.title}
            onError={() => setImgError(true)}
```

```
  />
</aside>

<main className="detail-info">
  <div className="detail-badges">
    <span className="badge badge-type">{movie.type}</span>
    {movie.genre.map((g) => (
      <span key={g} className="badge badge-genre">{g}</span>
    ))}
  </div>

  <h1 className="detail-title">{movie.title}</h1>

  <div className="detail-meta">
    <span className="detail-rating">★ {movie.rating}</span>
    <span className="detail-dot">·</span>
    <span>{movie.year}</span>
    <span className="detail-dot">·</span>
    <span>{movie.duration}</span>
  </div>

  <p className="detail-description">{movie.description}</p>

  <div className="detail-crew">
    <div className="detail-crew-item">
      <span className="detail-crew-label">Director</span>
      <span className="detail-crew-value">{movie.director}</span>
    </div>
    <div className="detail-crew-item">
      <span className="detail-crew-label">Cast</span>
      <span className="detail-crew-value">{movie.cast.join(', ')}</span>
    </div>
  </div>

  <div className="detail-actions">
    <button
      className={`btn-primary ${inList ? 'in-list' : ''}`}
      onClick={handleToggle}
    >
      {inList ? '✓ In Watchlist' : '+ Add to Watchlist'}
    </button>
  </div>

  {inList && (
    <div className="detail-status-section">
      <p className="detail-status-label">Status</p>
      <div className="detail-status-btns">
        {Object.values(STATUS).map((s) => (
          <button
            key={s}
            className={`status-btn ${currentStatus === s ? 'active' : ''}`}
```

```
                onClick={() => updateStatus(movie.id, s)}
              >
                {s}
              </button>
            ))}
          </div>
        </div>
      )}
    </main>
  </div>
 </div>
 );
}

export default MovieDetail;
```

File: src/pages/MovieDetail.css

```
.detail-page {
  max-width: 1000px;
  margin: 0 auto;
  padding: 36px 24px 80px;
}

.detail-back {
  font-size: 14px;
  color: var(--gray-600);
  margin-bottom: 32px;
  padding: 6px 0;
  transition: color 0.15s;
  display: inline-block;
}

.detail-back:hover {
  color: var(--gray-900);
}

.detail-layout {
  display: grid;
  grid-template-columns: 280px 1fr;
  gap: 48px;
  align-items: start;
}

.detail-poster img {
  width: 100%;
  border-radius: var(--radius-lg);
  border: 1px solid var(--gray-100);
}

.detail-badges {
  display: flex;
  flex-wrap: wrap;
  gap: 6px;
  margin-bottom: 16px;
}

.badge {
  padding: 3px 10px;
  border-radius: 99px;
  font-size: 11px;
  font-weight: 500;
  letter-spacing: 0.3px;
  text-transform: uppercase;
```

```
}

.badge-type {
  background: var(--gray-900);
  color: white;
}

.badge-genre {
  background: var(--gray-100);
  color: var(--gray-600);
}

.detail-title {
  font-family: var(--font-serif);
  font-size: clamp(26px, 4vw, 38px);
  font-weight: 400;
  line-height: 1.2;
  letter-spacing: -0.5px;
  color: var(--gray-900);
  margin-bottom: 12px;
}

.detail-meta {
  display: flex;
  align-items: center;
  gap: 8px;
  font-size: 14px;
  color: var(--gray-600);
  margin-bottom: 20px;
}

.detail-rating {
  color: var(--amber);
  font-weight: 500;
}

.detail-dot {
  color: var(--gray-200);
}

.detail-description {
  font-size: 15px;
  line-height: 1.7;
  color: var(--gray-600);
  margin-bottom: 28px;
}

.detail-crew {
  display: flex;
  flex-direction: column;
  gap: 10px;
  padding: 20px 0;
```

```
  border-top: 1px solid var(--gray-100);
  border-bottom: 1px solid var(--gray-100);
  margin-bottom: 28px;
}

.detail-crew-item {
  display: flex;
  gap: 16px;
  font-size: 14px;
}

.detail-crew-label {
  color: var(--gray-400);
  min-width: 64px;
  flex-shrink: 0;
}

.detail-crew-value {
  color: var(--gray-800);
}

.detail-actions {
  margin-bottom: 20px;
}

.btn-primary {
  padding: 11px 24px;
  border-radius: var(--radius-md);
  font-size: 14px;
  font-weight: 500;
  border: 1px solid var(--gray-900);
  background: var(--gray-900);
  color: white;
  transition: all 0.15s;
}

.btn-primary:hover {
  background: var(--gray-800);
}

.btn-primary.in-list {
  background: transparent;
  color: var(--green);
  border-color: var(--gray-200);
}

.btn-primary.in-list:hover {
  background: #fdf2f2;
  color: var(--red);
  border-color: #f5c6c6;
}
```

```
.detail-status-section {
  padding: 20px;
  background: var(--gray-50);
  border-radius: var(--radius-md);
  border: 1px solid var(--gray-100);
}

.detail-status-label {
  font-size: 12px;
  font-weight: 500;
  color: var(--gray-400);
  text-transform: uppercase;
  letter-spacing: 0.5px;
  margin-bottom: 12px;
}

.detail-status-btns {
  display: flex;
  flex-wrap: wrap;
  gap: 8px;
}

.status-btn {
  padding: 7px 16px;
  border-radius: 99px;
  font-size: 13px;
  border: 1px solid var(--gray-200);
  color: var(--gray-600);
  background: var(--white);
  transition: all 0.15s;
}

.status-btn:hover {
  border-color: var(--gray-400);
  color: var(--gray-900);
}

.status-btn.active {
  background: var(--gray-900);
  border-color: var(--gray-900);
  color: white;
}

.detail-not-found {
  text-align: center;
  padding: 80px;
}

@media (max-width: 700px) {
  .detail-layout {
    grid-template-columns: 1fr;
    gap: 24px;
```

```
  }

  .detail-poster {
    max-width: 240px;
    margin: 0 auto;
  }
}
```

File: src/pages/About.js

```
import React from 'react';
import { Link } from 'react-router-dom';
import './About.css';

class About extends React.Component {
  constructor(props) {
    super(props);
    this.state = {
      expandedFeature: null,
    };
    this.toggleFeature = this.toggleFeature.bind(this);
  }

  toggleFeature(index) {
    this.setState((prev) => ({
      expandedFeature: prev.expandedFeature === index ? null : index,
    }));
  }

  render() {
    const features = [
      {
        title: 'Browse & Search',
        desc: 'Explore a curated collection of top-rated movies and TV shows. Filter by type
or genre, and search by title instantly.',
      },
      {
        title: 'Smart Watchlist',
        desc: 'Add any title to your personal watchlist with one click. Your list is saved in your
browser — no account needed.',
      },
      {
        title: 'Track Your Progress',
        desc: 'Mark titles as "Want to Watch", "Watching", or "Watched". See your progress
stats at a glance on the Watchlist page.',
      },
      {
        title: 'Detail Pages',
        desc: 'Every movie and show has its own dedicated page with rating, genre, cast,
director, and more.',
      },
    ];

    const techStack = [
      { label: 'React 18', note: 'UI library' },
      { label: 'React Router v6', note: 'Client-side routing' },
```

```
  { label: 'Context API', note: 'Global state' },
  { label: 'PropTypes', note: 'Props validation' },
  { label: 'Hooks', note: 'useState, useEffect, useMemo' },
  { label: 'localStorage', note: 'Persistent watchlist' },
];

return (
  <div className="about-page">
    <div className="about-hero">
      <h1 className="about-title">
        About <span className="about-title-serif">CineTrack</span>
      </h1>
      <p className="about-lead">
        CineTrack is a minimal movie and TV show tracker built with React.
        Save titles you want to watch, mark what you're currently watching,
        and keep a record of everything you've seen.
      </p>
      <Link to="/" className="about-cta">Start Browsing →</Link>
    </div>

    <section className="about-section">
      <h2 className="about-section-title">Features</h2>
      <div className="features-list">
        {features.map((f, i) => (
          <div
            key={i}
            className={`feature-item ${this.state.expandedFeature === i ? 'expanded' : ''}`}
          >
            <button className="feature-header" onClick={() => this.toggleFeature(i)}>
              <span className="feature-title">{f.title}</span>
              <span className="feature-toggle">
                {this.state.expandedFeature === i ? '–' : '+'}
              </span>
            </button>
            {this.state.expandedFeature === i && (
              <p className="feature-desc">{f.desc}</p>
            )}
          </div>
        ))}
      </div>
    </section>

    <section className="about-section">
      <h2 className="about-section-title">Built With</h2>
      <div className="tech-grid">
        {techStack.map((t) => (
          <div key={t.label} className="tech-card">
            <span className="tech-label">{t.label}</span>
            <span className="tech-note">{t.note}</span>
          </div>
        ))}
```

```
          </div>
        </section>

        <section className="about-section about-react-concepts">
          <h2 className="about-section-title">React Concepts Used</h2>
          <div className="concepts-grid">
            {[
              'JSX',
              'Class Components',
              'Functional Components',
              'useState',
              'useEffect',
              'useMemo',
              'useContext',
              'Custom Hooks',
              'Props & PropTypes',
              'Context API',
              'React Router v6',
              'CSS Modules',
            ].map((c) => (
              <span key={c} className="concept-tag">{c}</span>
            ))}
          </div>
        </section>
      </div>
    );
  }
}

export default About;
```

File: src/pages/About.css

```
.about-page {
  max-width: 760px;
  margin: 0 auto;
  padding: 48px 24px 80px;
}

.about-hero {
  margin-bottom: 56px;
}

.about-title {
  font-family: var(--font-sans);
  font-size: clamp(28px, 5vw, 42px);
  font-weight: 300;
  letter-spacing: -1px;
  color: var(--gray-900);
  margin-bottom: 16px;
  line-height: 1.2;
}

.about-title-serif {
  font-family: var(--font-serif);
  font-style: italic;
  font-weight: 400;
}

.about-lead {
  font-size: 16px;
  line-height: 1.75;
  color: var(--gray-600);
  margin-bottom: 24px;
  max-width: 560px;
}

.about-cta {
  display: inline-block;
  padding: 10px 22px;
  border-radius: var(--radius-md);
  background: var(--gray-900);
  color: white;
  font-size: 14px;
  font-weight: 500;
  transition: background 0.15s;
}

.about-cta:hover {
  background: var(--gray-800);
}
```

```
.about-section {
  margin-bottom: 48px;
}

.about-section-title {
  font-size: 12px;
  font-weight: 600;
  text-transform: uppercase;
  letter-spacing: 1px;
  color: var(--gray-400);
  margin-bottom: 20px;
}

.features-list {
  border: 1px solid var(--gray-100);
  border-radius: var(--radius-lg);
  overflow: hidden;
  background: var(--white);
}

.feature-item {
  border-bottom: 1px solid var(--gray-100);
}

.feature-item:last-child {
  border-bottom: none;
}

.feature-header {
  width: 100%;
  display: flex;
  justify-content: space-between;
  align-items: center;
  padding: 16px 20px;
  text-align: left;
  transition: background 0.15s;
}

.feature-header:hover {
  background: var(--gray-50);
}

.feature-title {
  font-size: 15px;
  font-weight: 500;
  color: var(--gray-900);
}

.feature-toggle {
  font-size: 18px;
  color: var(--gray-400);
  line-height: 1;
```

```
  width: 20px;
  text-align: center;
  flex-shrink: 0;
}

.feature-desc {
  padding: 0 20px 16px;
  font-size: 14px;
  line-height: 1.7;
  color: var(--gray-600);
}

.tech-grid {
  display: grid;
  grid-template-columns: repeat(auto-fill, minmax(180px, 1fr));
  gap: 10px;
}

.tech-card {
  background: var(--white);
  border: 1px solid var(--gray-100);
  border-radius: var(--radius-md);
  padding: 14px 16px;
  display: flex;
  flex-direction: column;
  gap: 3px;
}

.tech-label {
  font-size: 14px;
  font-weight: 500;
  color: var(--gray-900);
}

.tech-note {
  font-size: 12px;
  color: var(--gray-400);
}

.concepts-grid {
  display: flex;
  flex-wrap: wrap;
  gap: 8px;
}

.concept-tag {
  padding: 5px 12px;
  border-radius: 99px;
  background: var(--gray-100);
  color: var(--gray-600);
  font-size: 13px;
}
```

File: src/pages/NotFound.js

```
import React from 'react';
import { Link } from 'react-router-dom';
import './NotFound.css';

function NotFound() {
  return (
    <div className="notfound-page">
      <p className="notfound-code">404</p>
      <h1 className="notfound-title">Page not found</h1>
      <p className="notfound-sub">The page you're looking for doesn't exist.</p>
      <Link to="/" className="notfound-btn">Go Home</Link>
    </div>
  );
}

export default NotFound;
```

File: src/pages/NotFound.css

```
.notfound-page {
  max-width: 480px;
  margin: 0 auto;
  padding: 120px 24px;
  text-align: center;
}

.notfound-code {
  font-size: 80px;
  font-weight: 200;
  color: var(--gray-200);
  letter-spacing: -4px;
  line-height: 1;
  margin-bottom: 16px;
}


.notfound-title {
  font-size: 22px;
  font-weight: 500;
  color: var(--gray-900);
  margin-bottom: 8px;
}
```


```
.notfound-sub {
  font-size: 15px;
  color: var(--gray-400);
  margin-bottom: 28px;
}


.notfound-btn {
  display: inline-block;
  padding: 10px 24px;
  border-radius: var(--radius-md);
  background: var(--gray-900);
  color: white;
  font-size: 14px;
  font-weight: 500;
  transition: background 0.15s;
}

.notfound-btn:hover {
  background: var(--gray-800);
}
```

Output Screenshots:

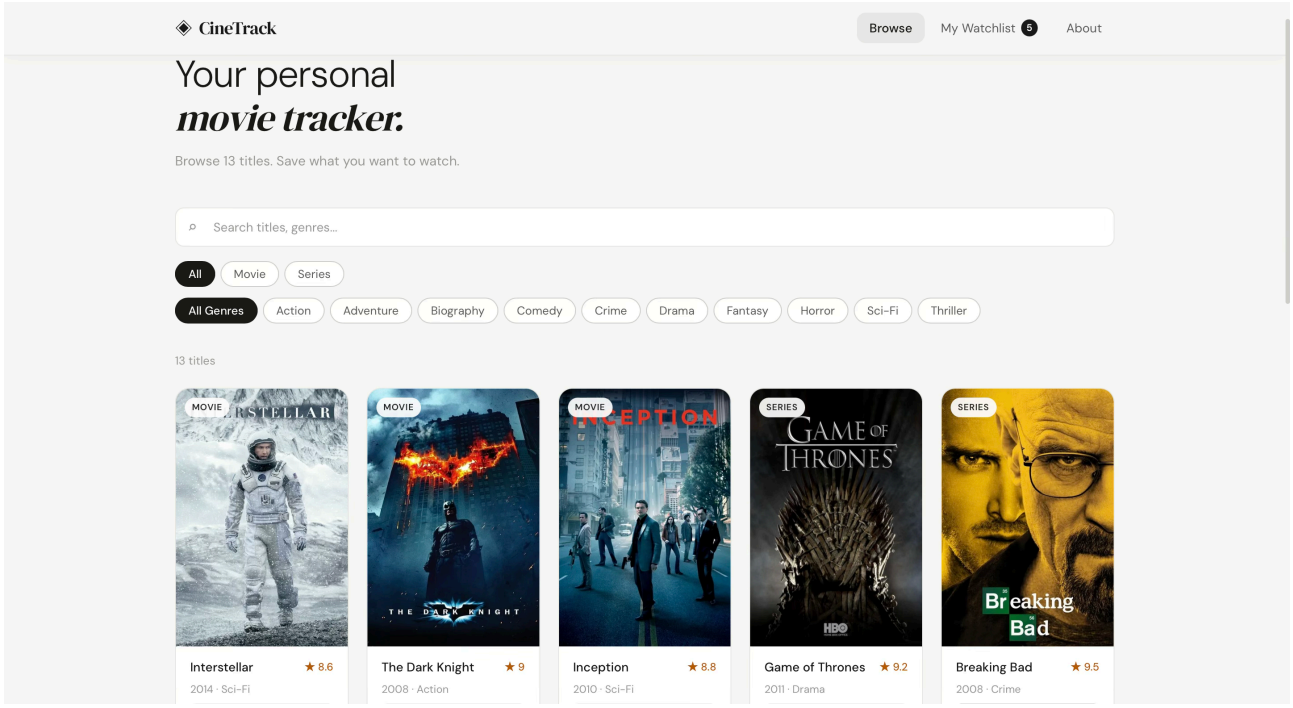

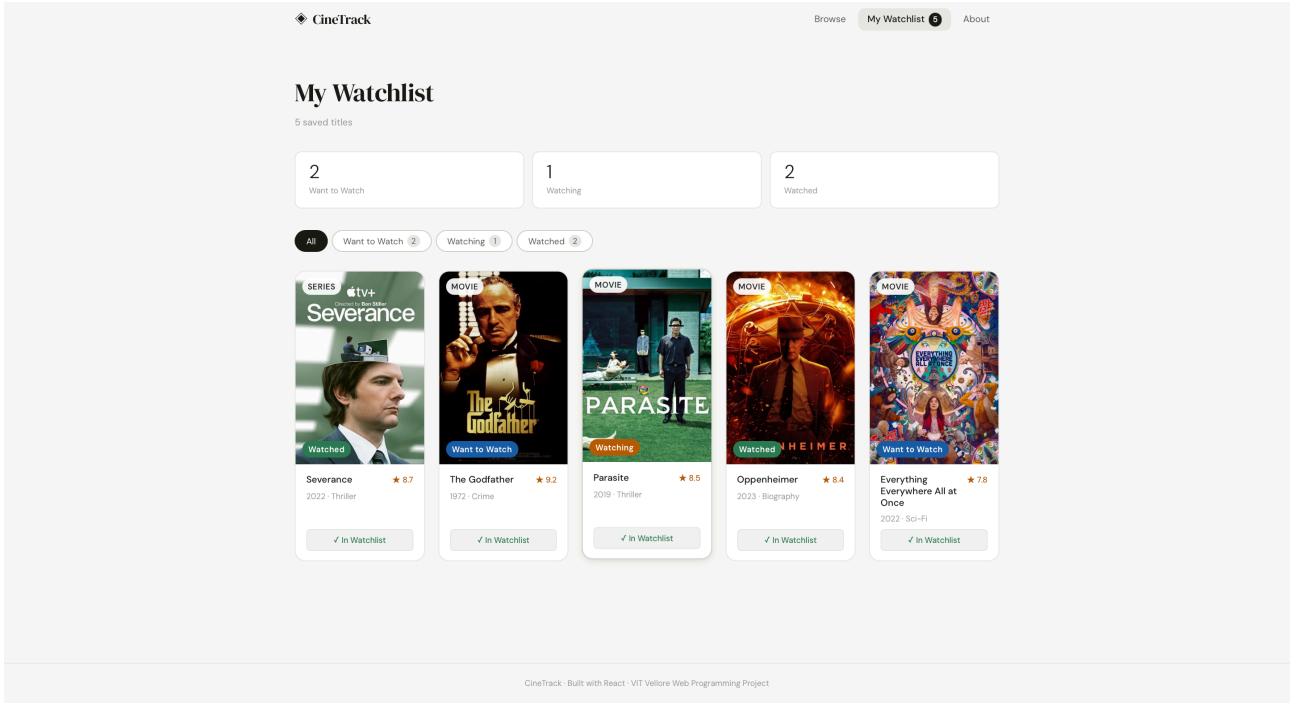

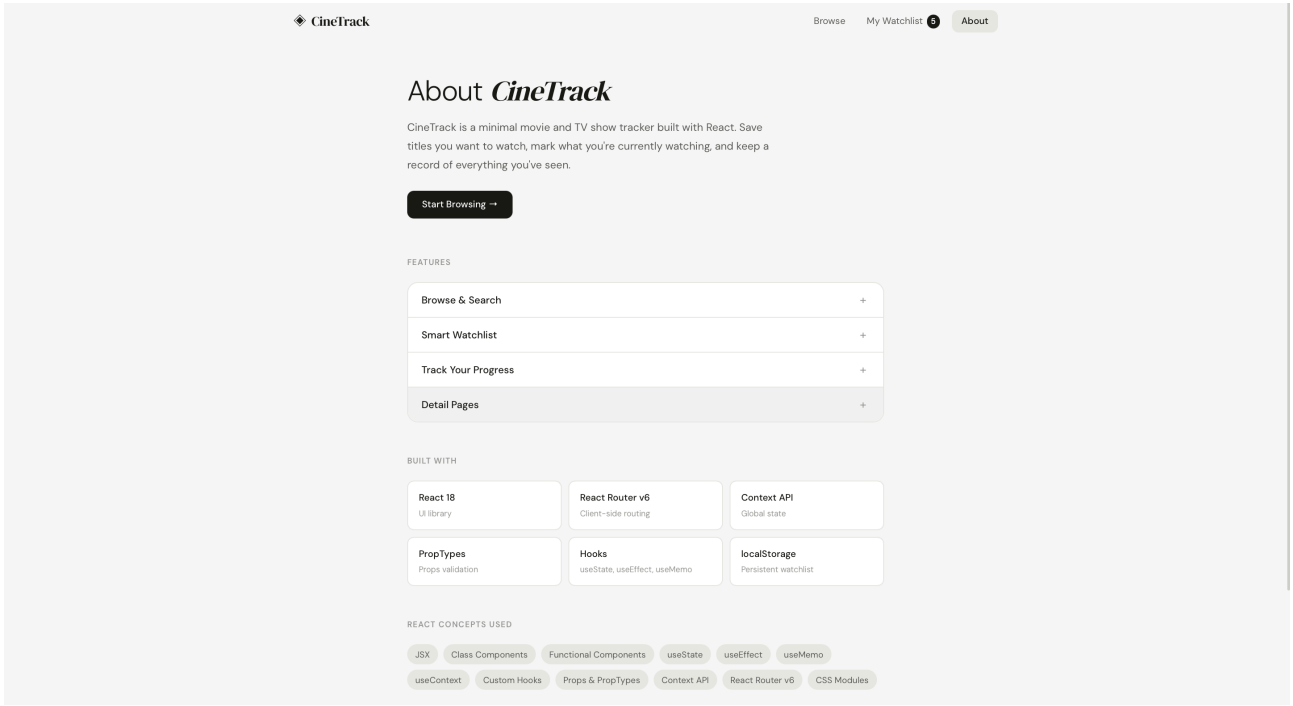
CineTrack
Browse
My Watchlist 5
About
About CineTrack
CineTrack is a minimal movie and TV show tracker built with React. Save titles you want to watch, mark what you're currently watching, and keep a record of everything you've seen.
Start Browsing →
FEATURES
Browse & Search
Smart Watchlist
Track Your Progress
Detail Pages
BUILT WITH
React 18
UI library
React Router v6
Client-side routing
Context API
Global state
PropTypes
Props validation
Hooks
useState, useEffect, useMemo
localStorage
Persistent watchlist
REACT CONCEPTS USED
JSX
Class Components
Functional Components
useState
useEffect
useMemo
useContext
Custom Hooks
Props & PropTypes
Context API
React Router v6
CSS Modules