


ID-value (Bergman)

- « Each element type can have attributes of type ID associated with it. »

For Example :

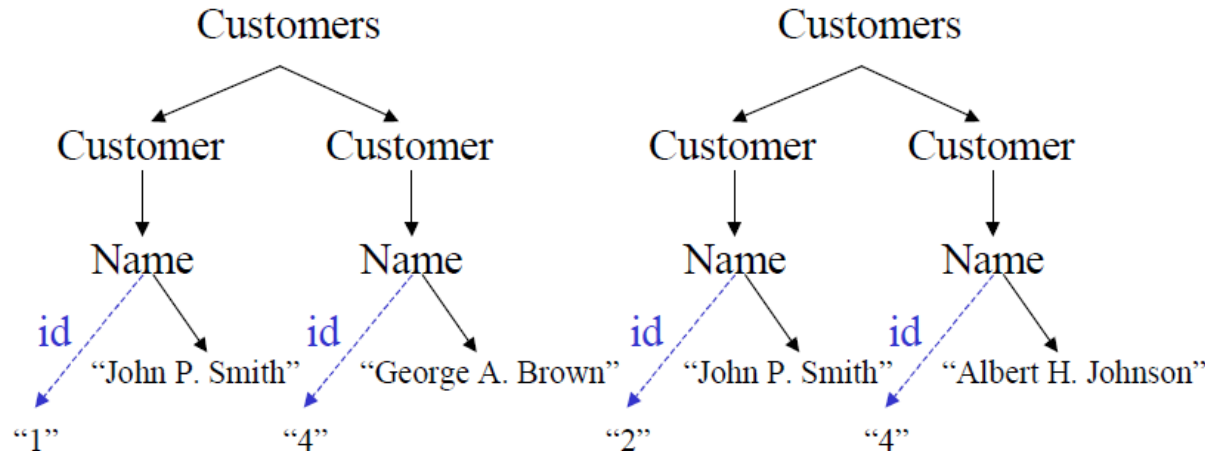

- « To resolve ID-value conflict, a global ID must be assigned to each element in the integrated document. »