Configuring an OAuth server in PHP

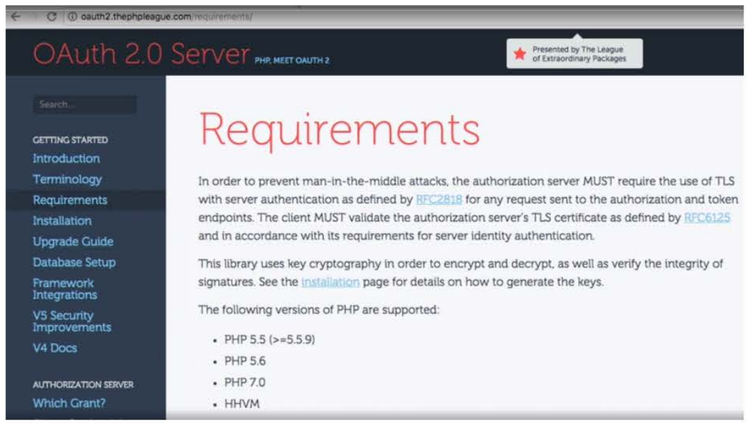

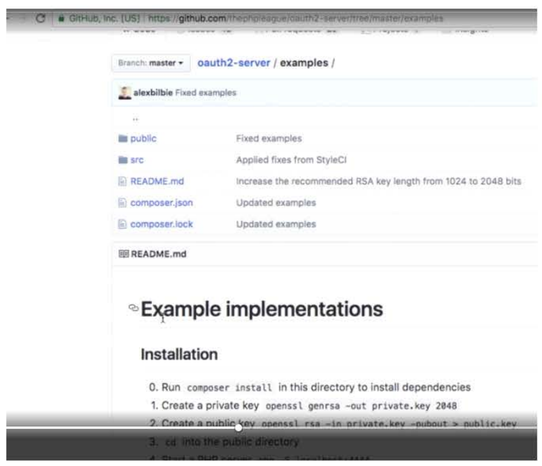

Web Security OAuth and OpenID Connect\Ch07\07_01\README.md

Heads Up

- The project may not support the extensions you need
- It's not always fun to support your projects
- If you have the time, skills, and abilities, it can work
- Make sure your project supports your requirements now and into the future

Configuring an OAuth server in Node

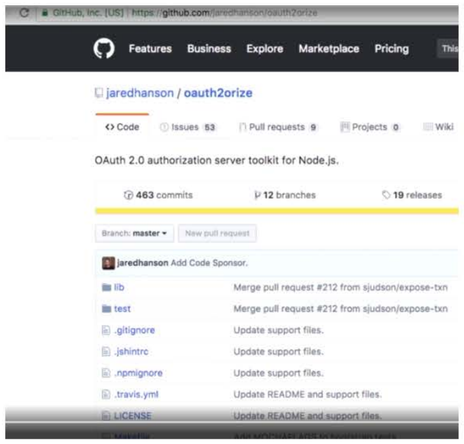

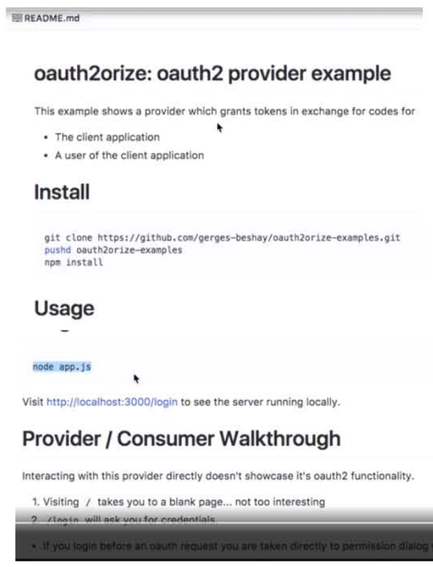

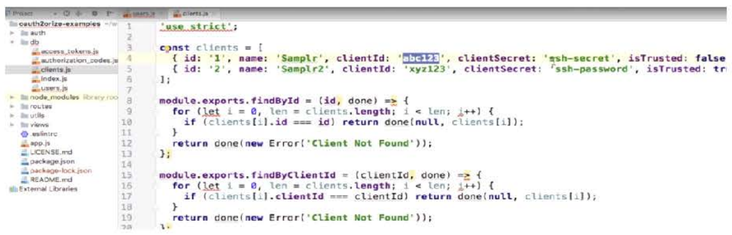


```
~/workspace/oauth2orize-examples
🐶  curl -X POST "http://localhost:3000/oauth/token" -d "grant_type=password&client_id=abc123&client_se
cret=ssh-secret&username=bob&password=secret"
```


```
{"access_token":"eQ1ldv1BSxg36kUTgASF0bNoqVYj4N09QHRr5HIQu5sPYsTaHsRHMVeFie8cyIEqujXtq6b5I7PHTSzVQyvcXY
fpgrIODVaQdm0Y2pbHdrUQ8Wz0IoVsaT2DVgzhs8hZ4GnUsCpKbCcELbOkNlzVymCQcoR2pOEDseHvwGTOXTHUbQ8wQpp8eDvJeKkZ6
Wl4MlP7o0H3kQITAD5KagzBEcr54trvsbGvTfMFHi9to7g3rf2NfOoxbsPuO00EWiDm","token_type":"Bearer"}~/workspace/
oauth2orize-examples
🐶  curl -X POST "http://localhost:3000/oauth/token" -d "grant_type=password&client_id=abc123&client_se
cret=ssh-secret&username=bob&password=secret" | ~/jq
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100   387  100   297  100    90  48680  14751 --:--:-- --:--:-- --:--:-- 49500
{
  "access_token": "Y0owAmTuiEFSI2Zt0mxpxJWpRorB5FkhV5hsDdbwl4zZ8xF9ffogTJbfmVFHfNoPirJ2lqhQ11clGKWy4C7r
5kTl1eGro7tfNjxlOETqGAS8Dwqjvuvgwo H7s8sQ4JbqyV1IUcyAyQBMabfYn3gz2x7mAv0H5aVVxi8ERxKvNonPsJgqLQbjNMGeOS6
KOccVL1X1EEjUnZUawvTTodPY9zZwWNQwM83HDPXQMNwNOmIyalxutSTMbWwqJU6ZMu09",
  "token_type": "Bearer"
}
~/workspace/oauth2orize-examples
🐶
```


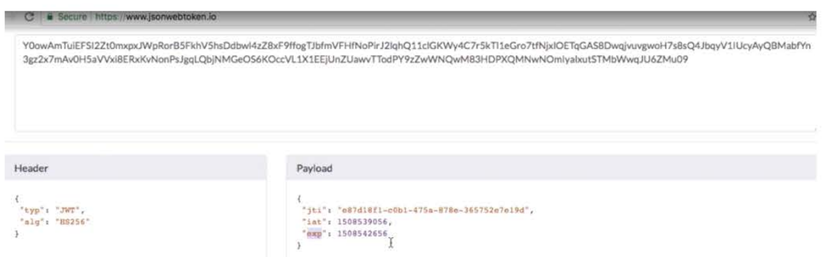
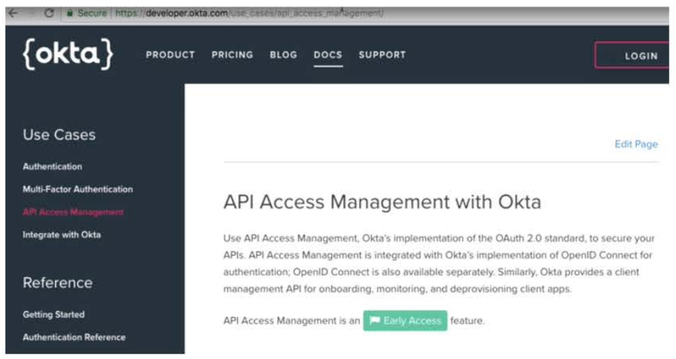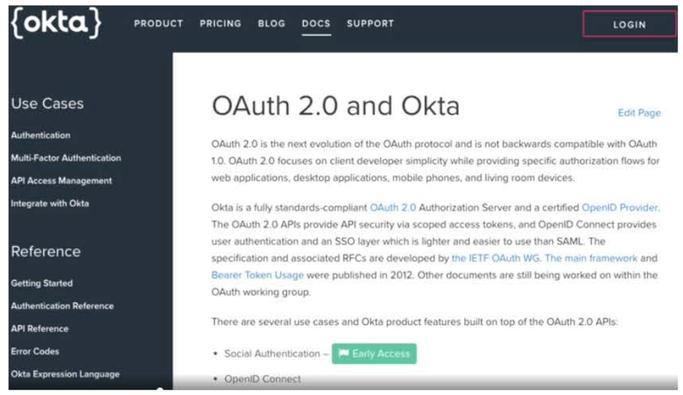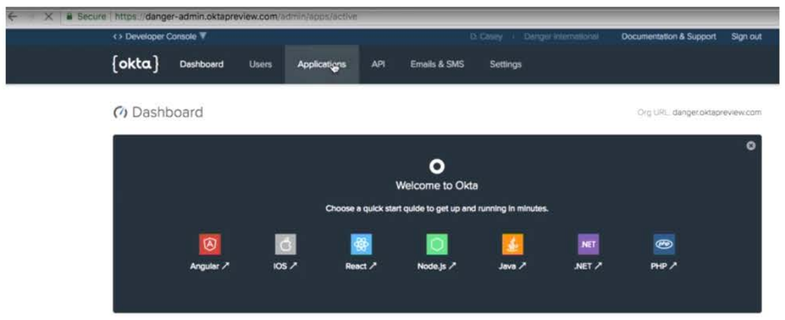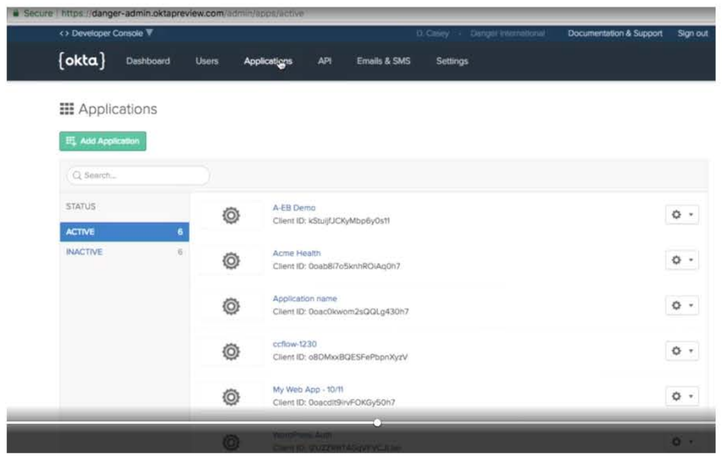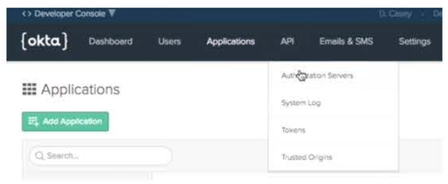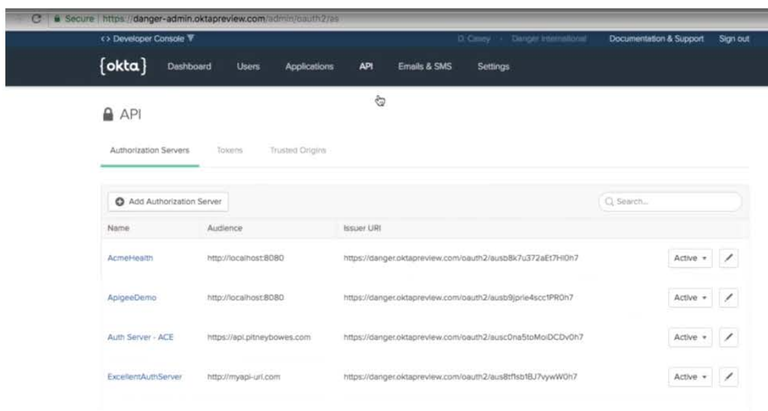
OAuth 2.0 as a service using Okta