

AWS EKS Kubernetes - Masterclass | DevOps, Microservices

Kalyan Reddy Daida



AWS EKS Course Outline



Kubernetes for Beginners On Cloud

**AWS EKS Kubernetes - Masterclass |
DevOps, Microservices**


**Azure AKS Kubernetes - Masterclass |
DevOps, Microservices**


**Google GKE Kubernetes - Masterclass |
DevOps, Microservices**

STACKSIMPLIFY
**Kubernetes
On
Cloud
Roadmap**


**Docker & Kubernetes for Java Spring Boot
Developers on AWS**

**Master HELM3 with Kubernetes on AWS &
Azure**

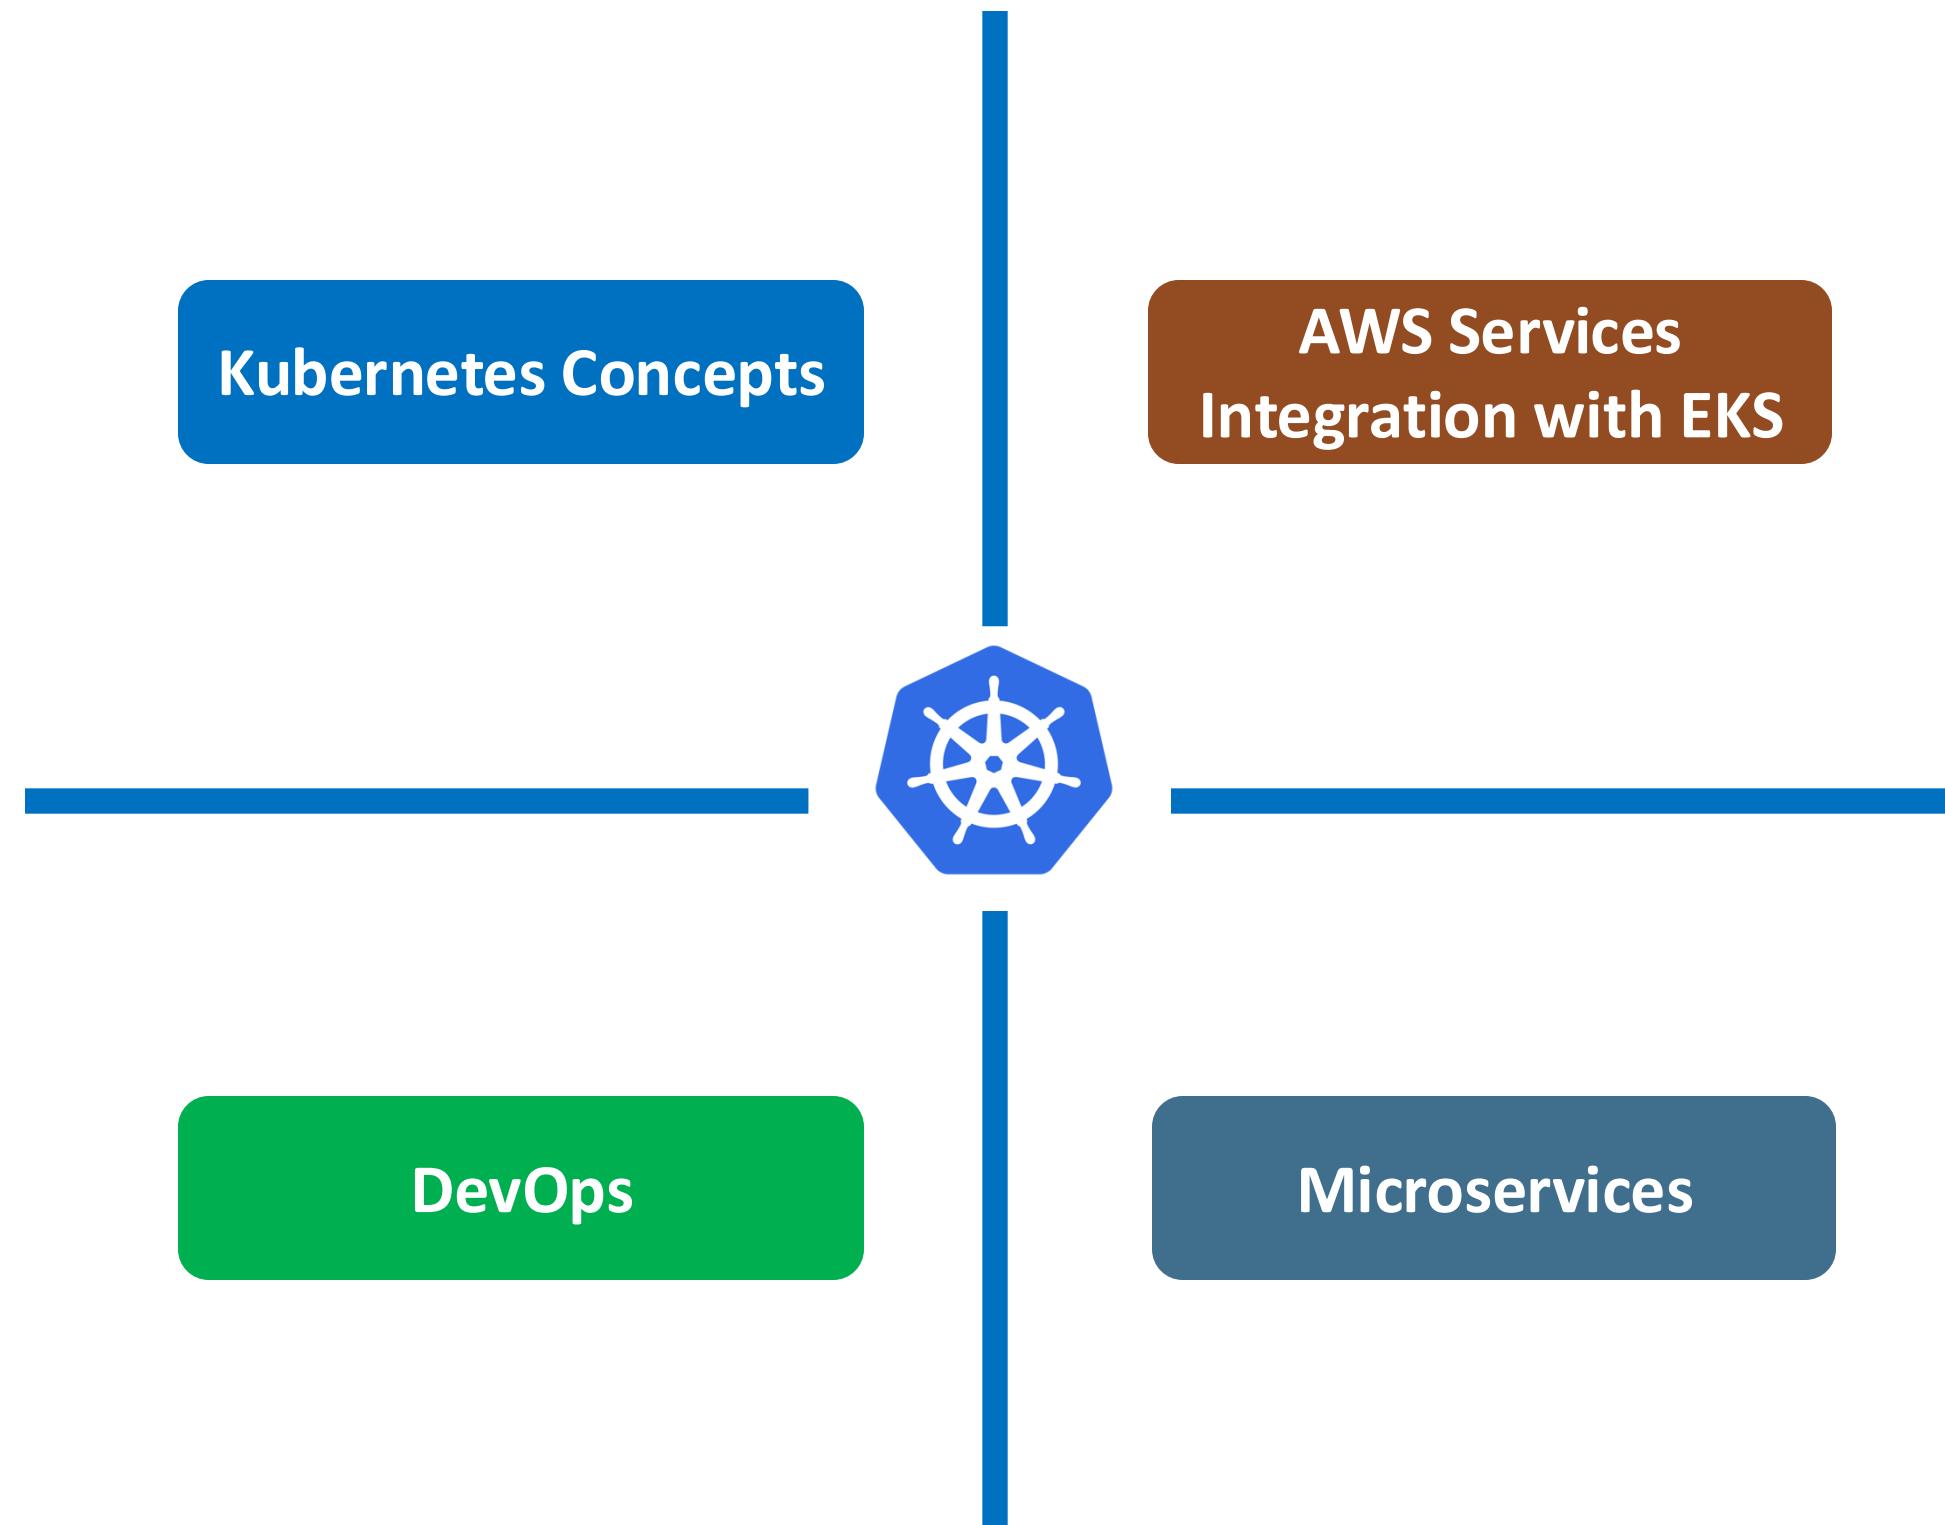

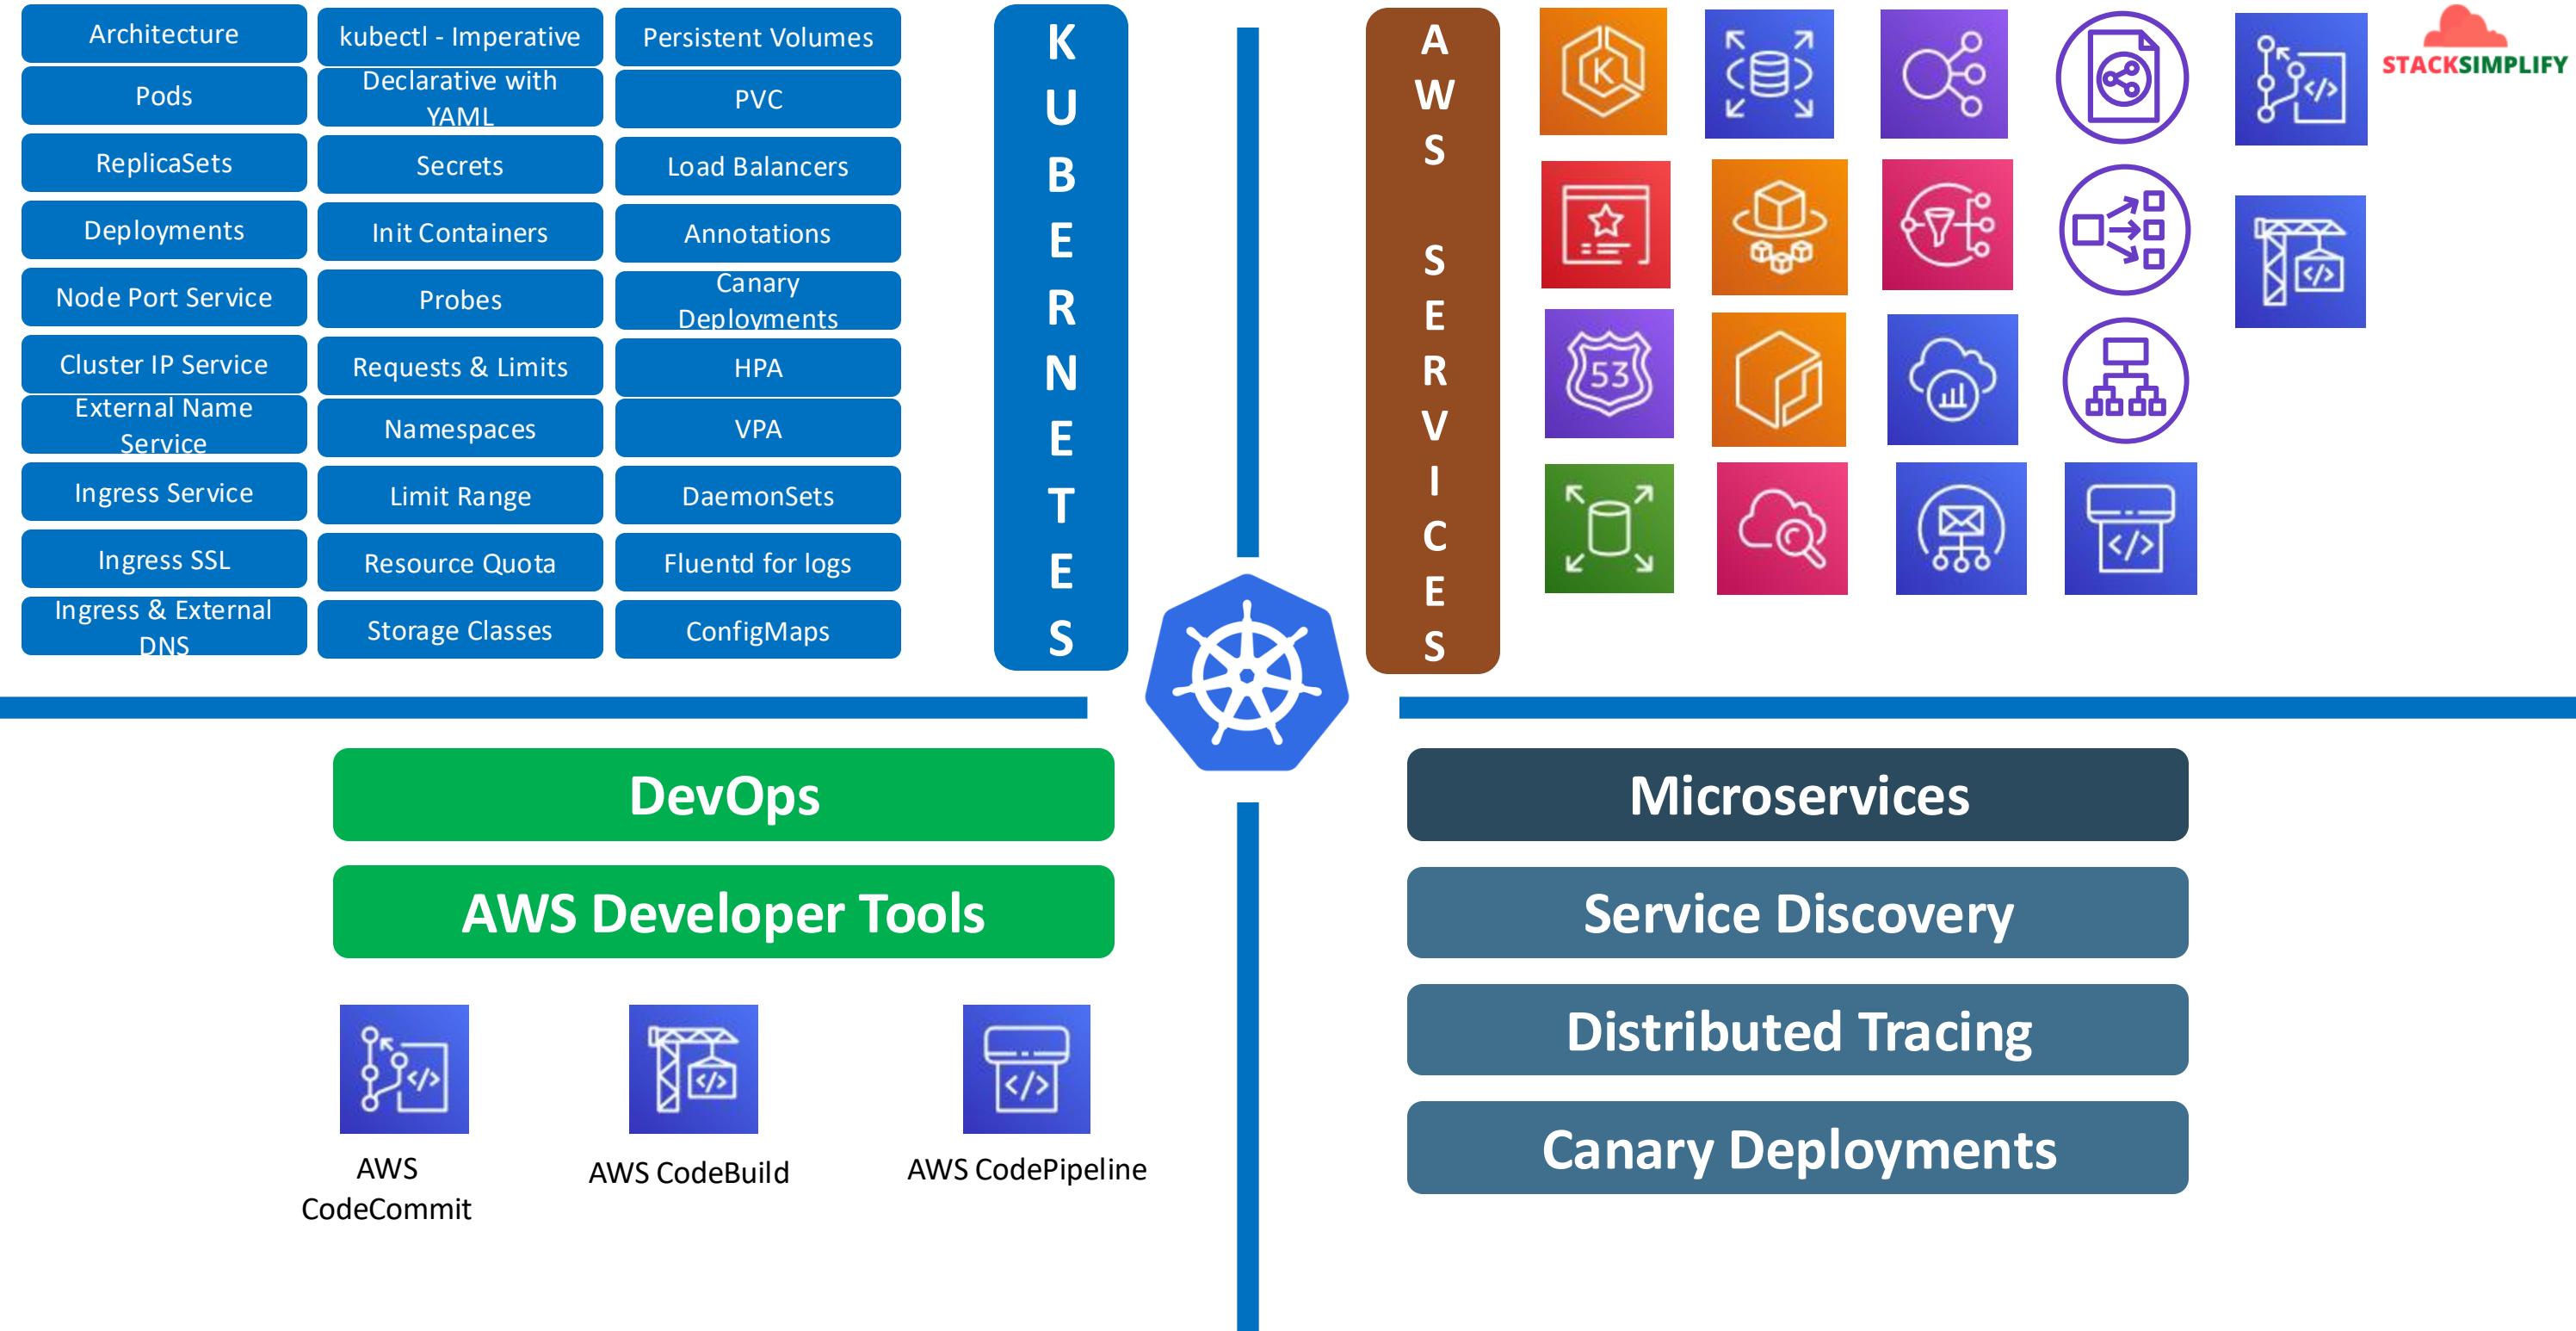

Docker - Fundamentals

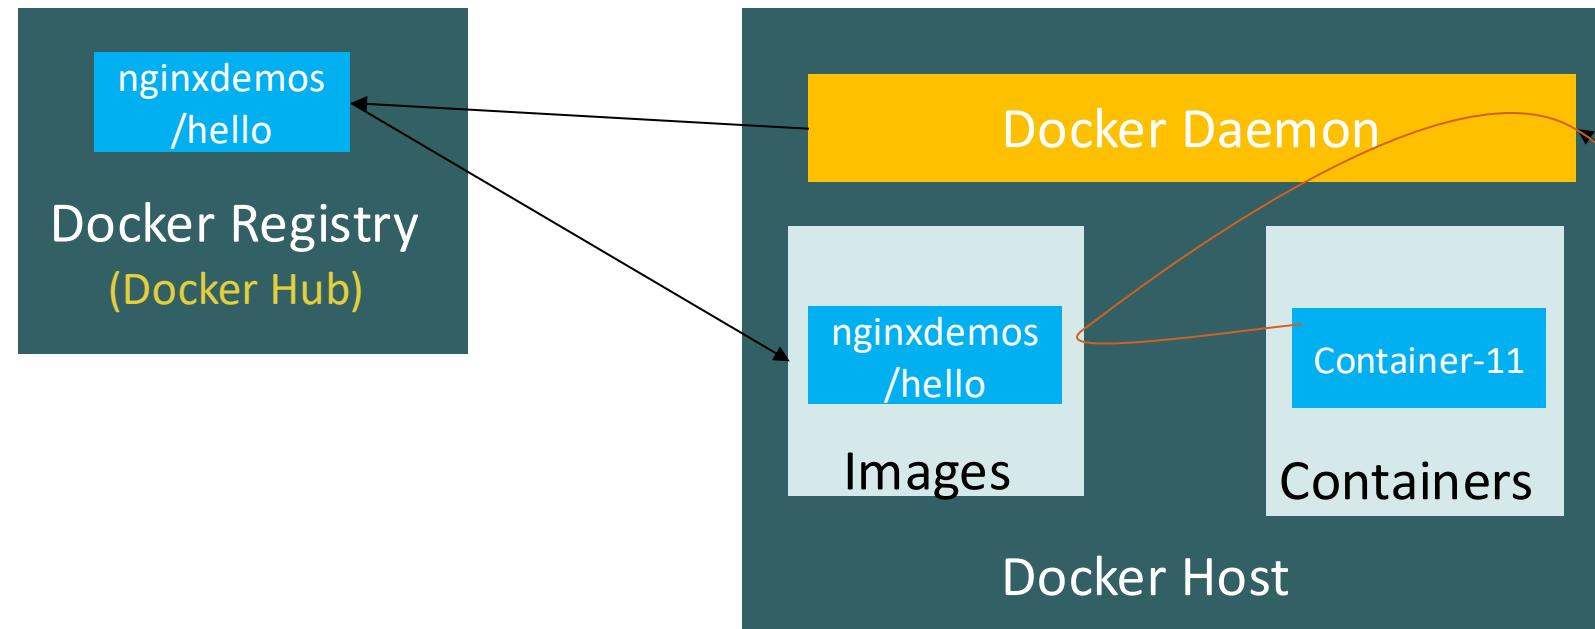

- **Docker Registry or Docker Hub**
 - A Docker *registry* **stores** Docker images.
 - **Docker Hub** is a public registry that anyone can use, and Docker is configured to look for images on Docker Hub by default.
 - We can even run our own **private registry**.
 - When we use the **docker pull** or **docker run** commands, the required images are pulled from our configured registry.
 - When we use the **docker push** command, our image is pushed to our configured registry.

```
docker pull nginxdemos/hello  
docker run -p 82:80 -d nginxdemos/hello
```

Docker Client (My Desktop or Docker Host)

Kubernetes - Imperative & Declarative

Kubernetes Fundamentals

Imperative

Declarative

kubectl

Pod

ReplicaSet

Deployment

Service

YAML & kubectl

Pod


ReplicaSet

Deployment

Service




EKS Cluster

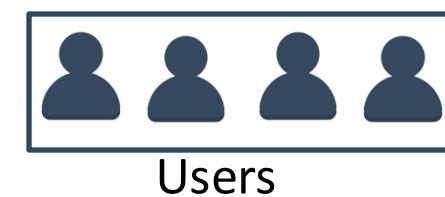

http://<worker-node-public-ip>:<NodePort>/usermgmt/<apis>

UserMgmt – NodePort Service

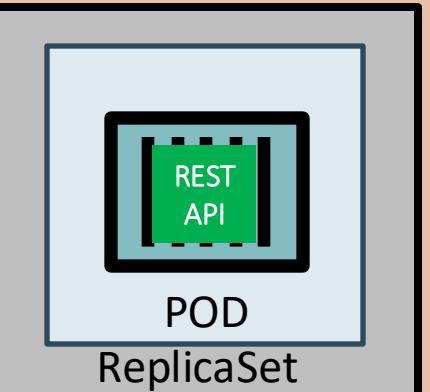

Deployment (UserMgmt)

NodePort Service

Deployment

Environment Variables

StatefulSets

Environment Variables

Volumes

Volume Mounts

ClusterIP Service

EKS Storage EBS CSI Driver

- Drawbacks of EBS CSI for MySQL DB
- Complex setup to achieve HA
- Complex Multi-Az support for EBS
- Complex Master-Master MySQL setup
- Complex Master-Slave MySQL setup
- No Automatic Backup & Recovery
- No Auto-Upgrade MySQL



AWS Elastic Block Store - EBS


Storage Class

Persistent Volume Claim


Config Map


Deployment

MySQL – ClusterIP Service

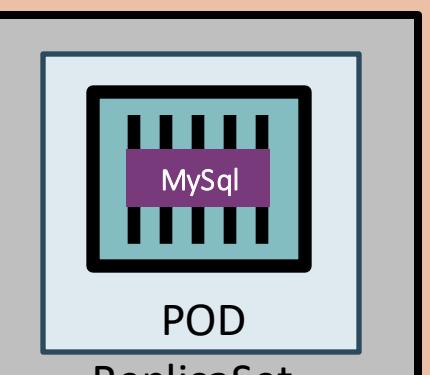


Deployment (mysql)

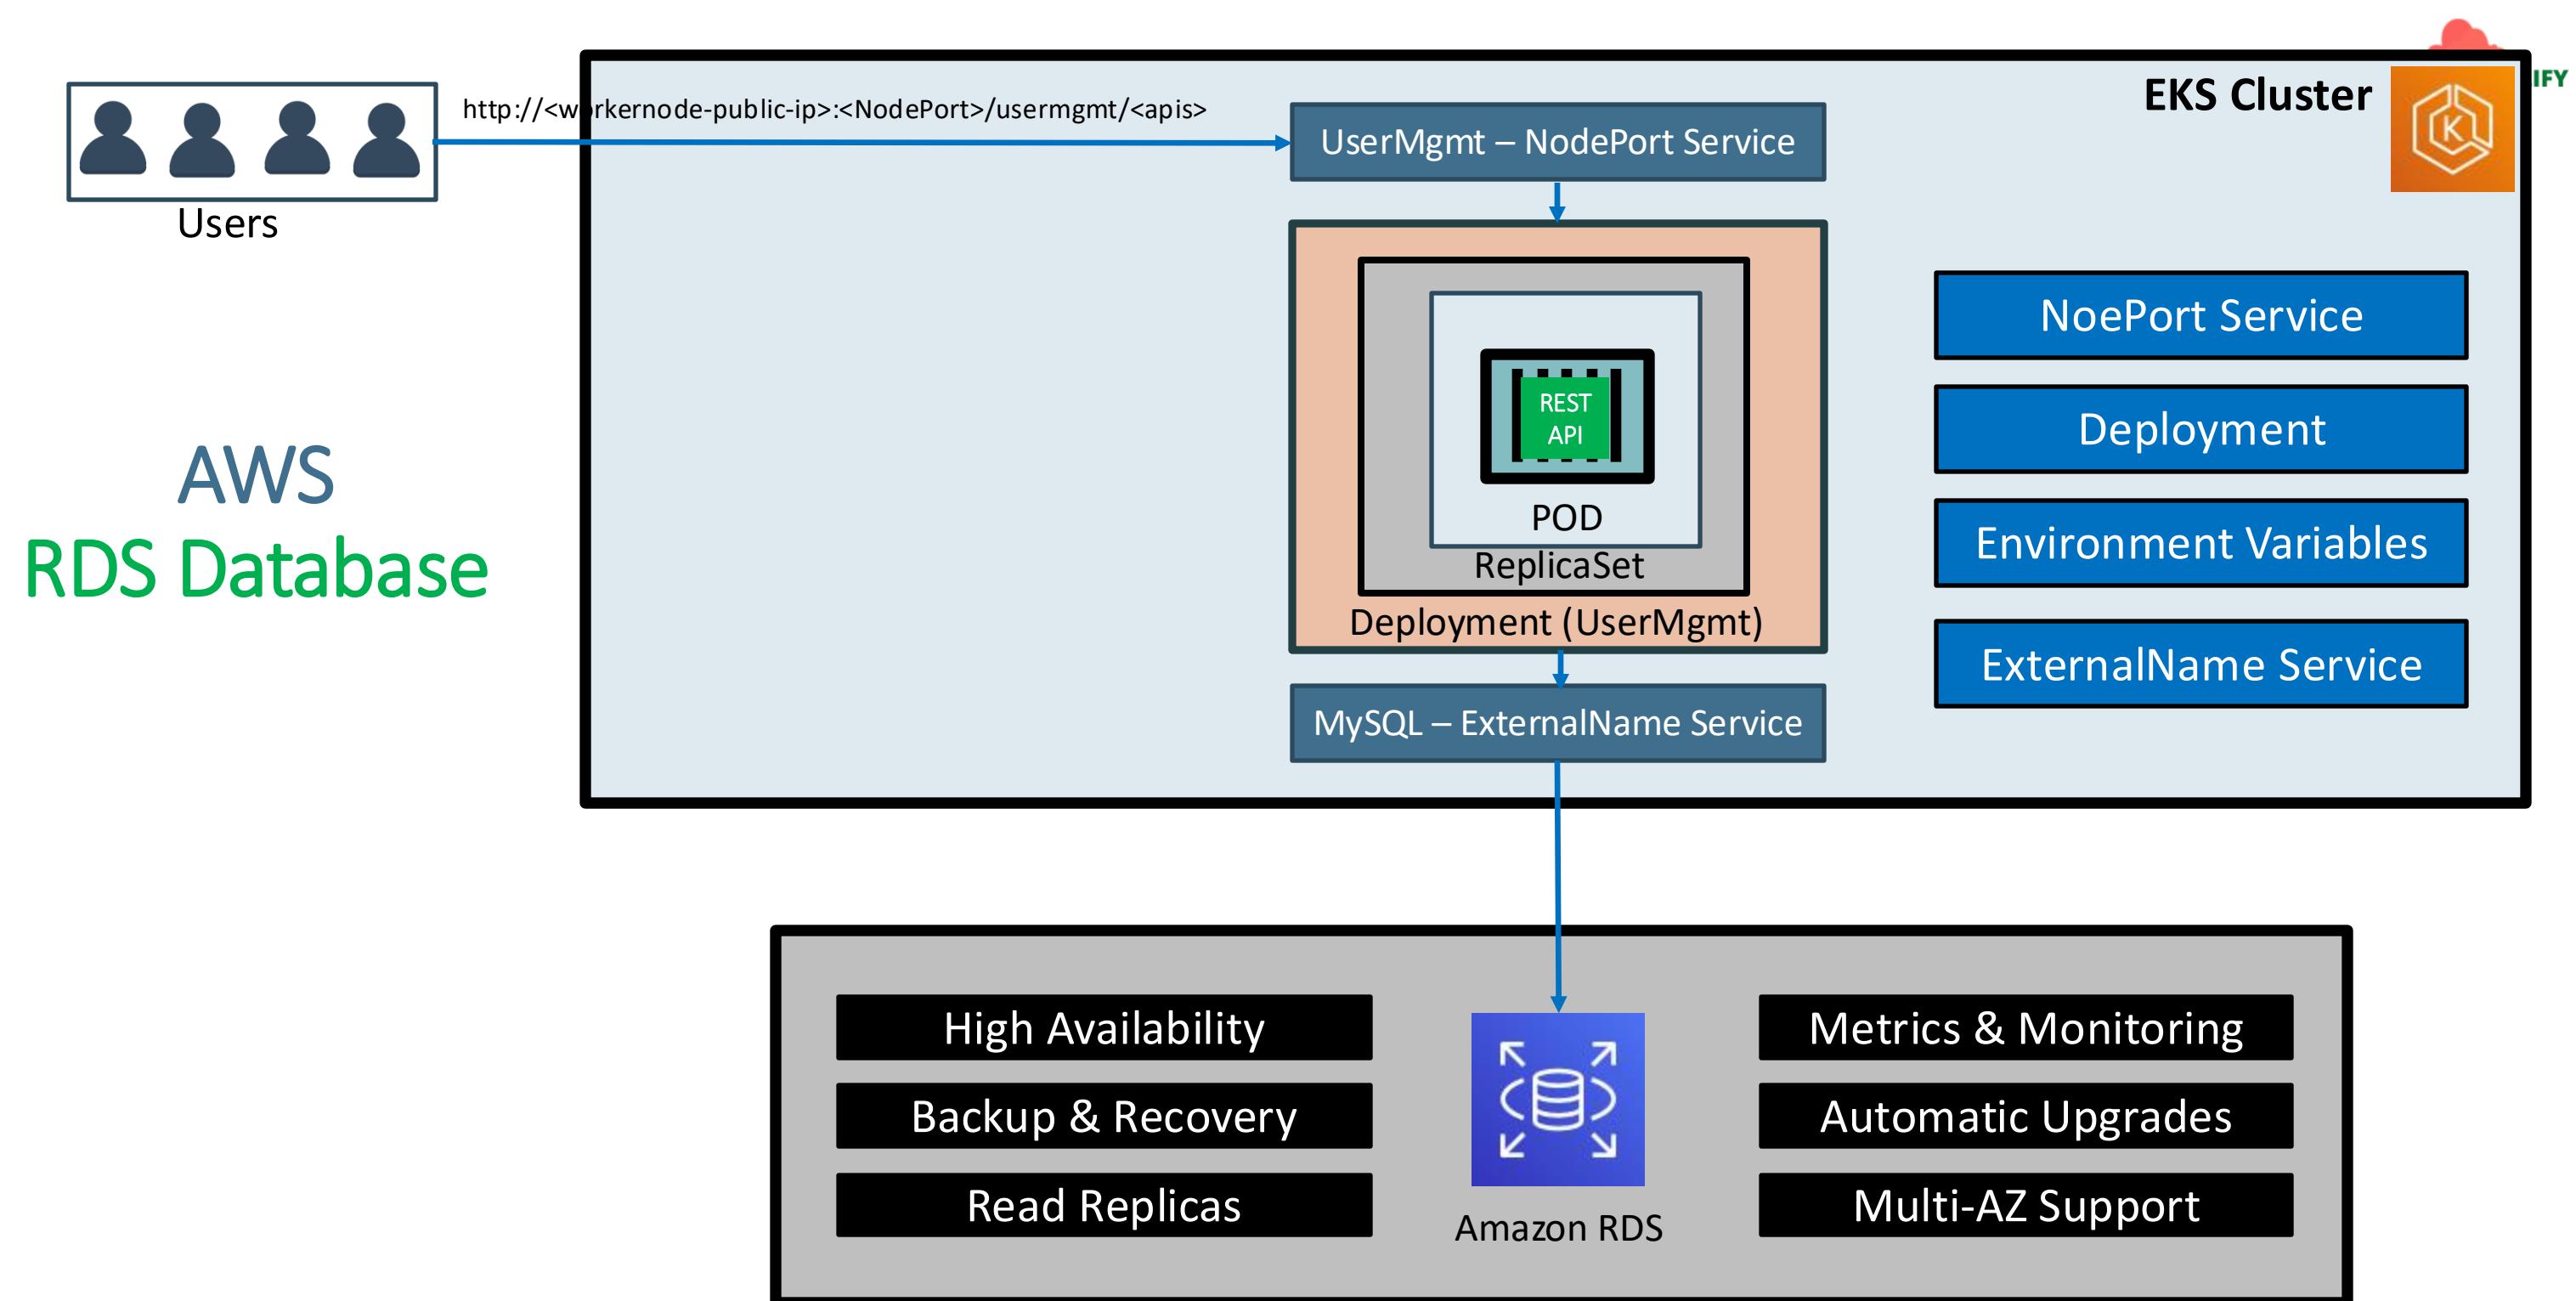


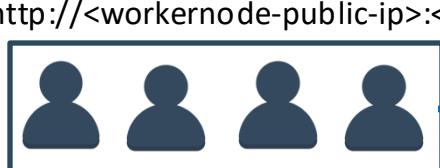


Users


AWS EKS Network Design With EKS Workload & RDS Database

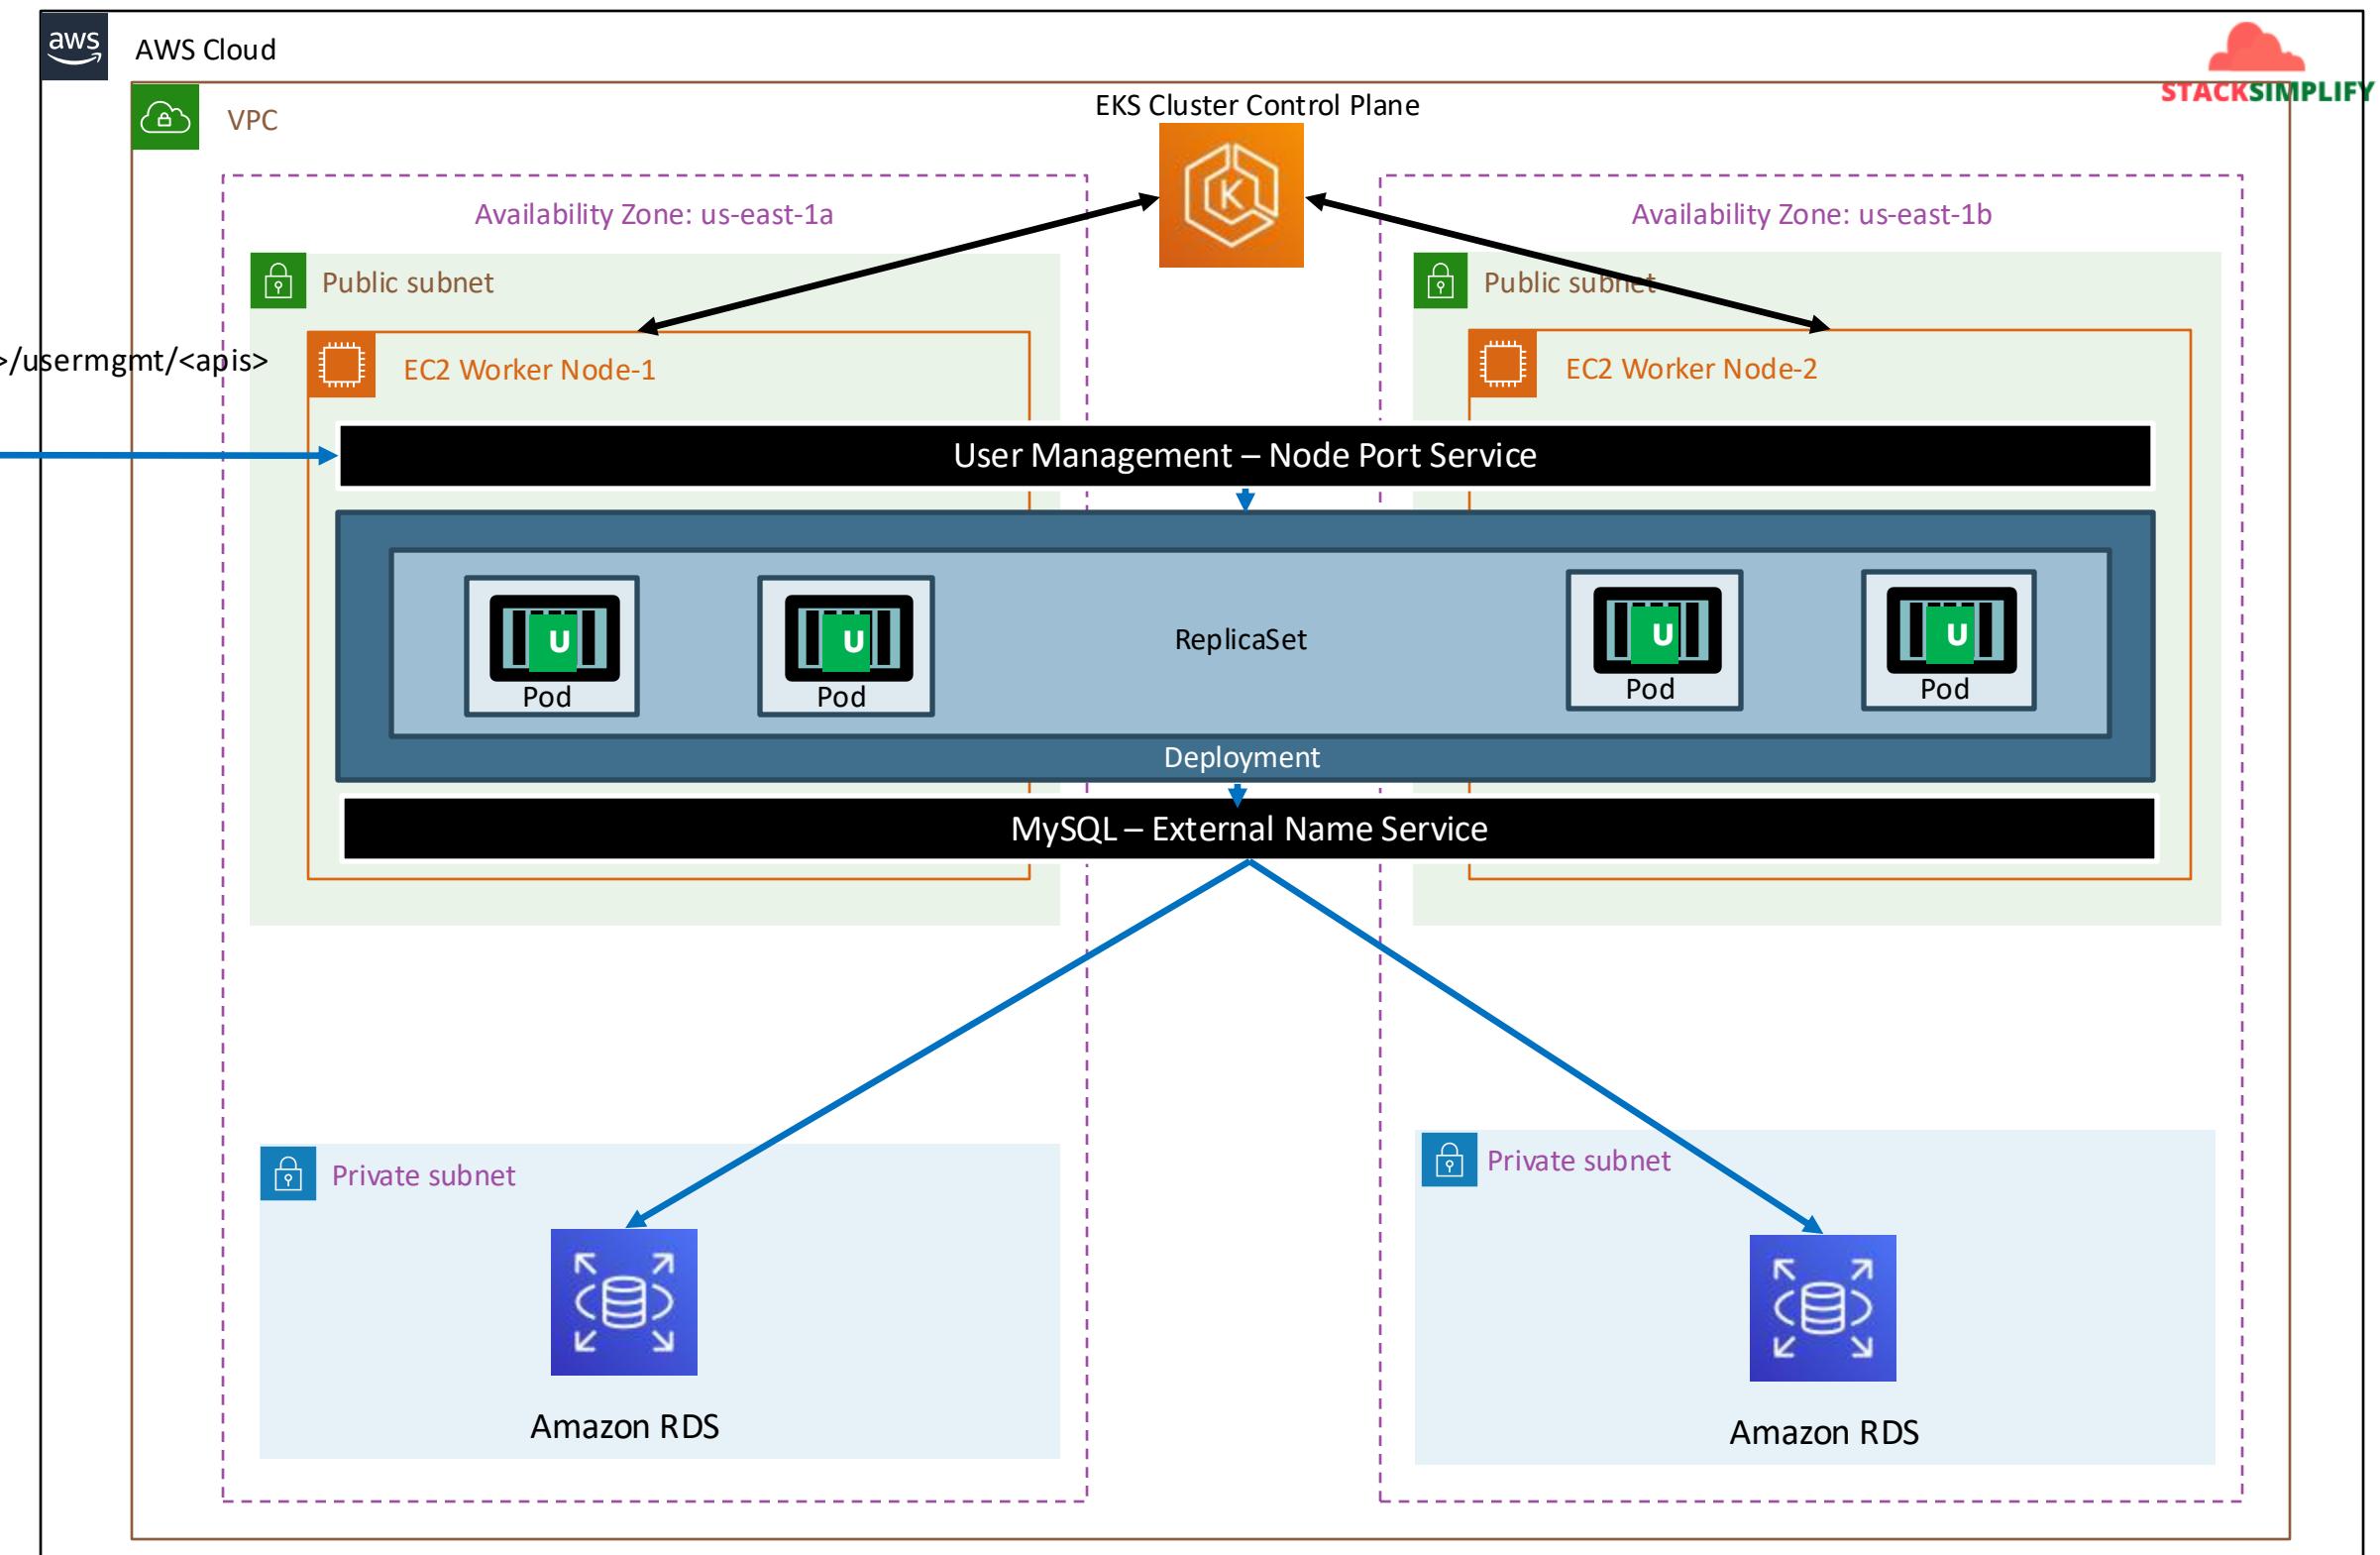

AWS EKS Network Design With EKS Workload RDS & ELB Classic Load Balancer

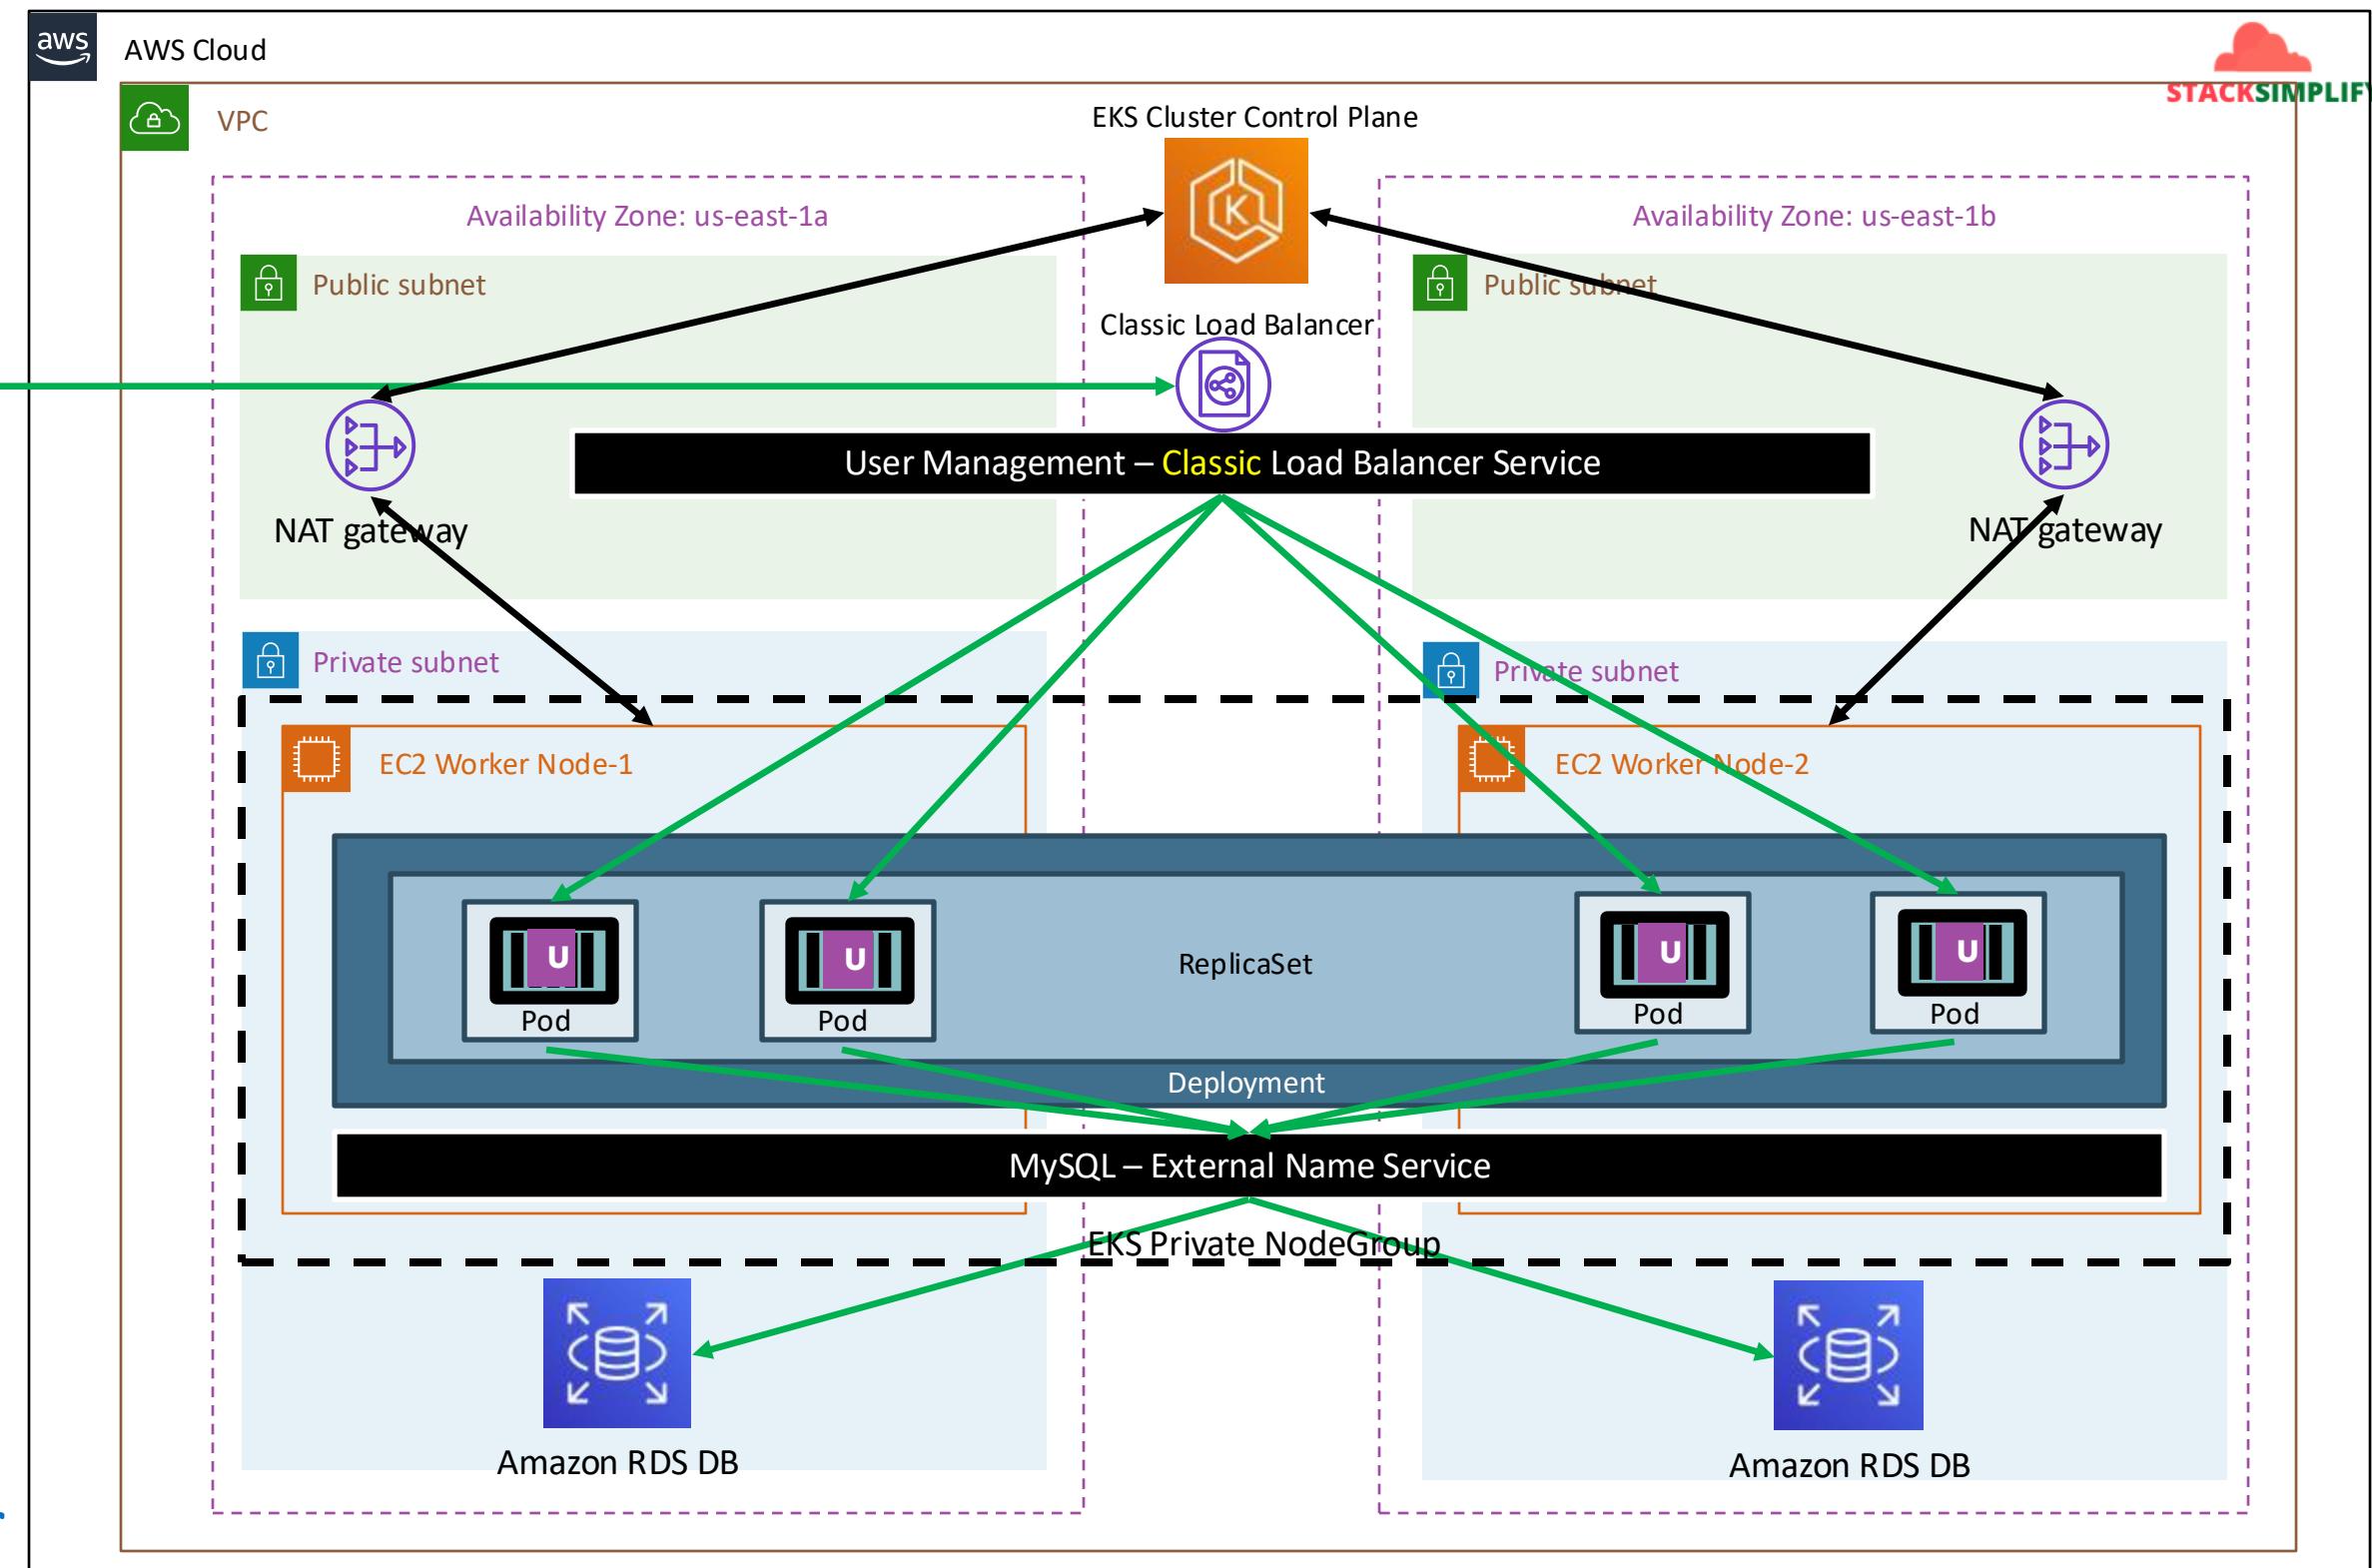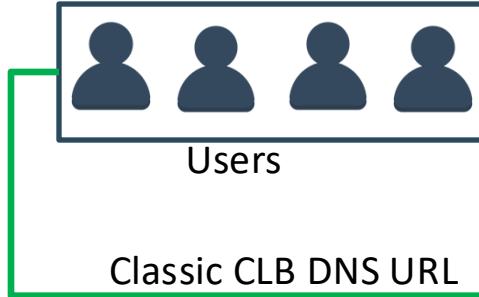


AWS EKS Network Design With EKS Workload RDS & ELB Network Load Balancer

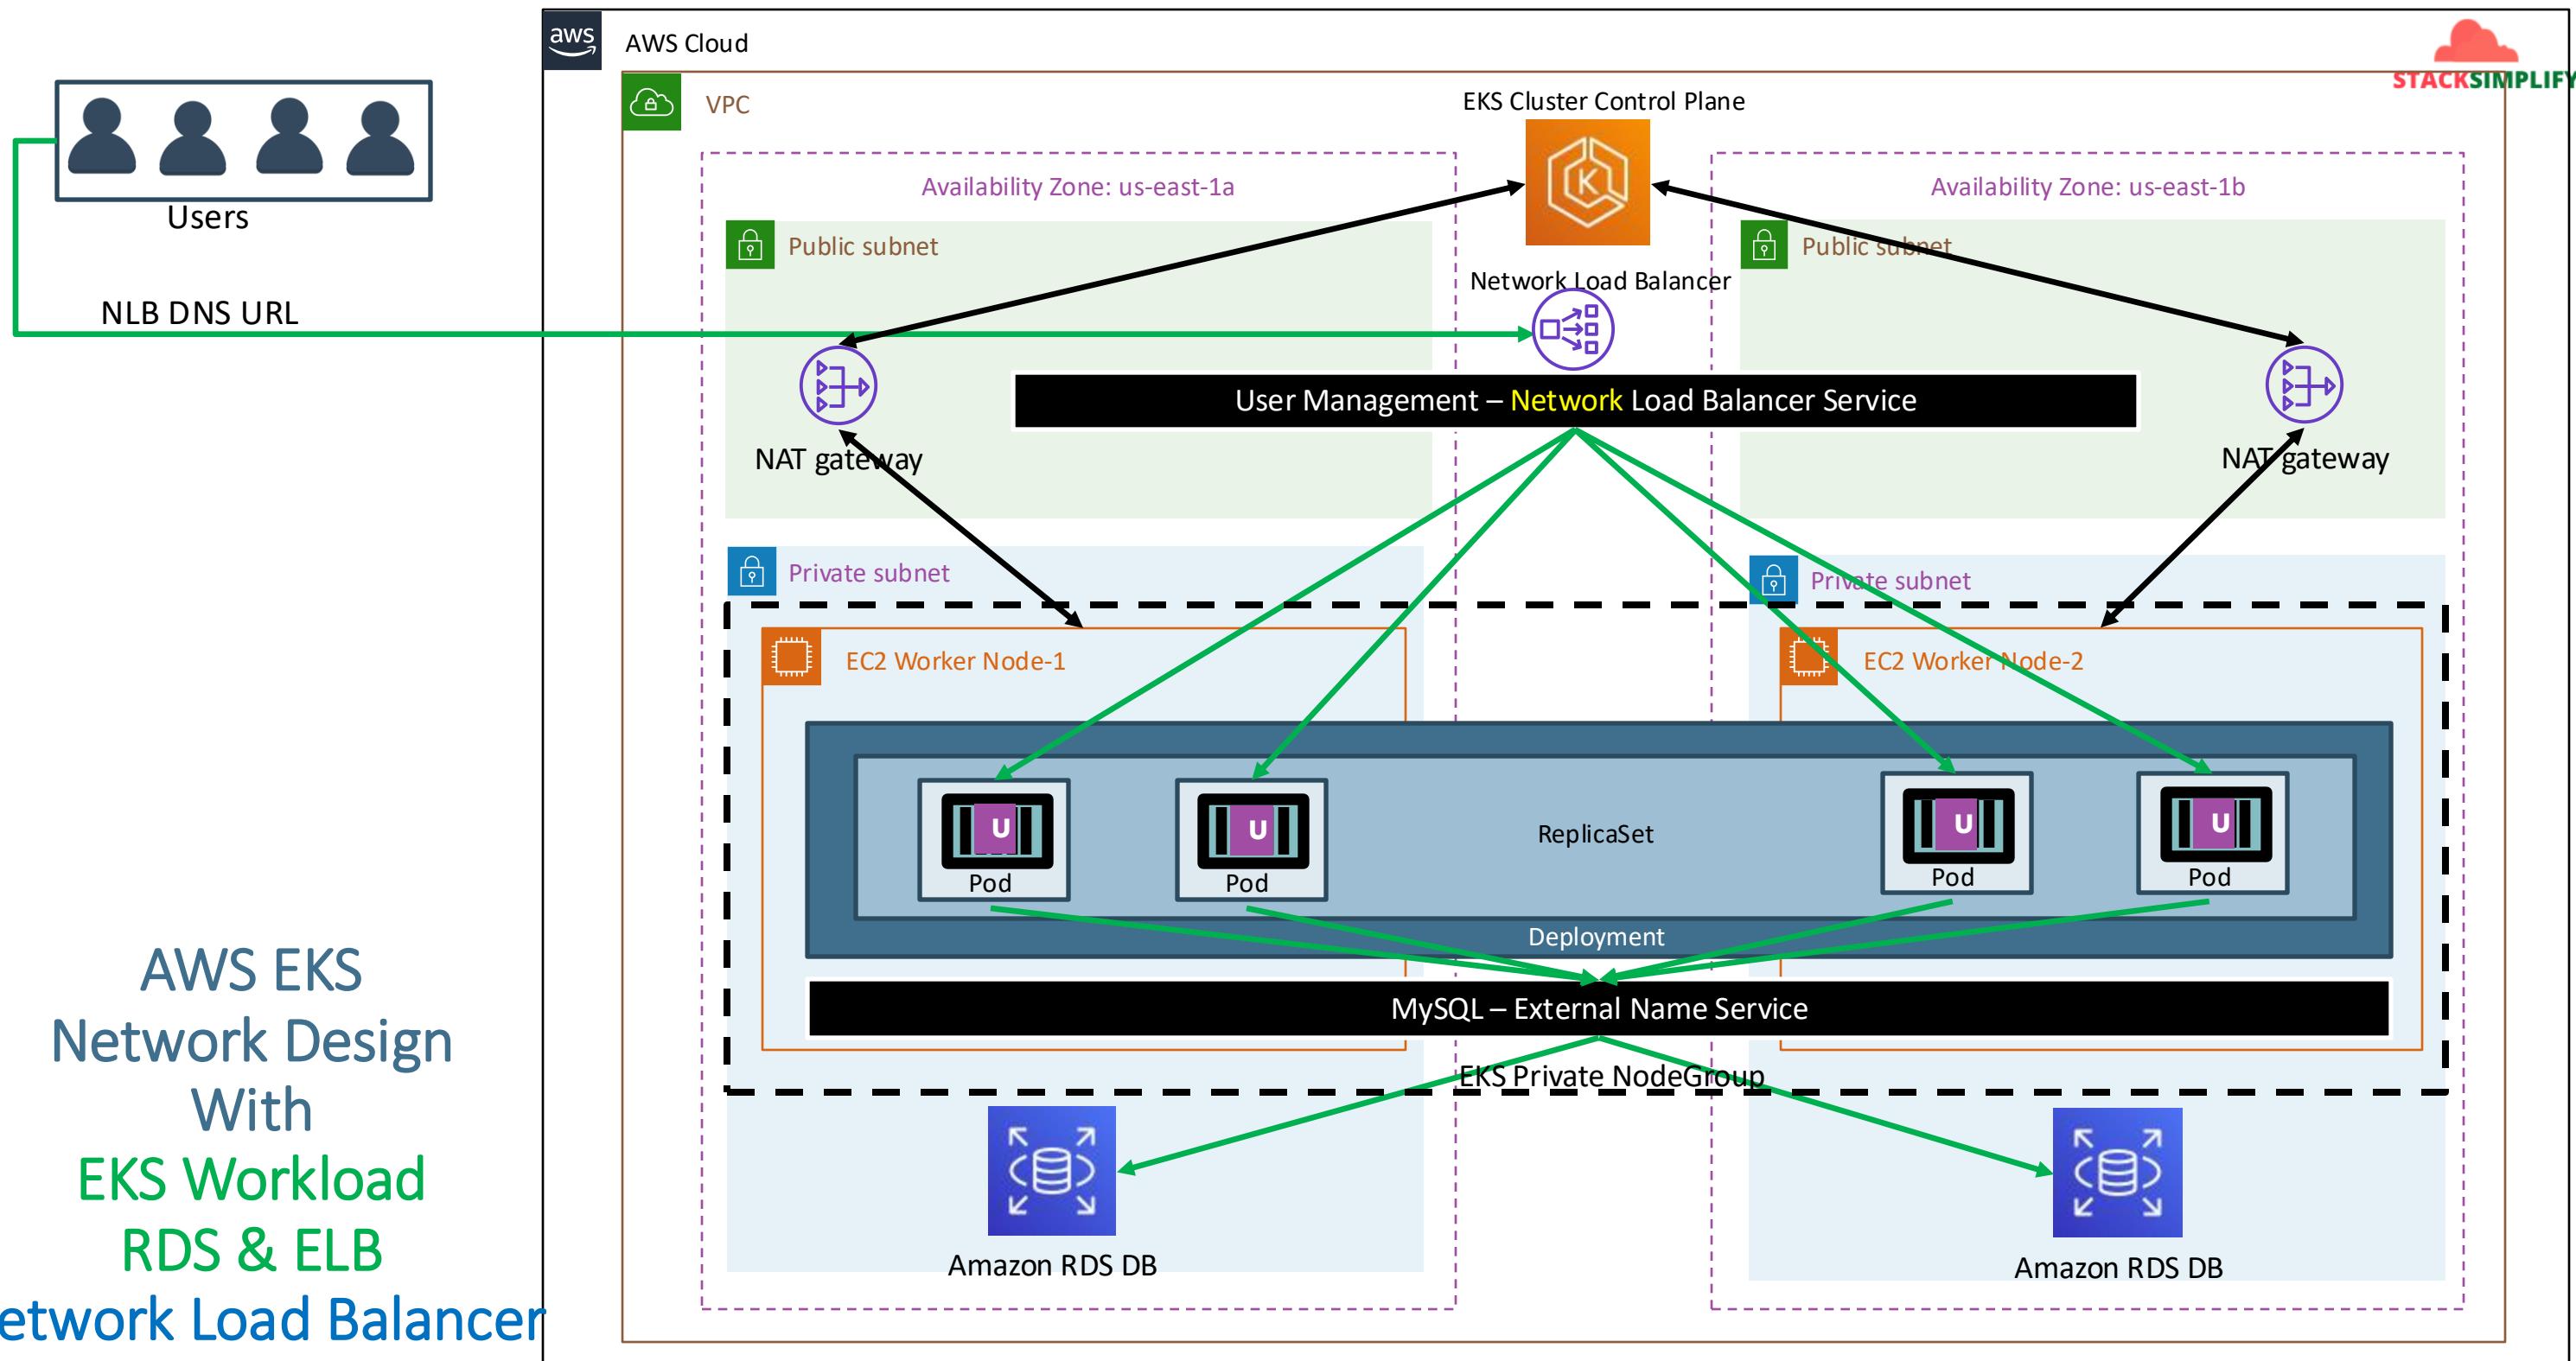




STACKSIMPLIFY

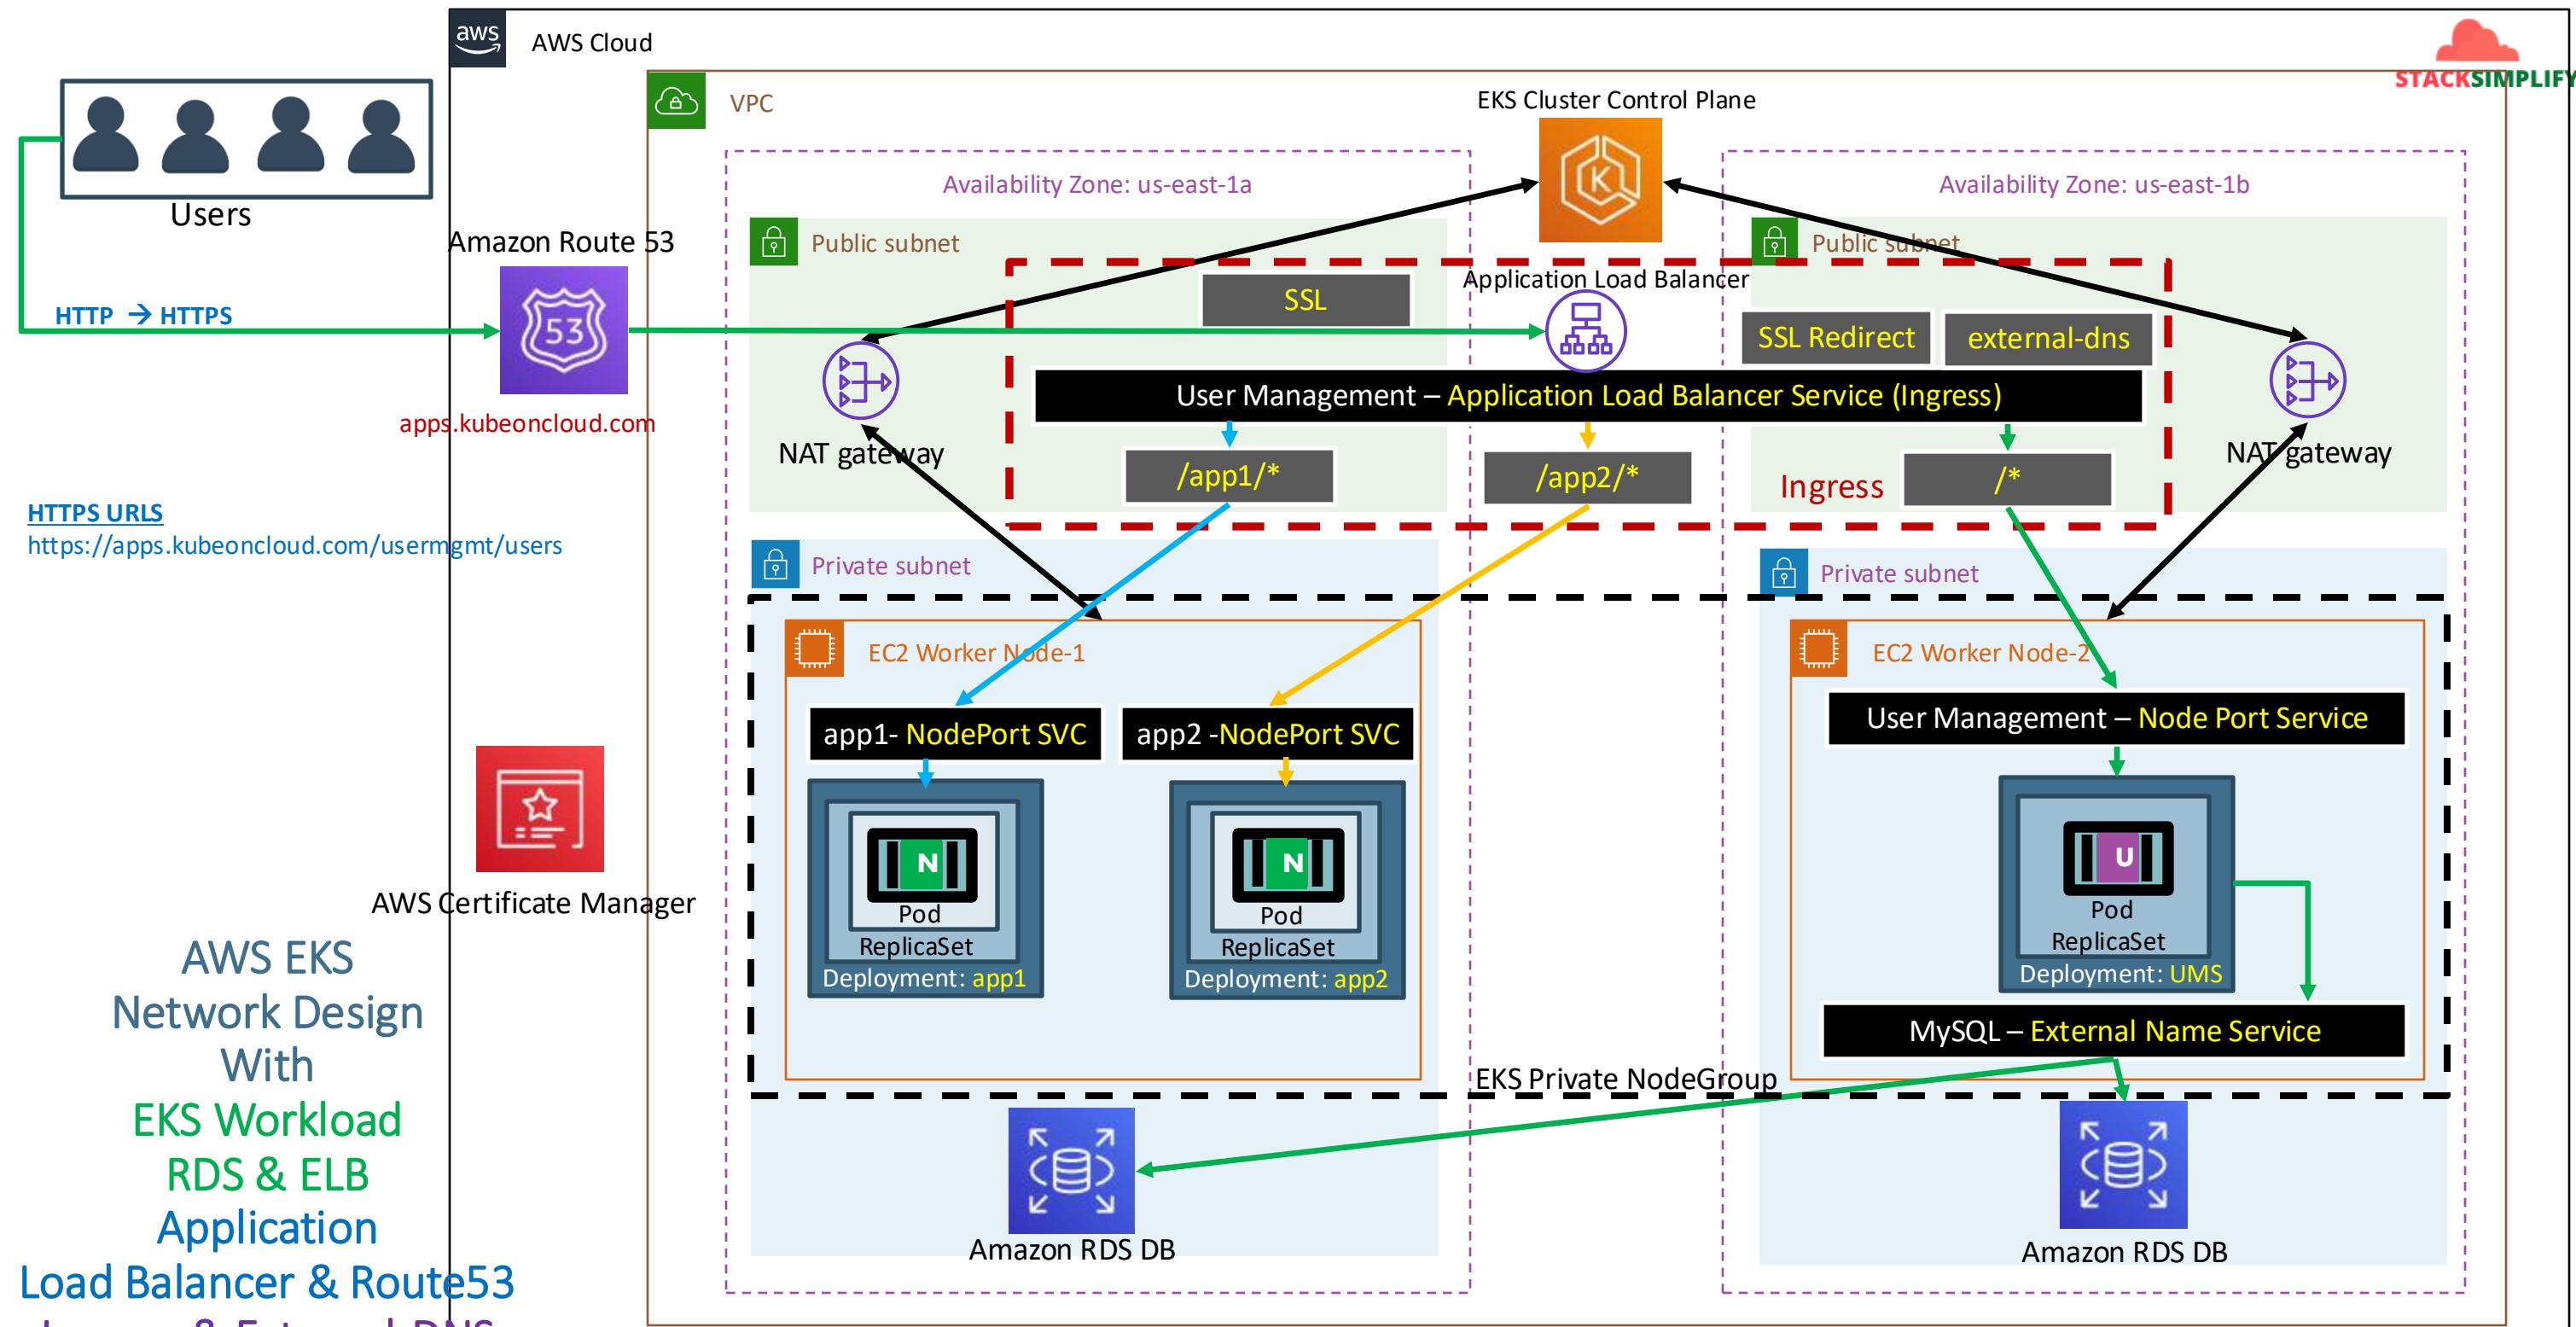

EKS Deployment Options - Mixed

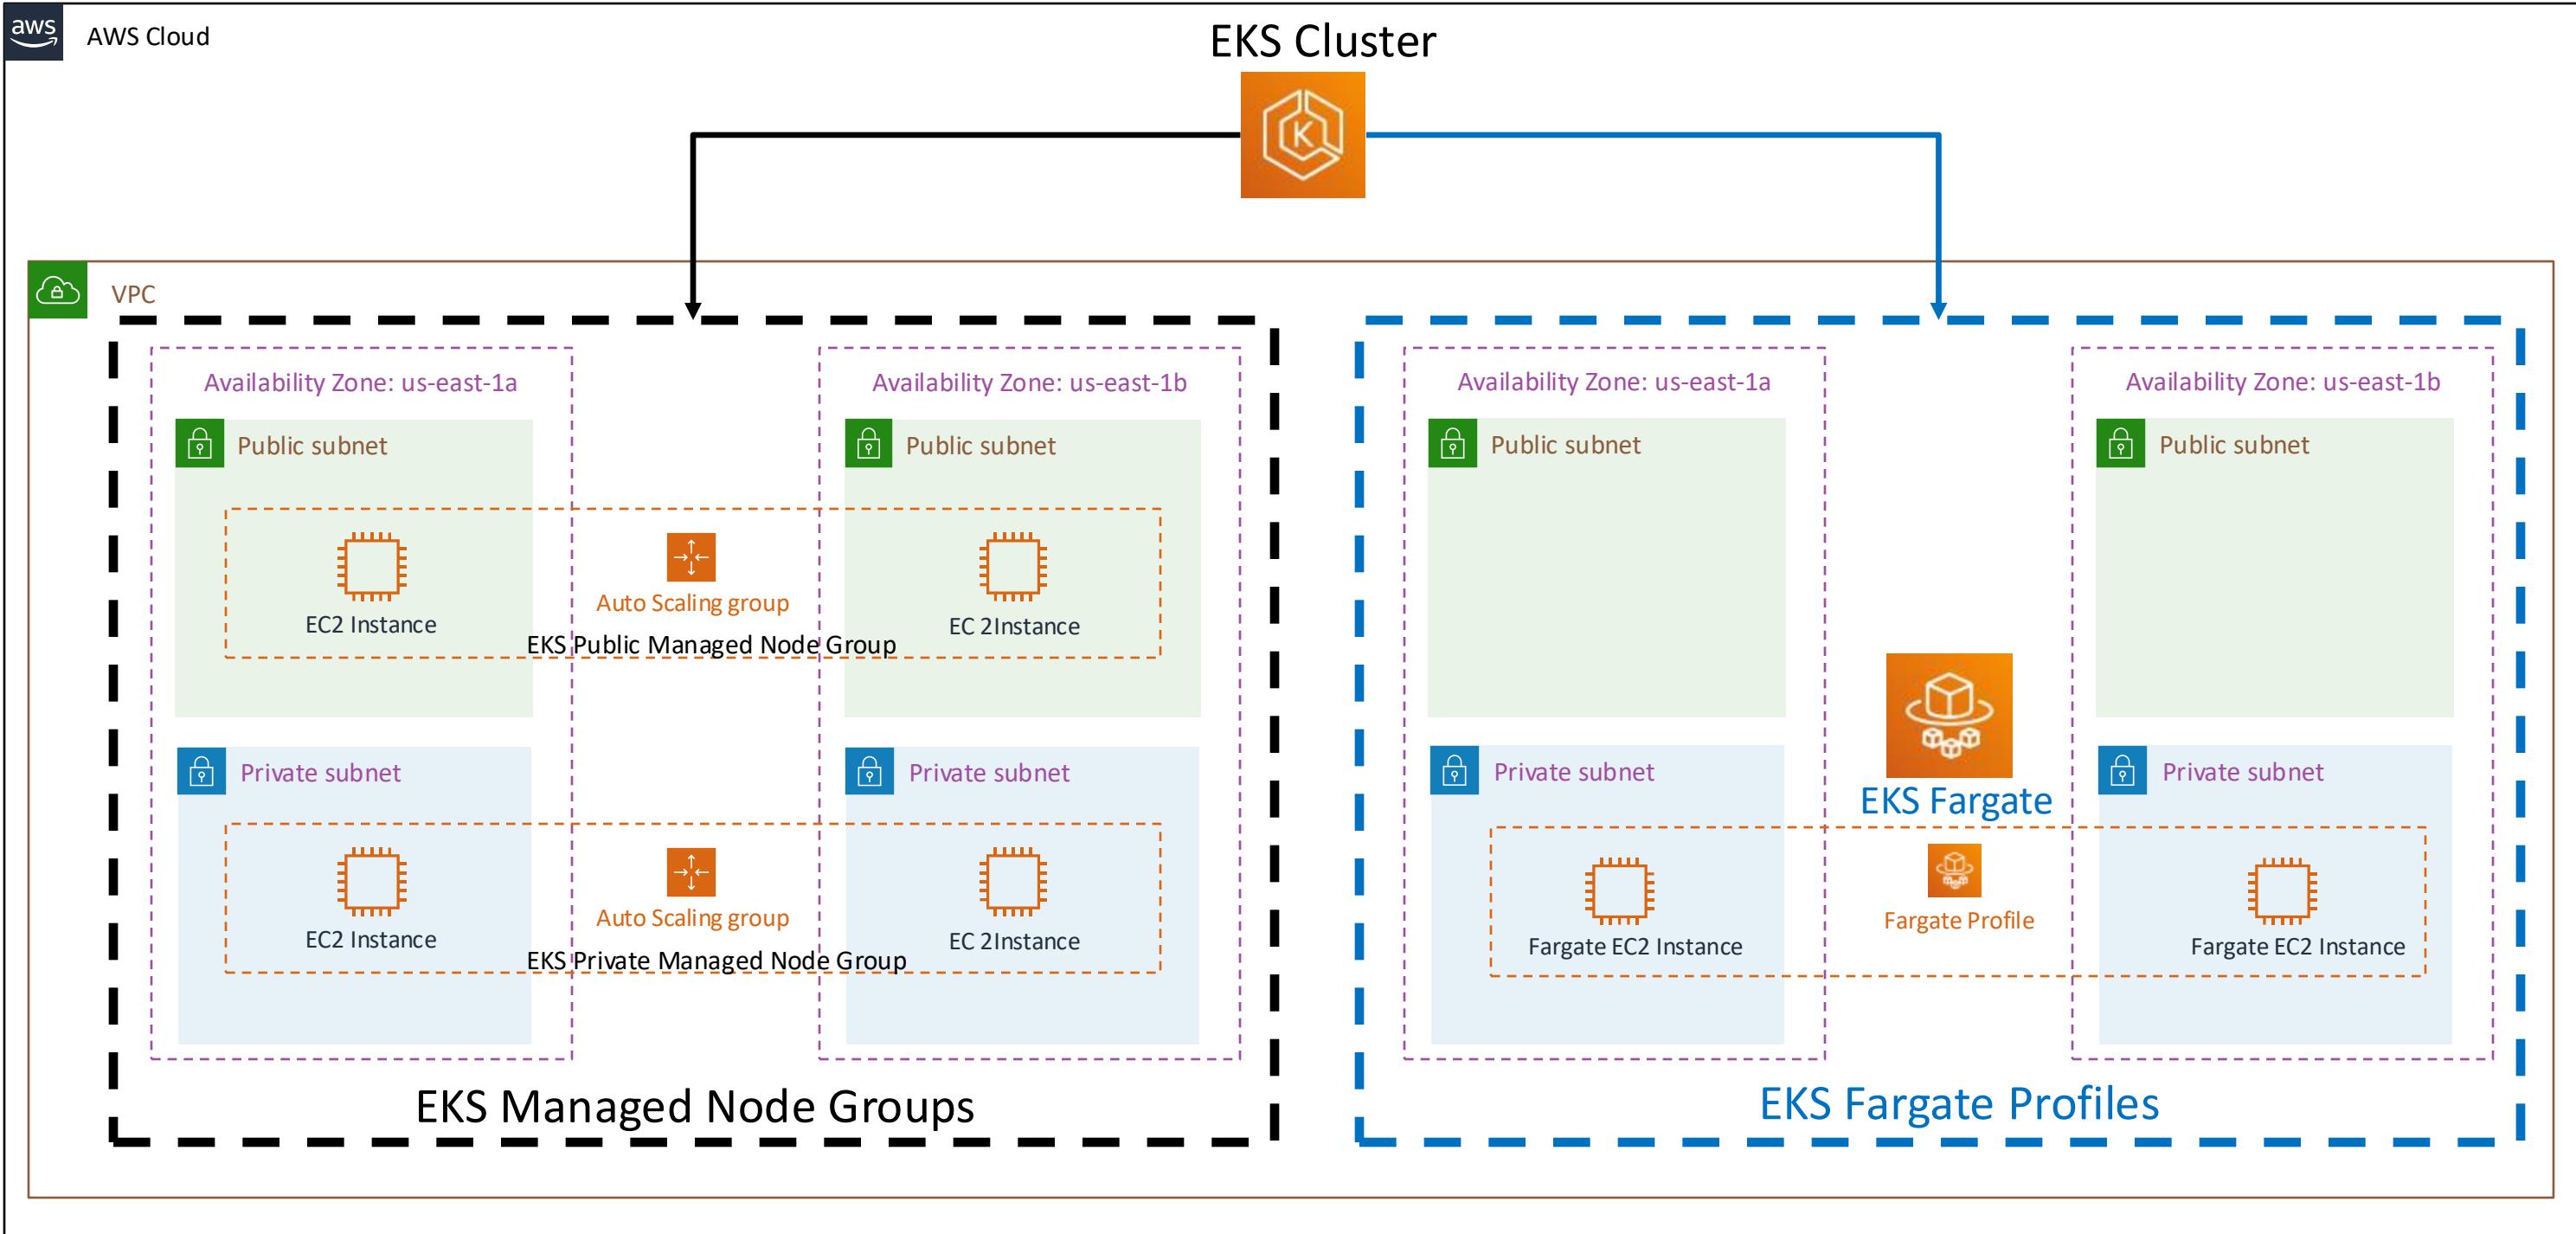


Users




EKS Deployment Options – Mixed Mode - 3 Apps

STACKSIMPLIFY

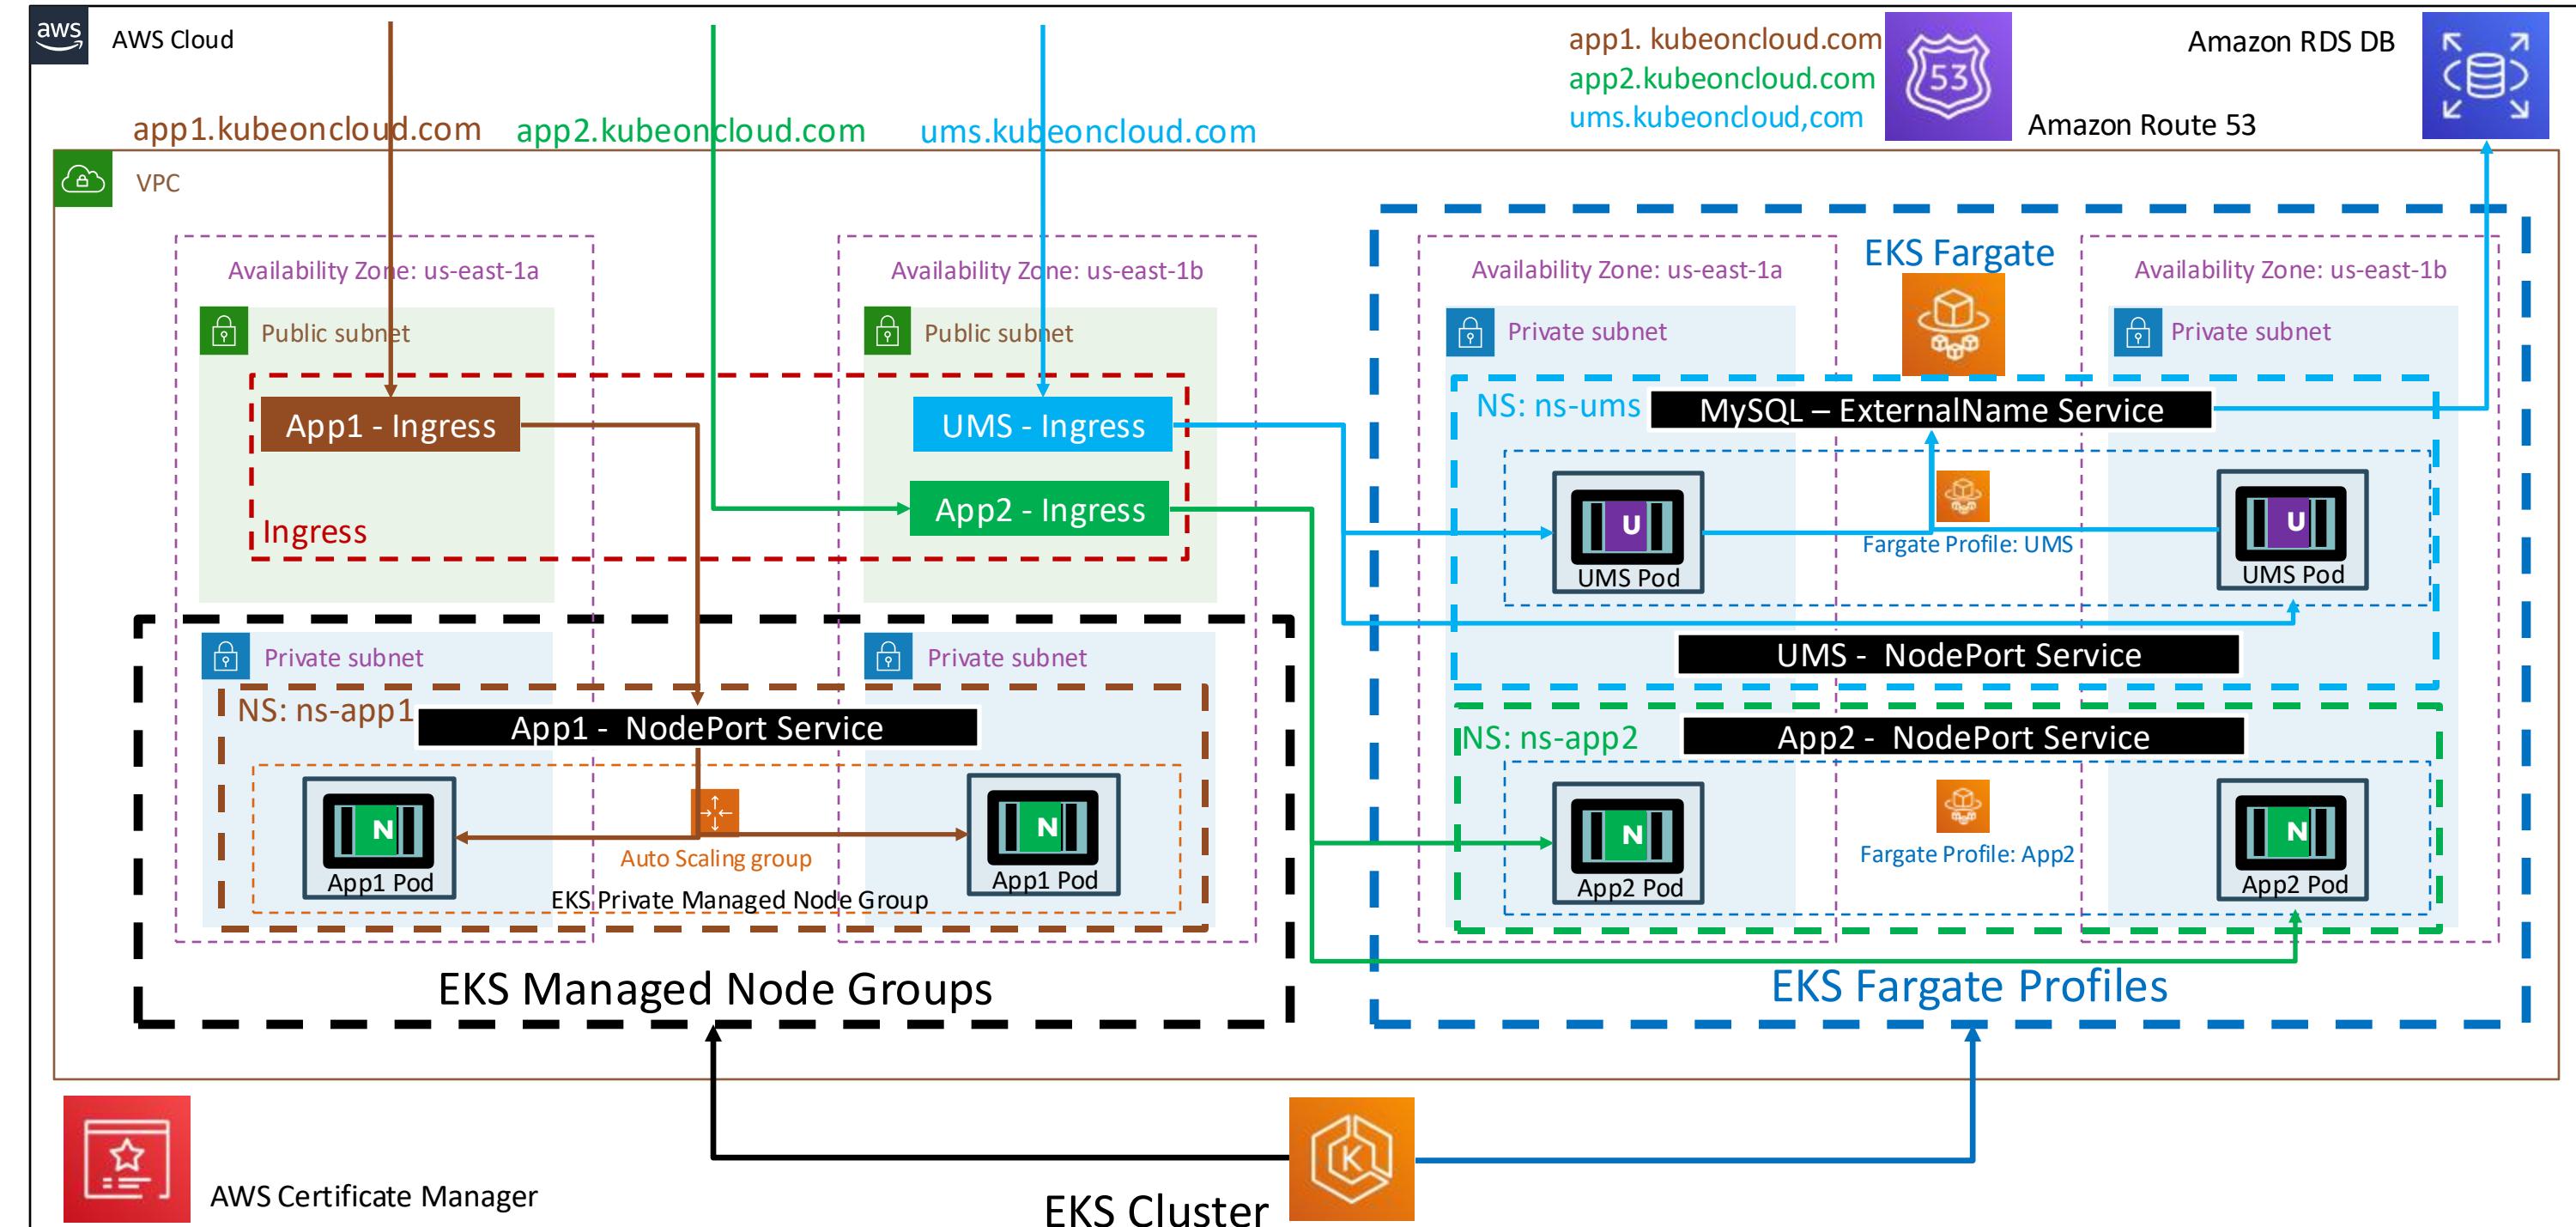


EKS & ECR


Developer

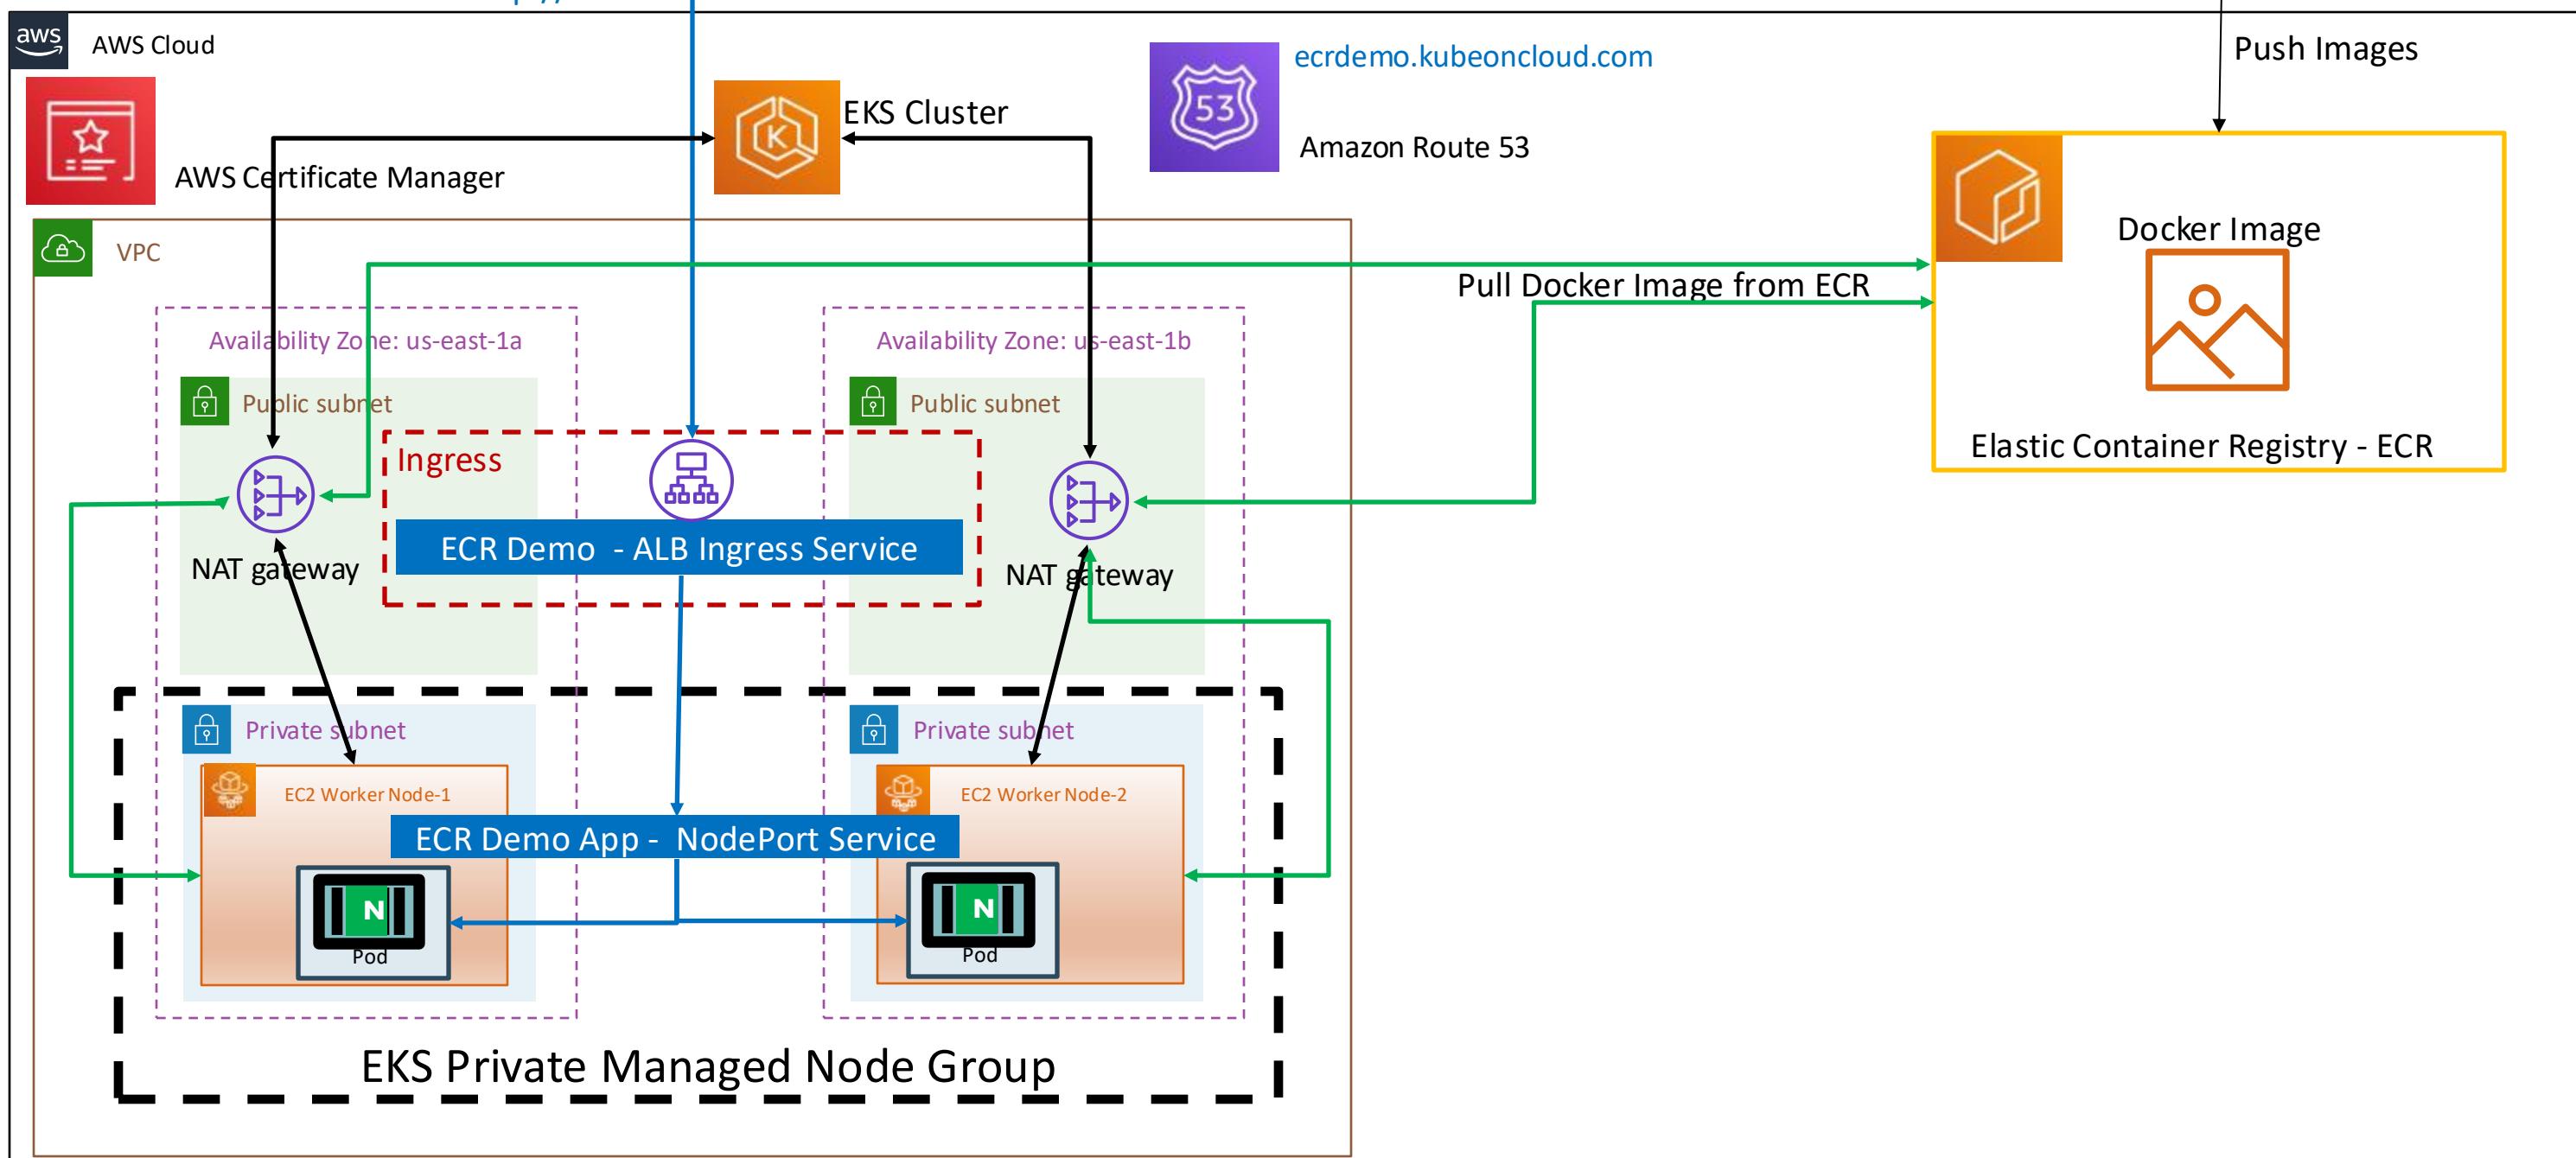


Stages in Release Process

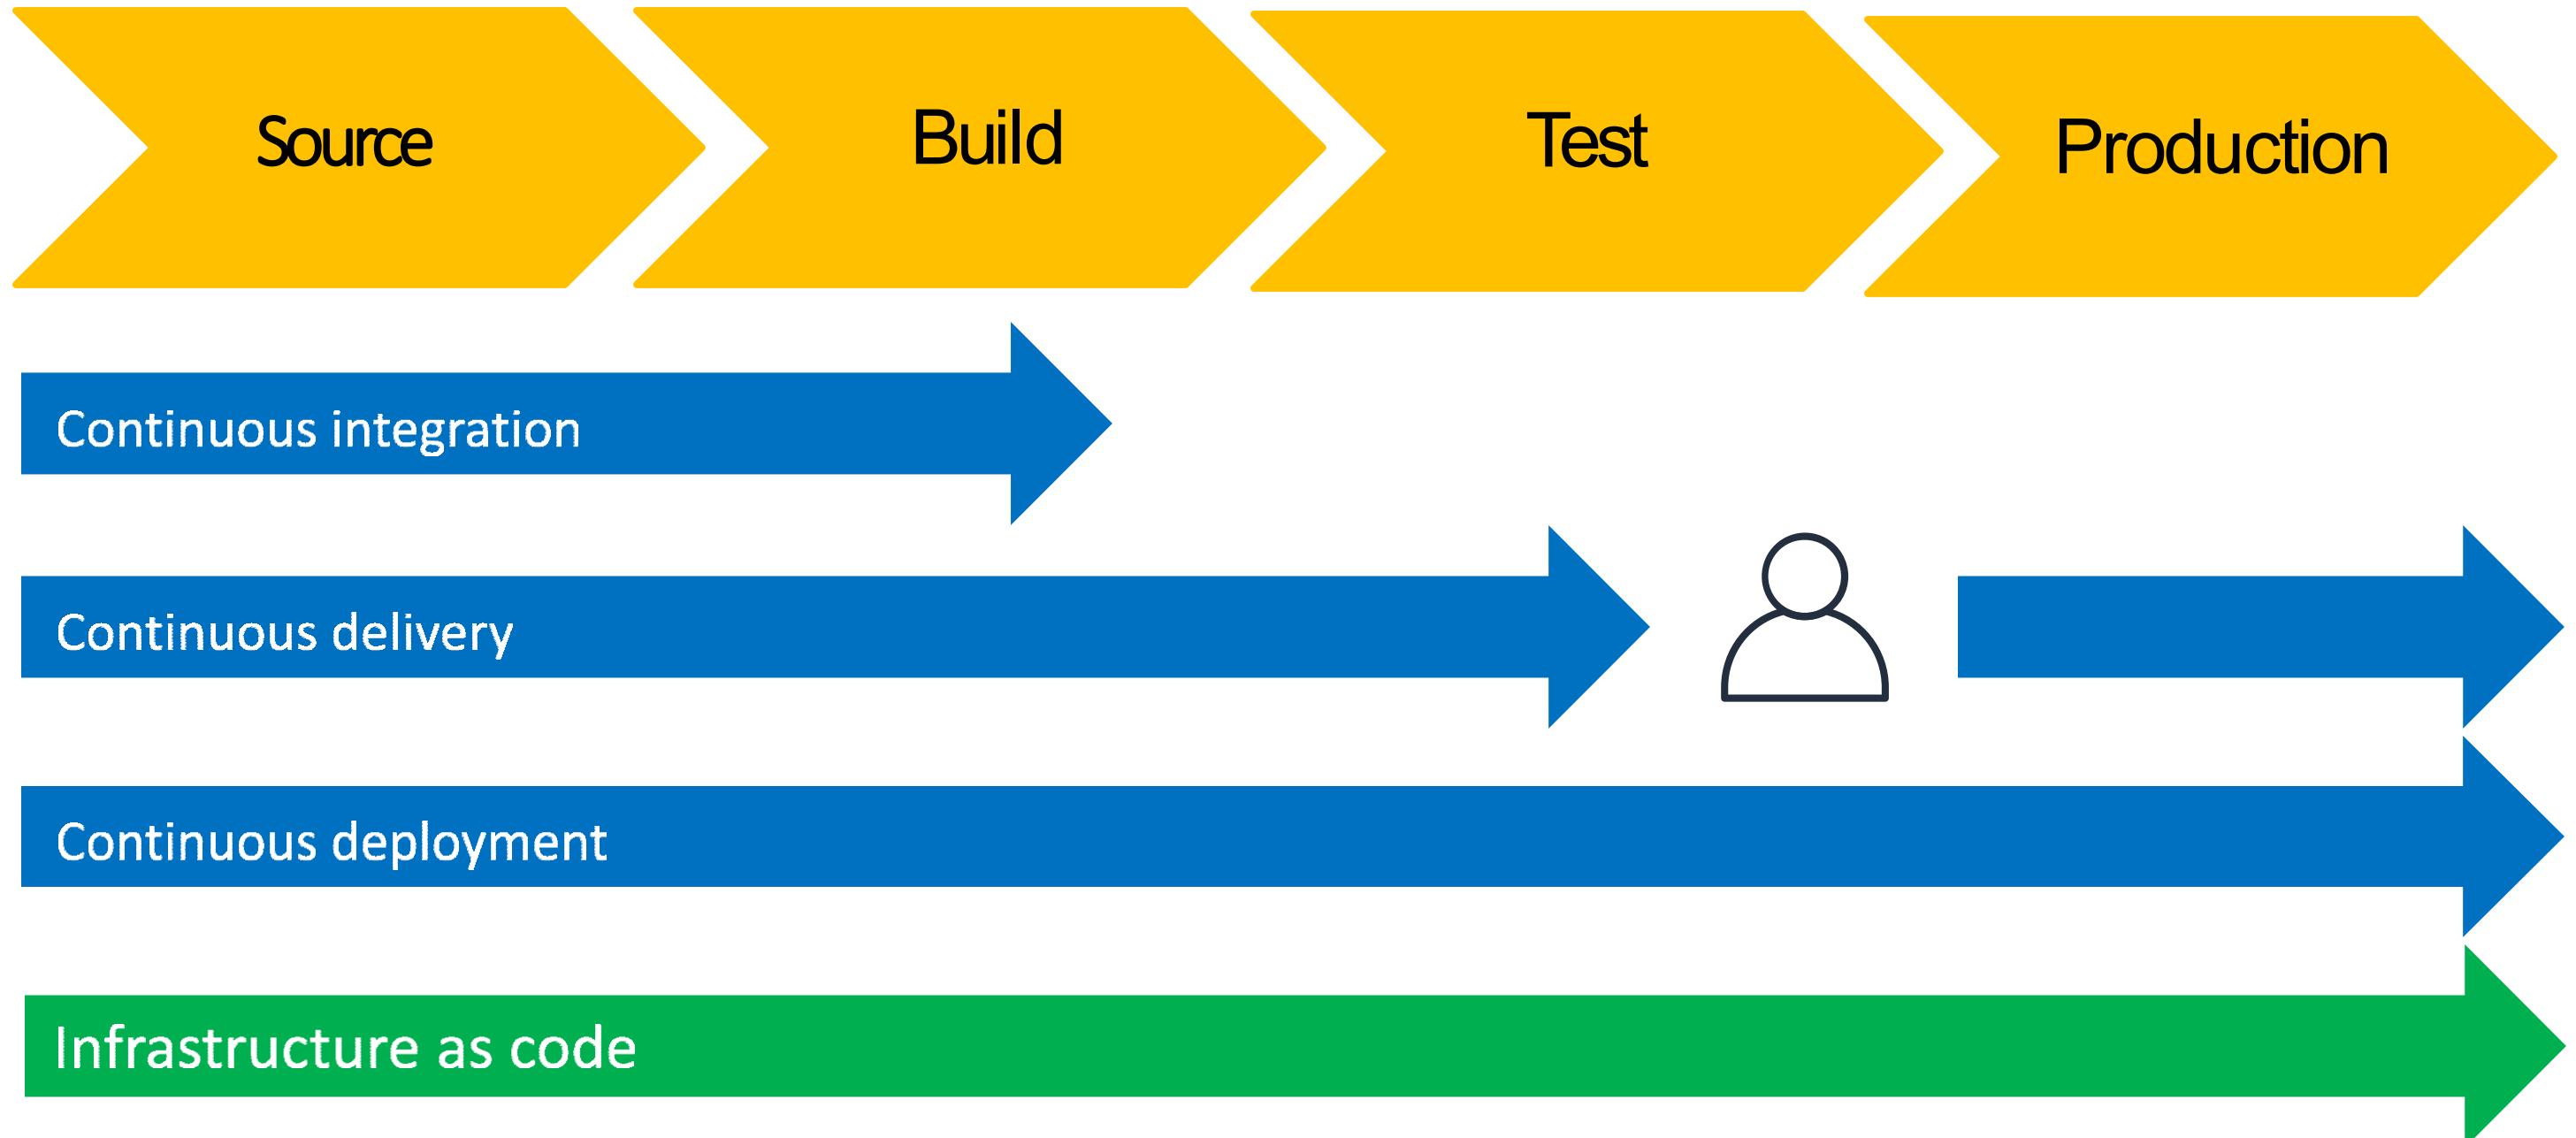


AWS Developer Tools or Code Services

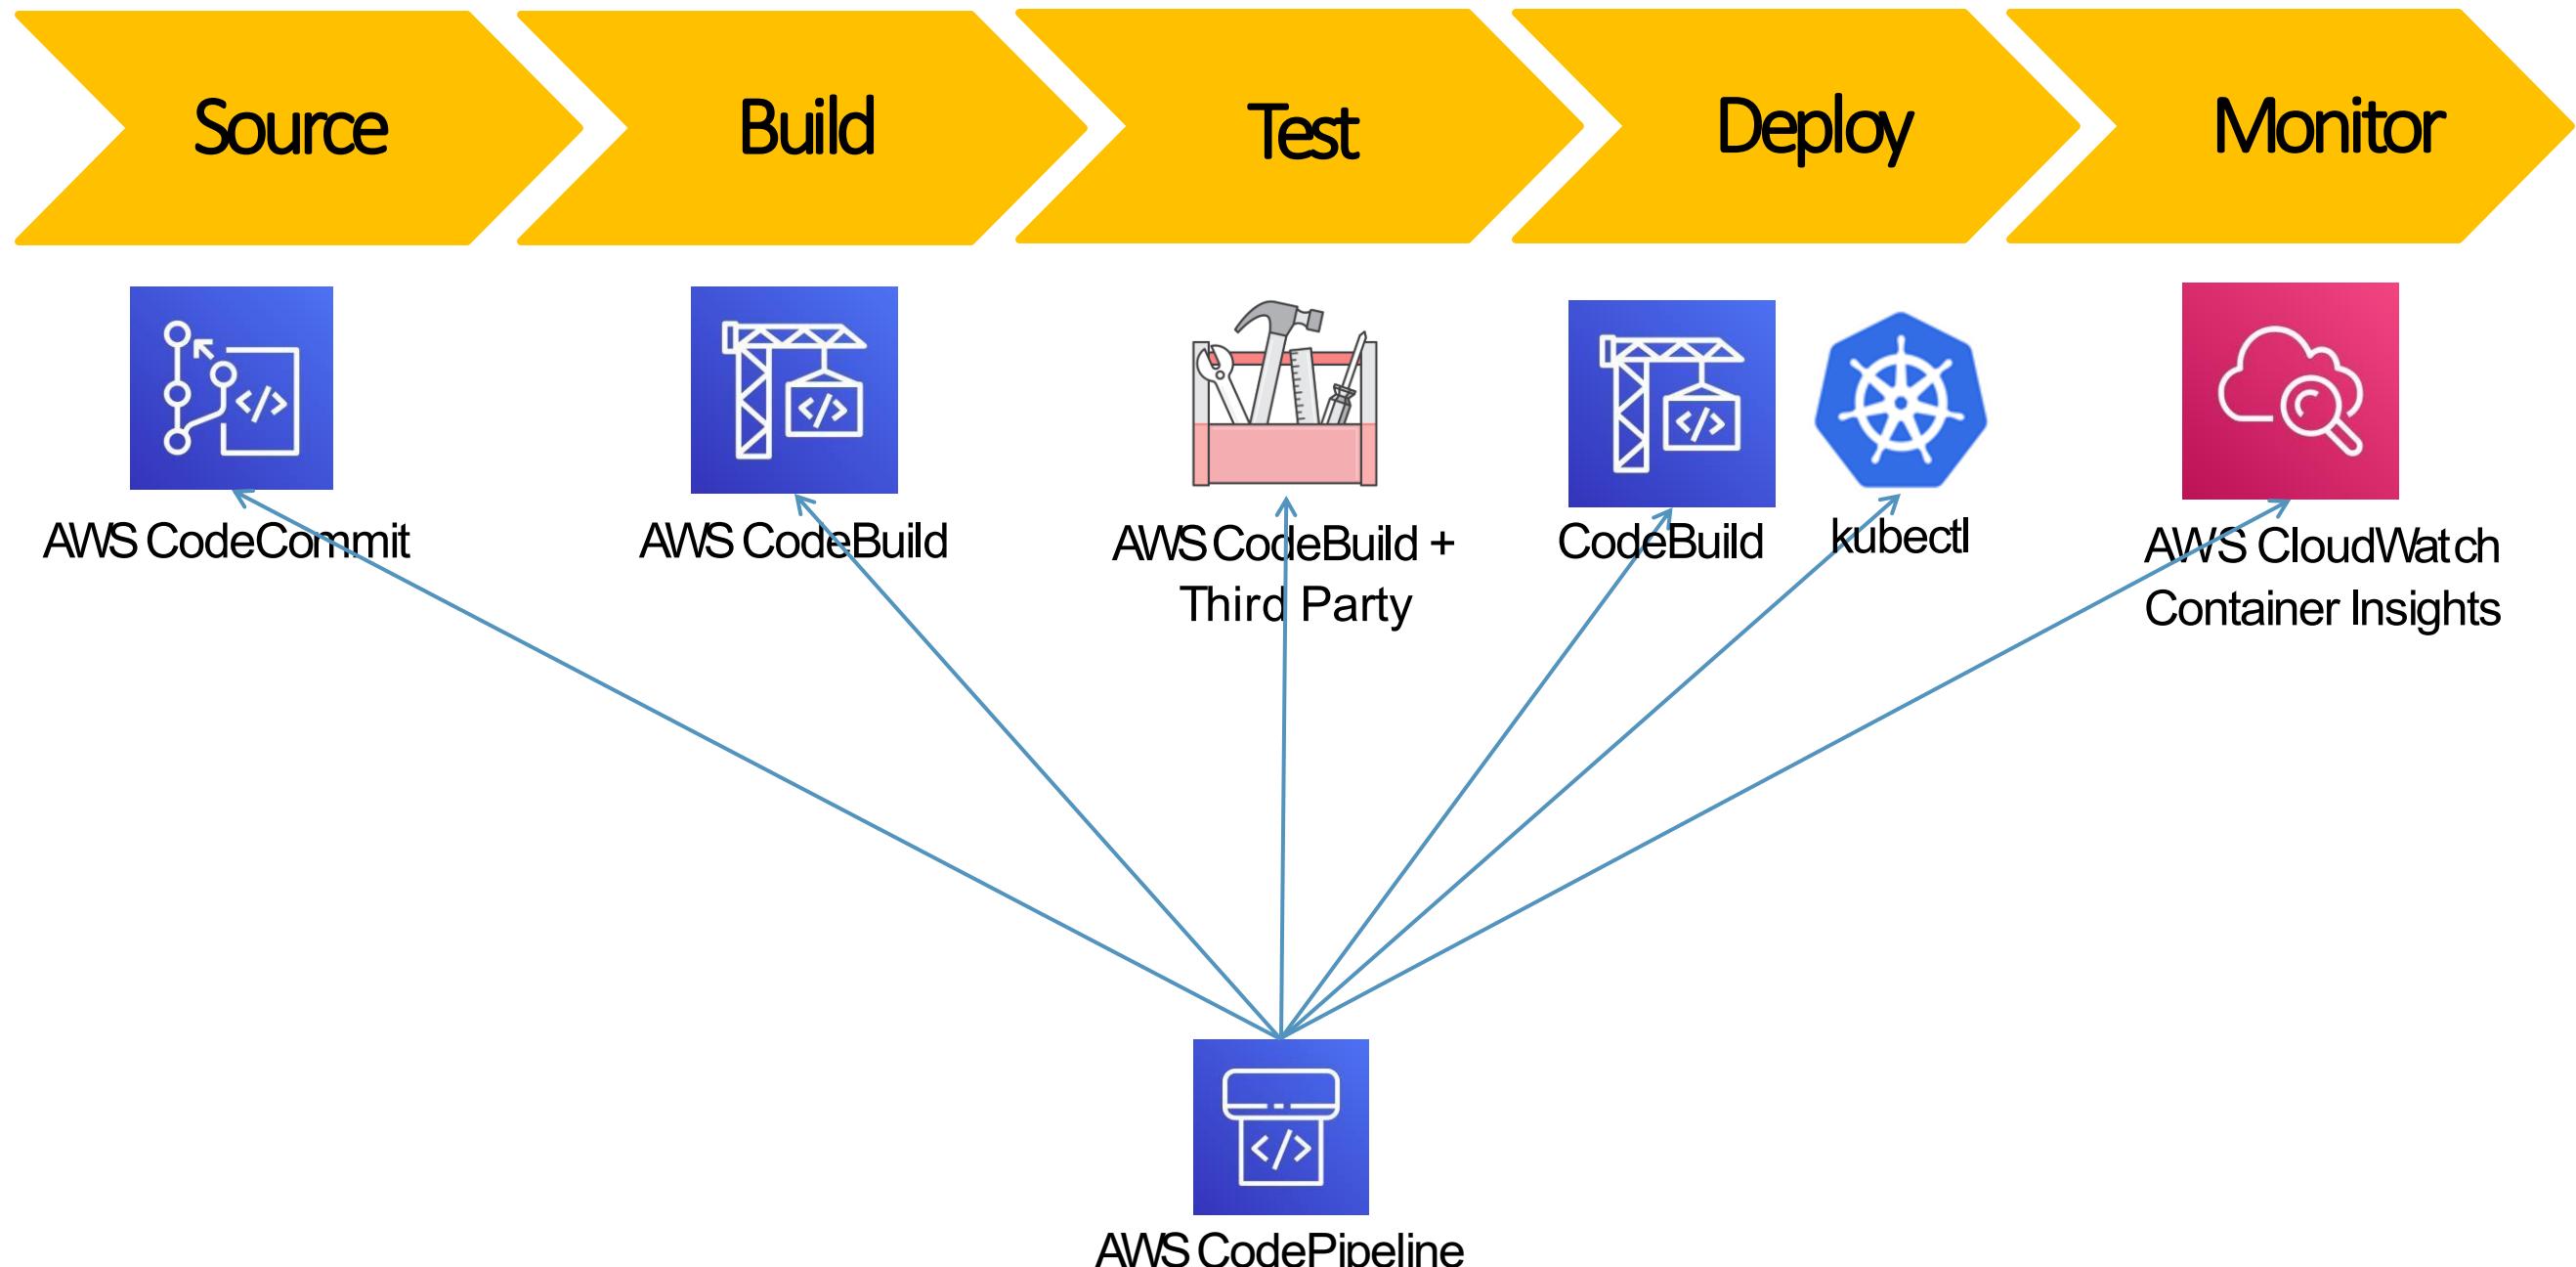


AWS Developer Tools or Code Services

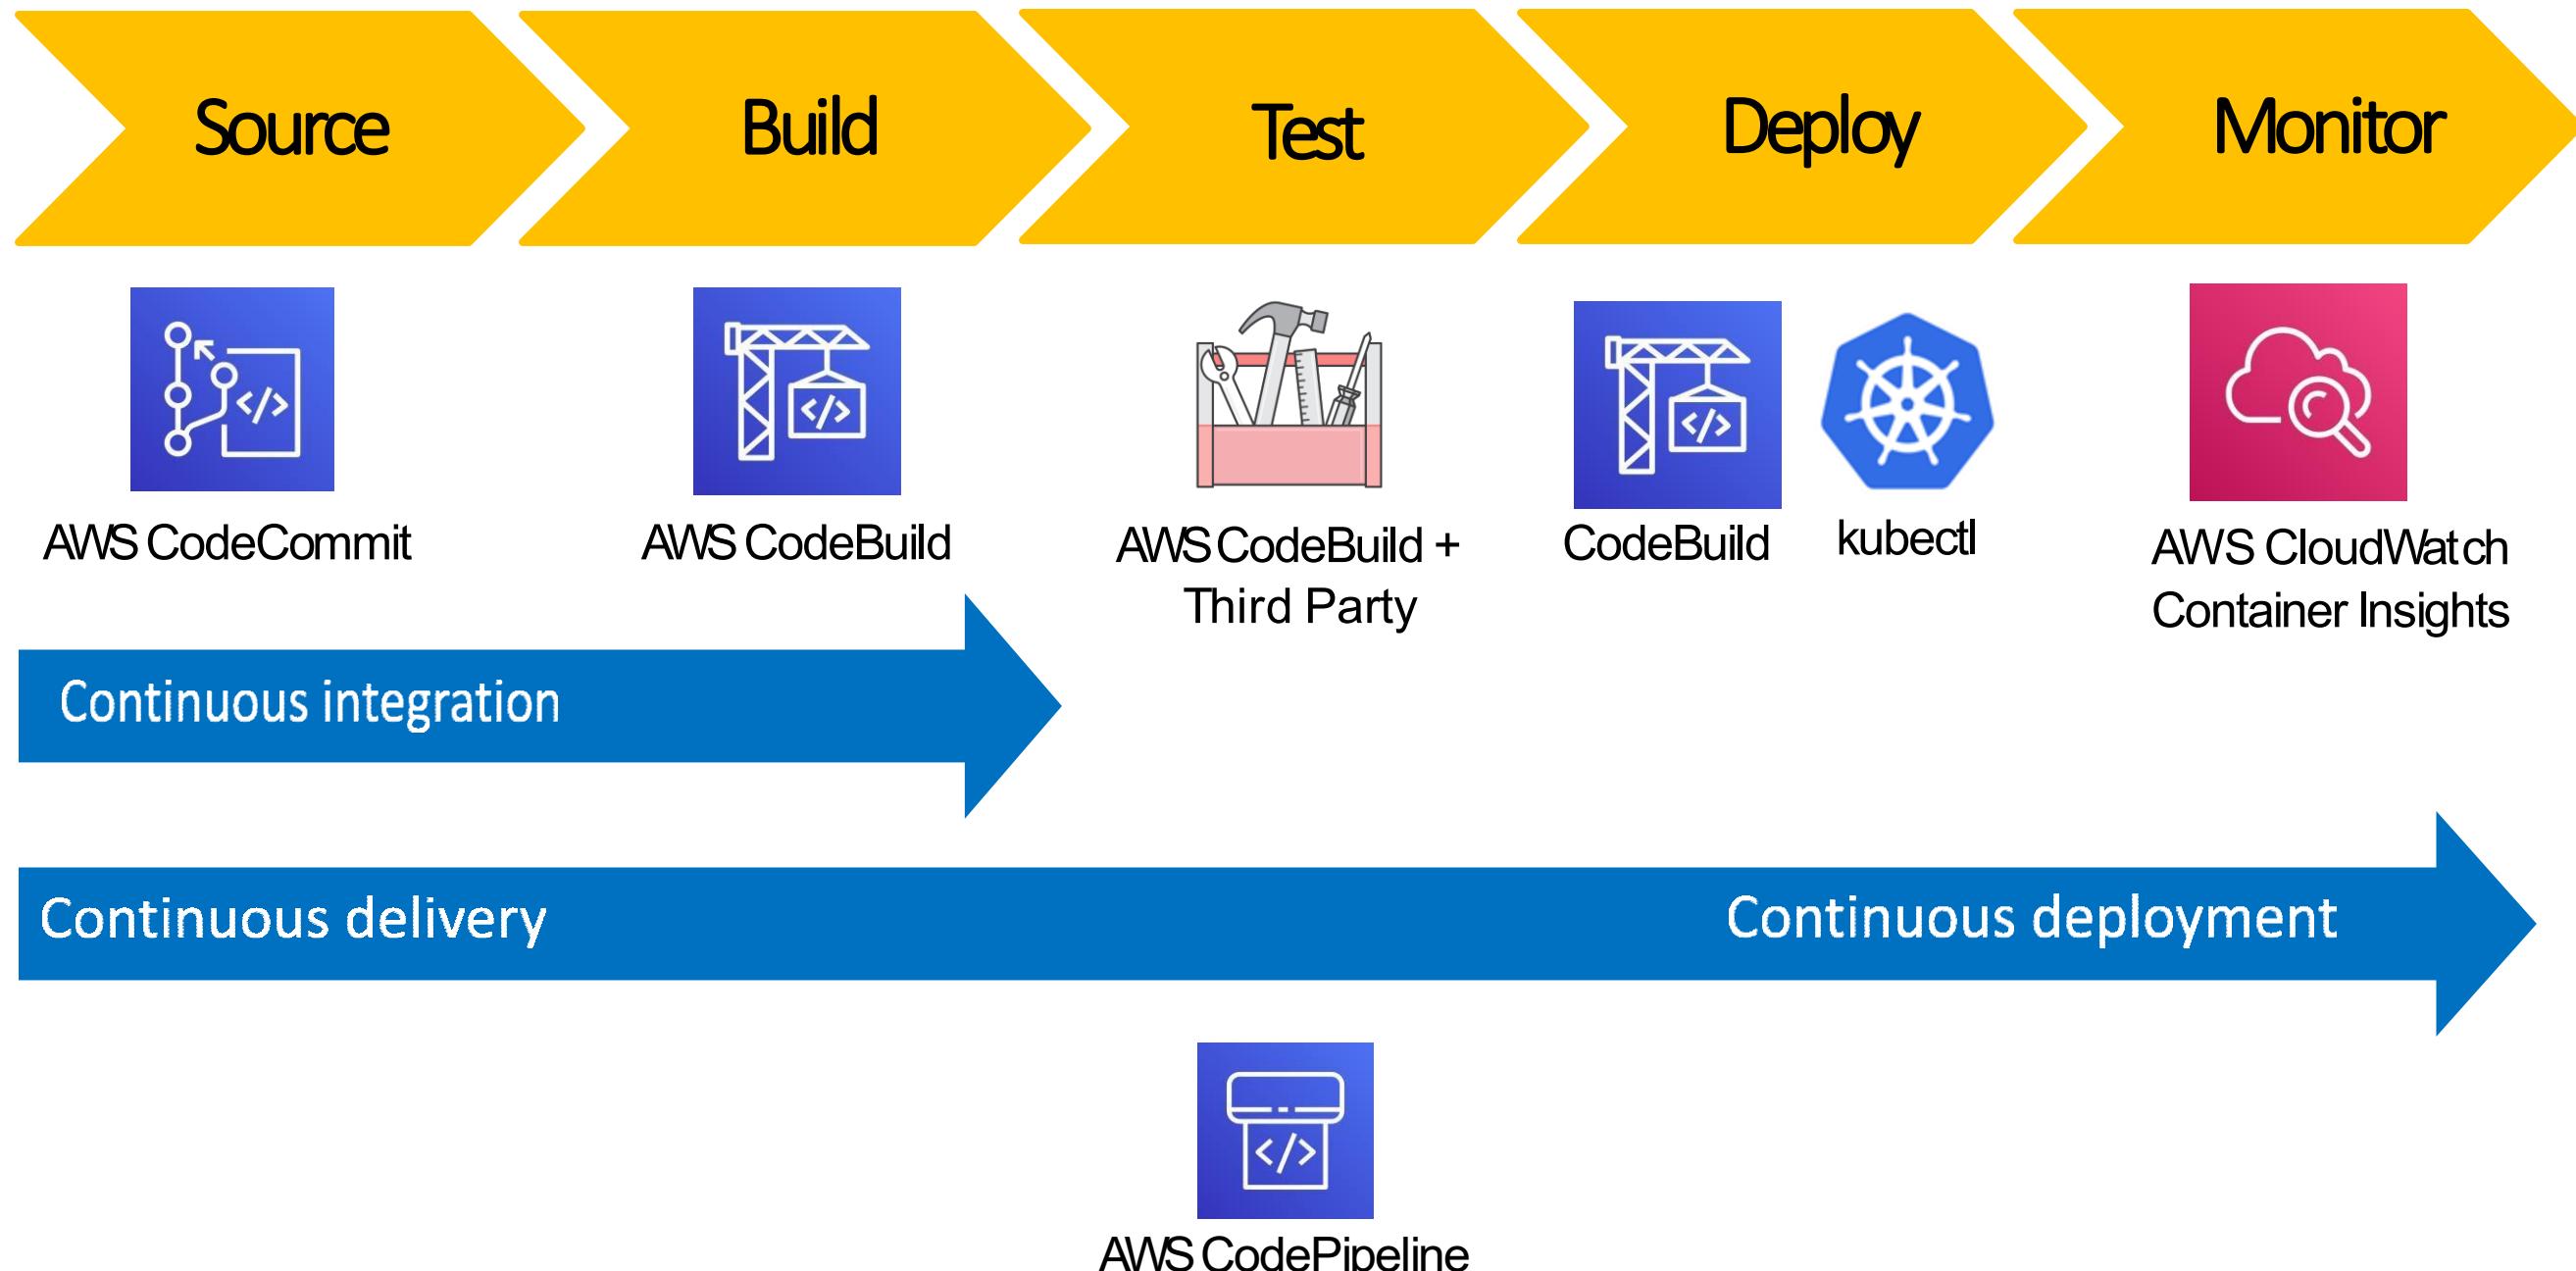


Microservices

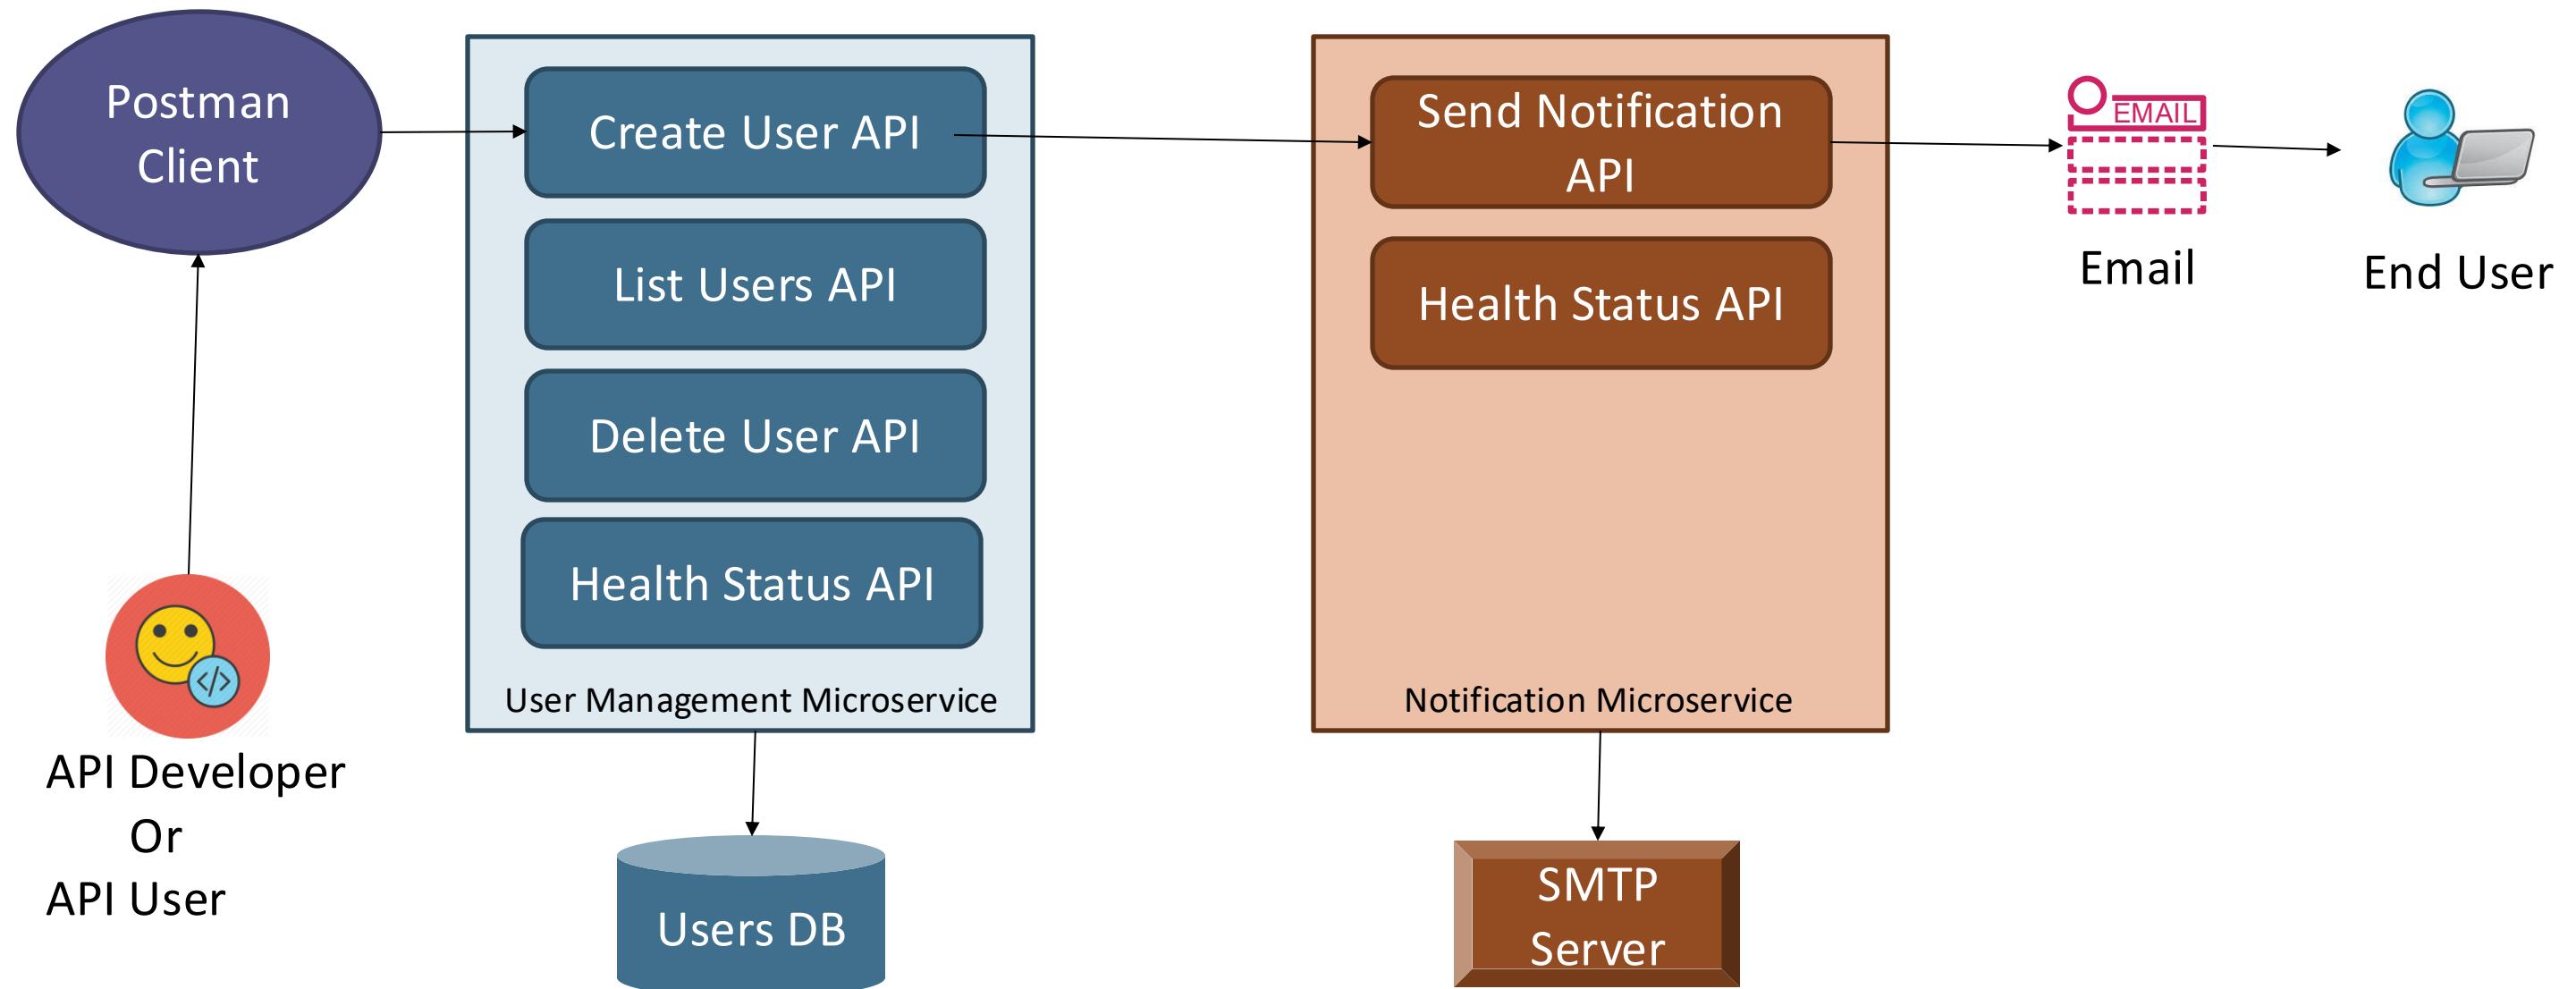

Microservices Deployment on AWS EKS

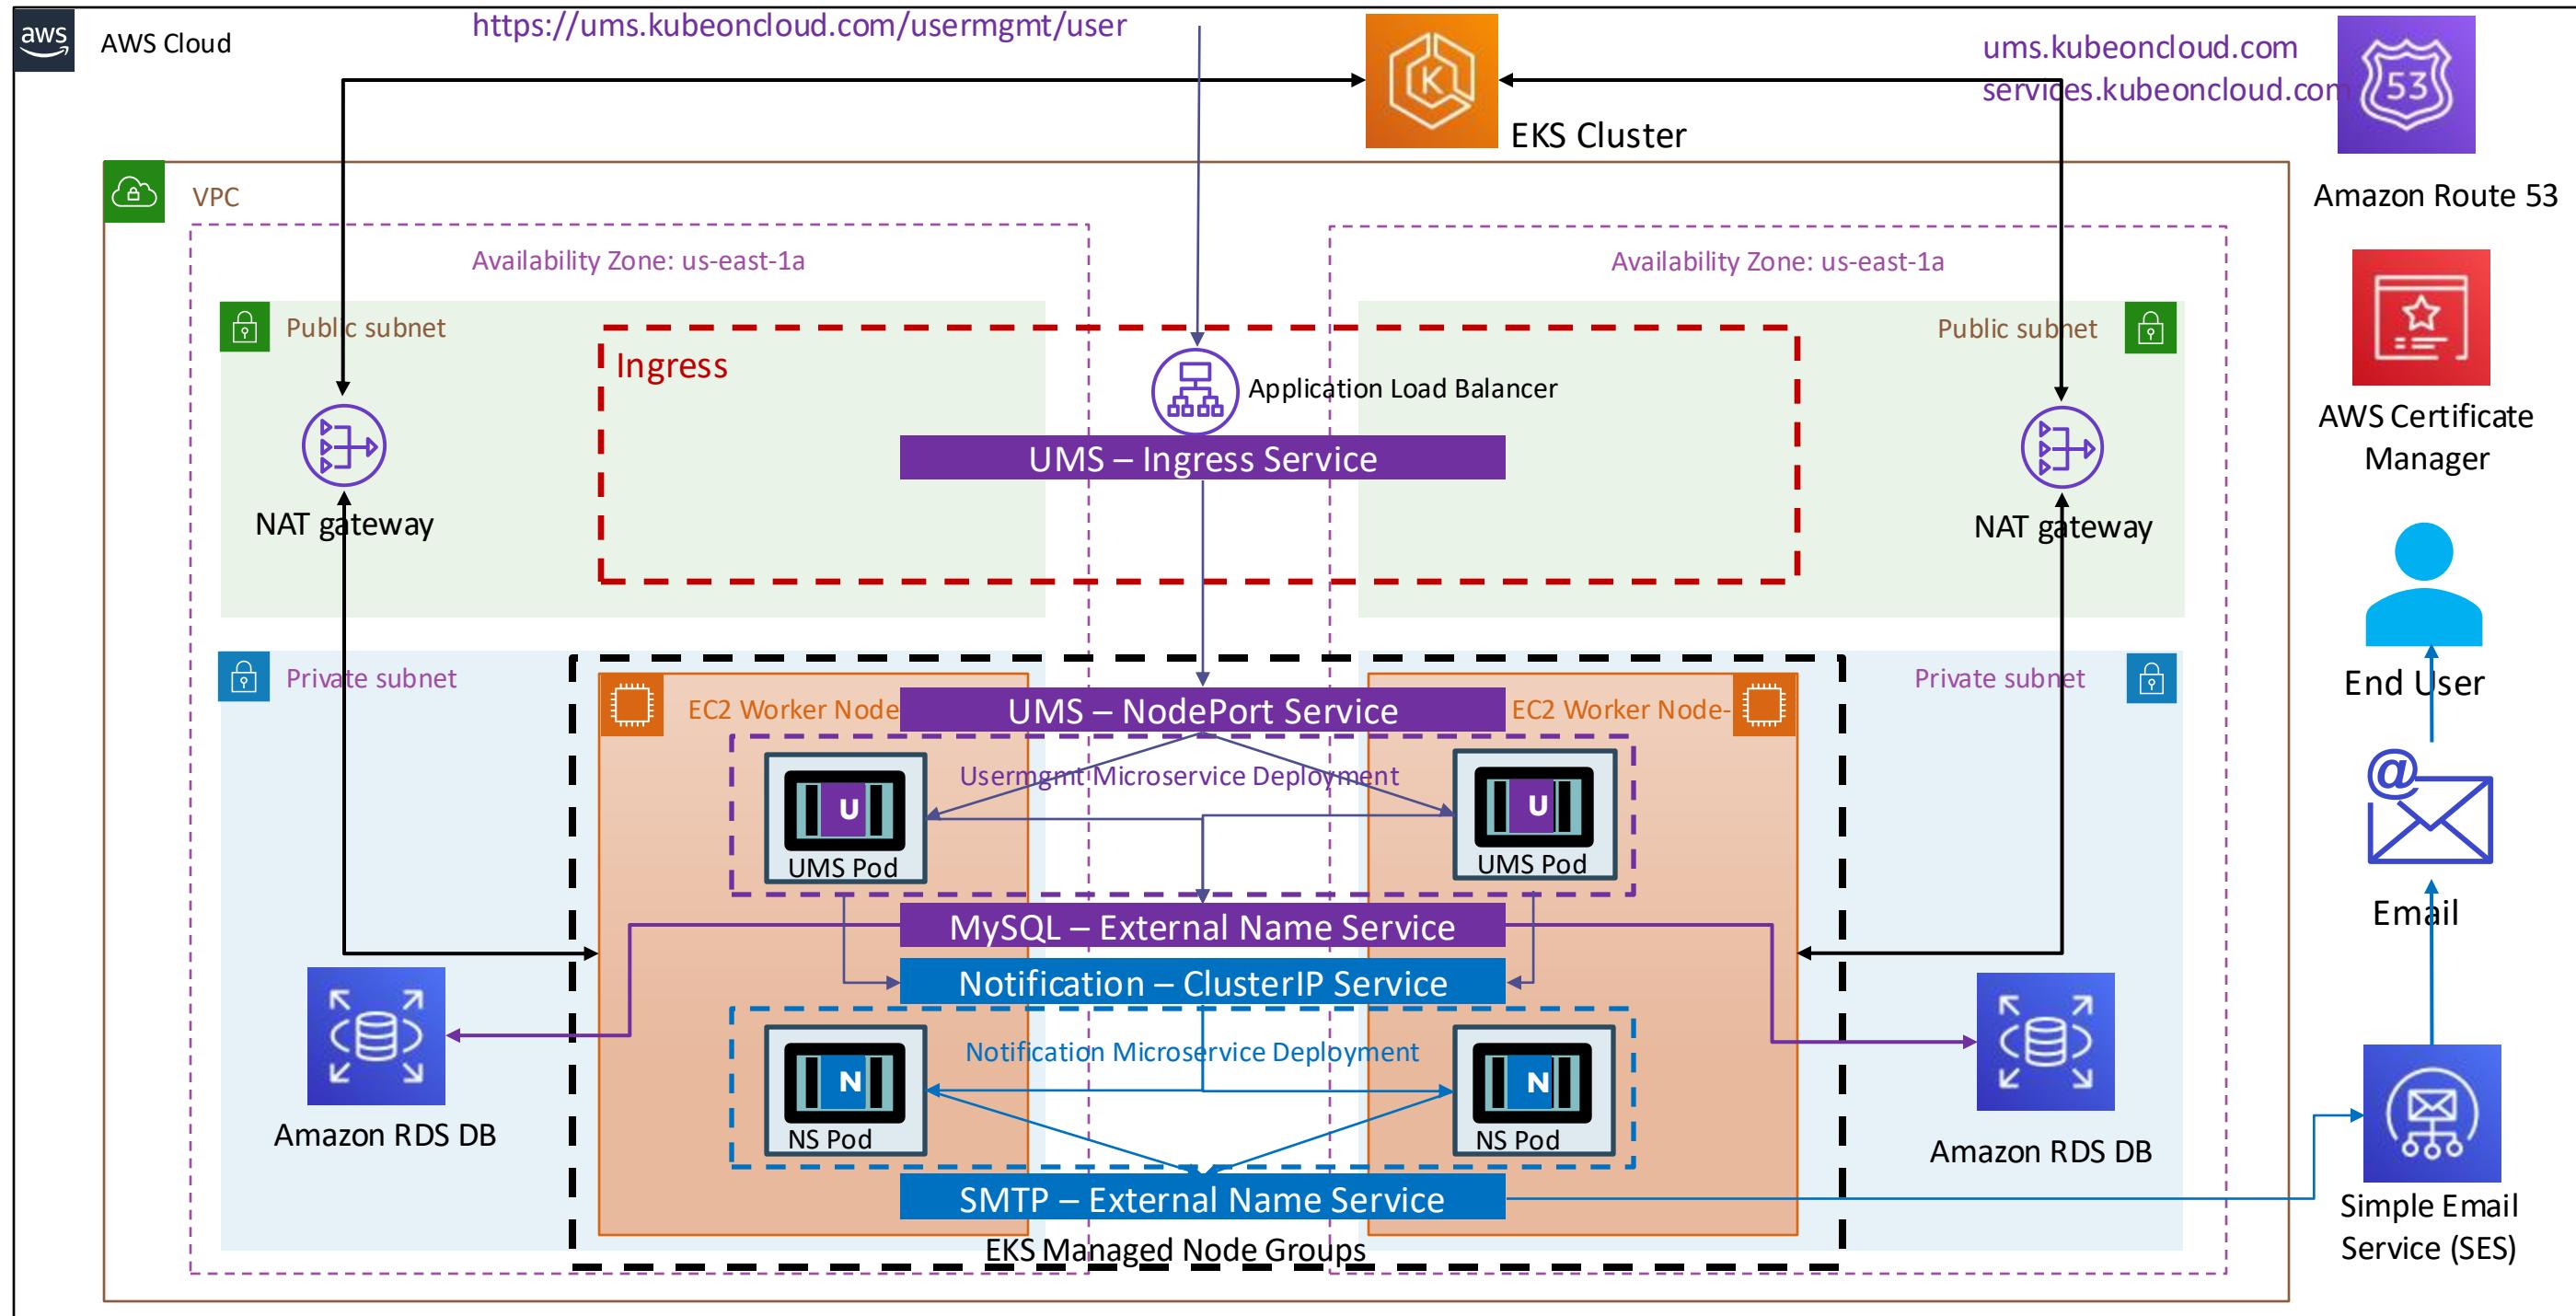


Kubernetes – DaemonSets

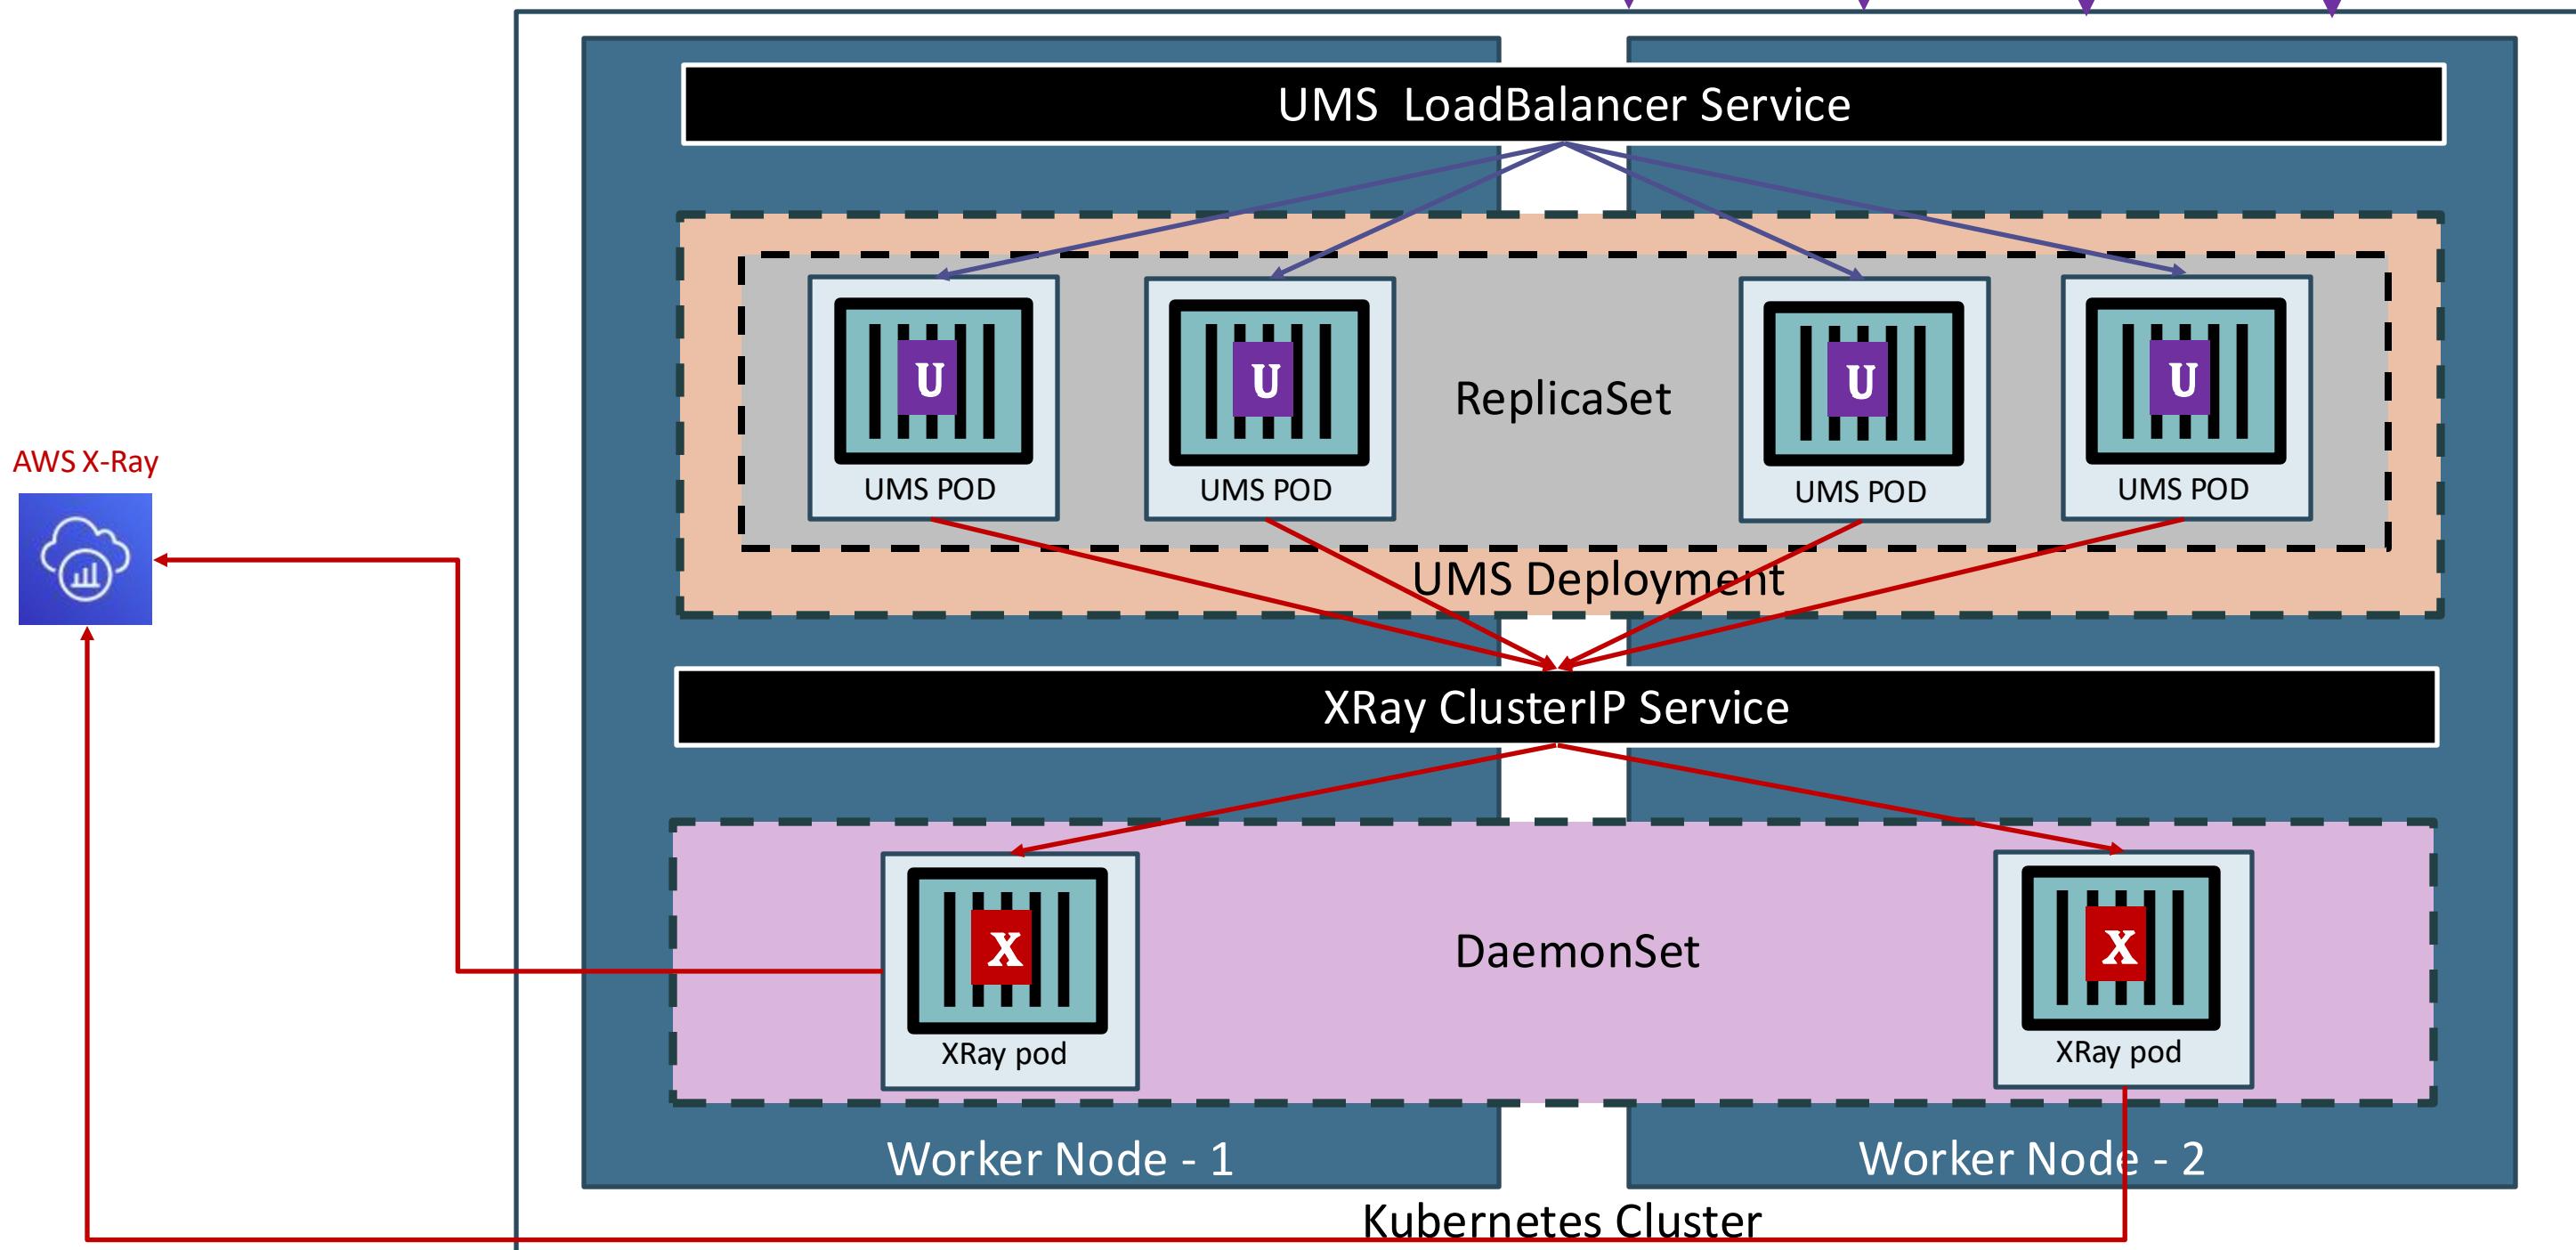




Microservices Distributed Tracing with AWS X-Ray


STACKSIMPLIFY

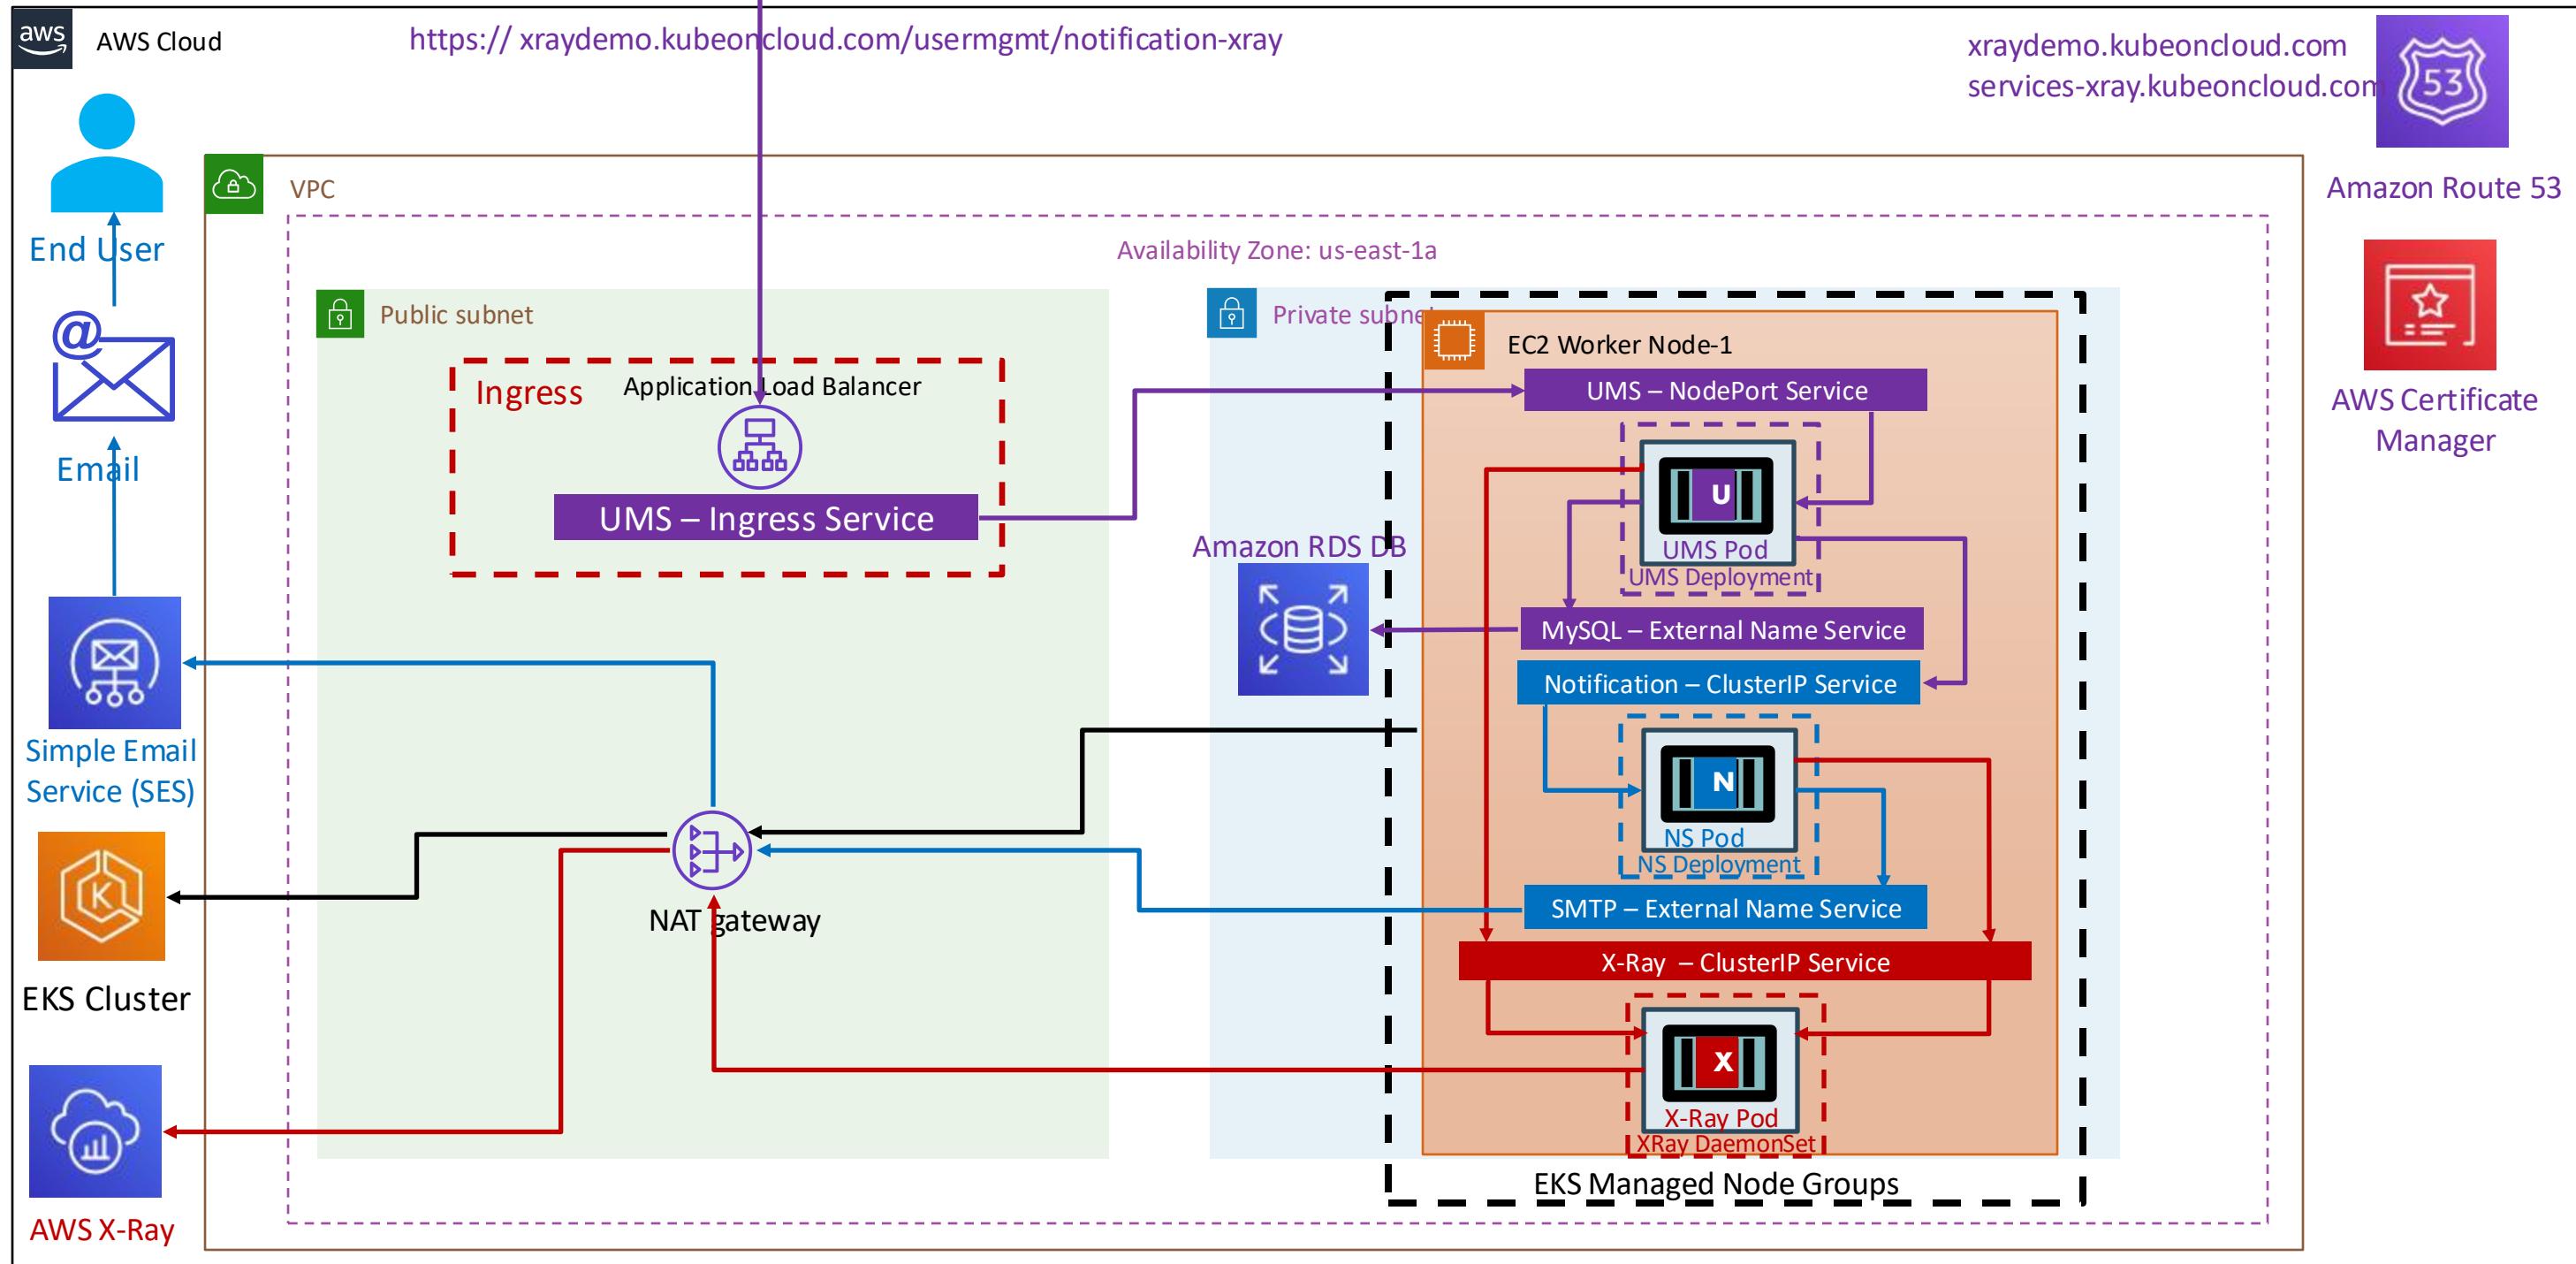


AWS X-Ray – Service Map

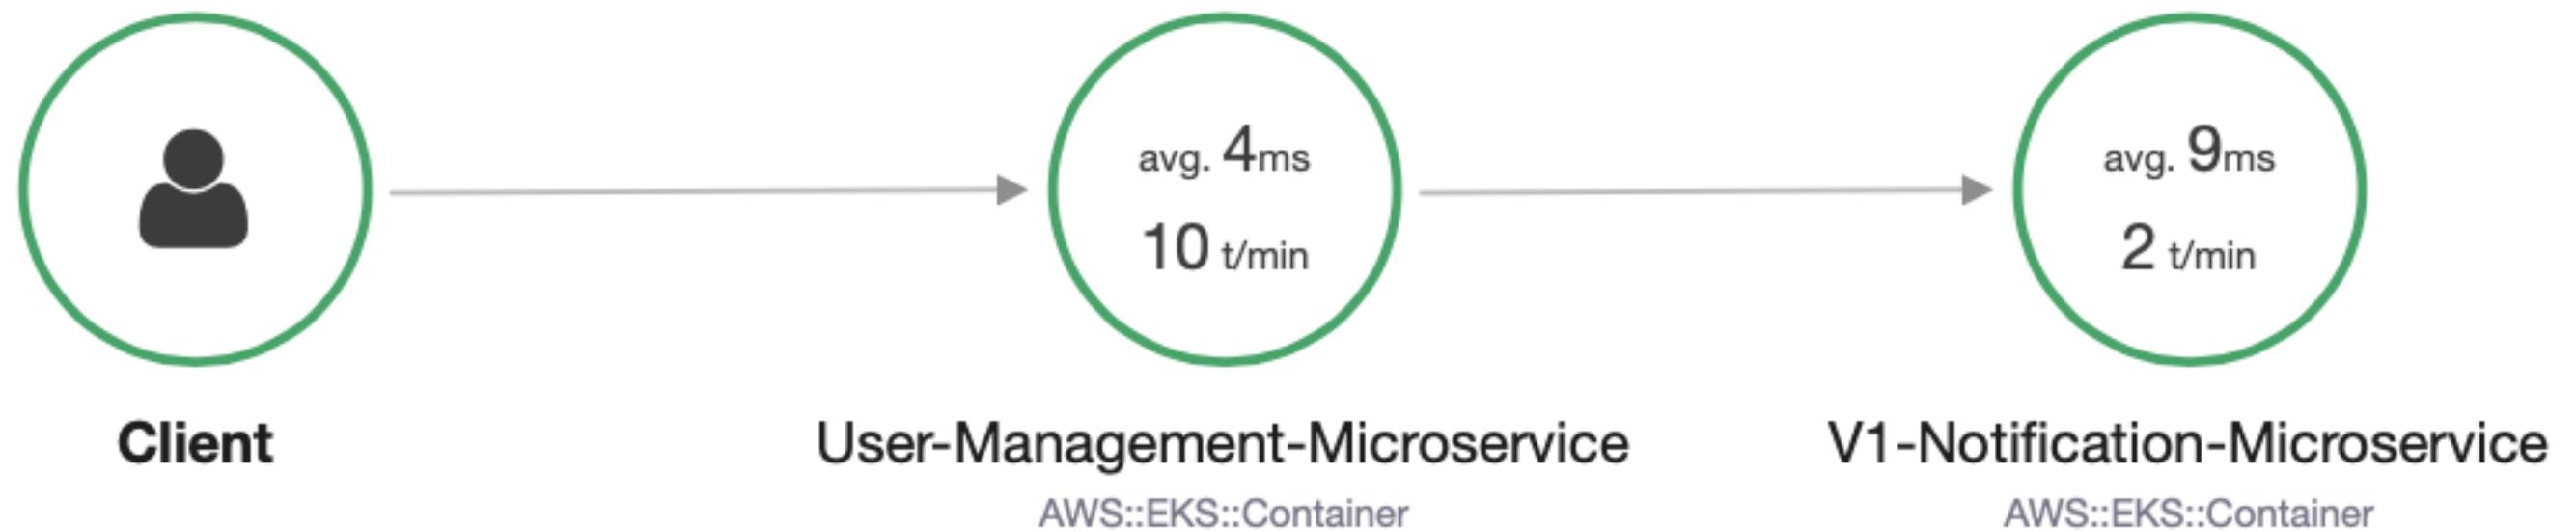


AWS X-Ray - Traces

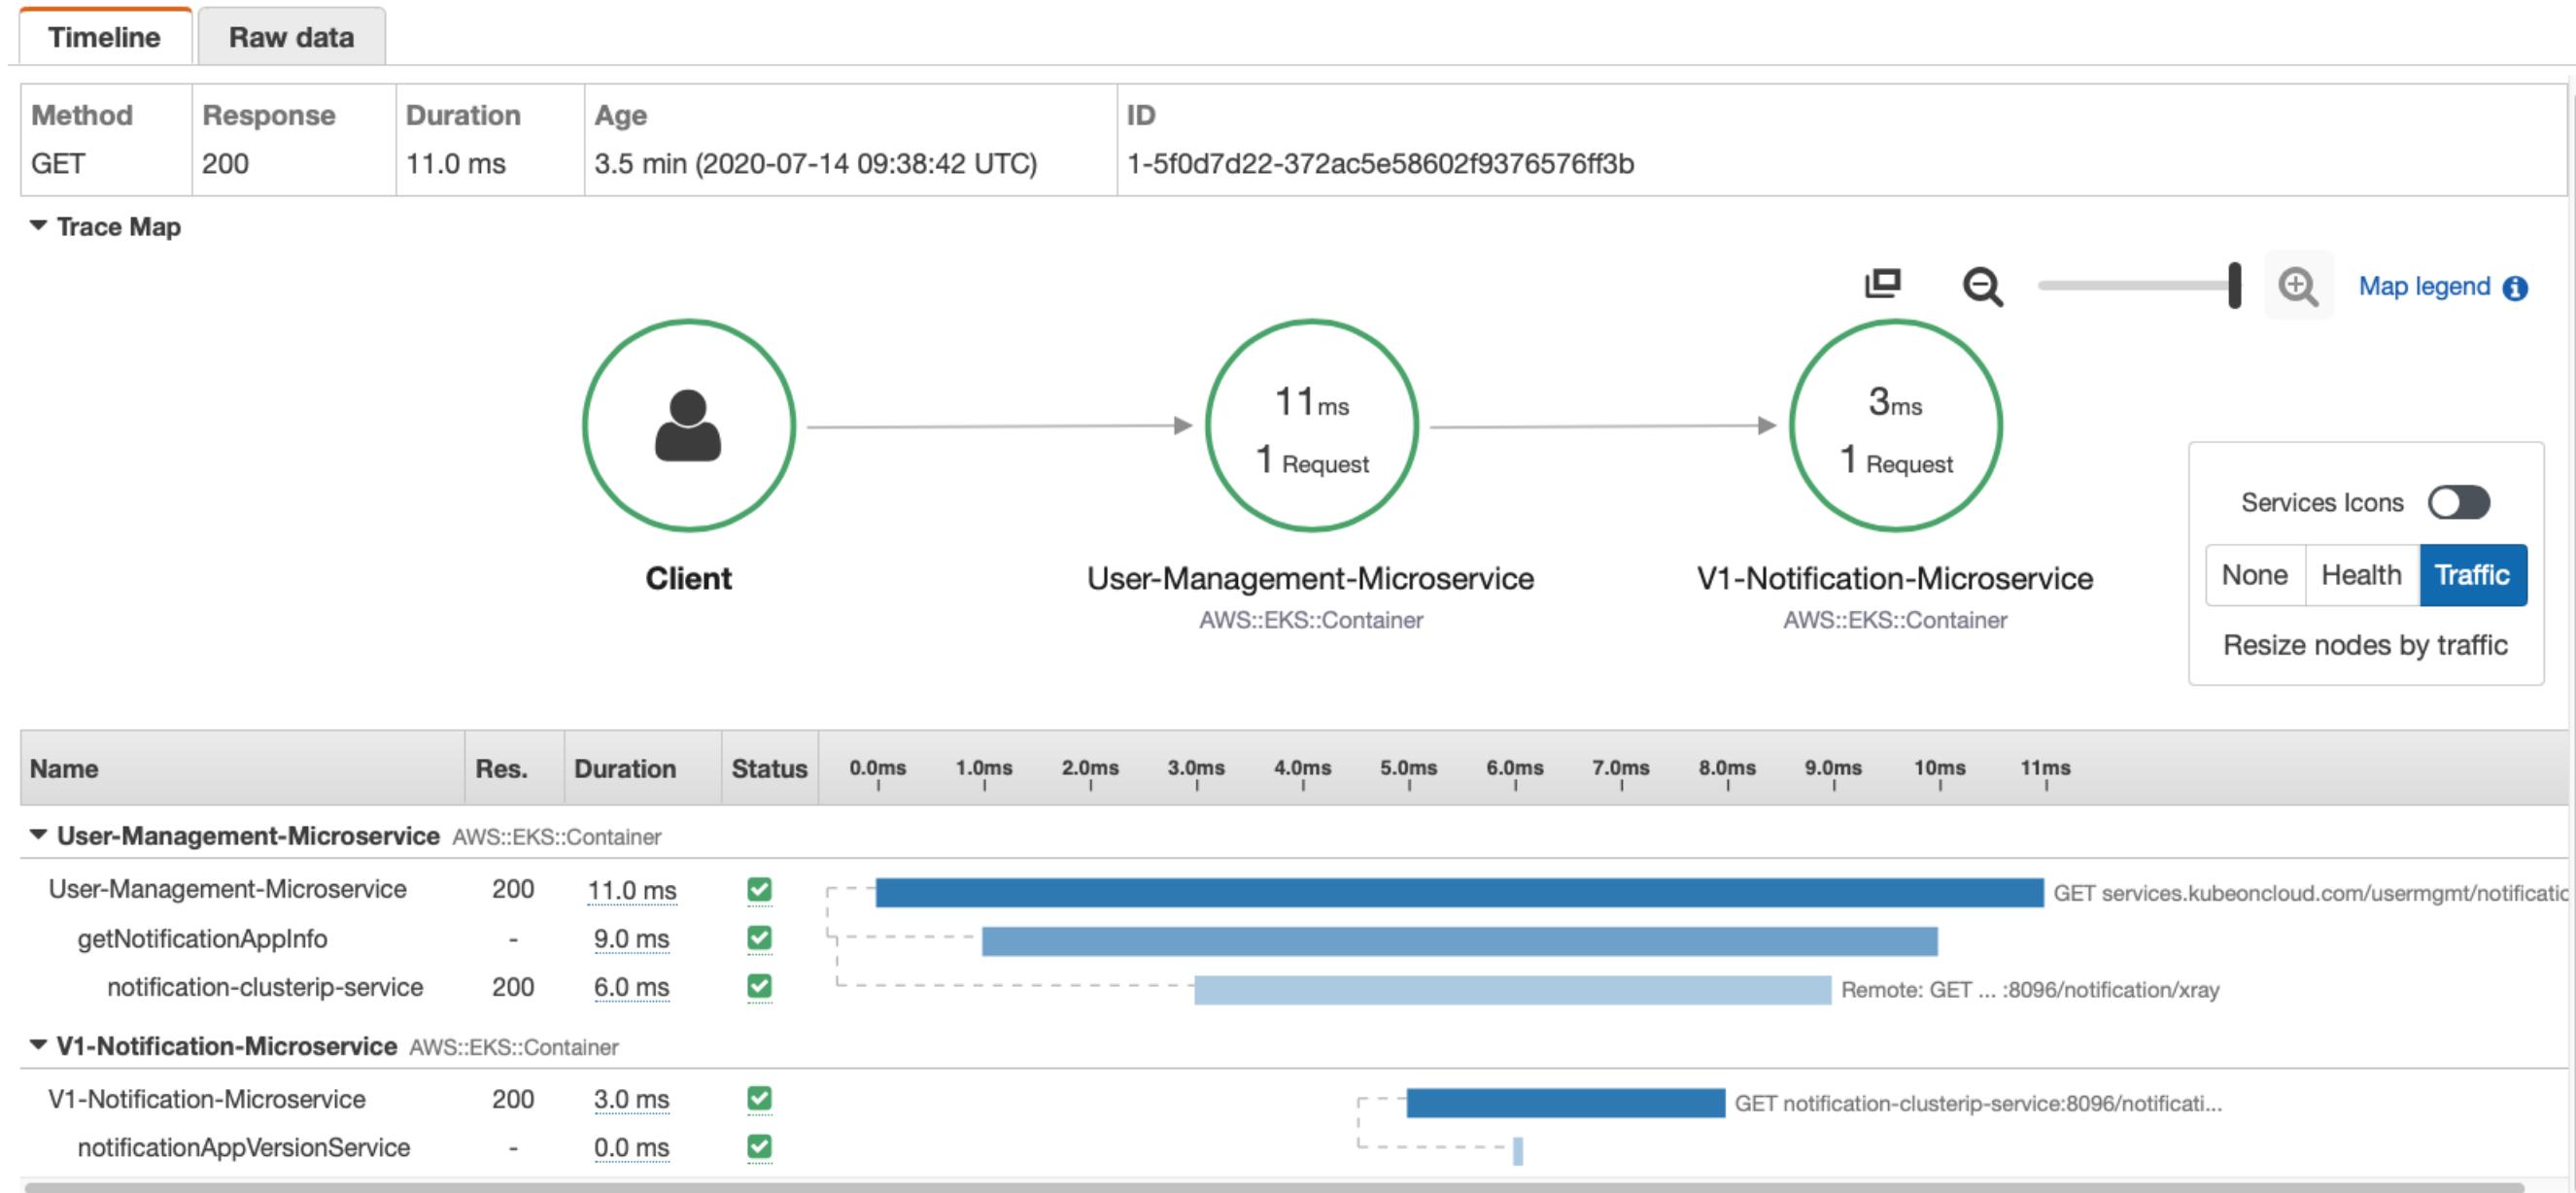

Microservices – Canary Deployments

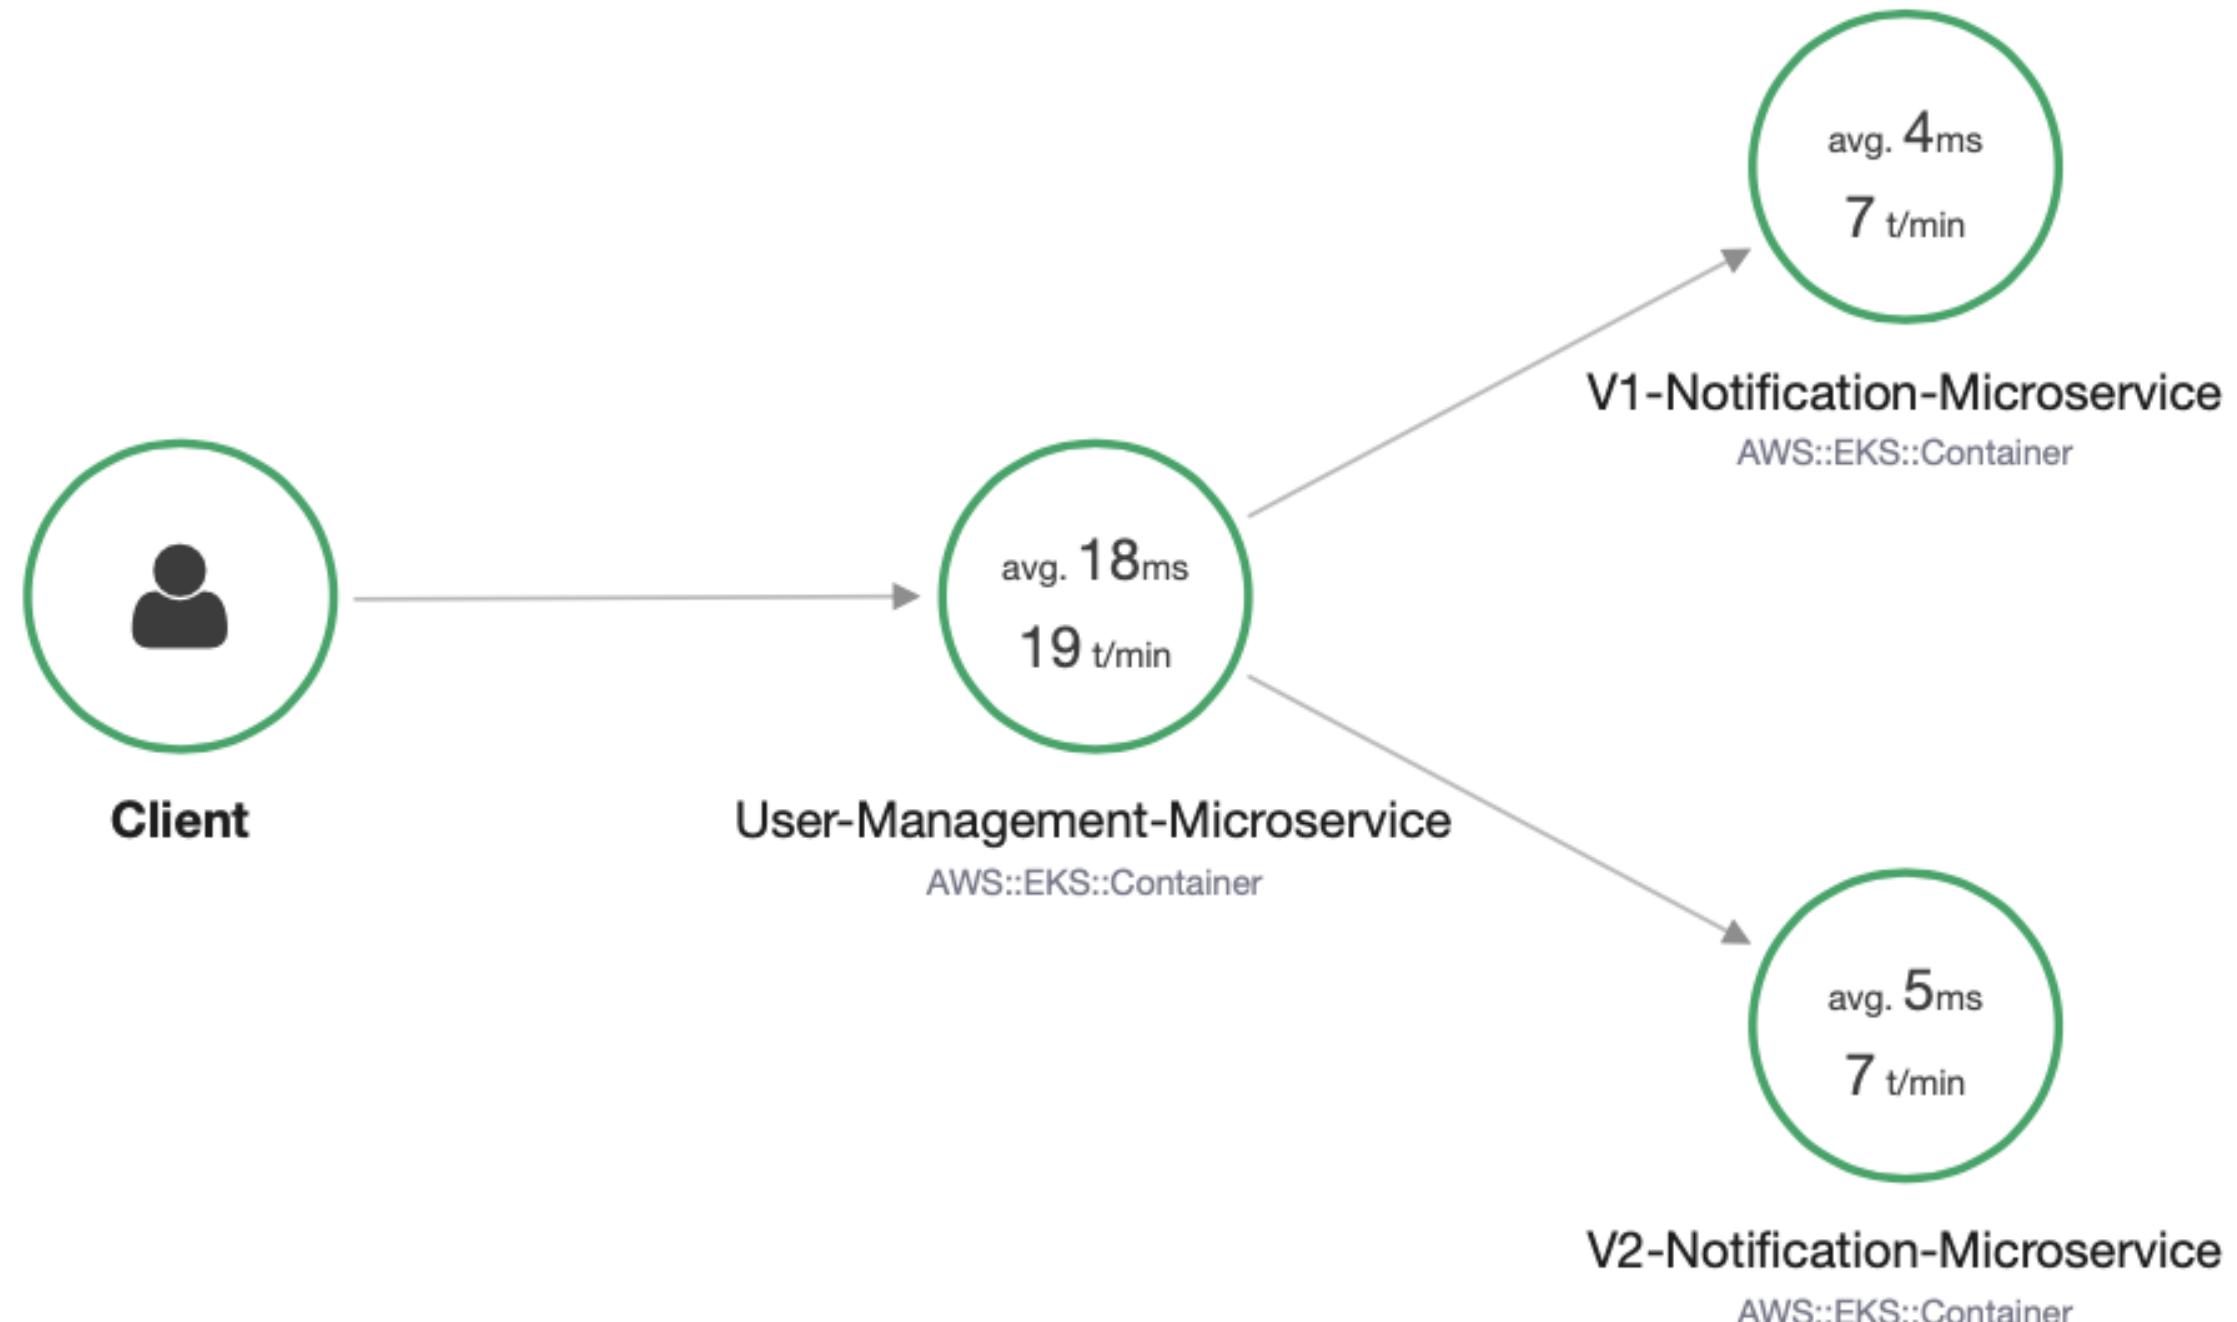

How HPA works?

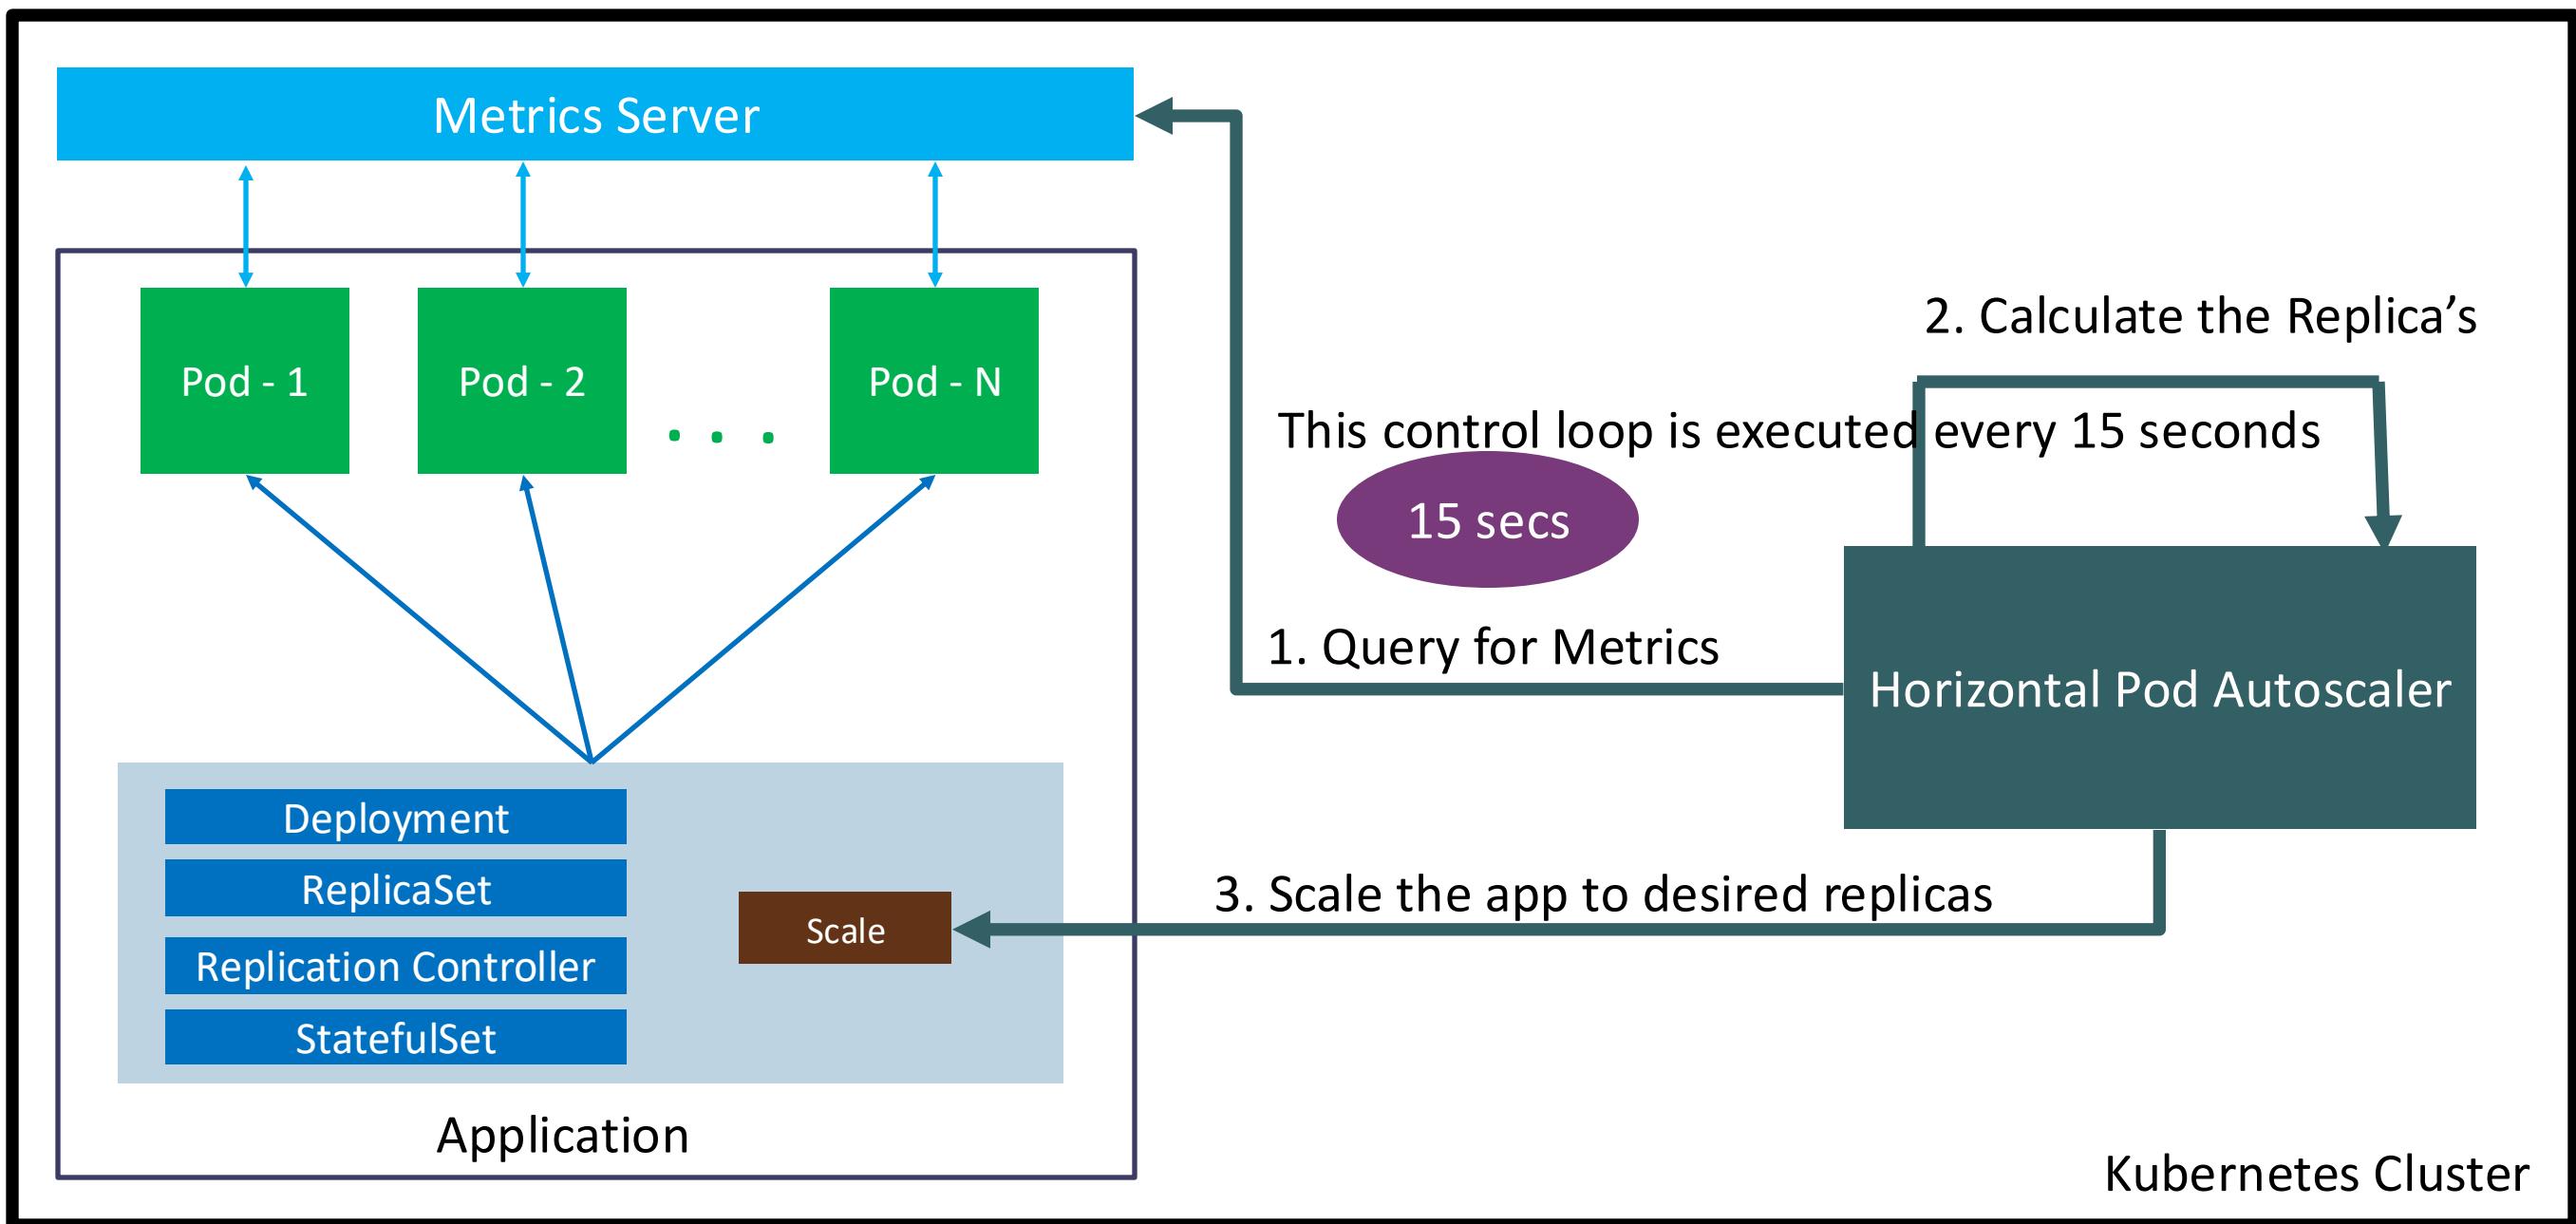

- Container Map
- Container Resources
- Performance Dashboards
- Log Groups
- Log Insights
- Alarms




Developer or Operations User




CloudWatch

Container Insights

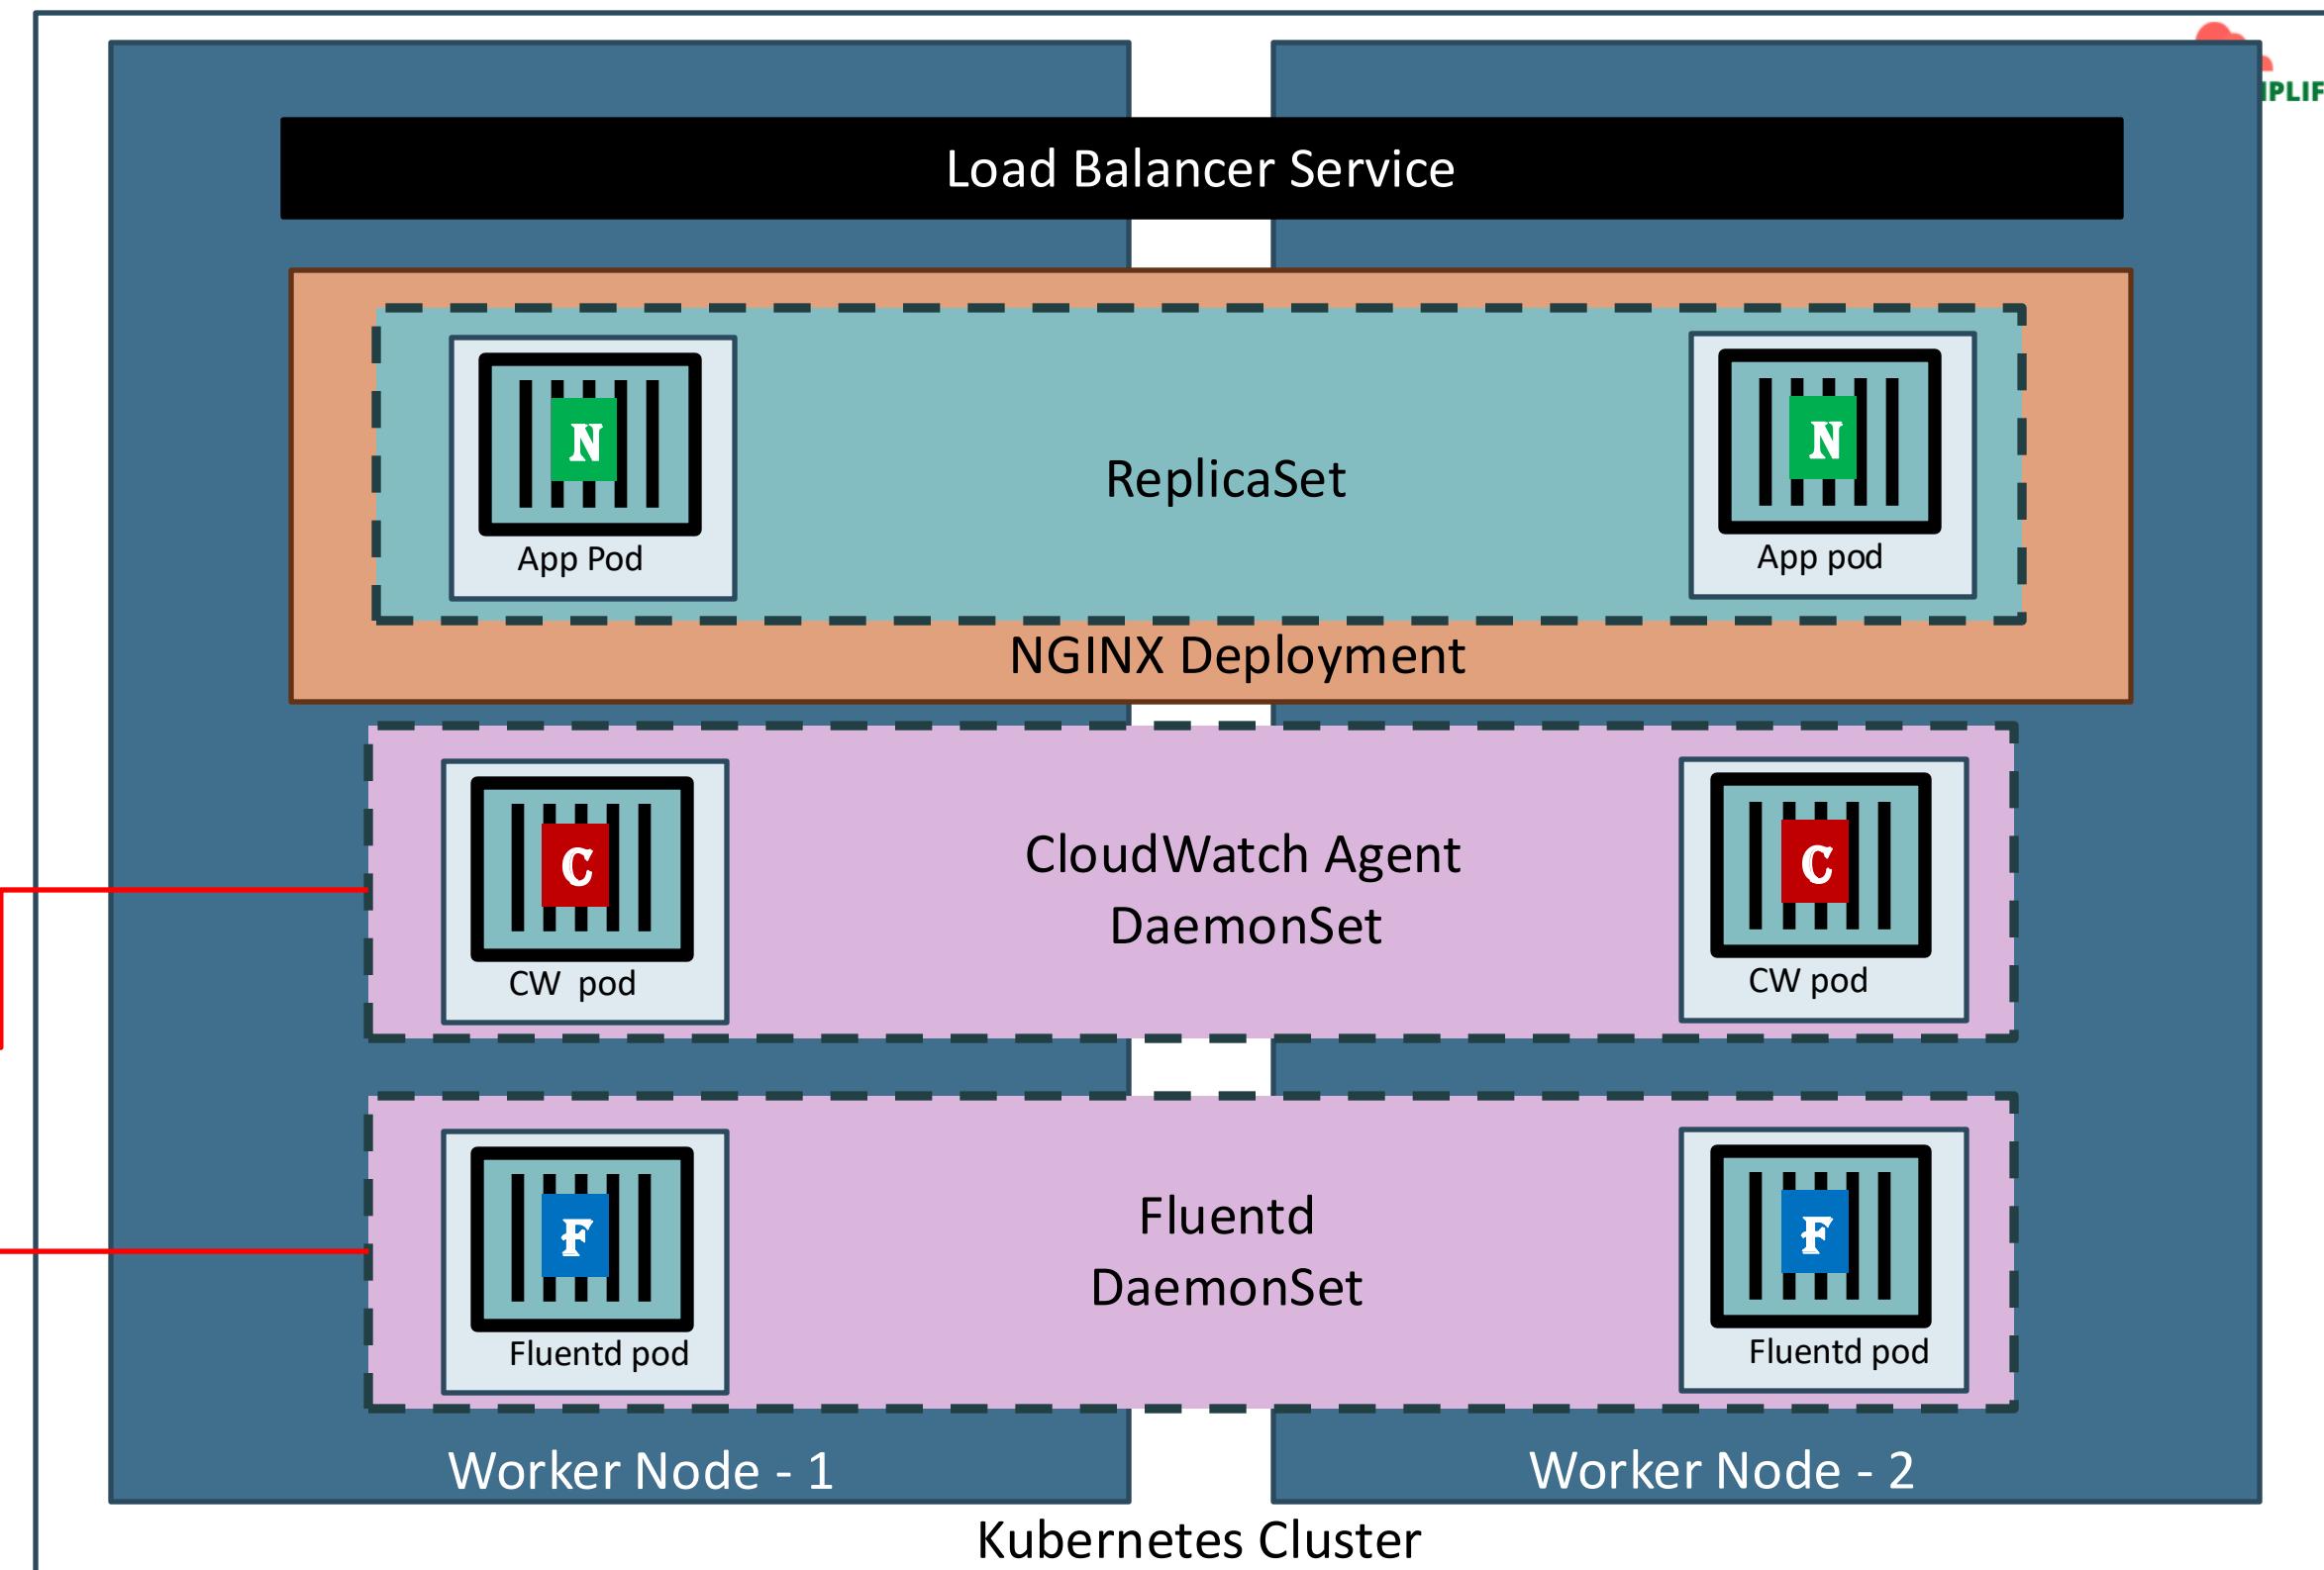

CloudWatch Container Insights Map

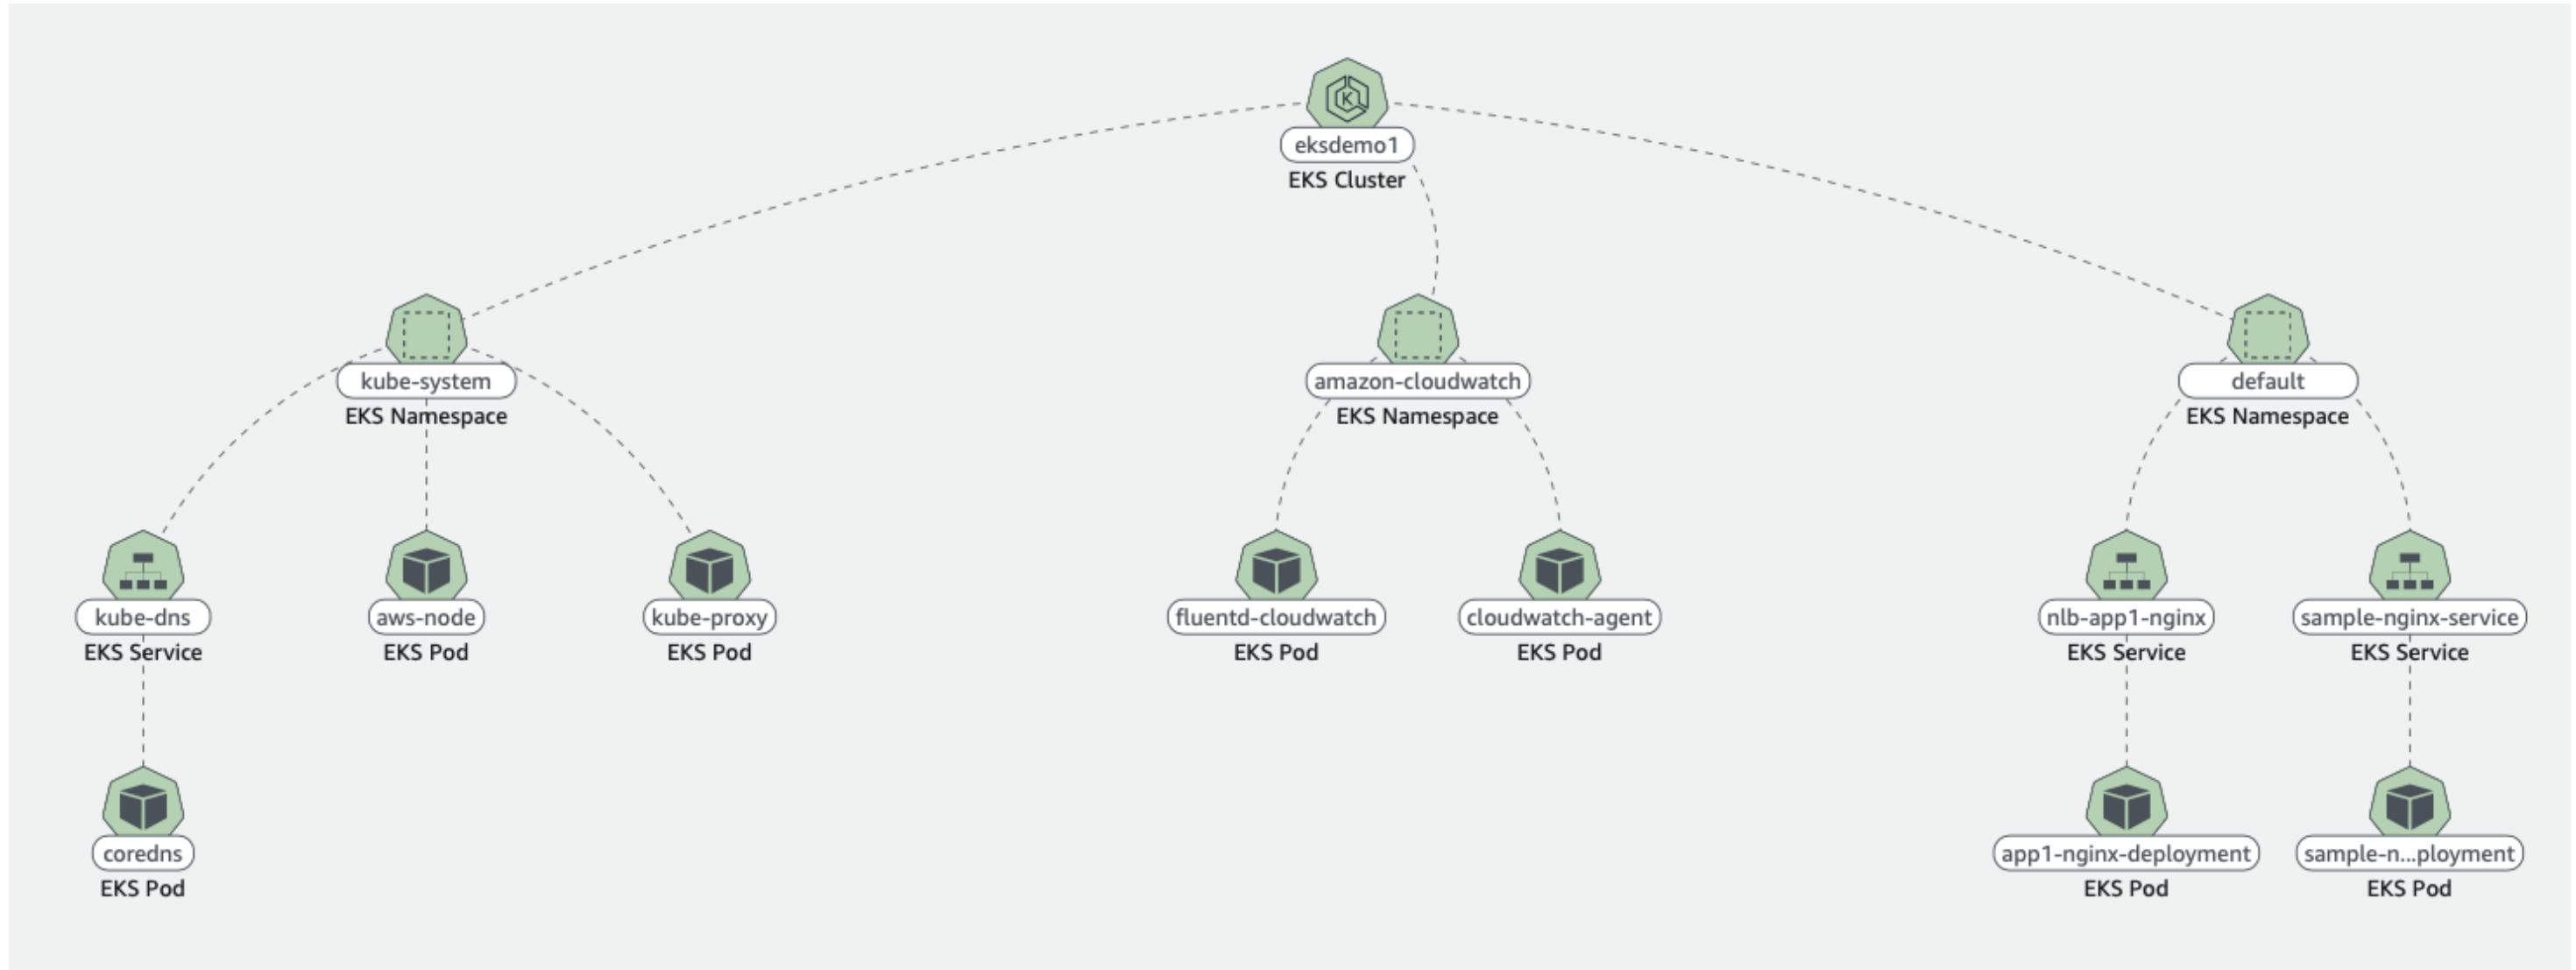




AWS EKS CLIs



AWS EKS Cluster - CLIs

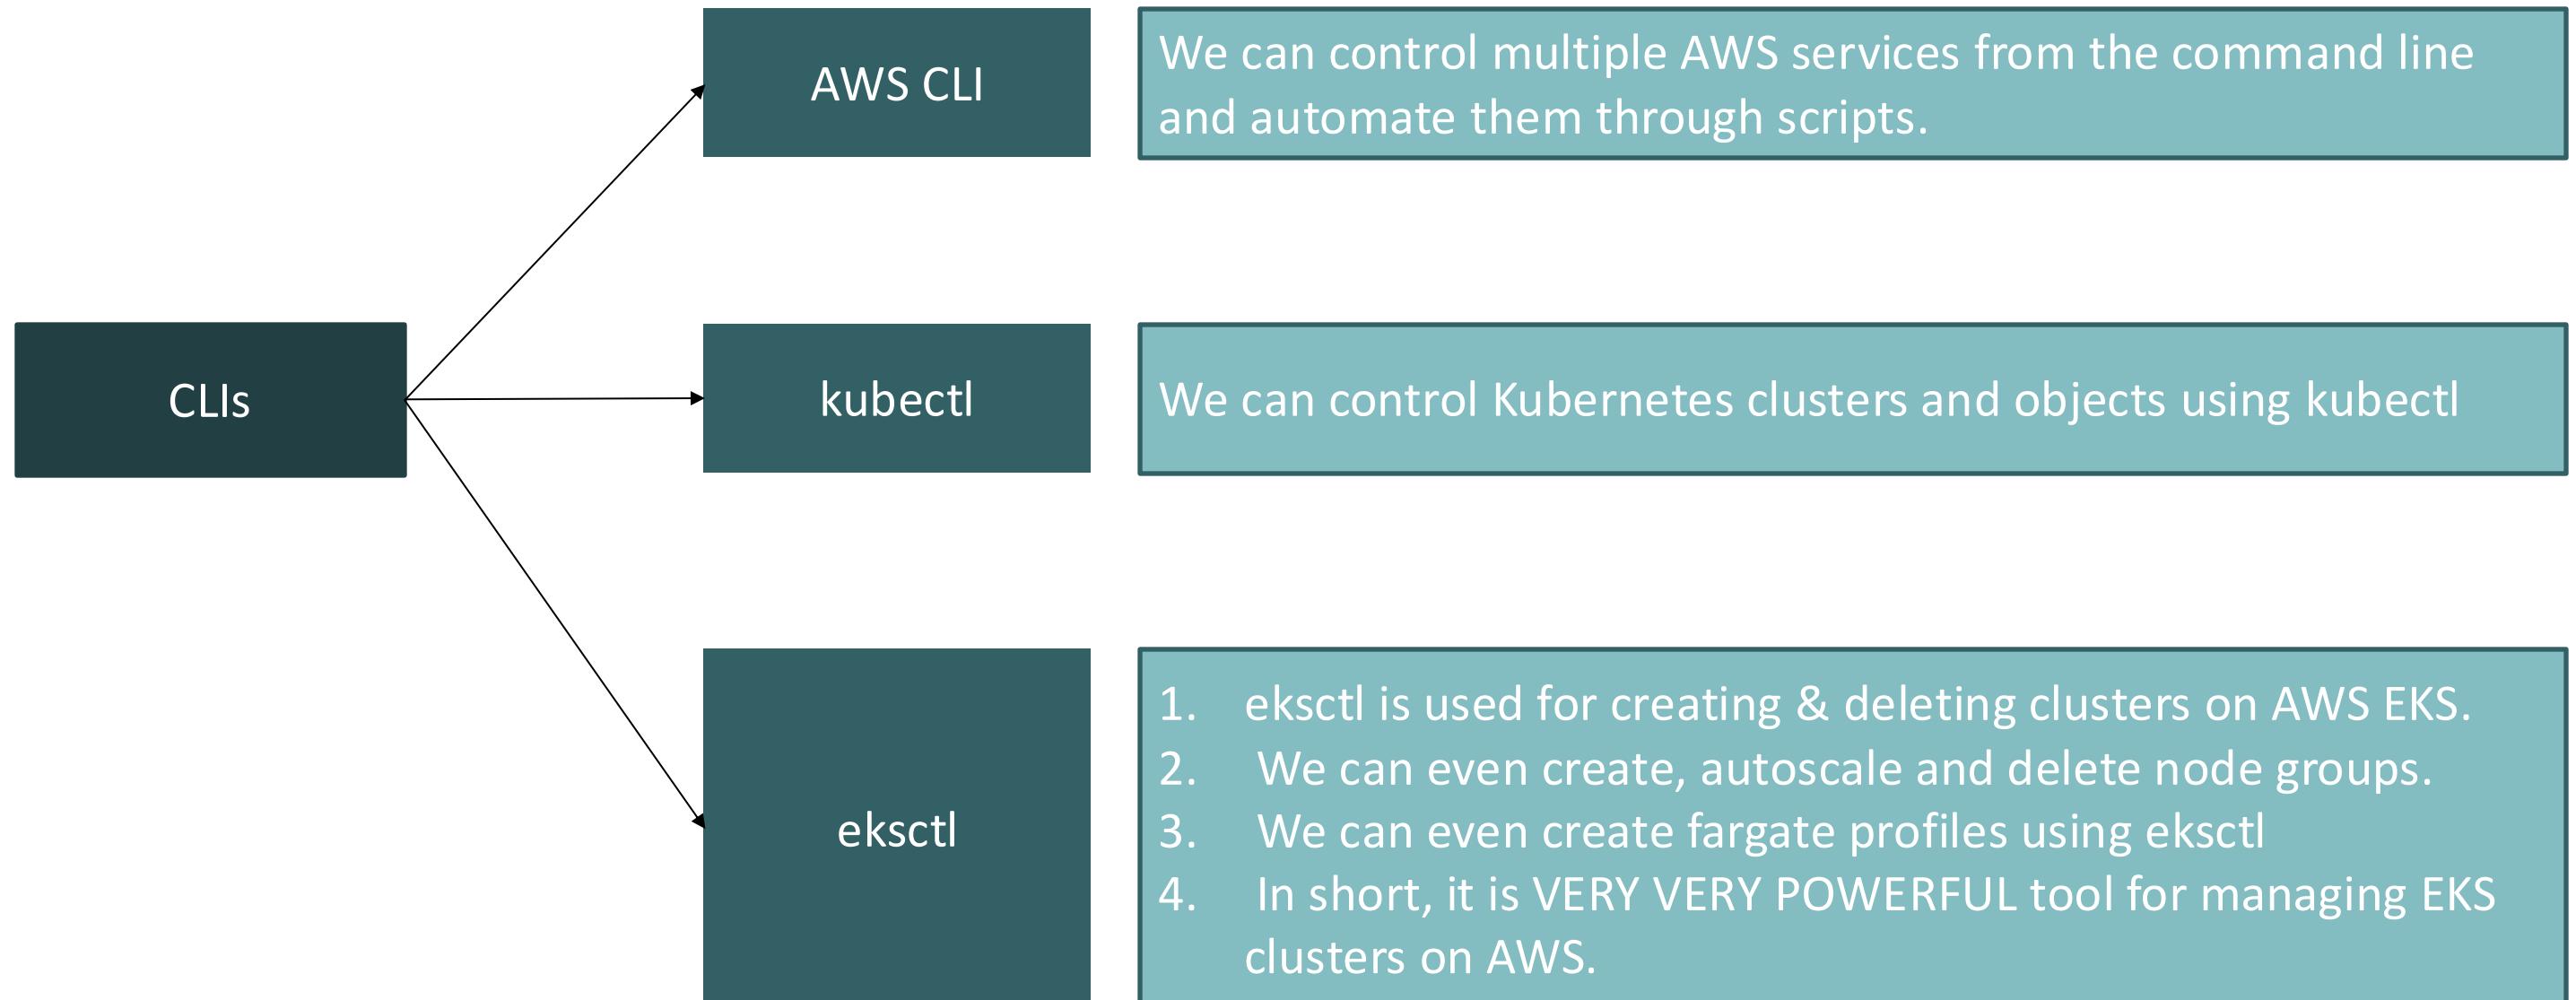





AWS EKS Cluster



AWS EKS – Core Objects

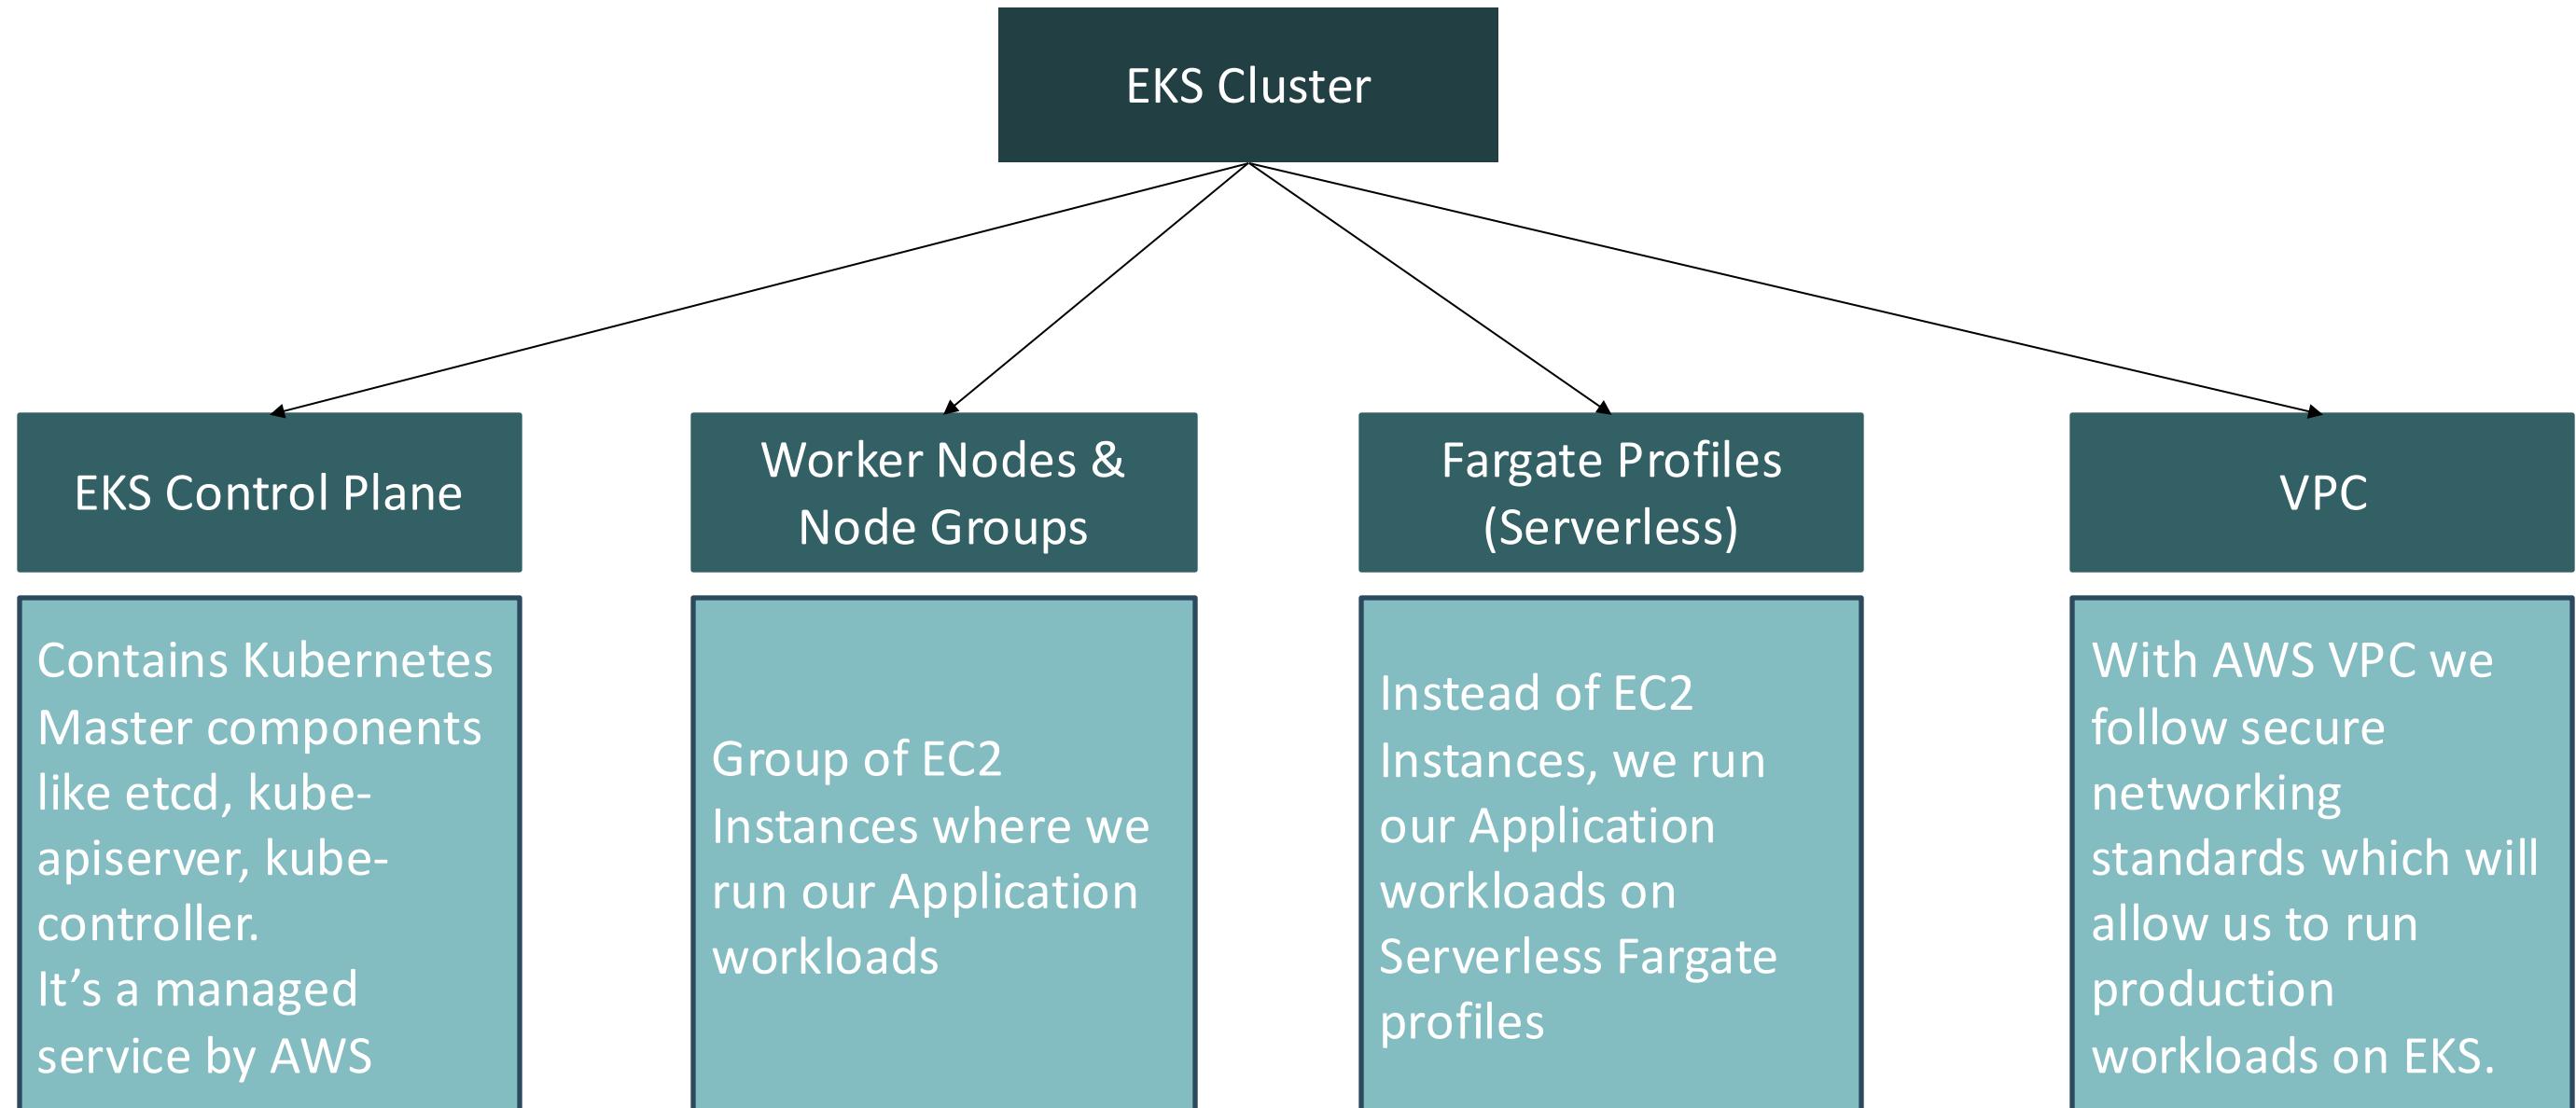

How does EKS work?

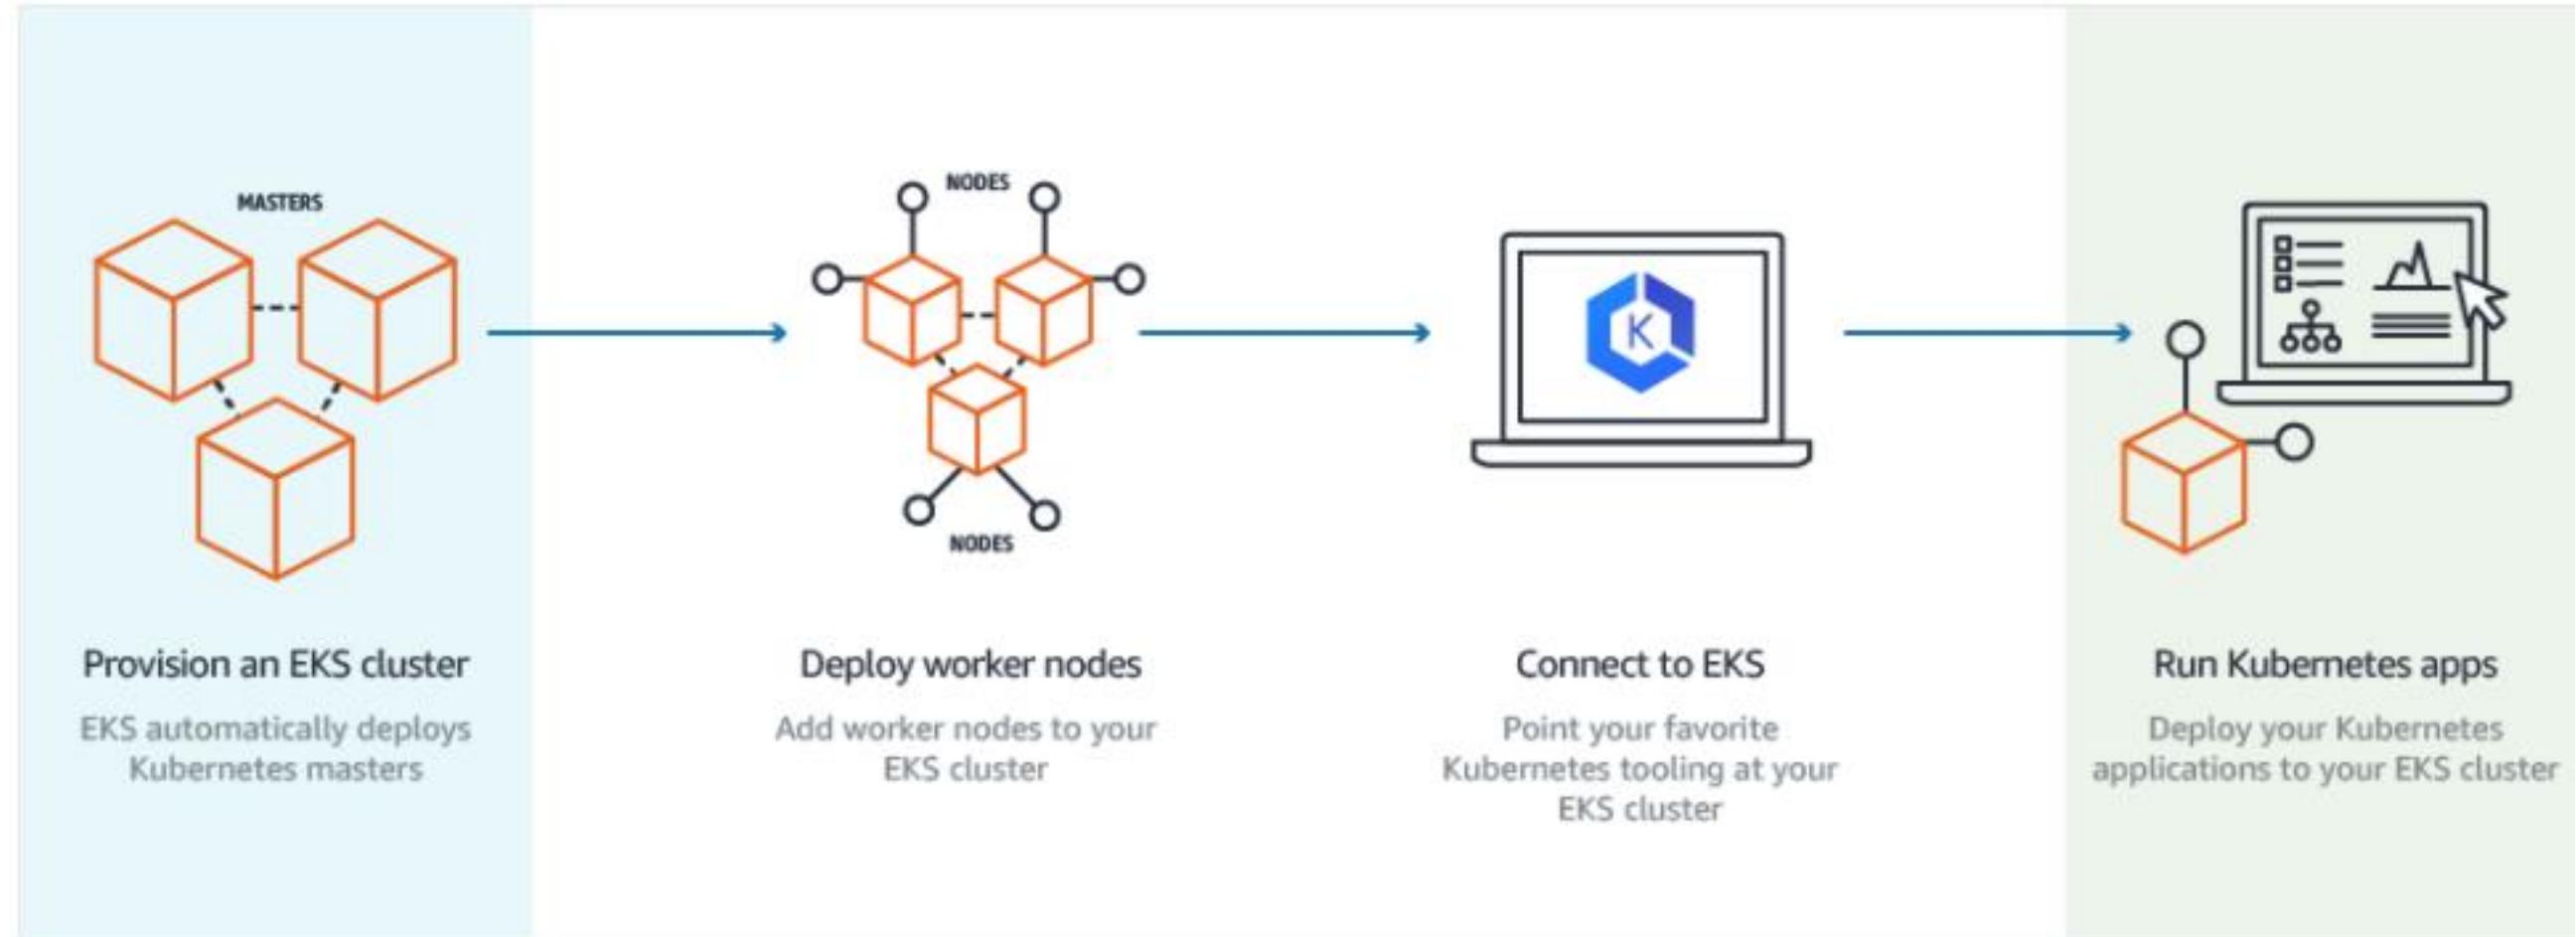

EKS Cluster – Core Objects Detailed

EKS Control Plane

1. EKS runs a single tenant Kubernetes control plane for each cluster, and control plane infrastructure is **not shared** across clusters or AWS accounts.
2. This control plane consists of at least two API server nodes and three etcd nodes that run across **three Availability Zones within a Region**
3. EKS automatically detects and replaces **unhealthy** control plane instances, restarting them across the Availability Zones within the Region as needed.

Worker Nodes & Node Groups

1. Worker machines in Kubernetes are called nodes. These are EC2 Instances
2. EKS worker nodes run in our AWS account and connect to our cluster's control plane via the **cluster API server endpoint**.
3. A node group is **one or more** EC2 instances that are deployed in an EC2 Autoscaling group.
4. All instances in a node group must
 1. Be the **same instance type**
 2. Be **running the same AMI**
 3. Use the **same EKS worker node IAM role**

EKS Cluster – Core Objects Detailed

Fargate Profiles

1. AWS Fargate is a technology that provides **on-demand, right-sized compute capacity** for containers
2. With Fargate, we **no longer** have to provision, configure, or scale groups of virtual machines to run containers.
3. Each pod running on Fargate has its **own isolation boundary** and does not share the underlying kernel, CPU resources, memory resources, or elastic network interface with another pod.
4. AWS specially built **Fargate controllers** that recognizes the pods belonging to fargate and schedules them on Fargate profiles.
5. We will see more in our Fargate learning section.

VPC

1. EKS uses AWS VPC network policies **to restrict traffic** between control plane components to within a single cluster.
2. Control plane components for a EKS cluster **cannot view or receive communication** from other clusters or other AWS accounts, except as authorized with Kubernetes RBAC policies.
3. This **secure and highly-available configuration** makes EKS reliable and recommended for **production workloads**.

Kubernetes Architecture







Kubernetes Architecture



Kubernetes - Architecture

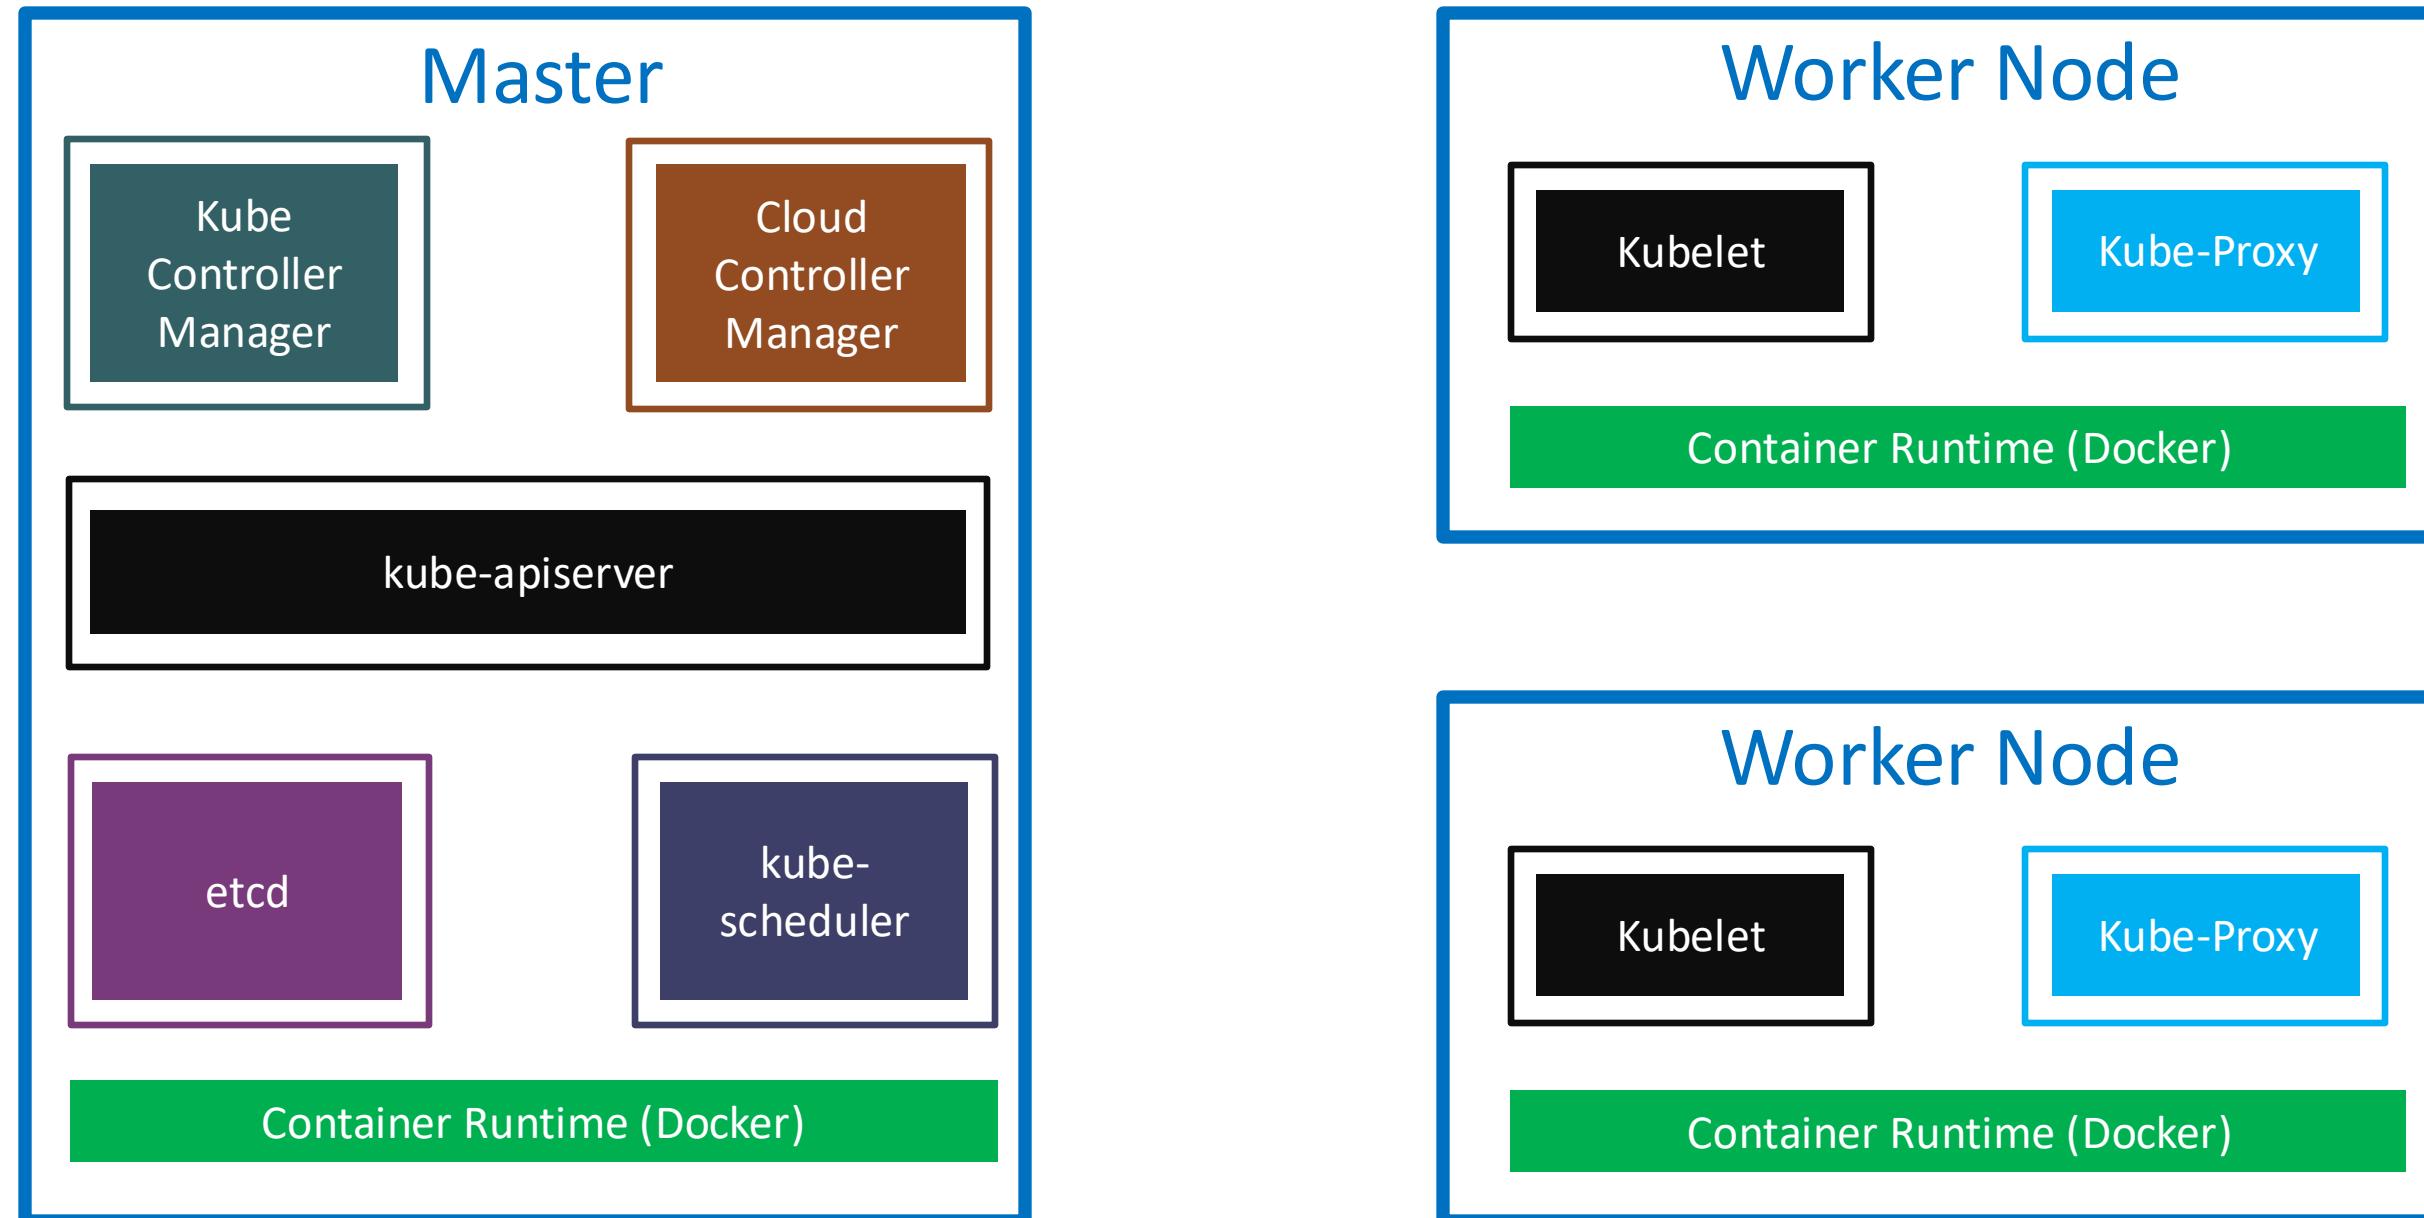

Kubernetes Architecture - Master

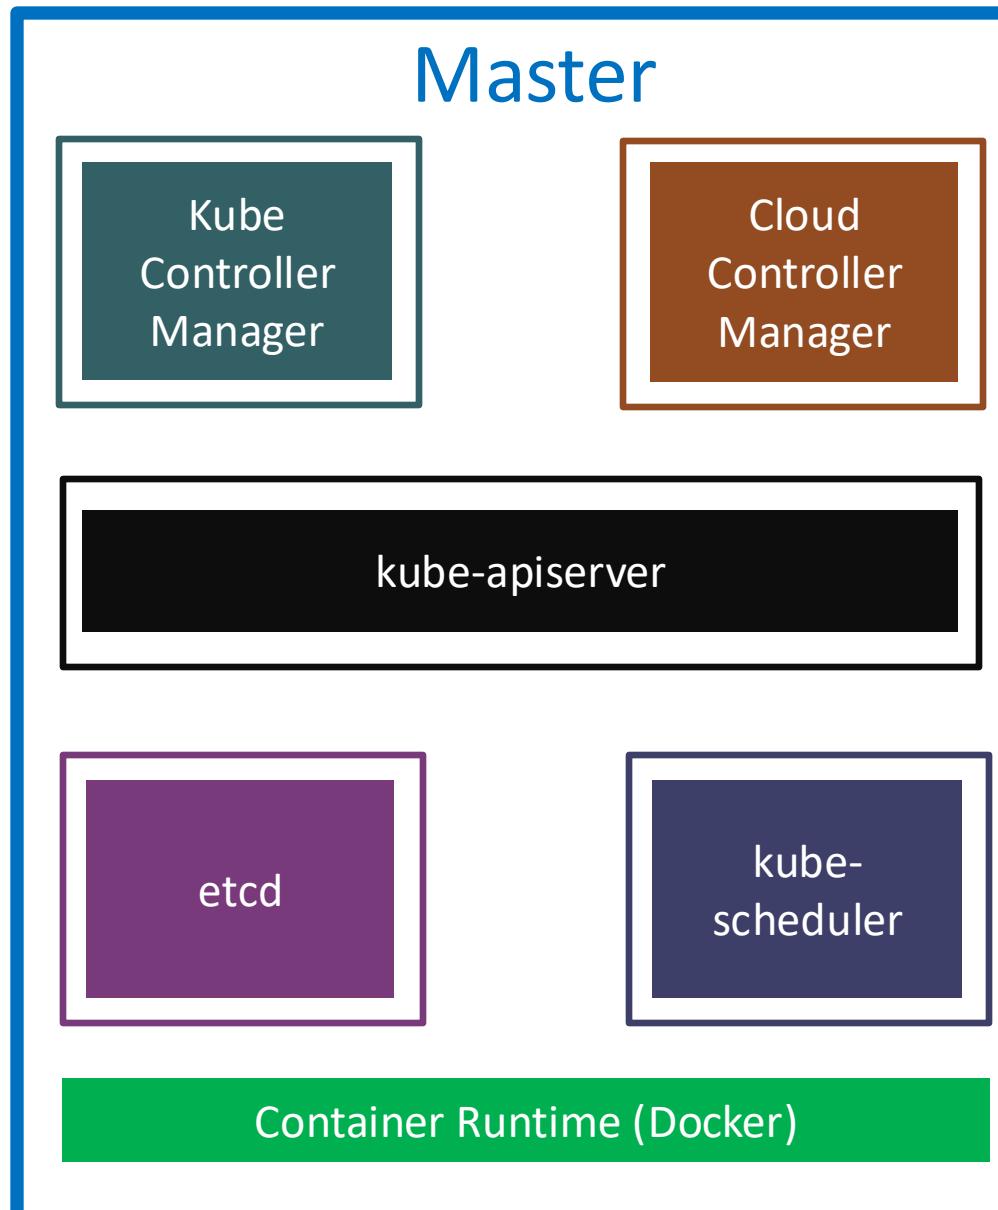

- **kube-apiserver**

- It acts as **front end** for the Kubernetes control plane. It **exposes** the Kubernetes API
- Command line tools (like kubectl), Users and even Master components (scheduler, controller manager, etcd) and Worker node components like (Kubelet) **everything talk** with API Server.


- **etcd**

- Consistent and highly-available **key value store** used as Kubernetes' **backing store** for all cluster data.
- It **stores** all the masters and worker node information.

- **kube-scheduler**

- Scheduler is responsible for distributing containers across multiple nodes.
- It watches for newly created Pods with no assigned node, and selects a node for them to run on.


Kubernetes Architecture - Master

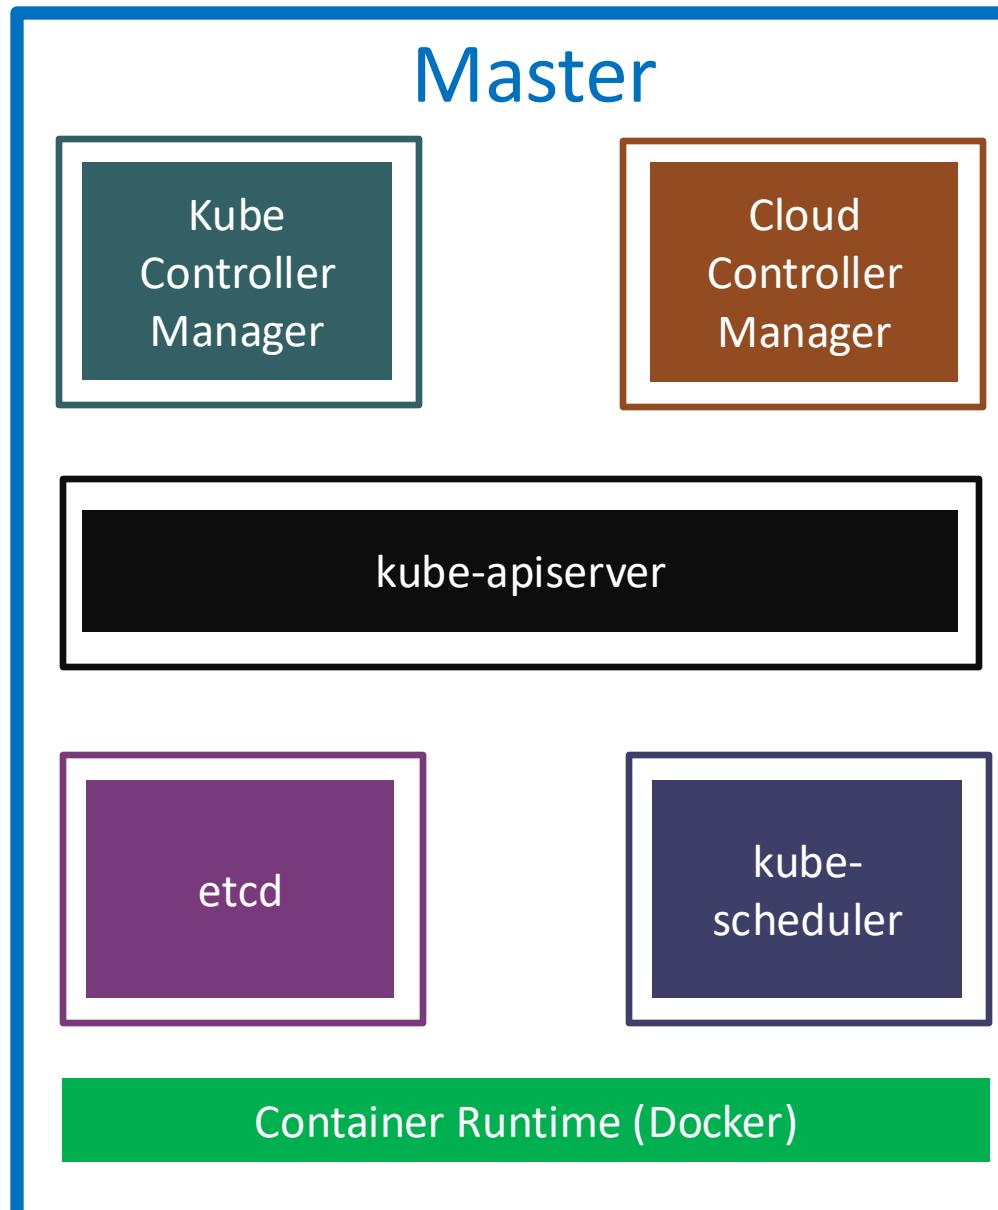

- **kube-controller-manager**

- Controllers are responsible for noticing and responding when nodes, containers or endpoints go down. They make decisions to bring up new containers in such cases.
- **Node Controller**: Responsible for noticing and responding when **nodes go down**.
- **Replication Controller**: Responsible for maintaining the **correct number of pods** for every replication controller object in the system.
- **Endpoints Controller**: **Populates** the Endpoints object (that is, joins Services & Pods)
- **Service Account & Token Controller**: Creates default accounts and API Access for **new namespaces**.


Kubernetes Architecture - Master

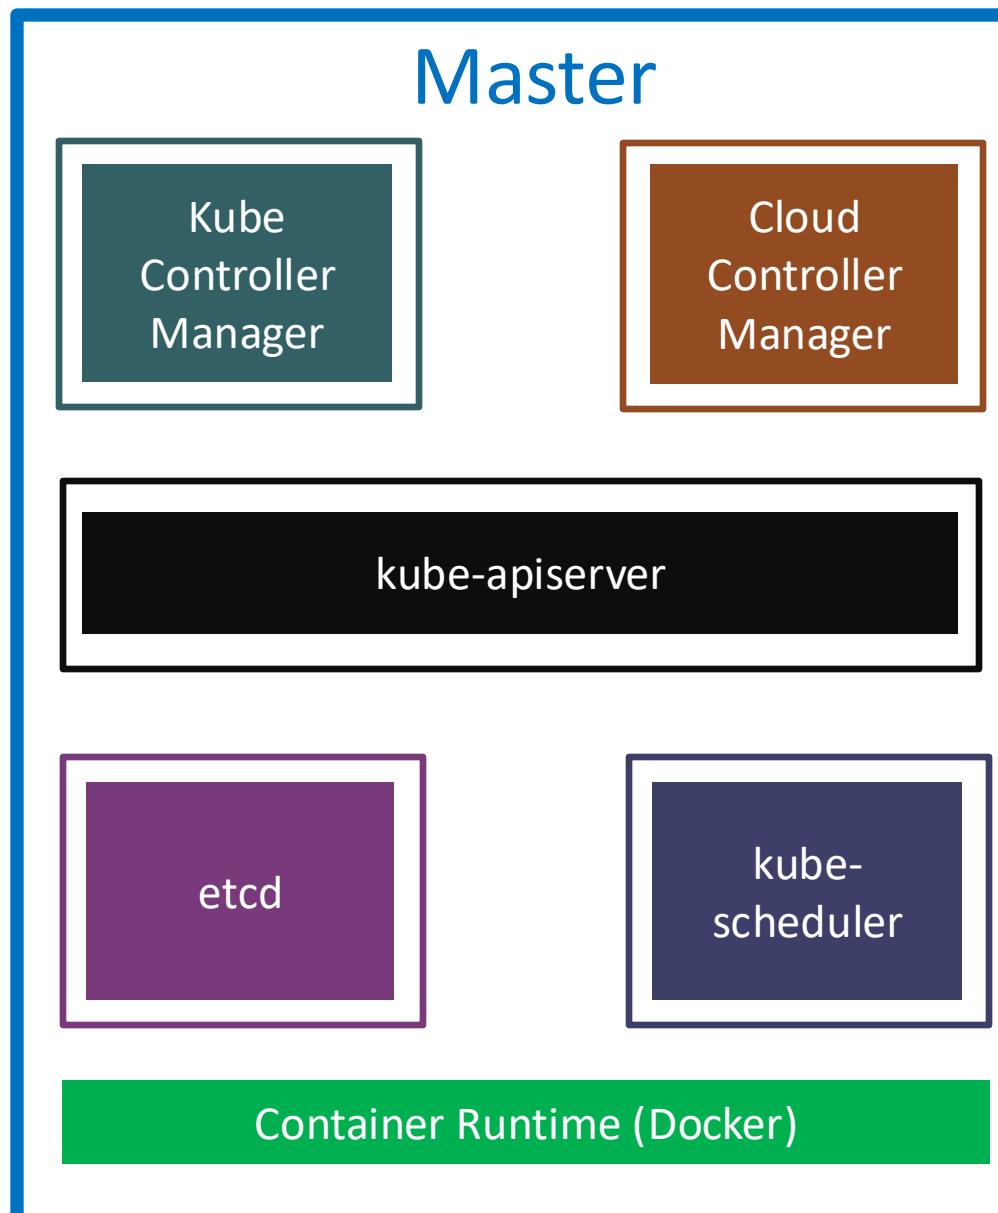

- **cloud-controller-manager**

- A Kubernetes control plane component that embeds **cloud-specific control logic**.
- It only runs controllers that are **specific to your cloud provider**.
- **On-Premise** Kubernetes clusters will not have this component.
- **Node controller**: For **checking** the cloud provider to determine if a node has been deleted in the cloud after it stops responding
- **Route controller**: For setting up **routes** in the underlying cloud infrastructure
- **Service controller**: For creating, updating and deleting cloud provider **load balancer**

Kubernetes Architecture – Worker Nodes

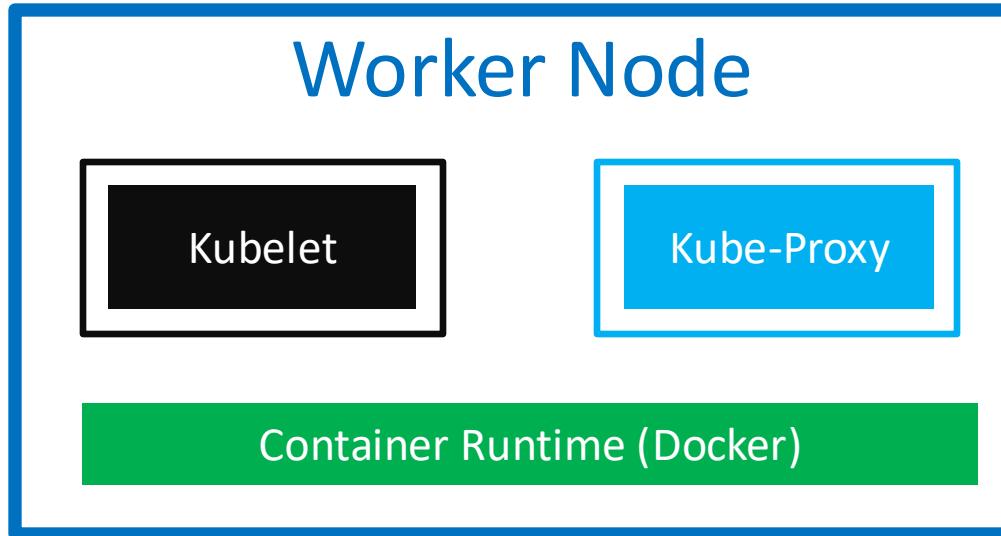

- Container Runtime
 - Container Runtime is the **underlying software** where we run all these Kubernetes components.
 - We are using Docker, but we have other runtime options like rkt, container-d etc.


- **Kubelet**

- Kubelet is the **agent** that runs on every node in the cluster
- This agent is **responsible** for making sure that containers are running in a Pod on a node.

- **Kube-Proxy**

- It is a **network proxy** that runs on each node in your cluster.
- It maintains **network rules** on nodes
- In short, these network rules allow network communication to your Pods from network sessions inside or outside of your cluster.

Kubernetes - Architecture

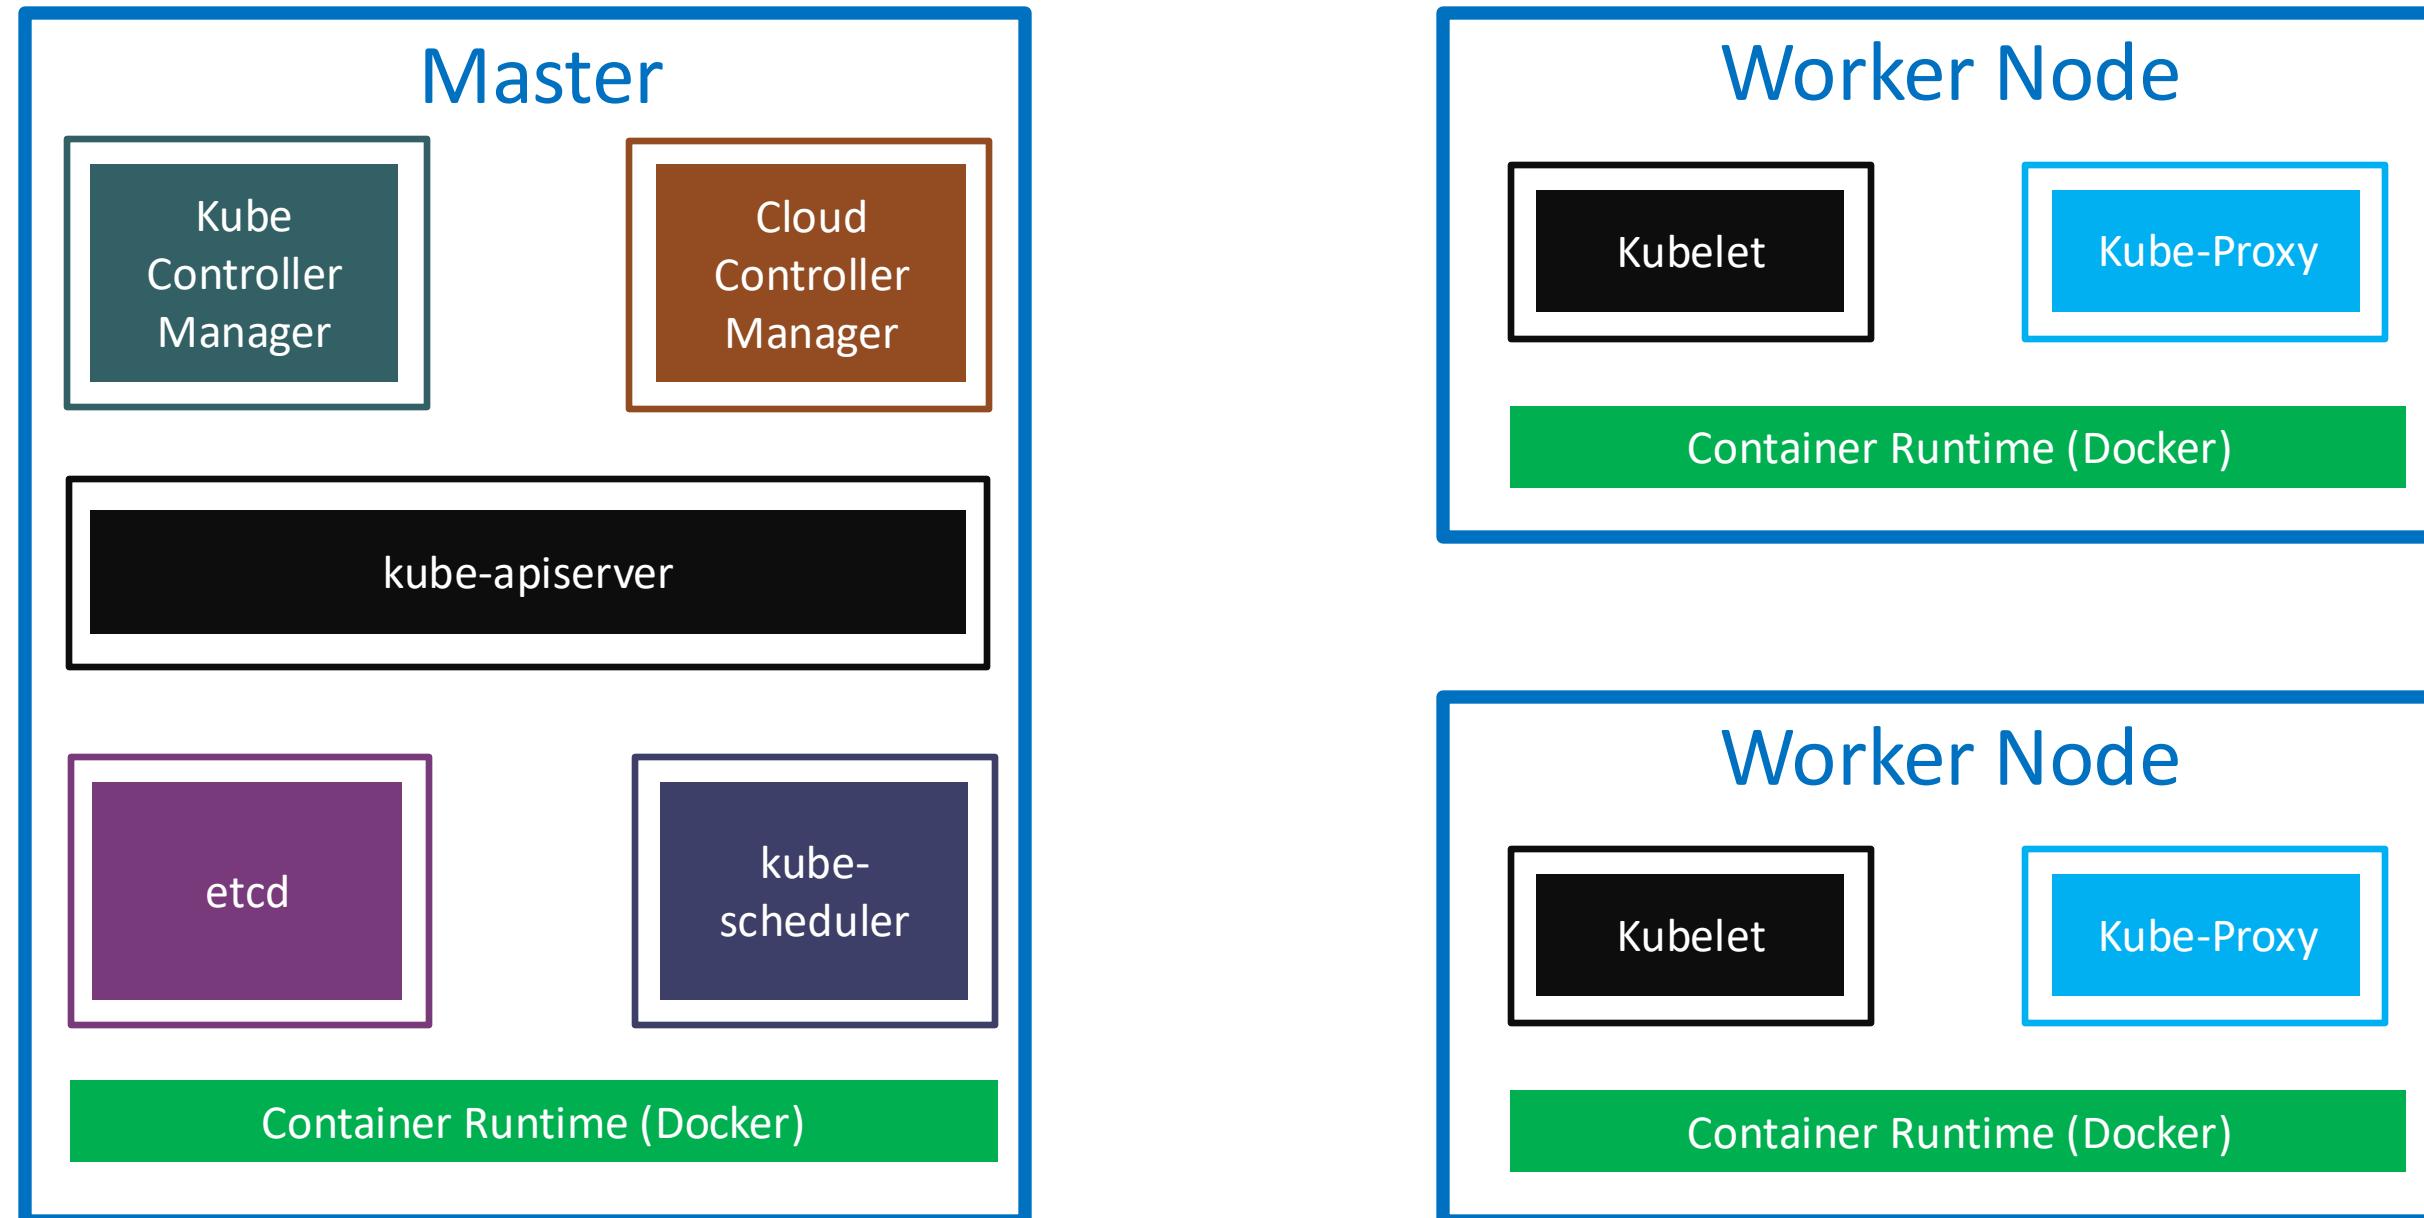




AWS EKS Cluster



EKS Kubernetes - Architecture

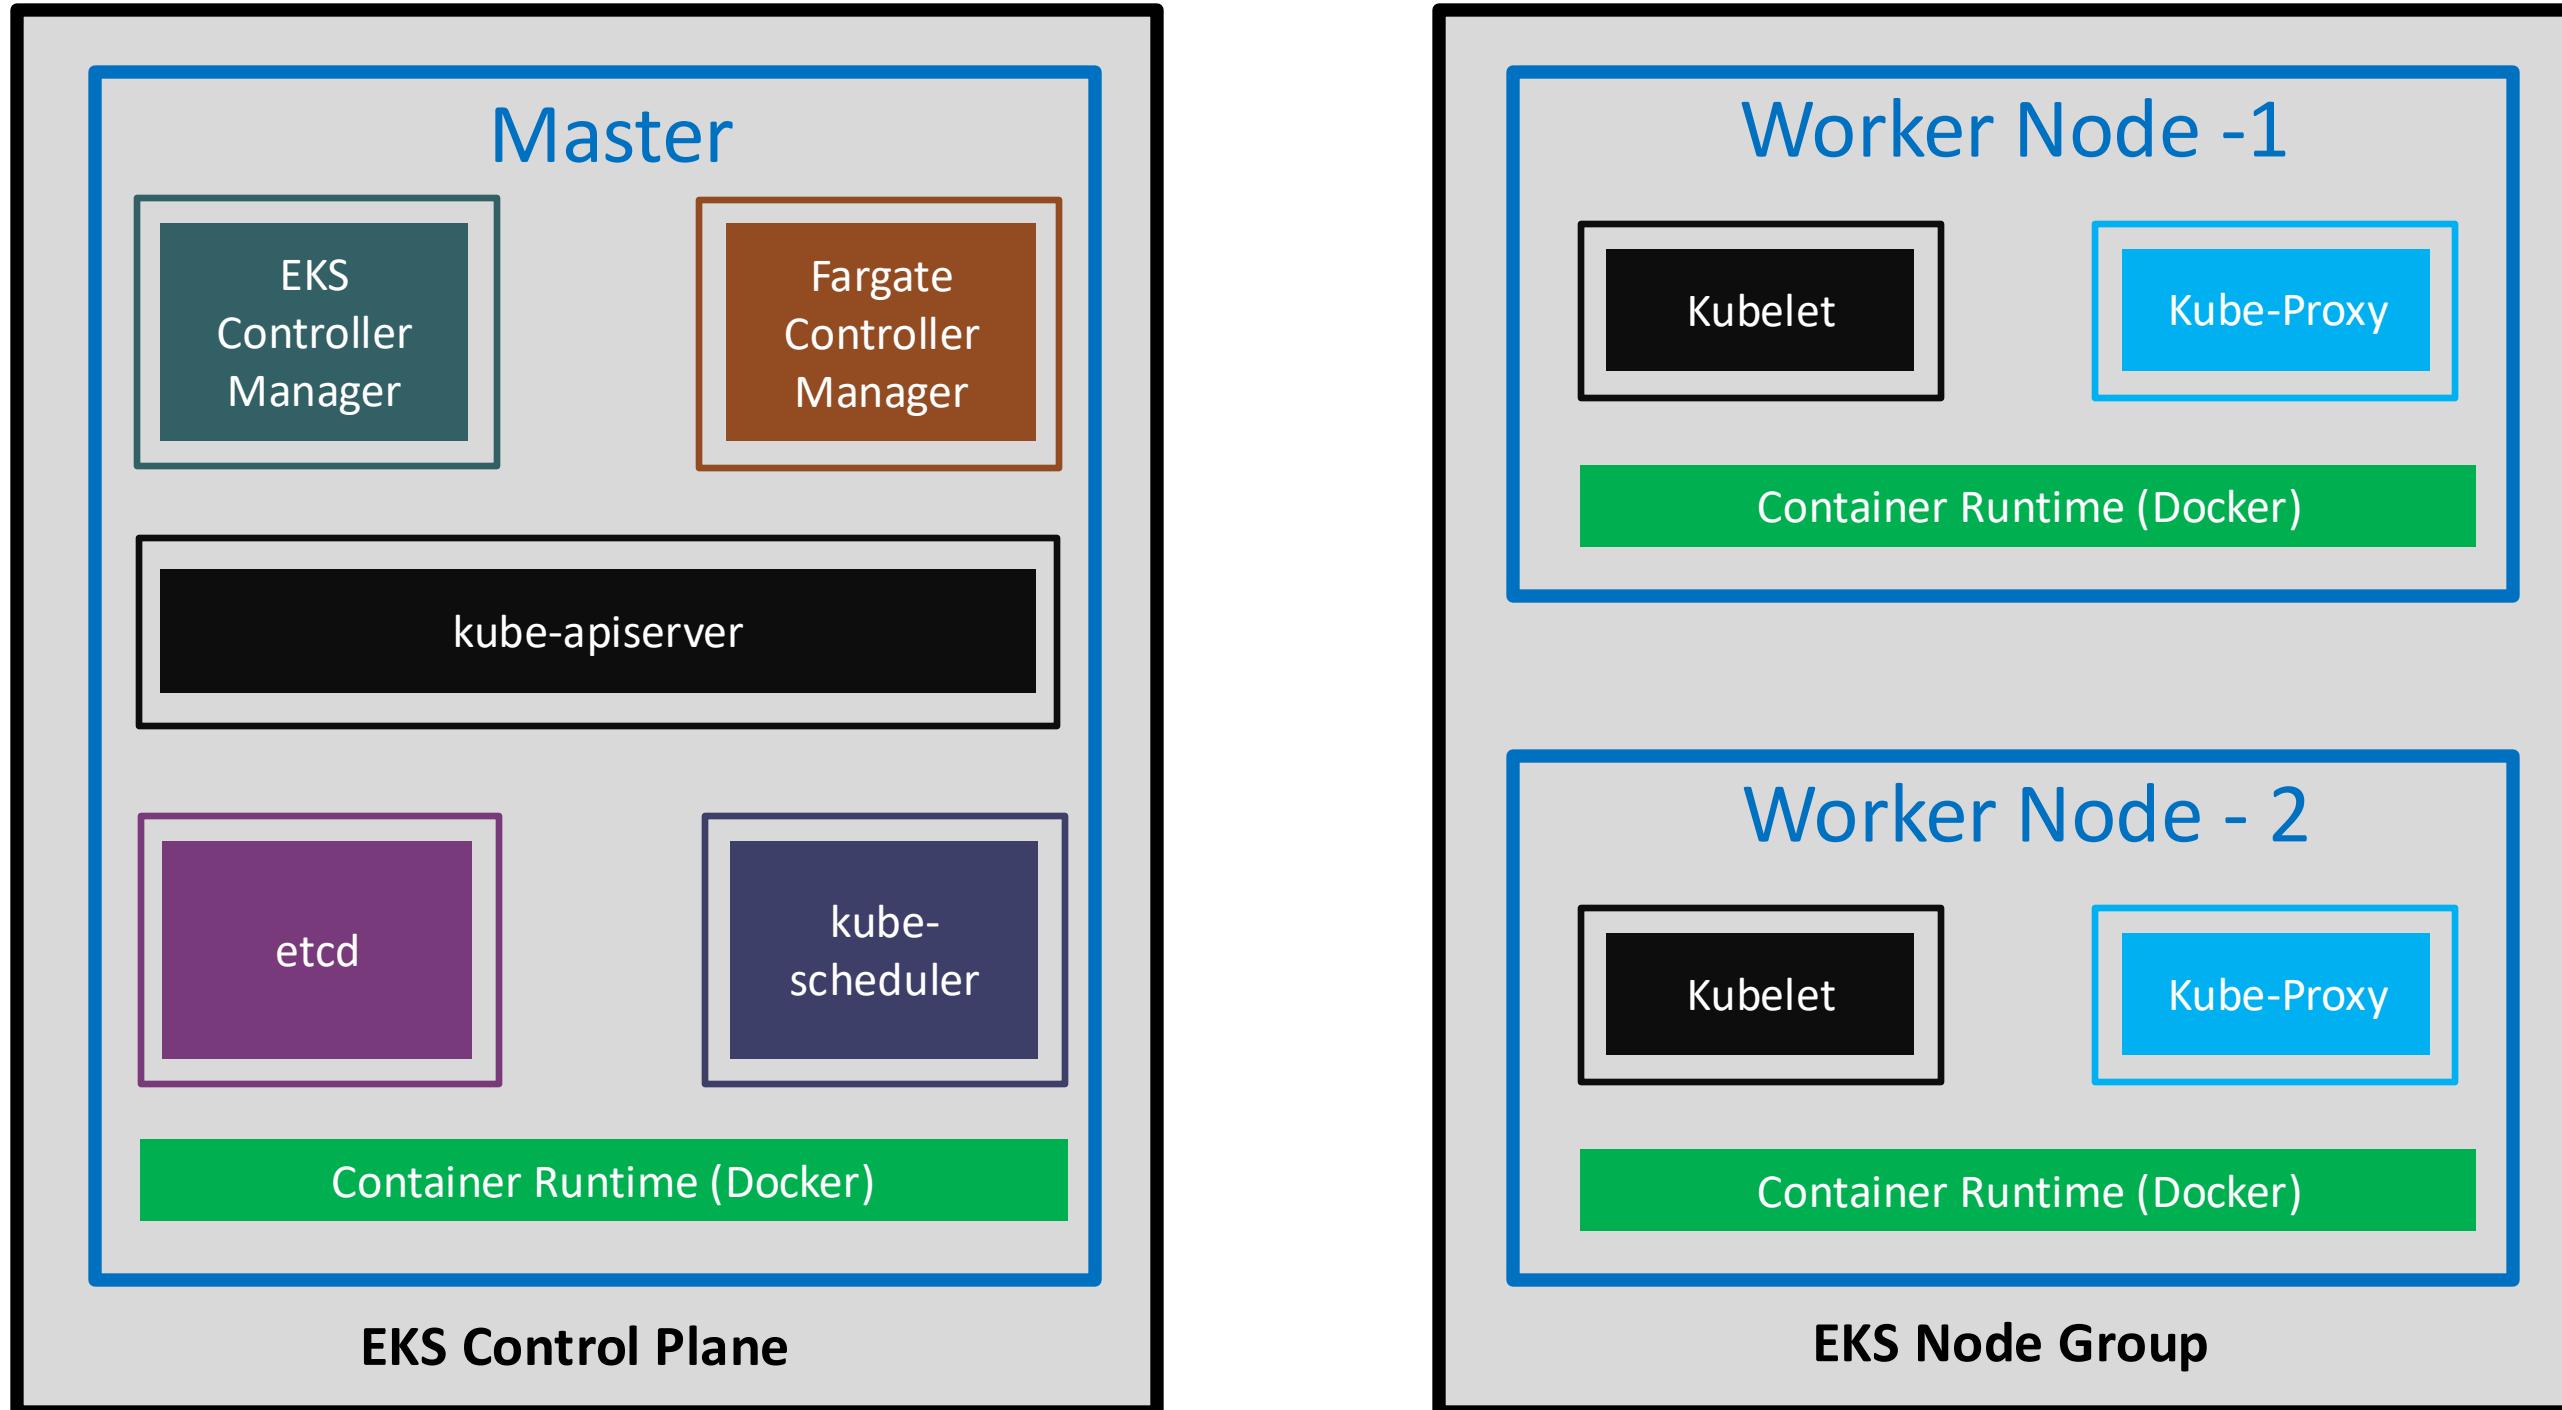


Kubernetes Fundamentals

Pod, ReplicaSet, Deployment & Service



Kubernetes - Fundamentals

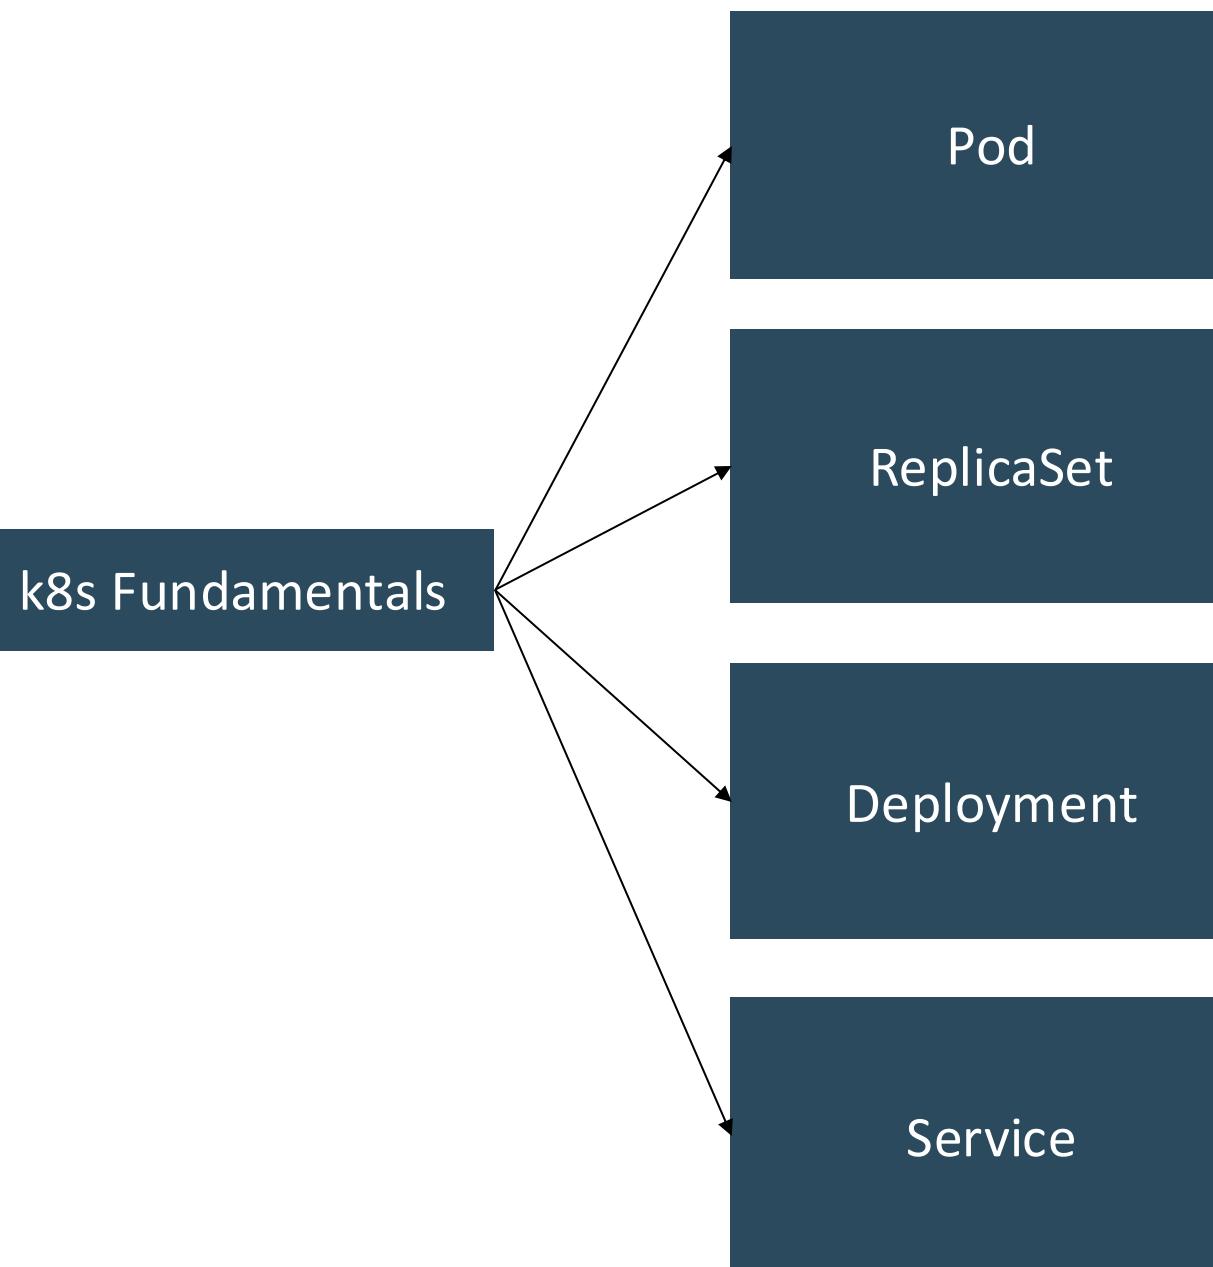

A POD is a single instance of an Application.
A POD is the smallest object, that you can create in Kubernetes.

A ReplicaSet will maintain a stable set of replica Pods running at any given time.
In short, it is often used to guarantee the availability of a specified number of identical Pods

A Deployment runs multiple replicas of your application and automatically replaces any instances that fail or become unresponsive.
Rollout & rollback changes to applications. Deployments are well-suited for stateless applications.

A service is an abstraction for pods, providing a stable, so called virtual IP (VIP) address.
In simple terms, service sits Infront of a POD and acts as a load balancer.

Kubernetes - Imperative & Declarative

Kubernetes Fundamentals

Imperative

Declarative

kubectl

Pod

ReplicaSet

Deployment

Service

YAML & kubectl

Pod

ReplicaSet

Deployment

Service

Kubernetes POD




Kubernetes - POD

- With Kubernetes our core goal will be to deploy our applications in the form of **containers** on **worker nodes** in a k8s cluster.
- Kubernetes **does not** deploy containers directly on the worker nodes.
- Container is **encapsulated** in to a Kubernetes Object named **POD**.
- A POD is a **single instance** of an application.
- A POD is the **smallest object** that we can create in Kubernetes.




Nginx Container
Image

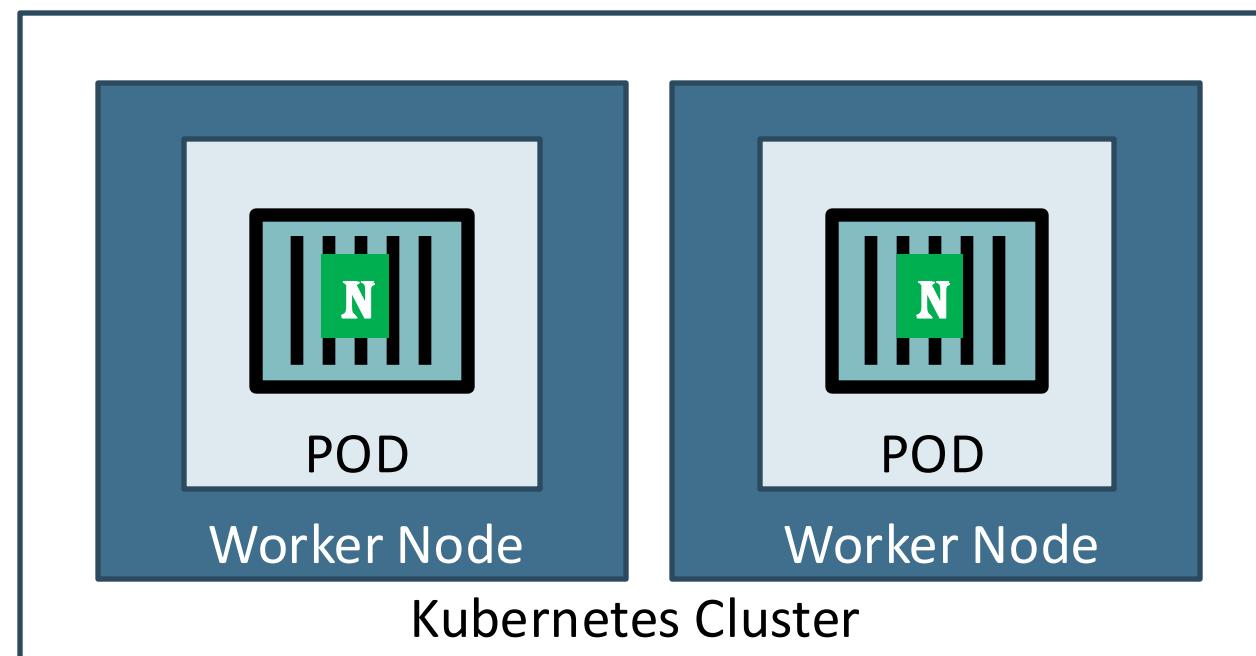


Kubernetes - POD

- PODs generally have **one to one** relationship with containers.
- To scale up we **create** new POD and to scale down we **delete** the POD.

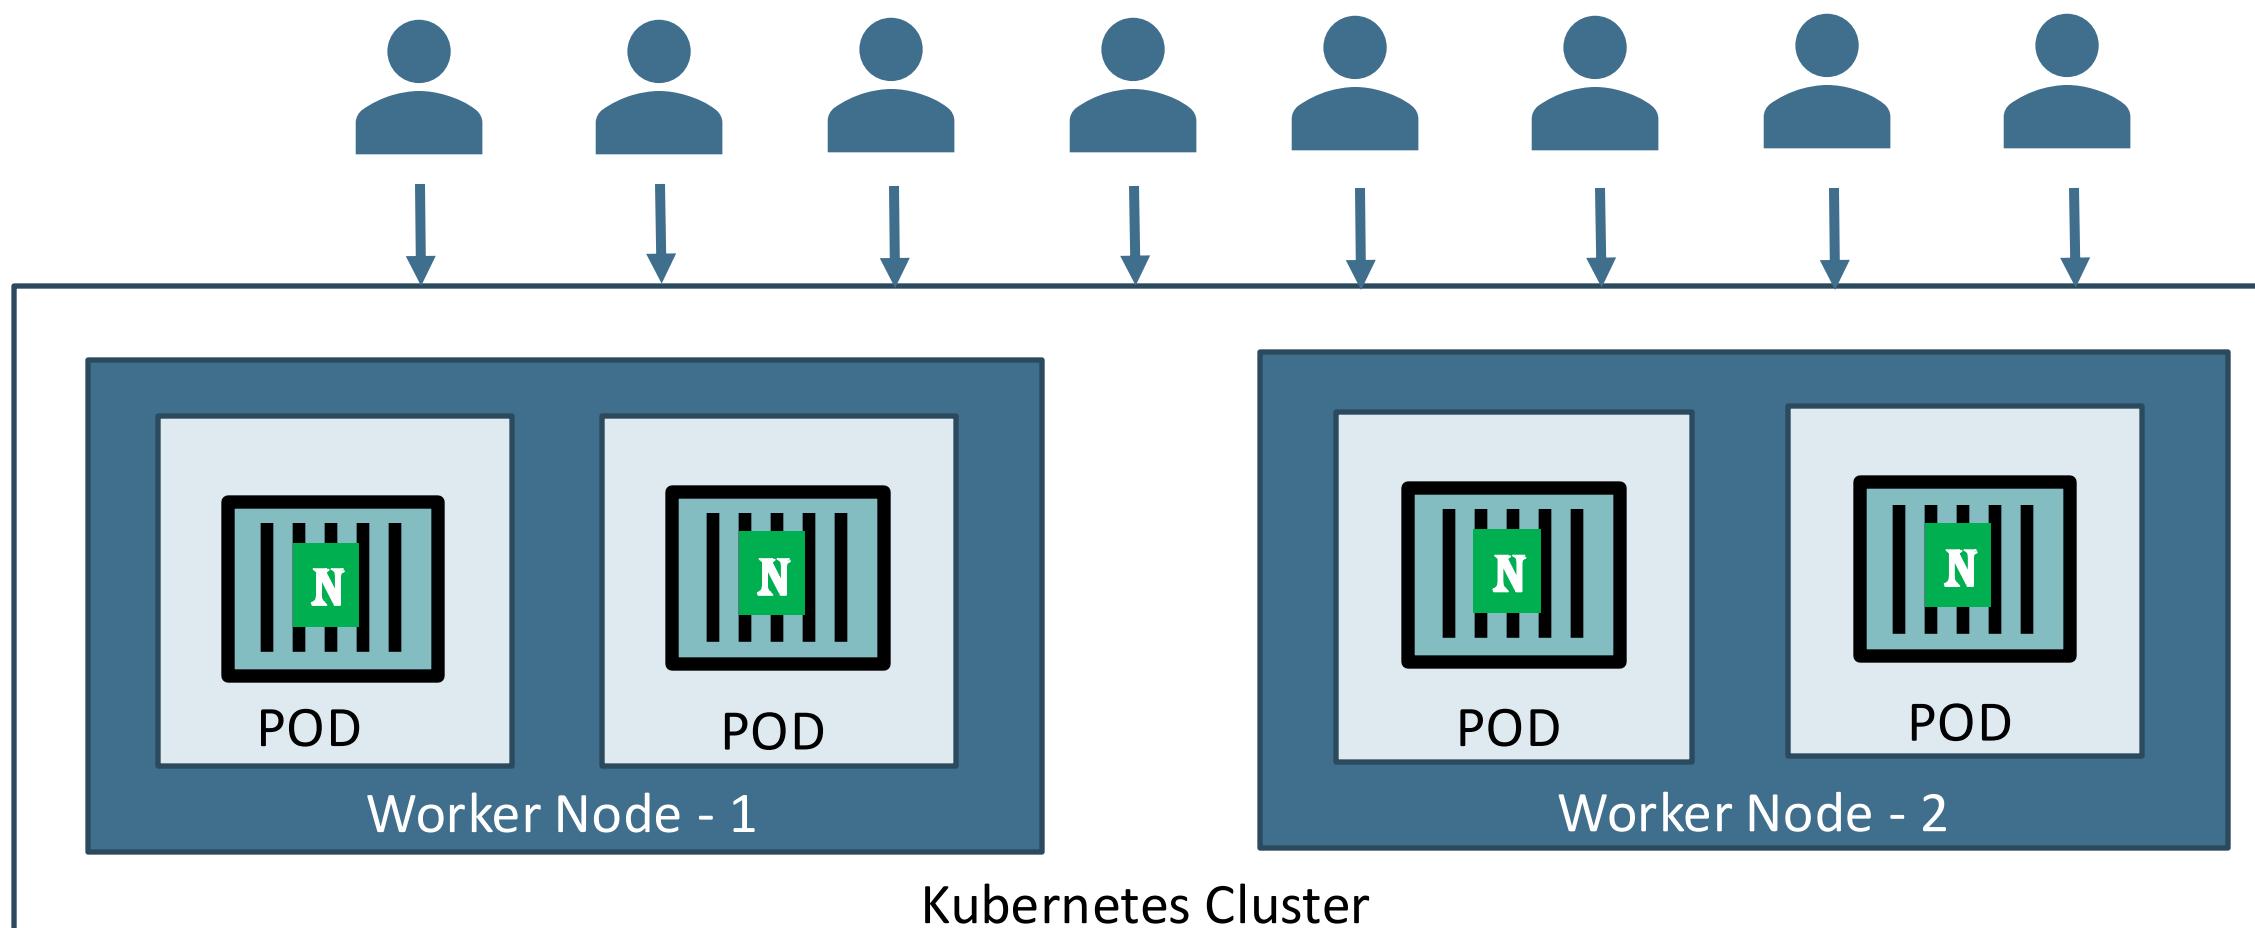


Kubernetes – PODs

- We **cannot have** multiple containers of **same kind** in a single POD.
- Example: Two NGINX containers in single POD serving same purpose is **not recommended**.

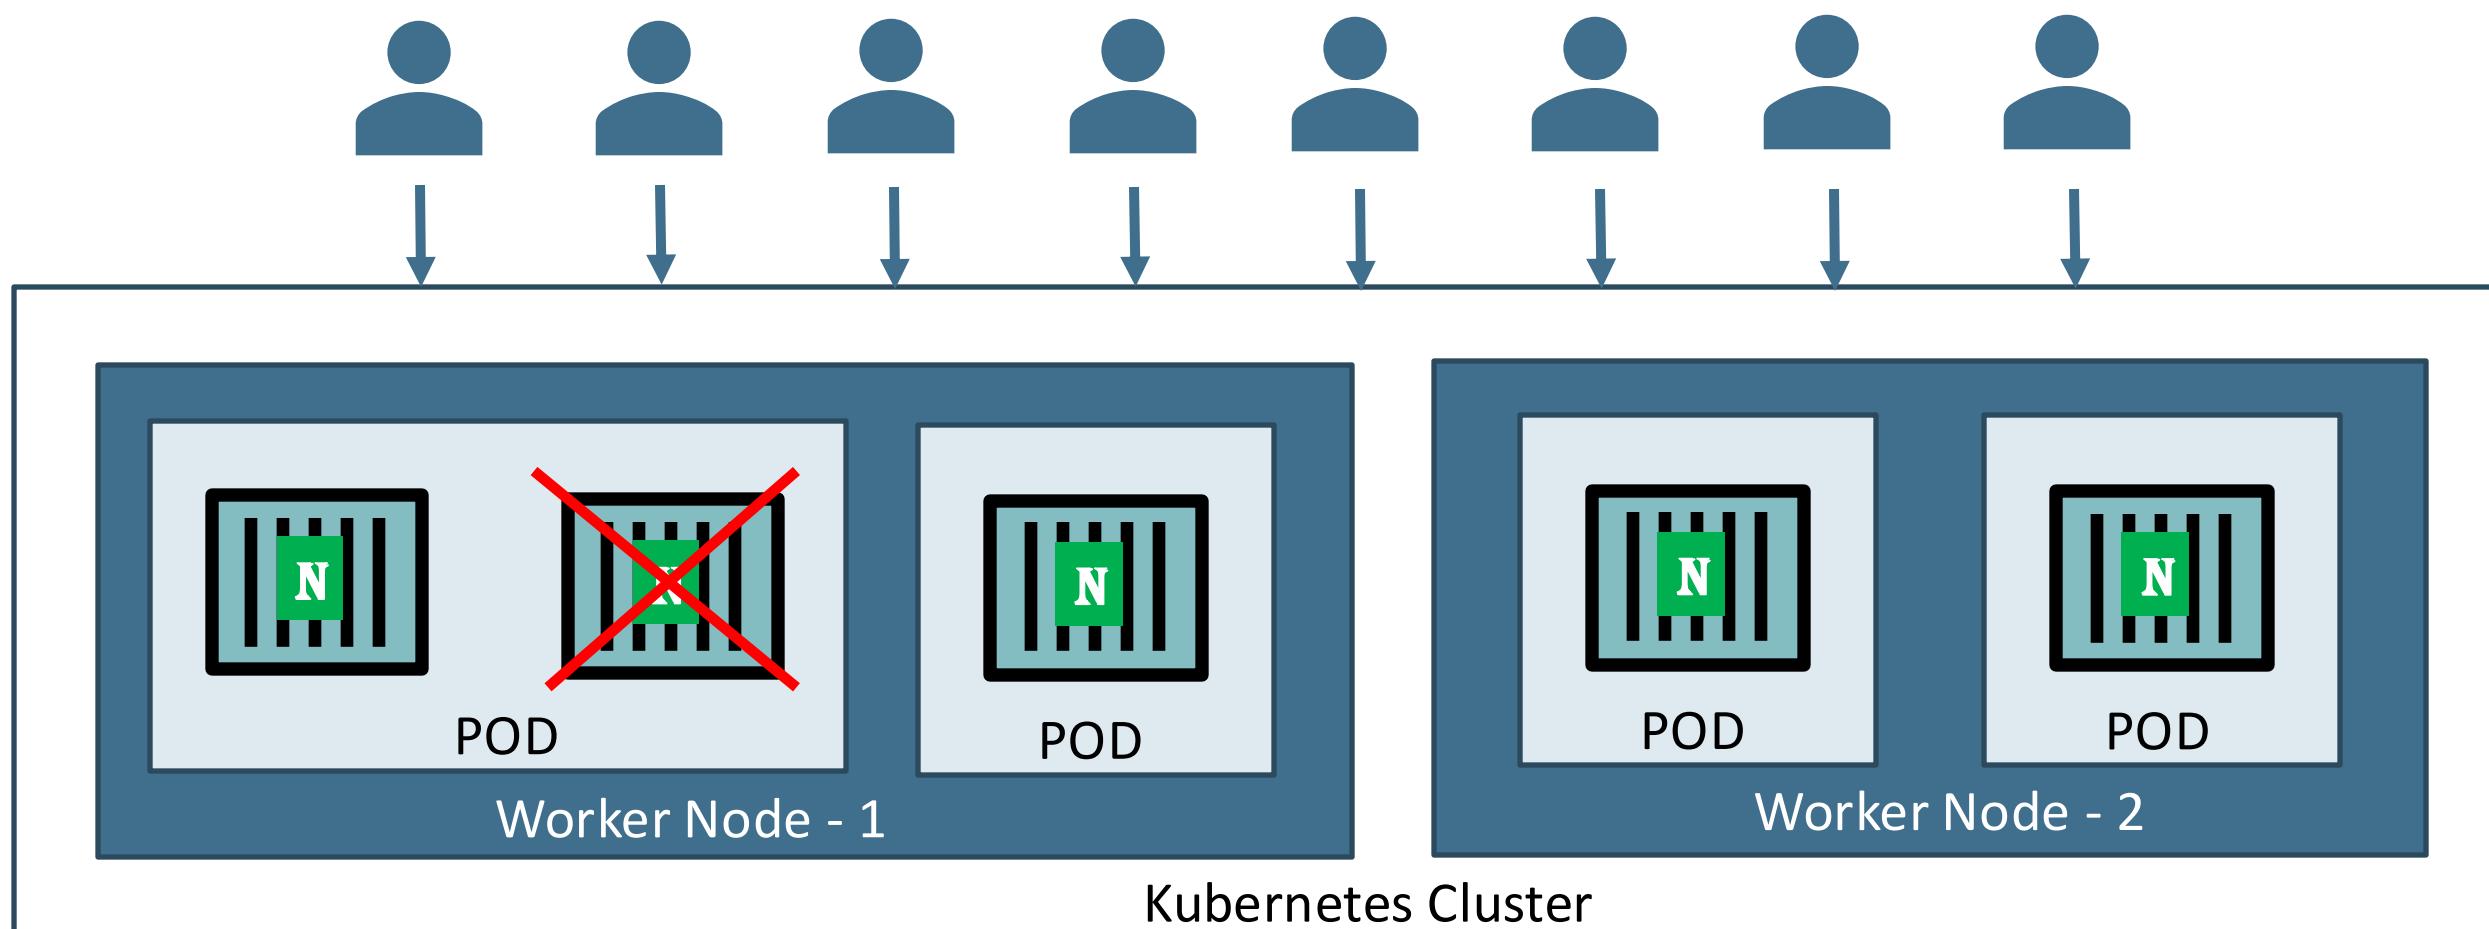

Kubernetes – Multi-Container Pods

- We can have multiple containers in a single POD, provided **they are not of same kind**.
- Helper Containers (Side-car)
 - Data Pullers: Pull data required by Main Container
 - Data pushers: Push data by collecting from main container (logs)
 - Proxies: Writes static data to html files using Helper container and Reads using Main Container.
- Communication
 - The two containers can easily communicate with each other easily as they share same **network space**.
 - They can also easily share **same storage space**.
- Multi-Container Pods is a **rare use-case** and we will try to focus on core fundamentals.

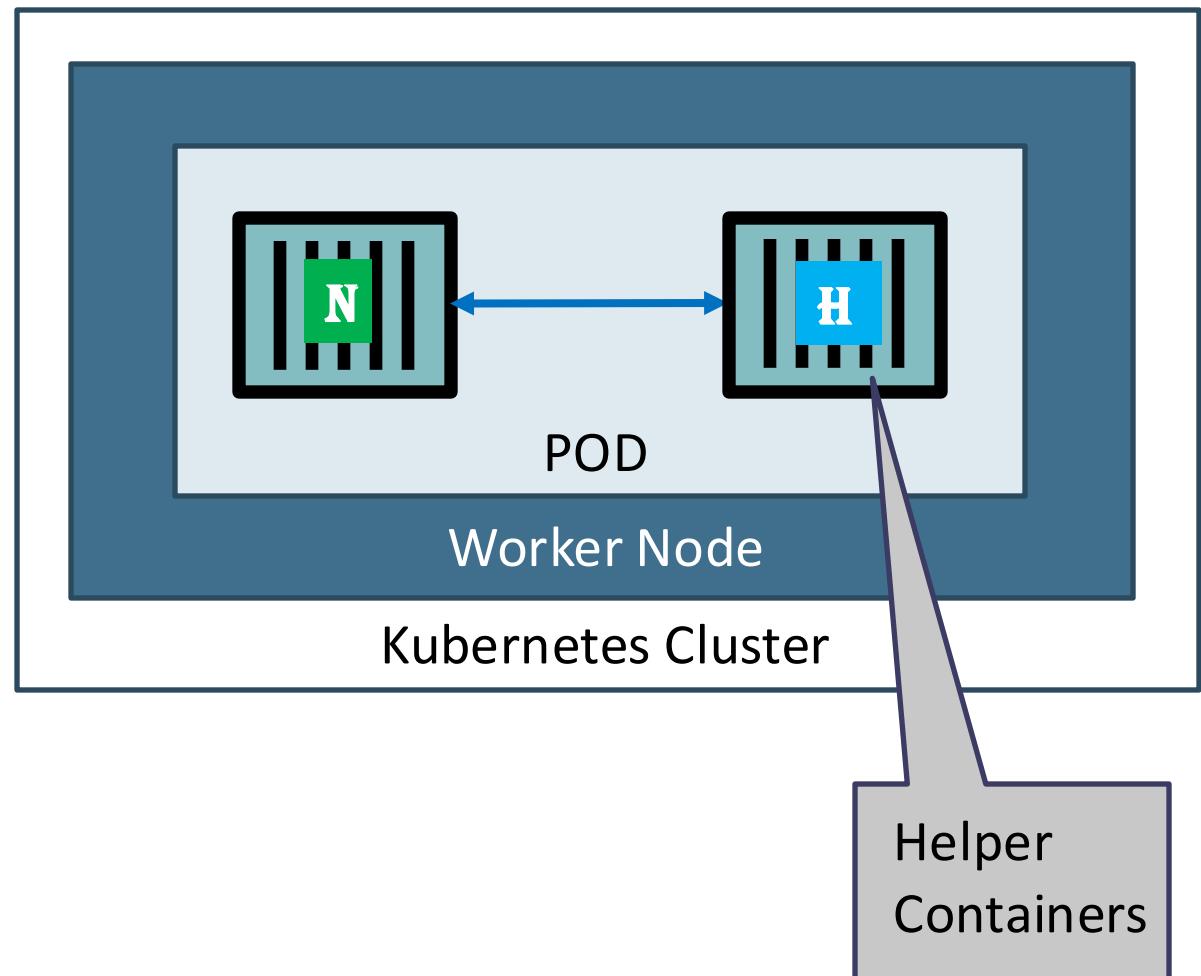

Kubernetes PODs Demo



Kubernetes Services - NodePort




Kubernetes – Service - NodePort

- We can **expose an application** running on a set of **PODs** using different types of Services available in k8s.

- ClusterIP
- NodePort
- LoadBalancer

- **NodePort Service**

- To access our application **outside of k8s cluster**, we can use NodePort service.
- Exposes the Service on each **Worker Node's IP** at a static port (nothing but NodePort).
- A **ClusterIP Service**, to which the **NodePort Service** routes, is **automatically** created.
- Port Range **30000-32767**

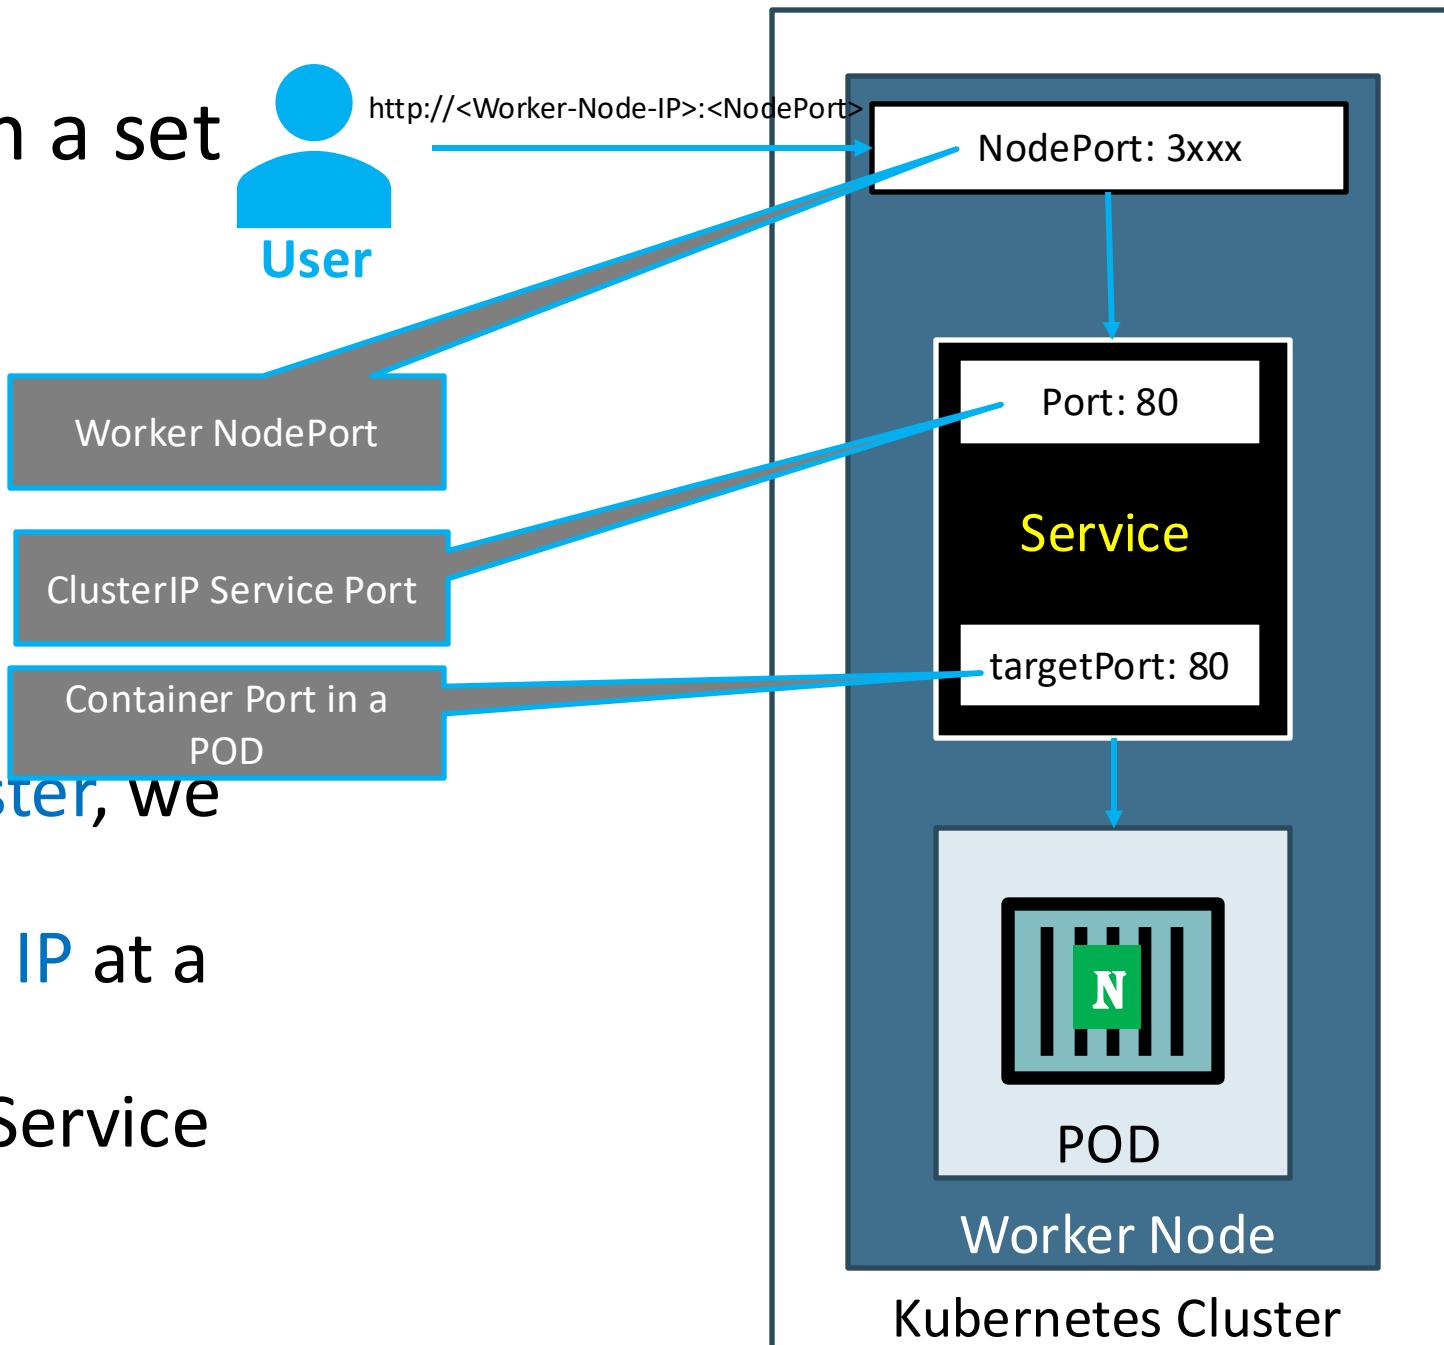


Kubernetes POD & NodePort Service Demo



Kubernetes ReplicaSets




Kubernetes - ReplicaSets

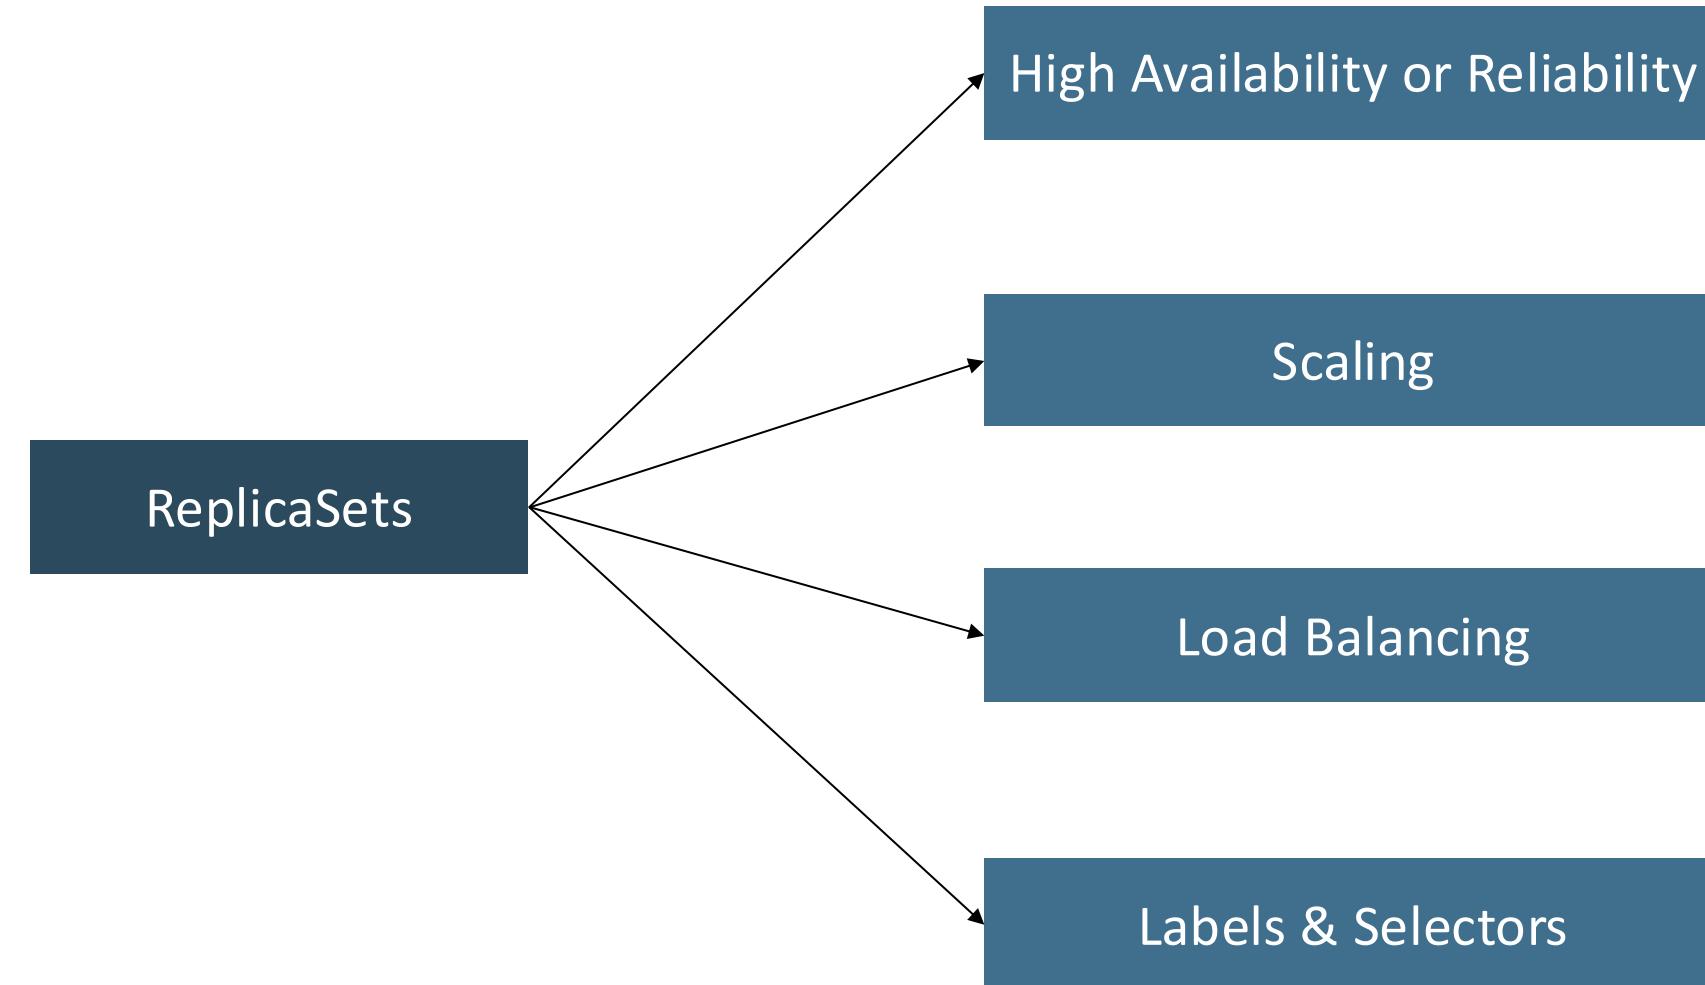

Kubernetes – ReplicaSet


- A ReplicaSet's purpose is to maintain a **stable set of replica Pods** running at any given time.
- If our application crashes (any pod dies), replicaset will **recreate** the pod immediately to ensure the configured number of pods running at any given time.

Reliability
Or
High Availability

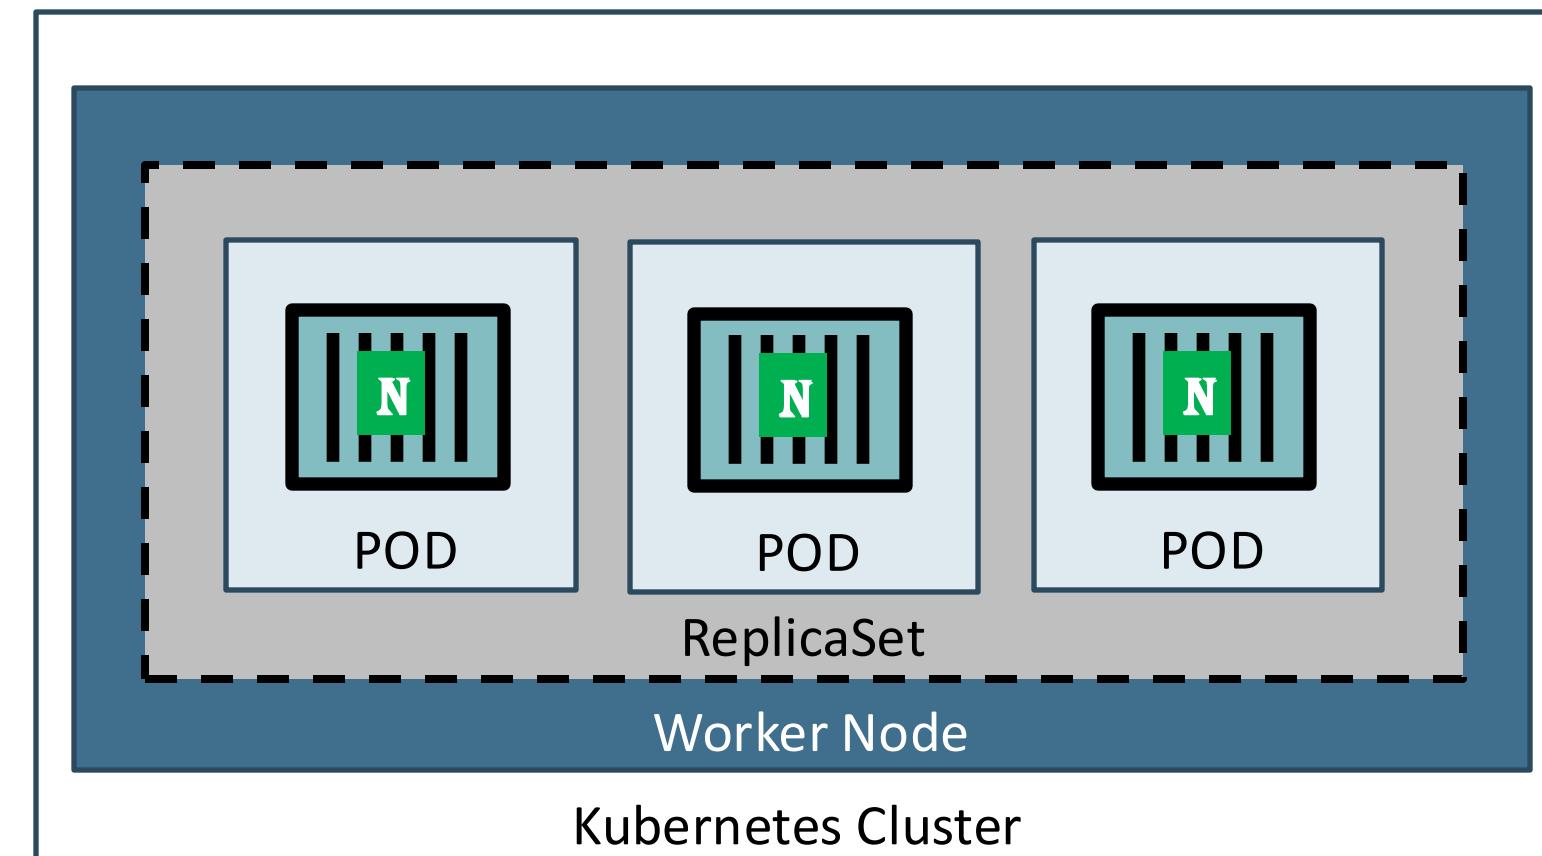


Kubernetes – ReplicaSet

- Load Balancing
- To avoid overloading of traffic to single pod we can use **load balancing**.
- Kubernetes provides pod load balancing **out of the box** using **Services** for the pods which are part of a ReplicaSet
- **Labels & Selectors** are the **key items** which **ties** all 3 together (Pod, ReplicaSet & Service), we will know in detail when we are writing YAML manifests for these objects

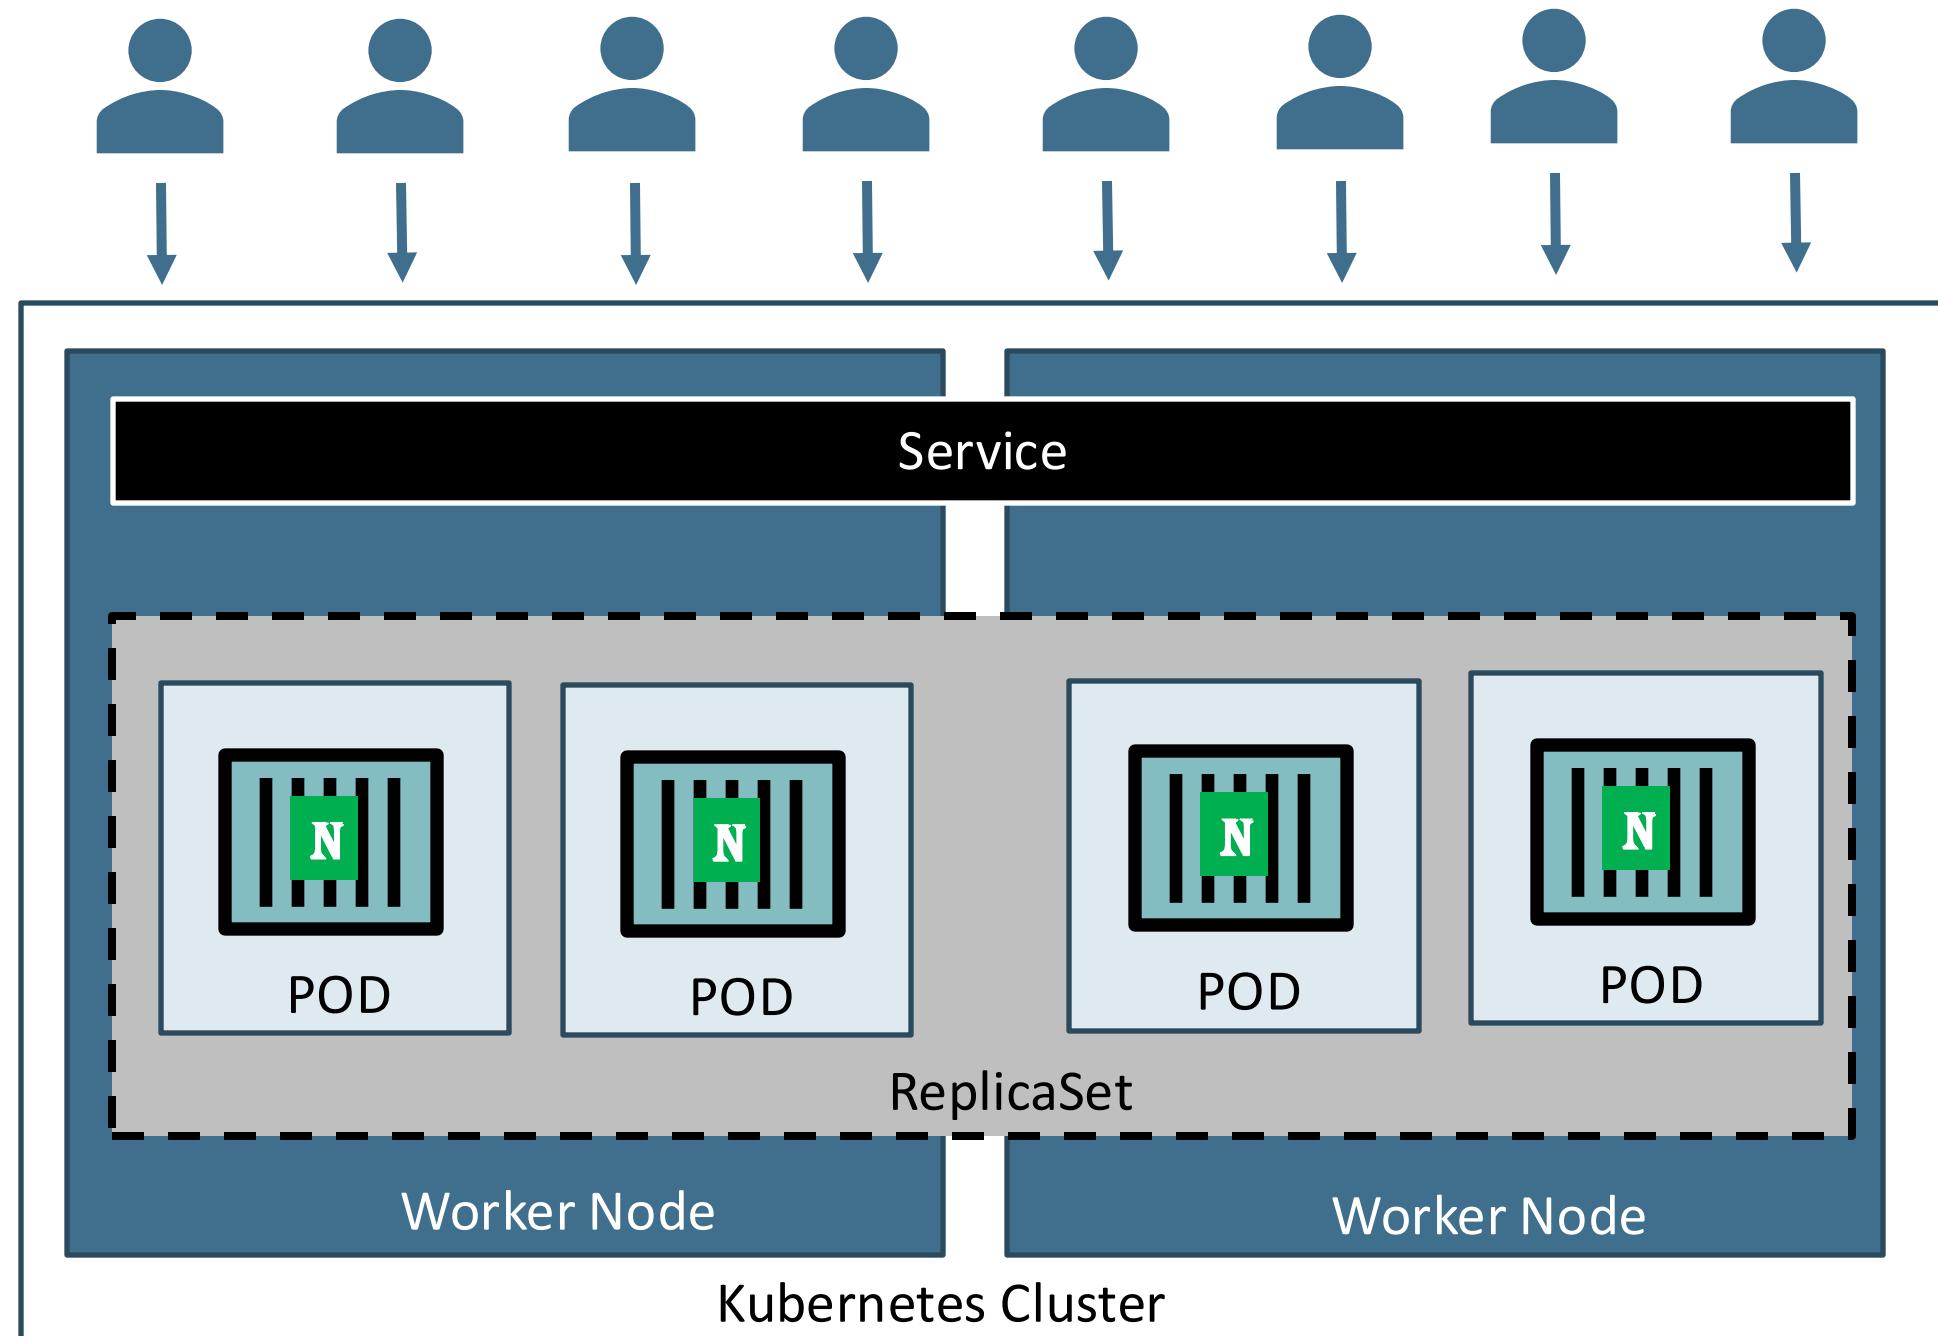

Kubernetes – ReplicaSet

- Scaling
- When load become too much for the number of existing pods, Kubernetes enables us to easily **scale** up our application, adding additional pods as needed.
- This is going to be **seamless and super quick**.

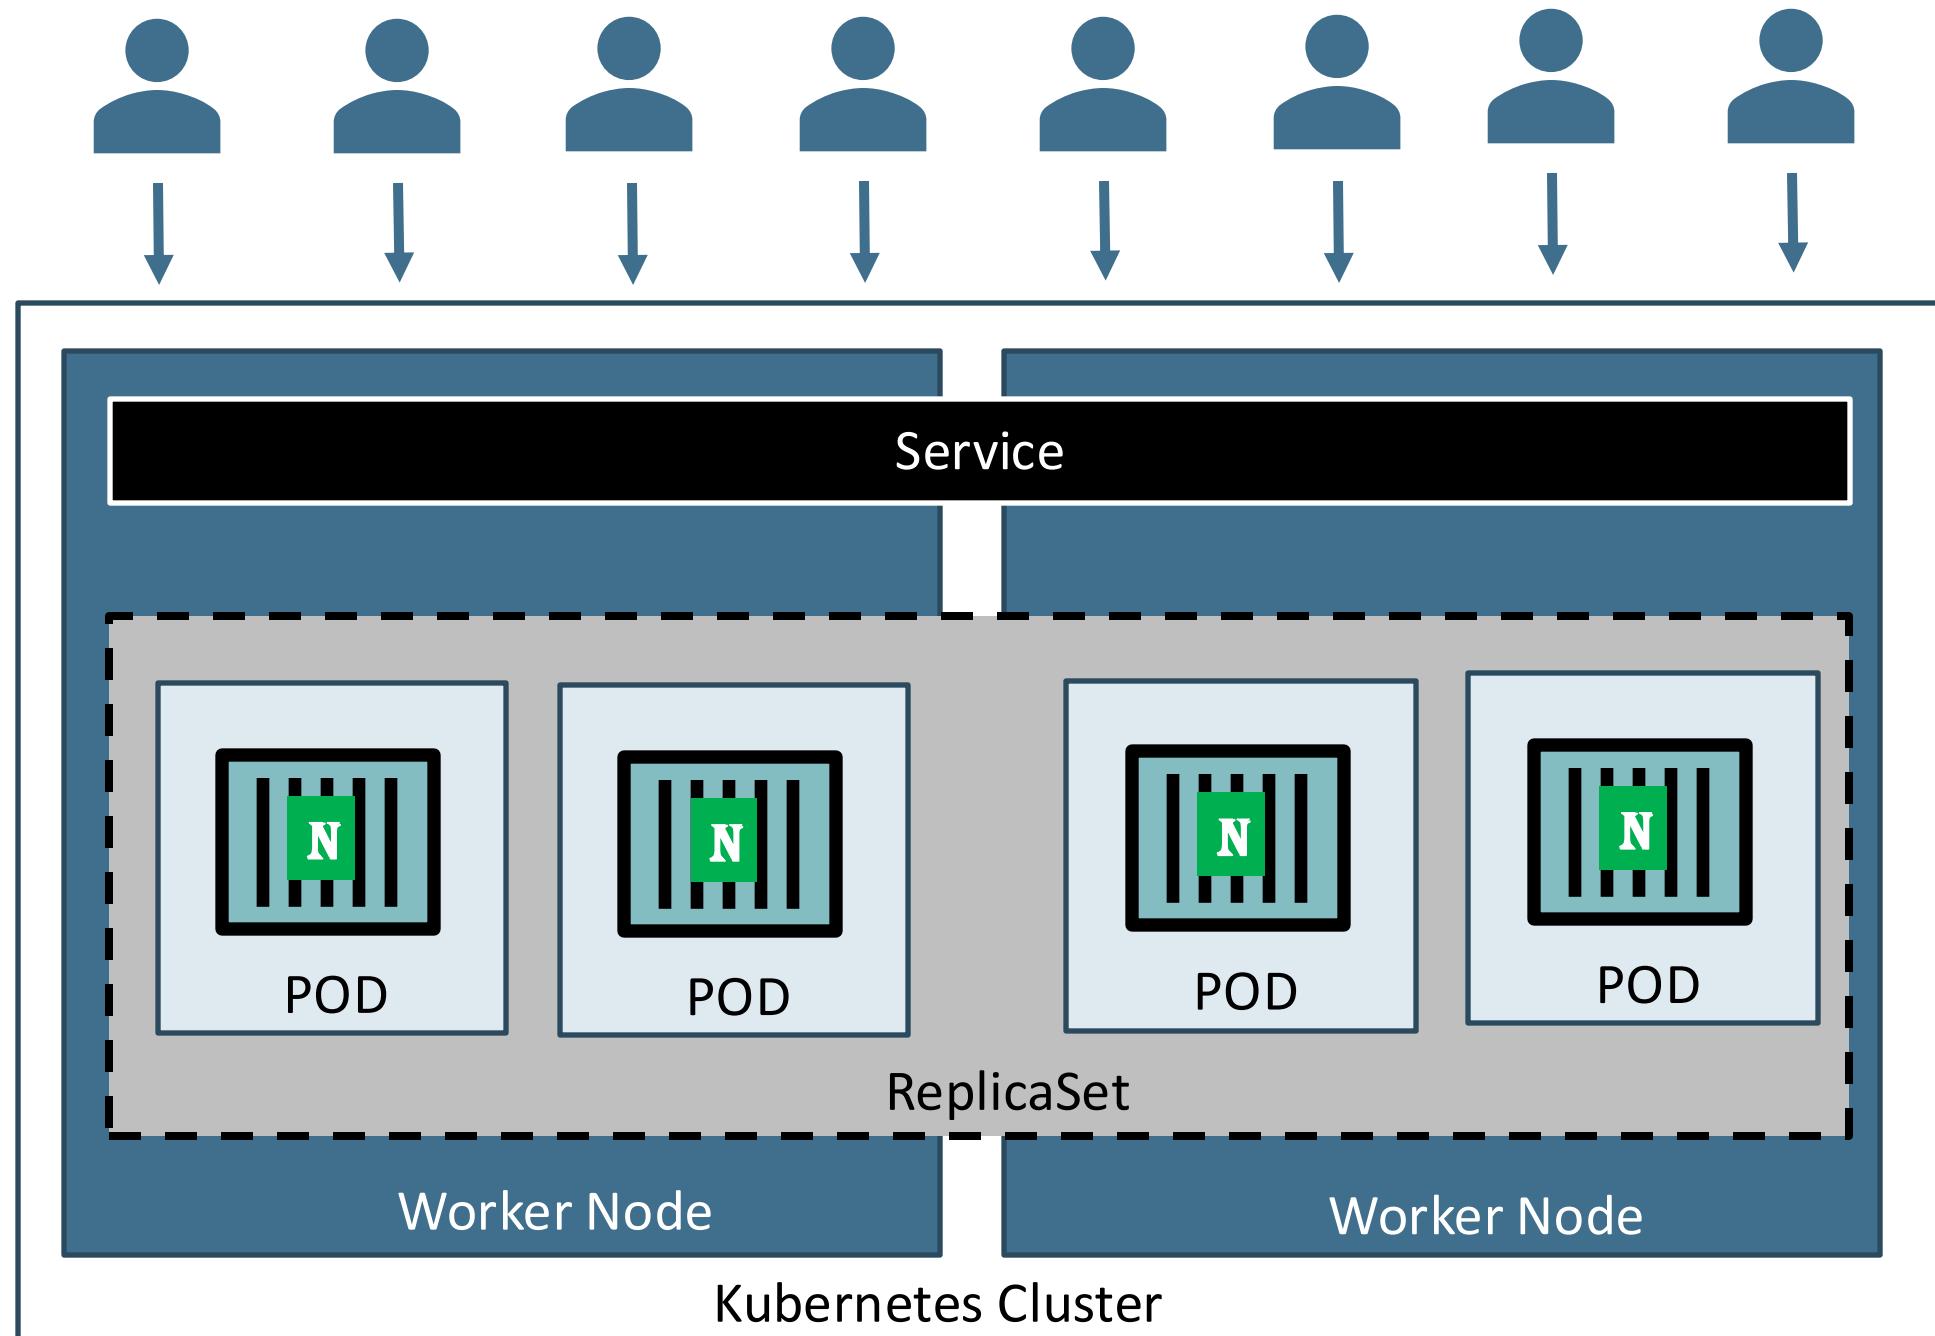


Kubernetes ReplicaSets Demo




Kubernetes Deployments



Kubernetes – Deployments

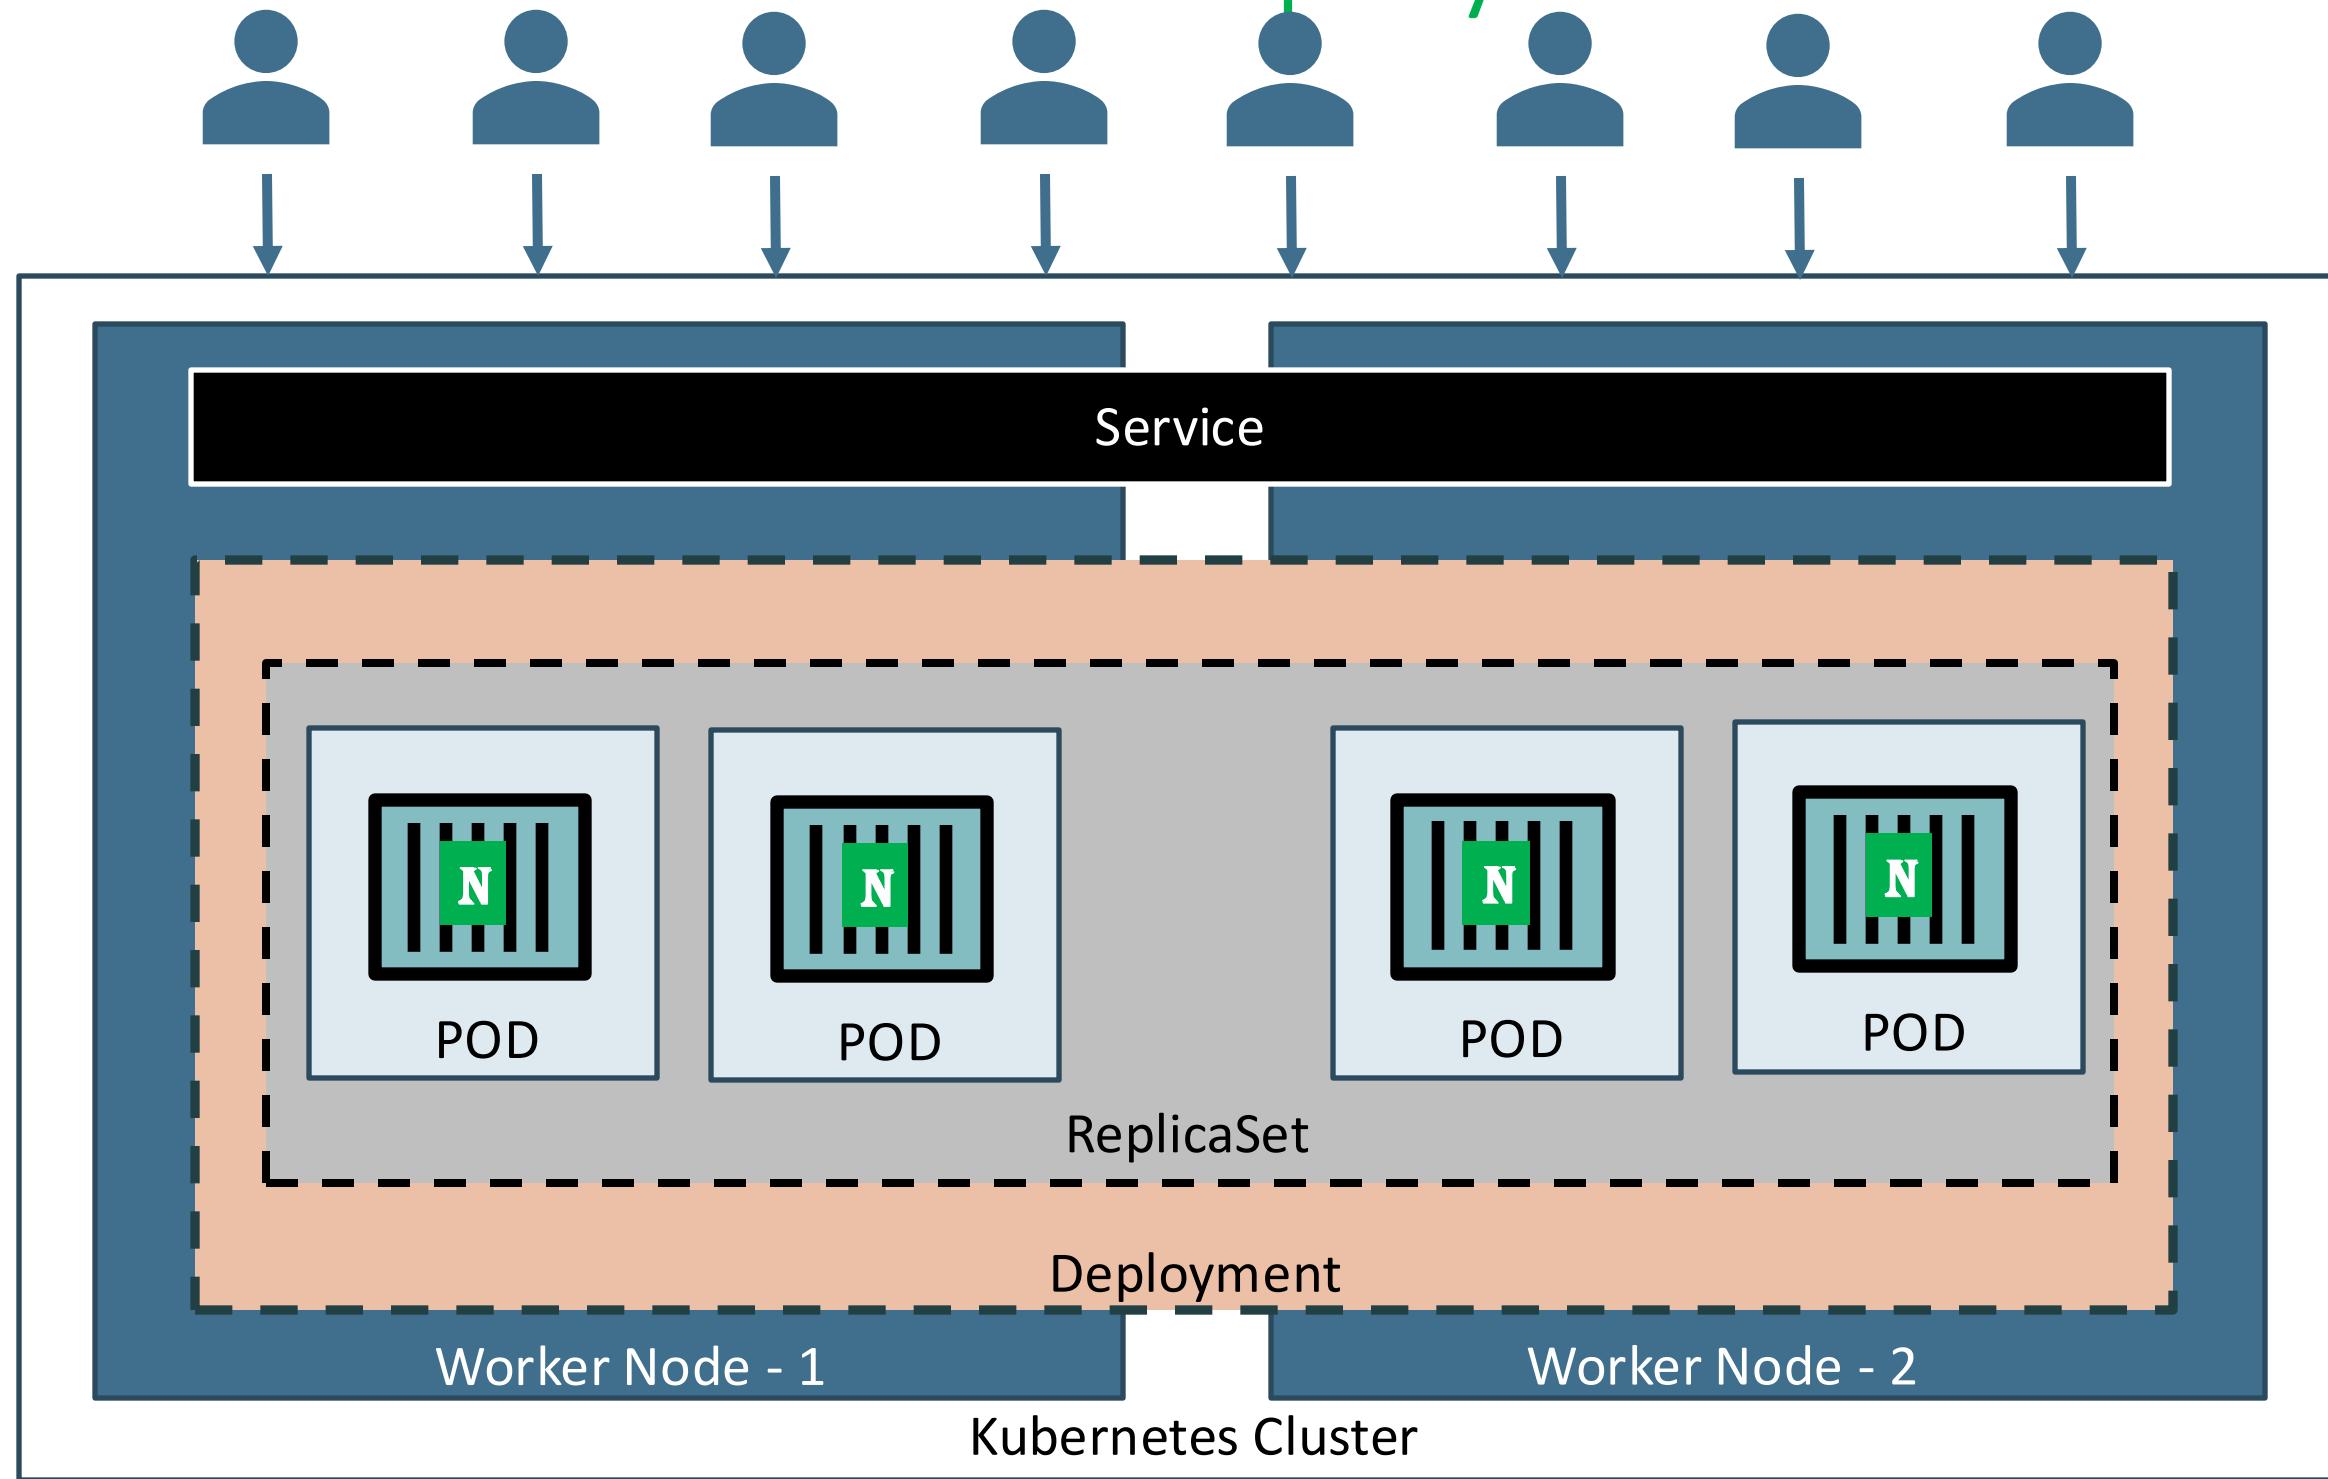

Kubernetes - Deployment

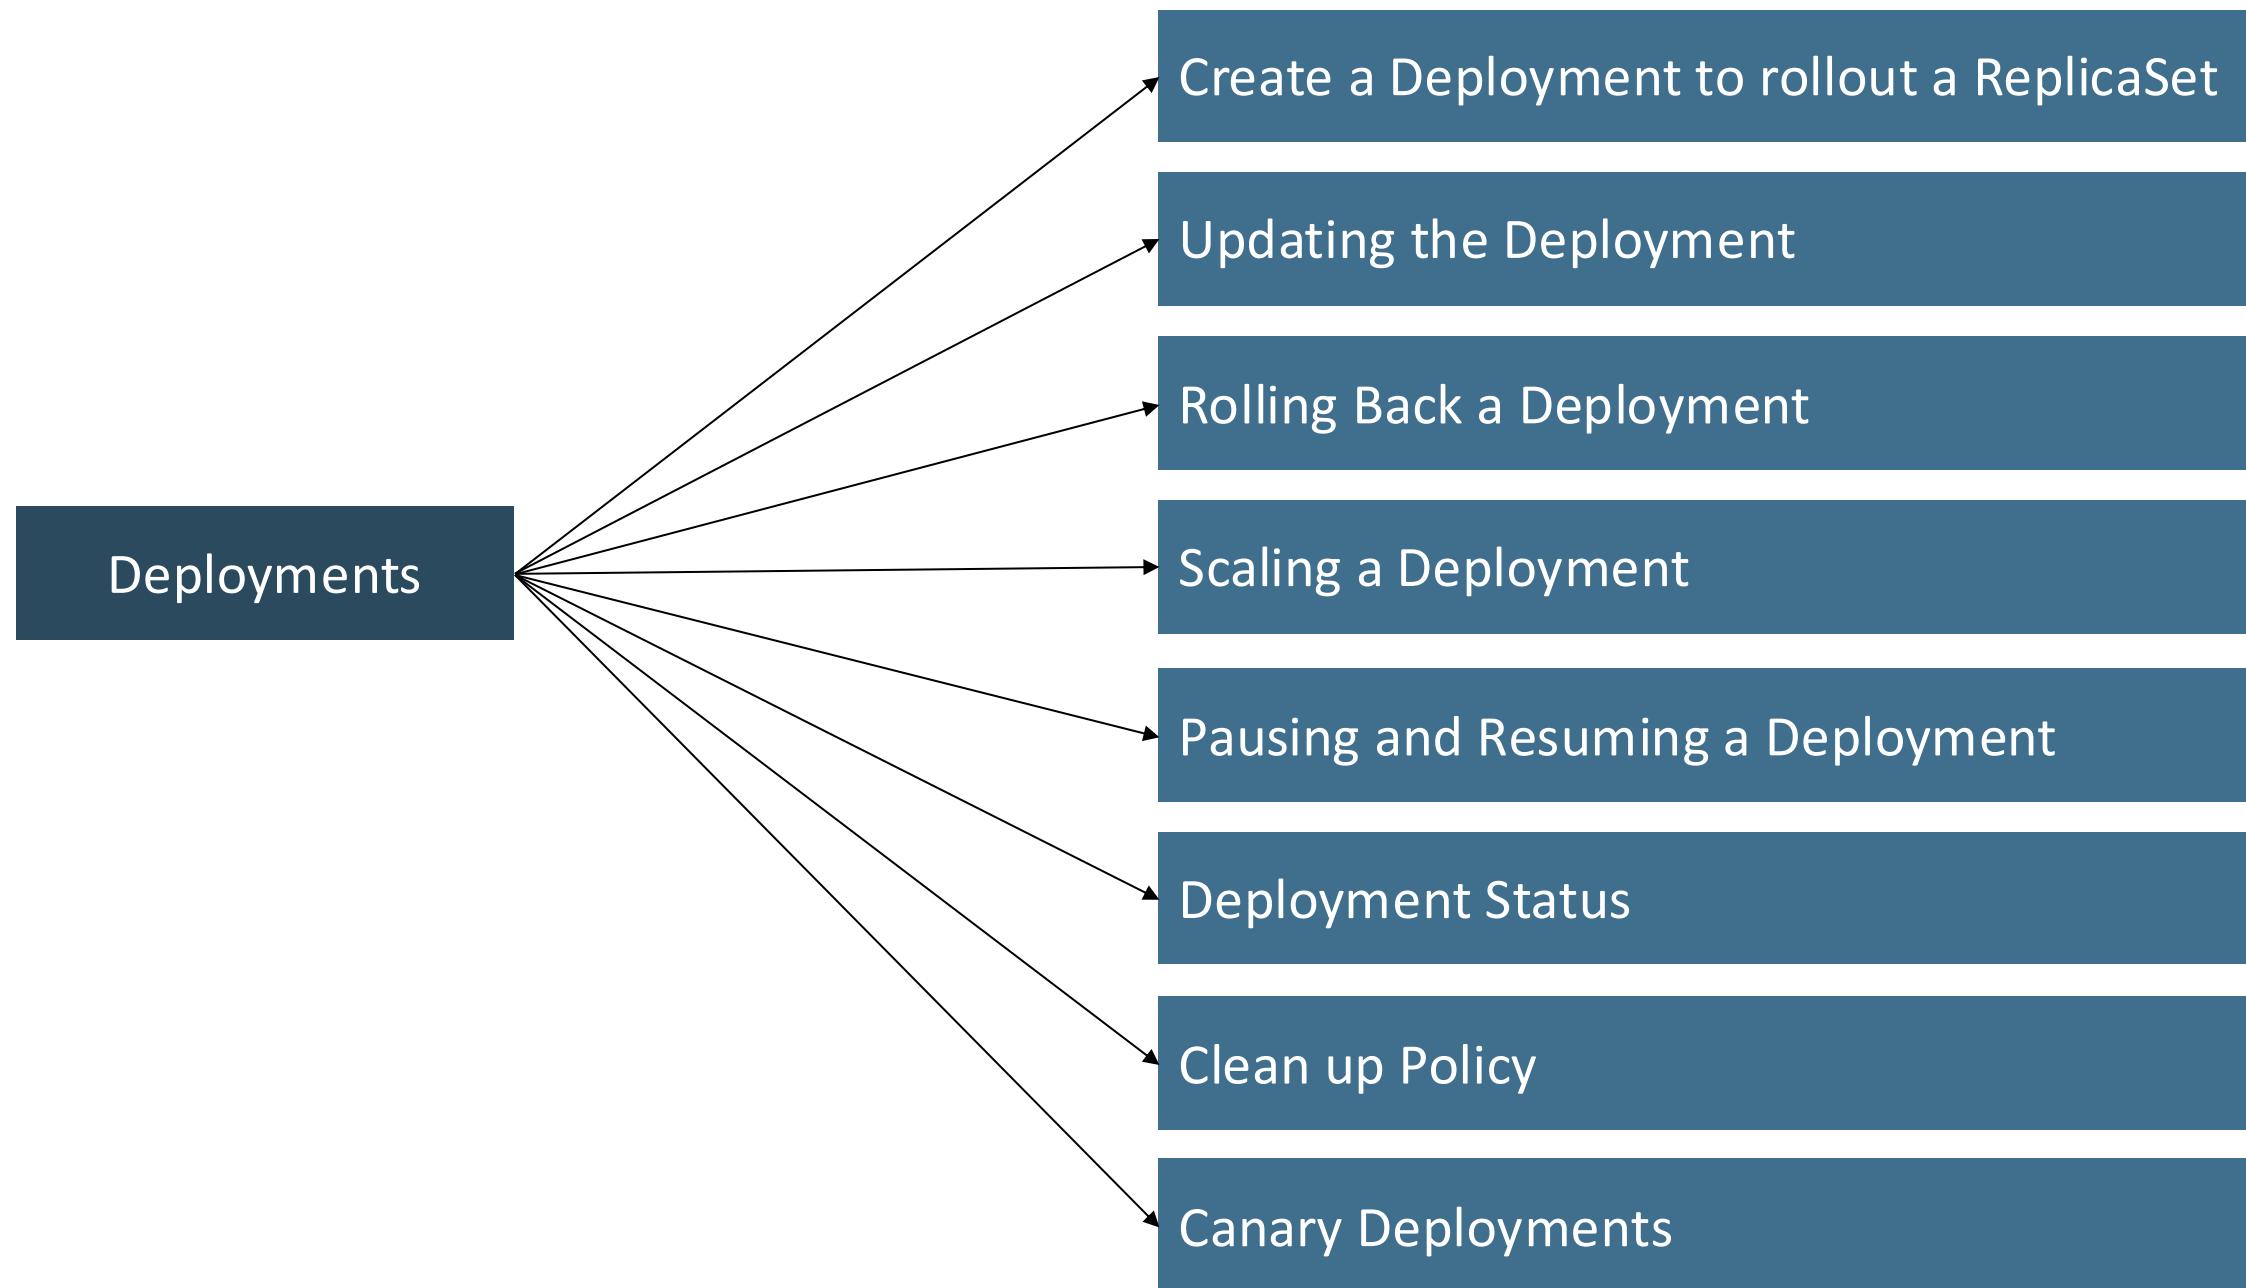


Kubernetes Deployments Demo




Kubernetes Services



Kubernetes - Services

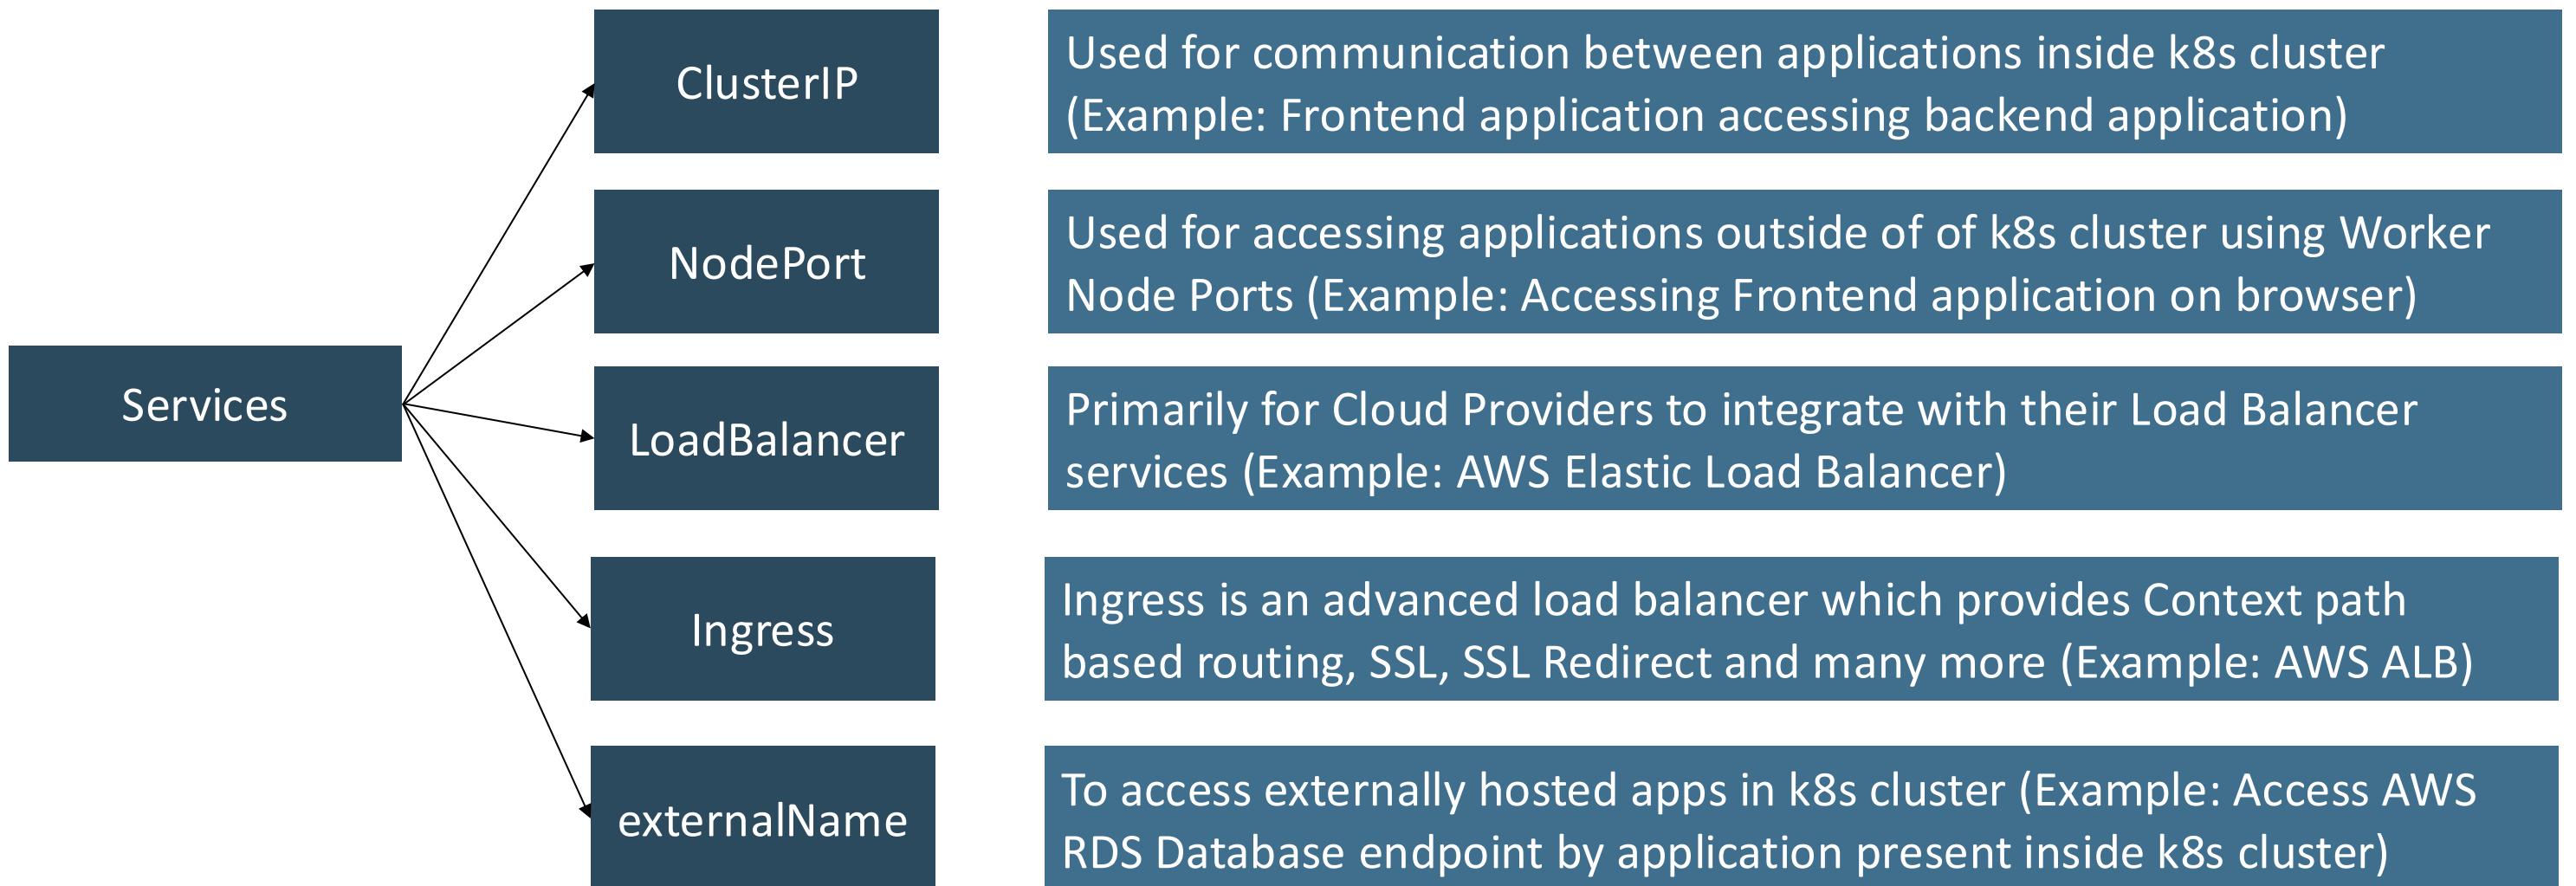

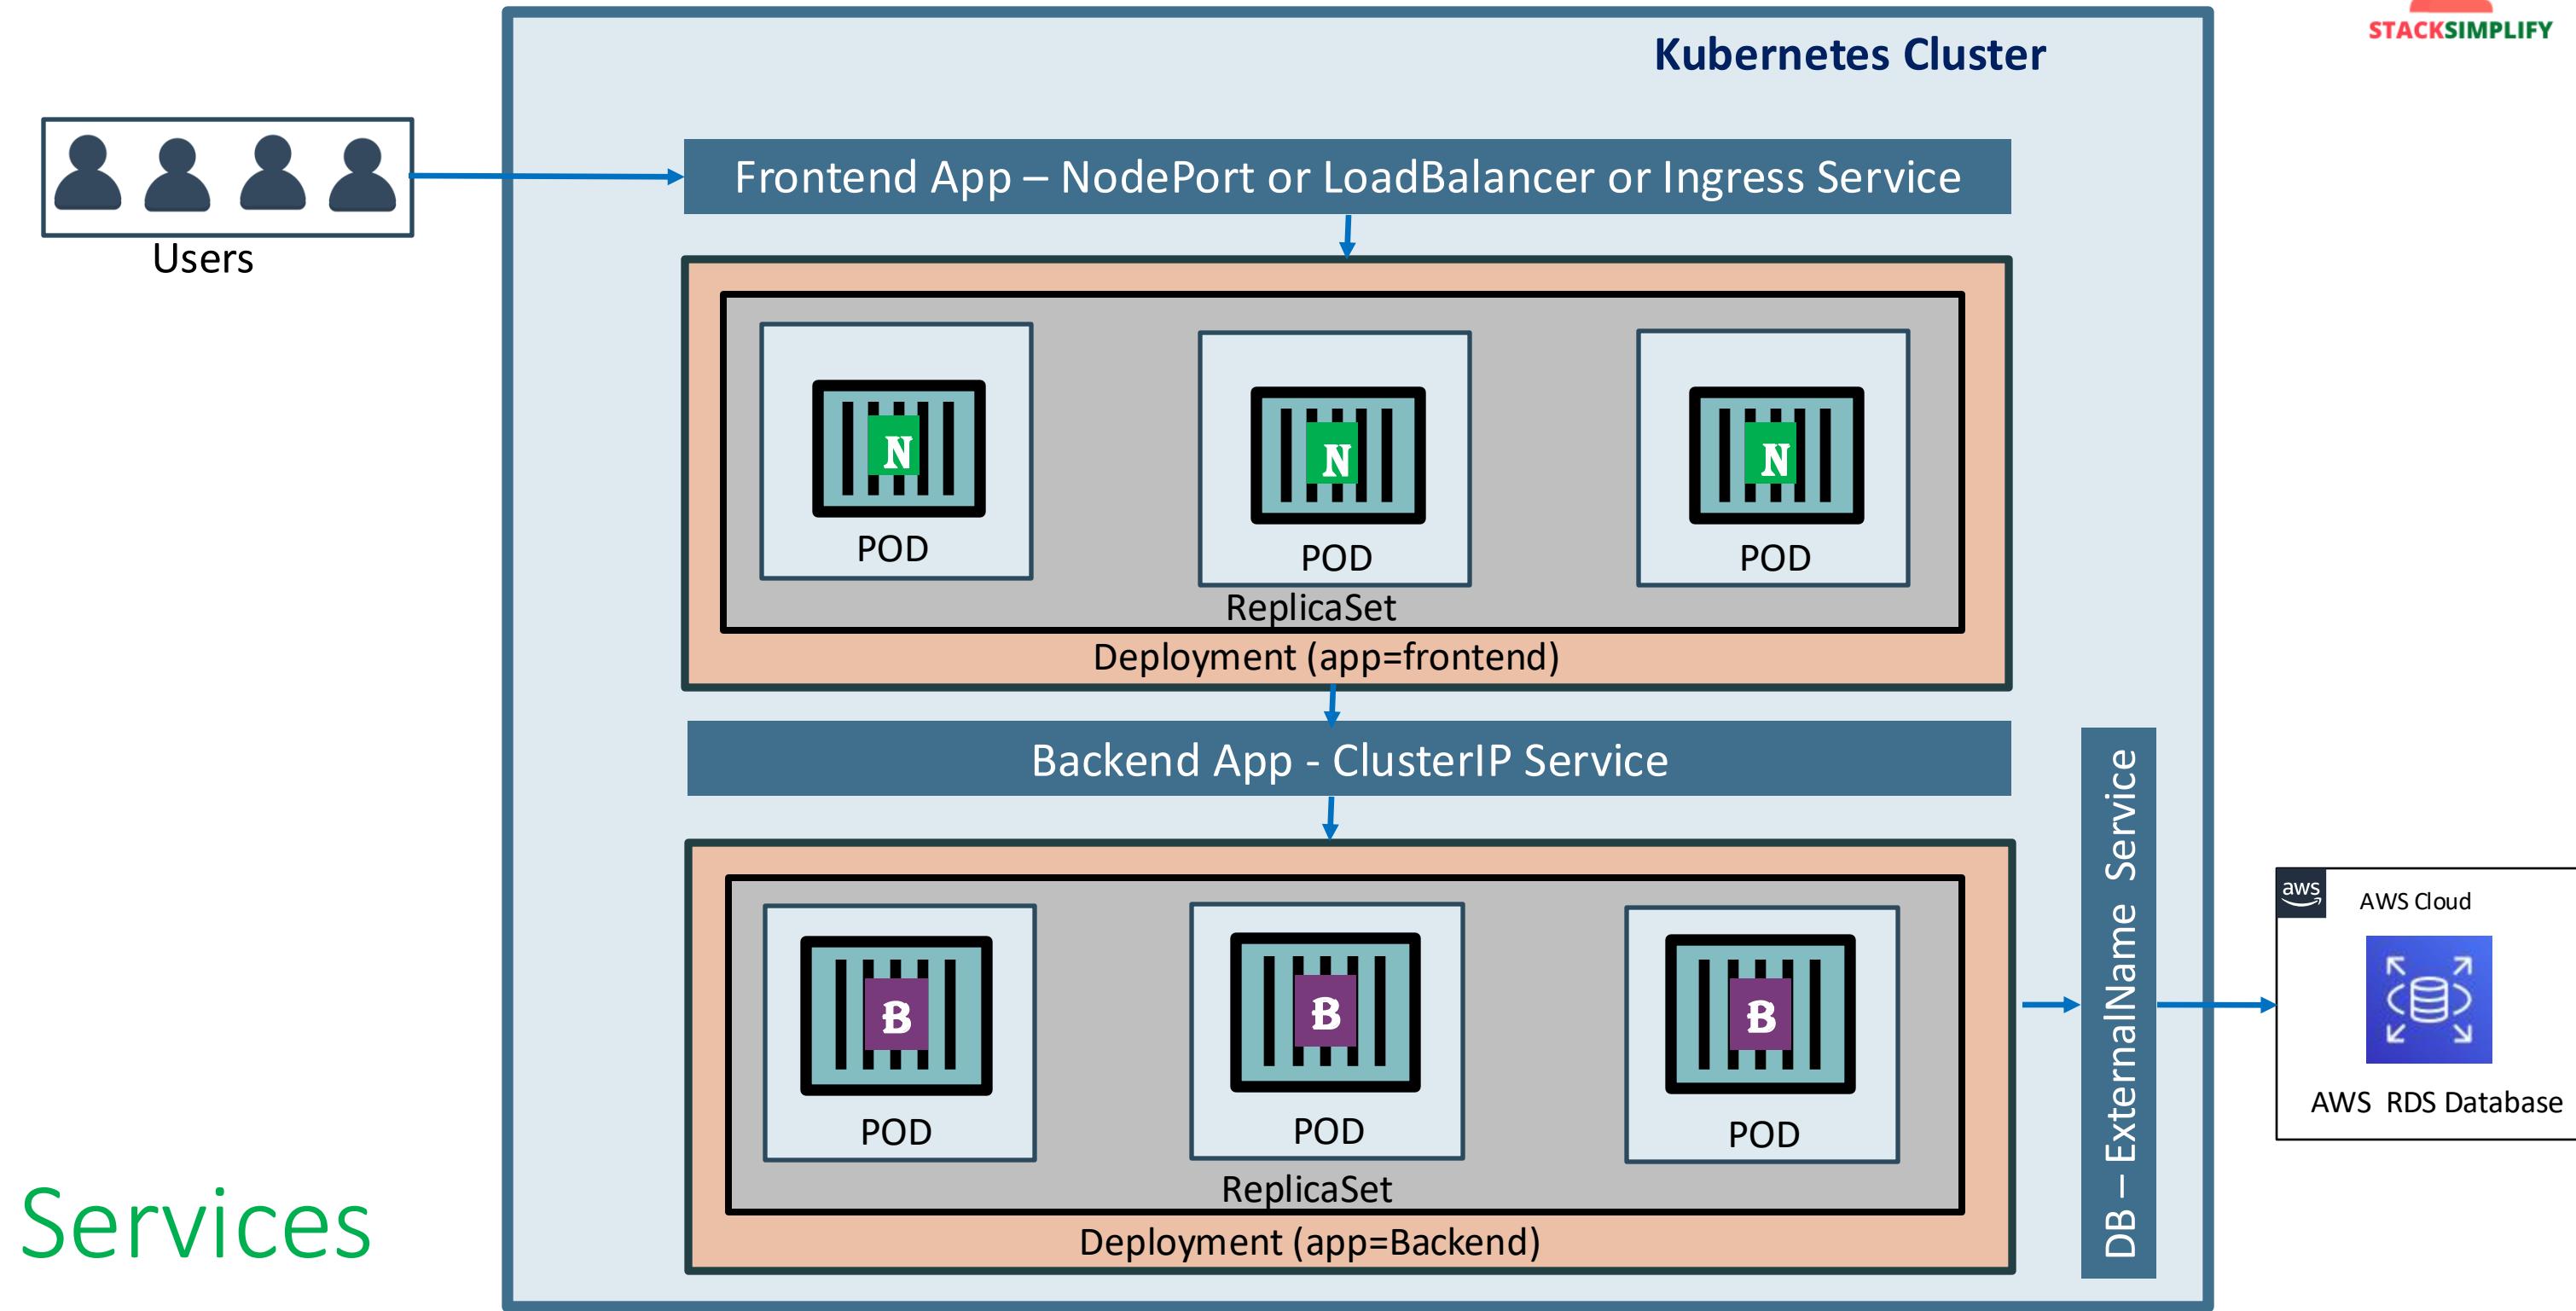


Services

Kubernetes Services Demo



Services Demo

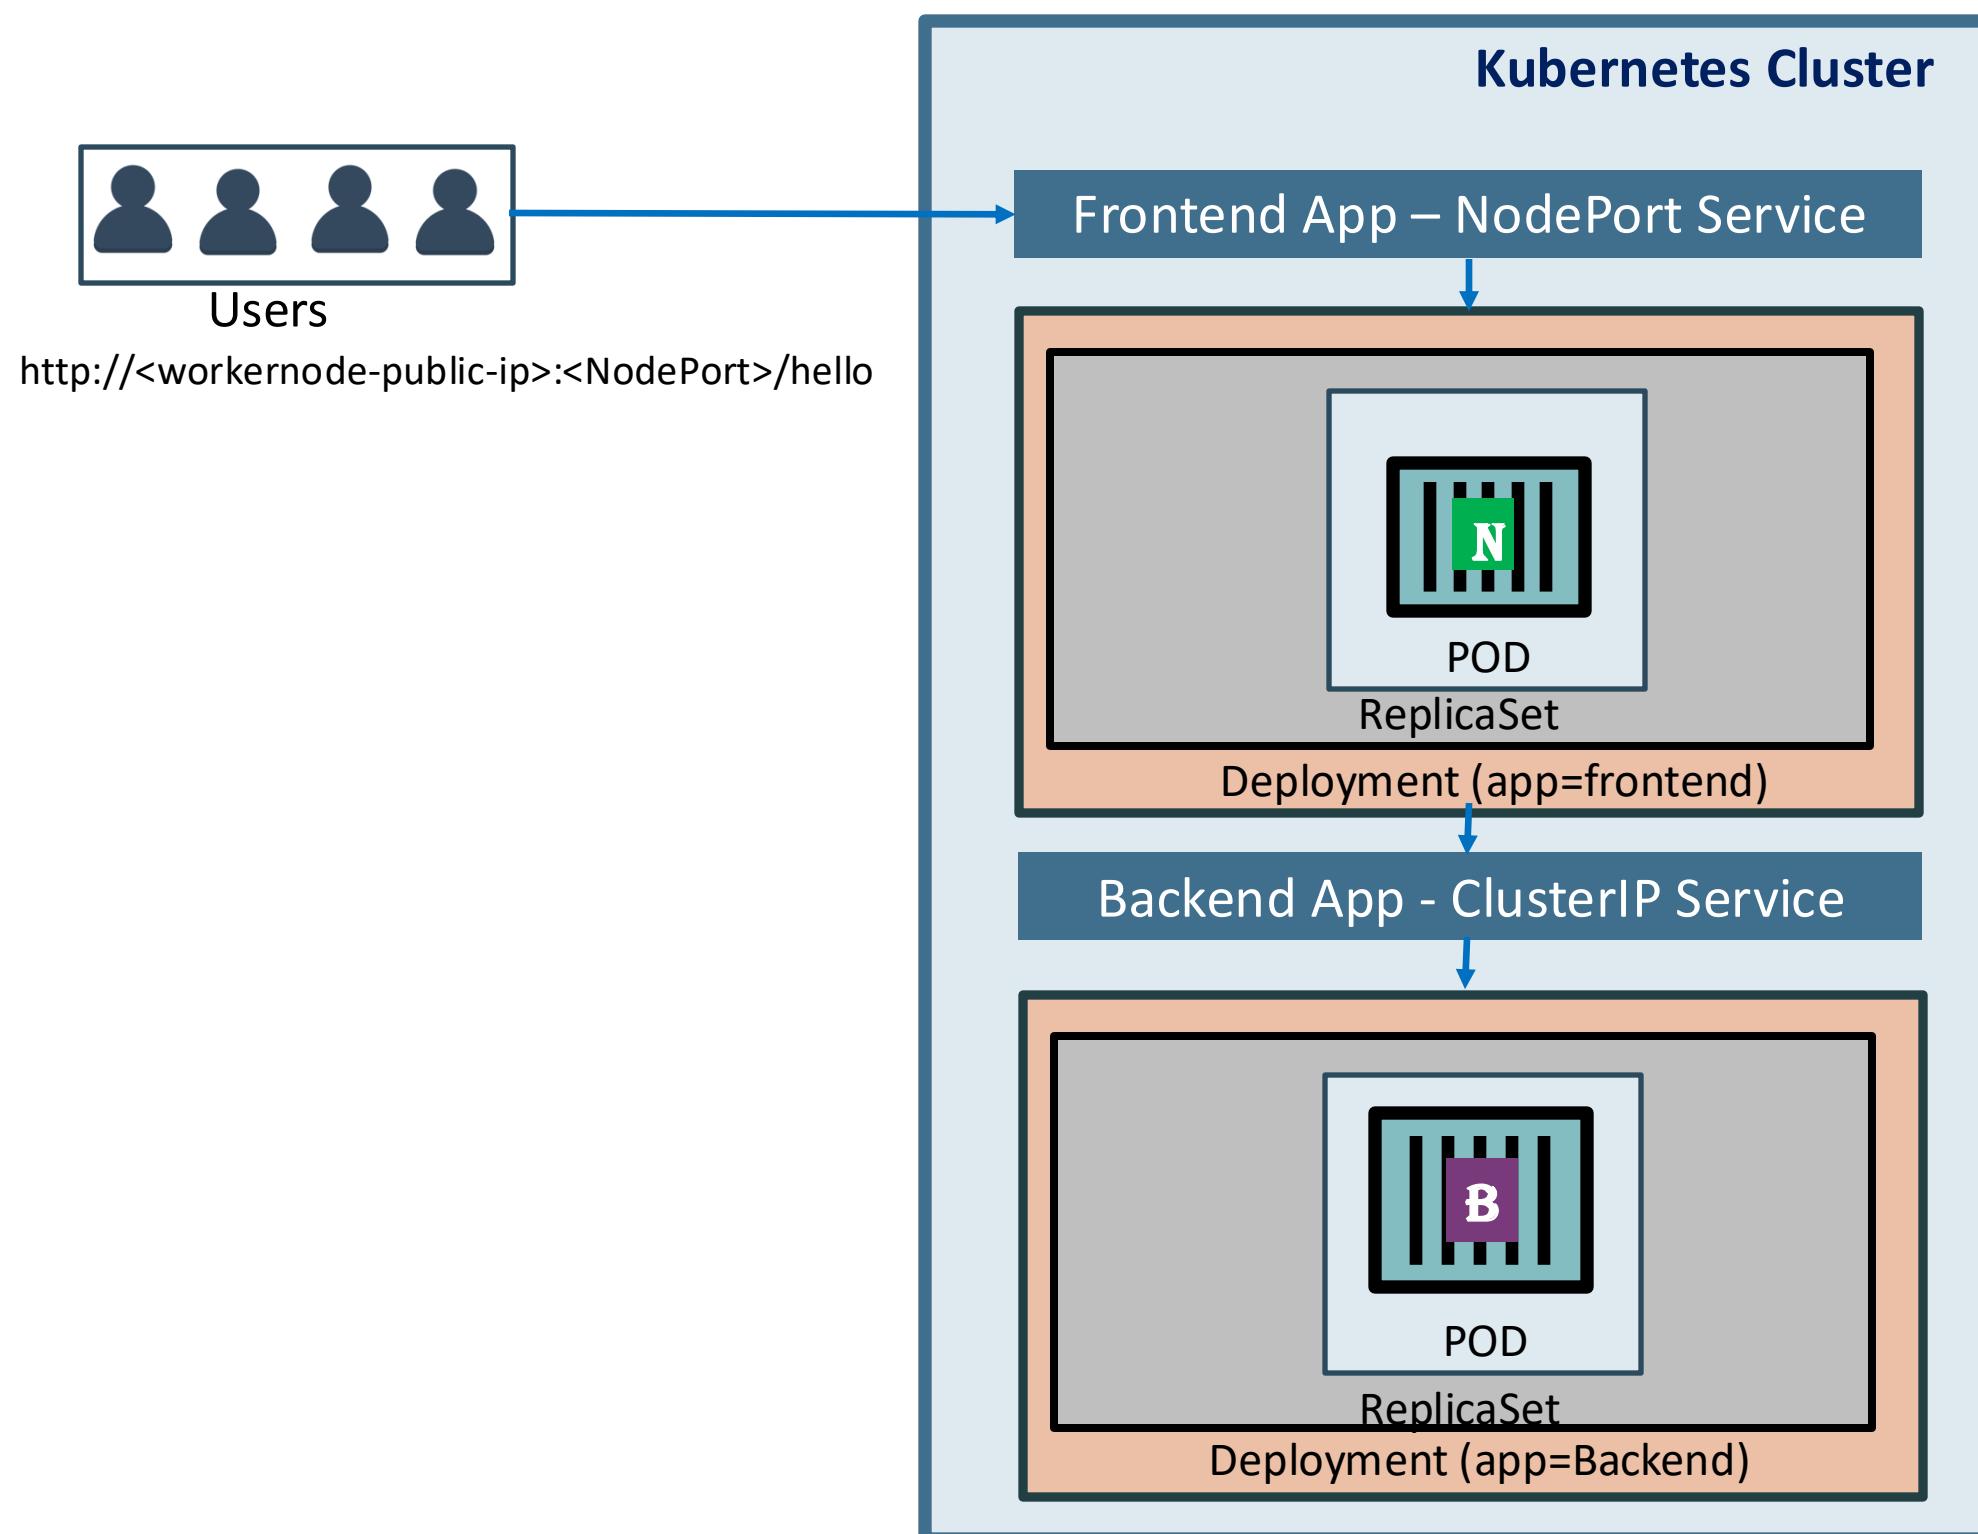

Kubernetes YAML Basics



YAML Basics

- YAML is **not** a Markup Language
- YAML is used to **store information** about different things
- We can use YAML to **define key, Value pairs** like variables, lists and objects
- YAML is very similar to **JSON** (Javascript Object Notation)
- YAML primarily focuses on **readability** and **user friendliness**
- YAML is designed to be **clean and easy to read**
- We can define YAML files with two different extensions
 - abc.**yml**
 - abc.**yaml**


YAML Basics

- YAML Comments
- YAML Key Value Pairs
- YAML Dictionary or Map
- YAML Array / Lists
- YAML Spaces
- YAML Document Separator




AWS EKS Storage



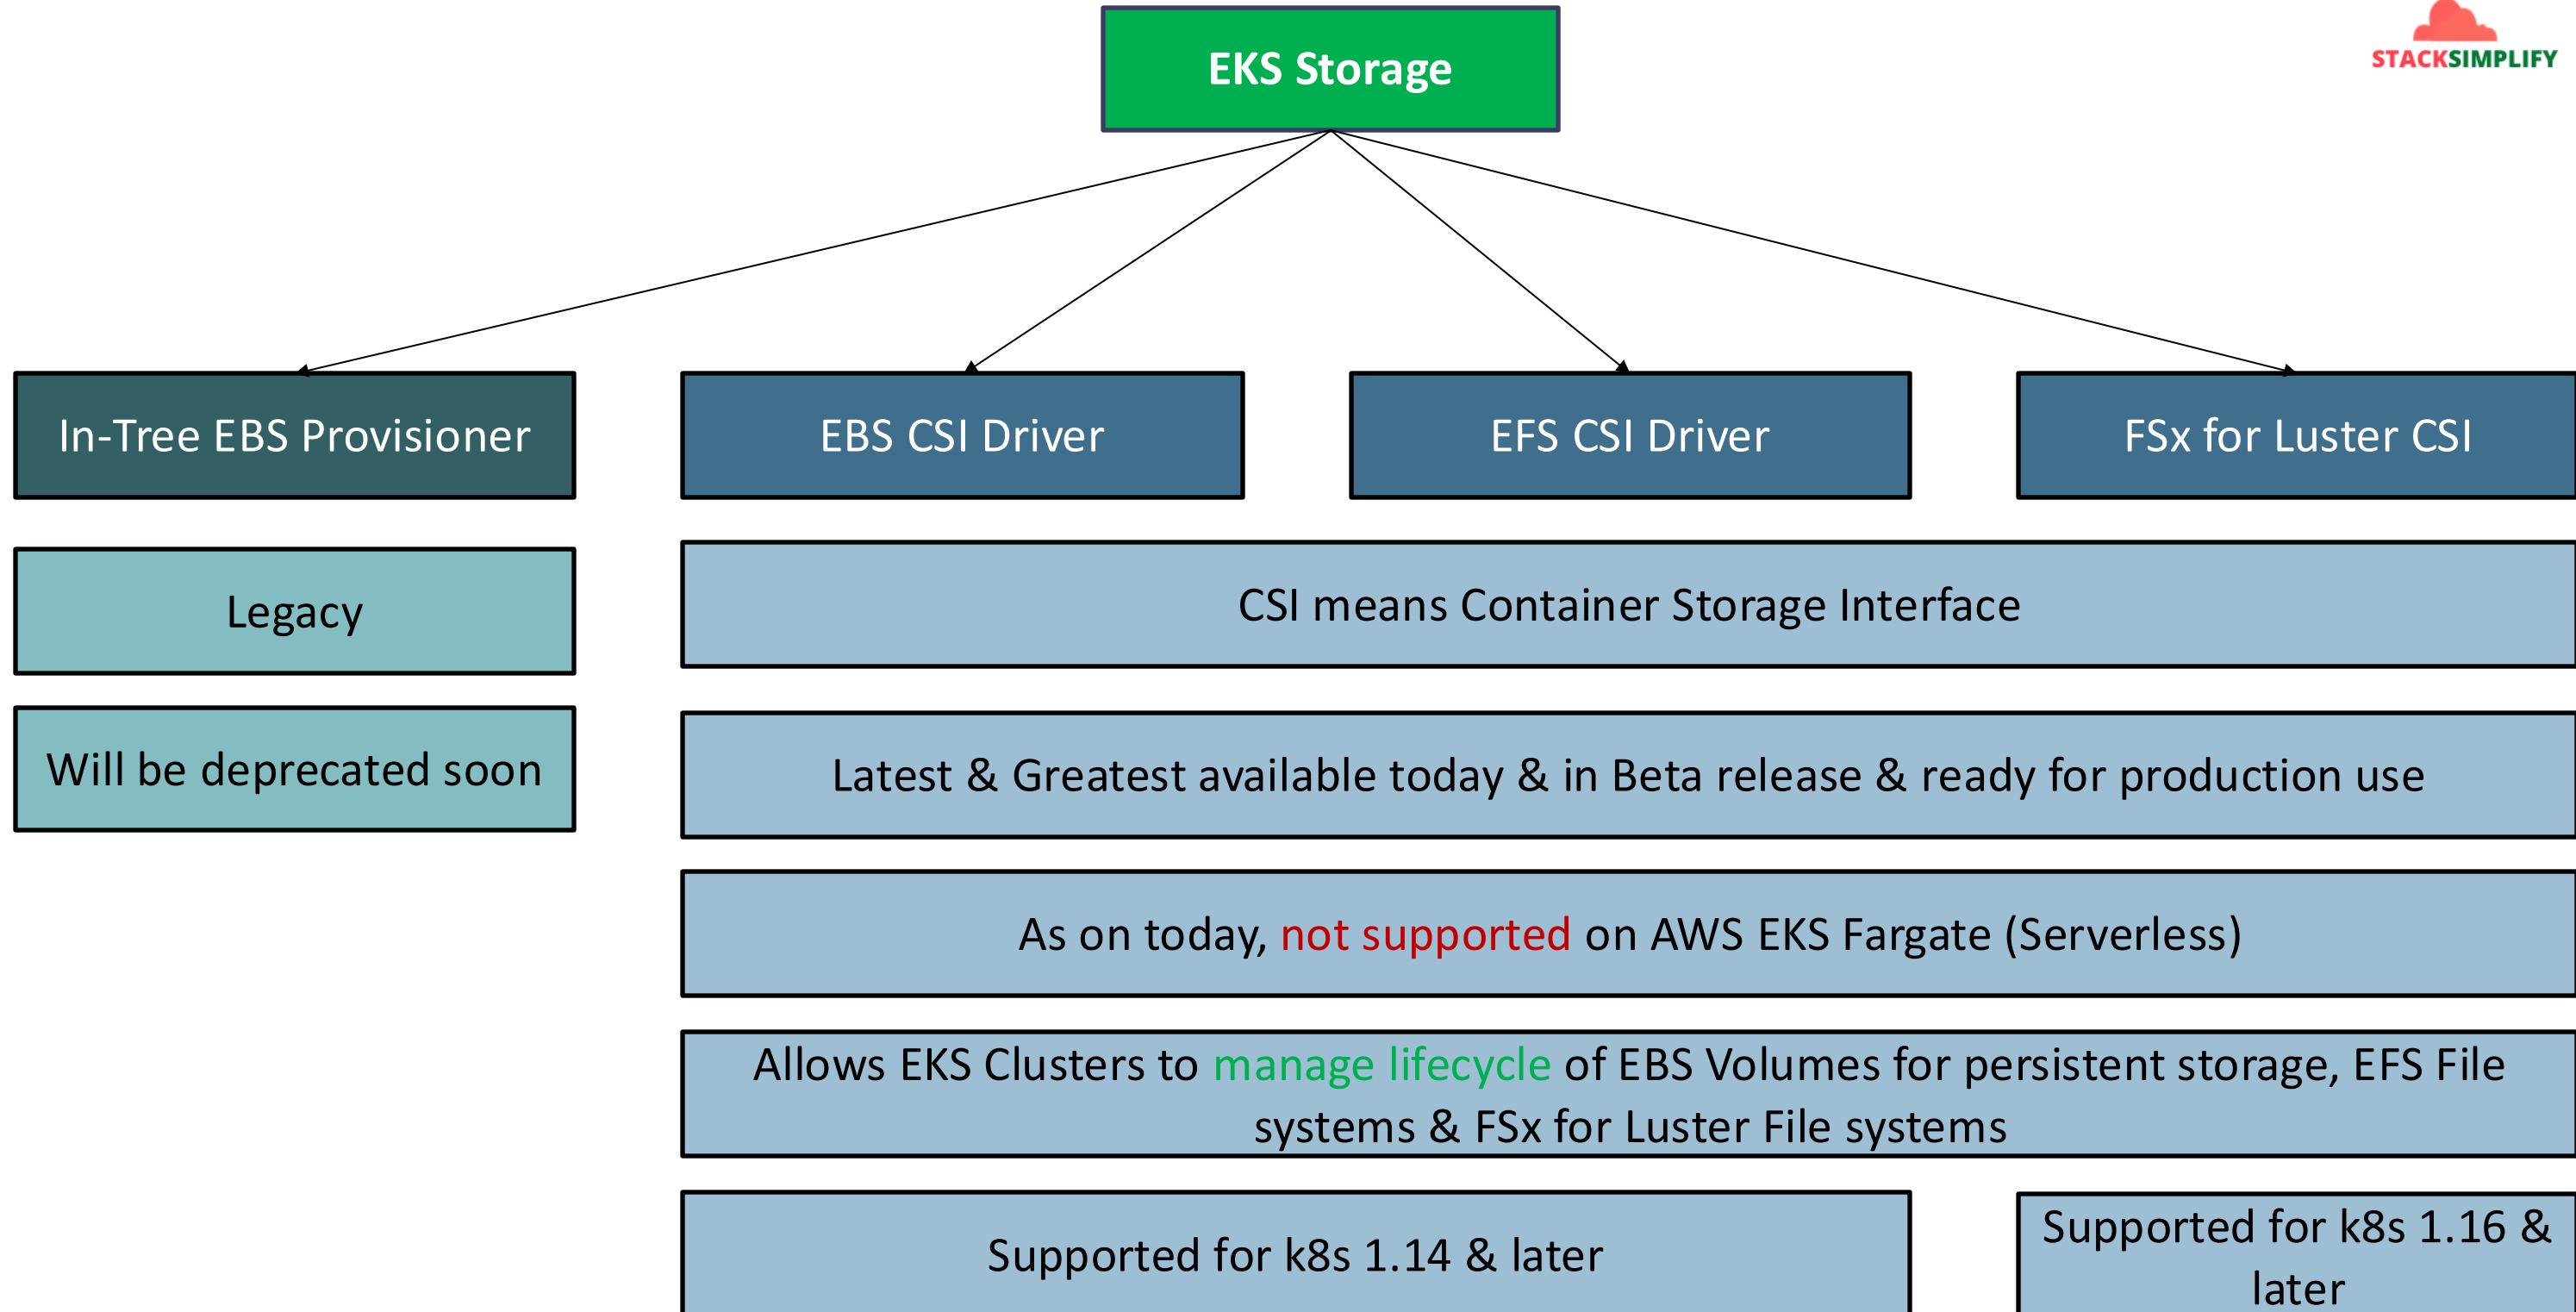



AWS EKS Storage EBS CSI Driver

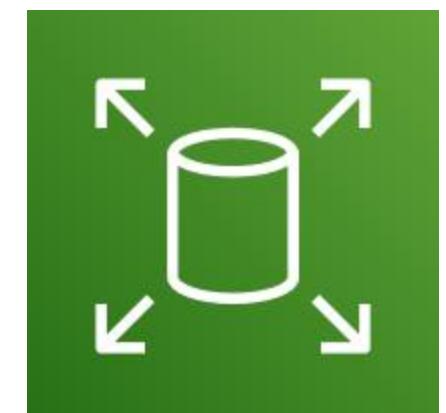


AWS Elastic Block Store - Introduction

- EBS provides **block level storage volumes** for use with **EC2 & Container instances**.
- We can mount these **volumes as devices** on our EC2 & Container instances.
- EBS volumes that are attached to an instance are **exposed as storage volumes that persist independently** from the life of the EC2 or Container instance.
- We can **dynamically change** the configuration of a volume attached to an instance.
- AWS recommends EBS for data that must be **quickly accessible** and requires **long-term persistence**.
- EBS is well suited to both **database-style applications** that rely on random reads and writes, and to **throughput-intensive applications** that perform long, continuous reads and writes.




EKS Storage EBS CSI Driver

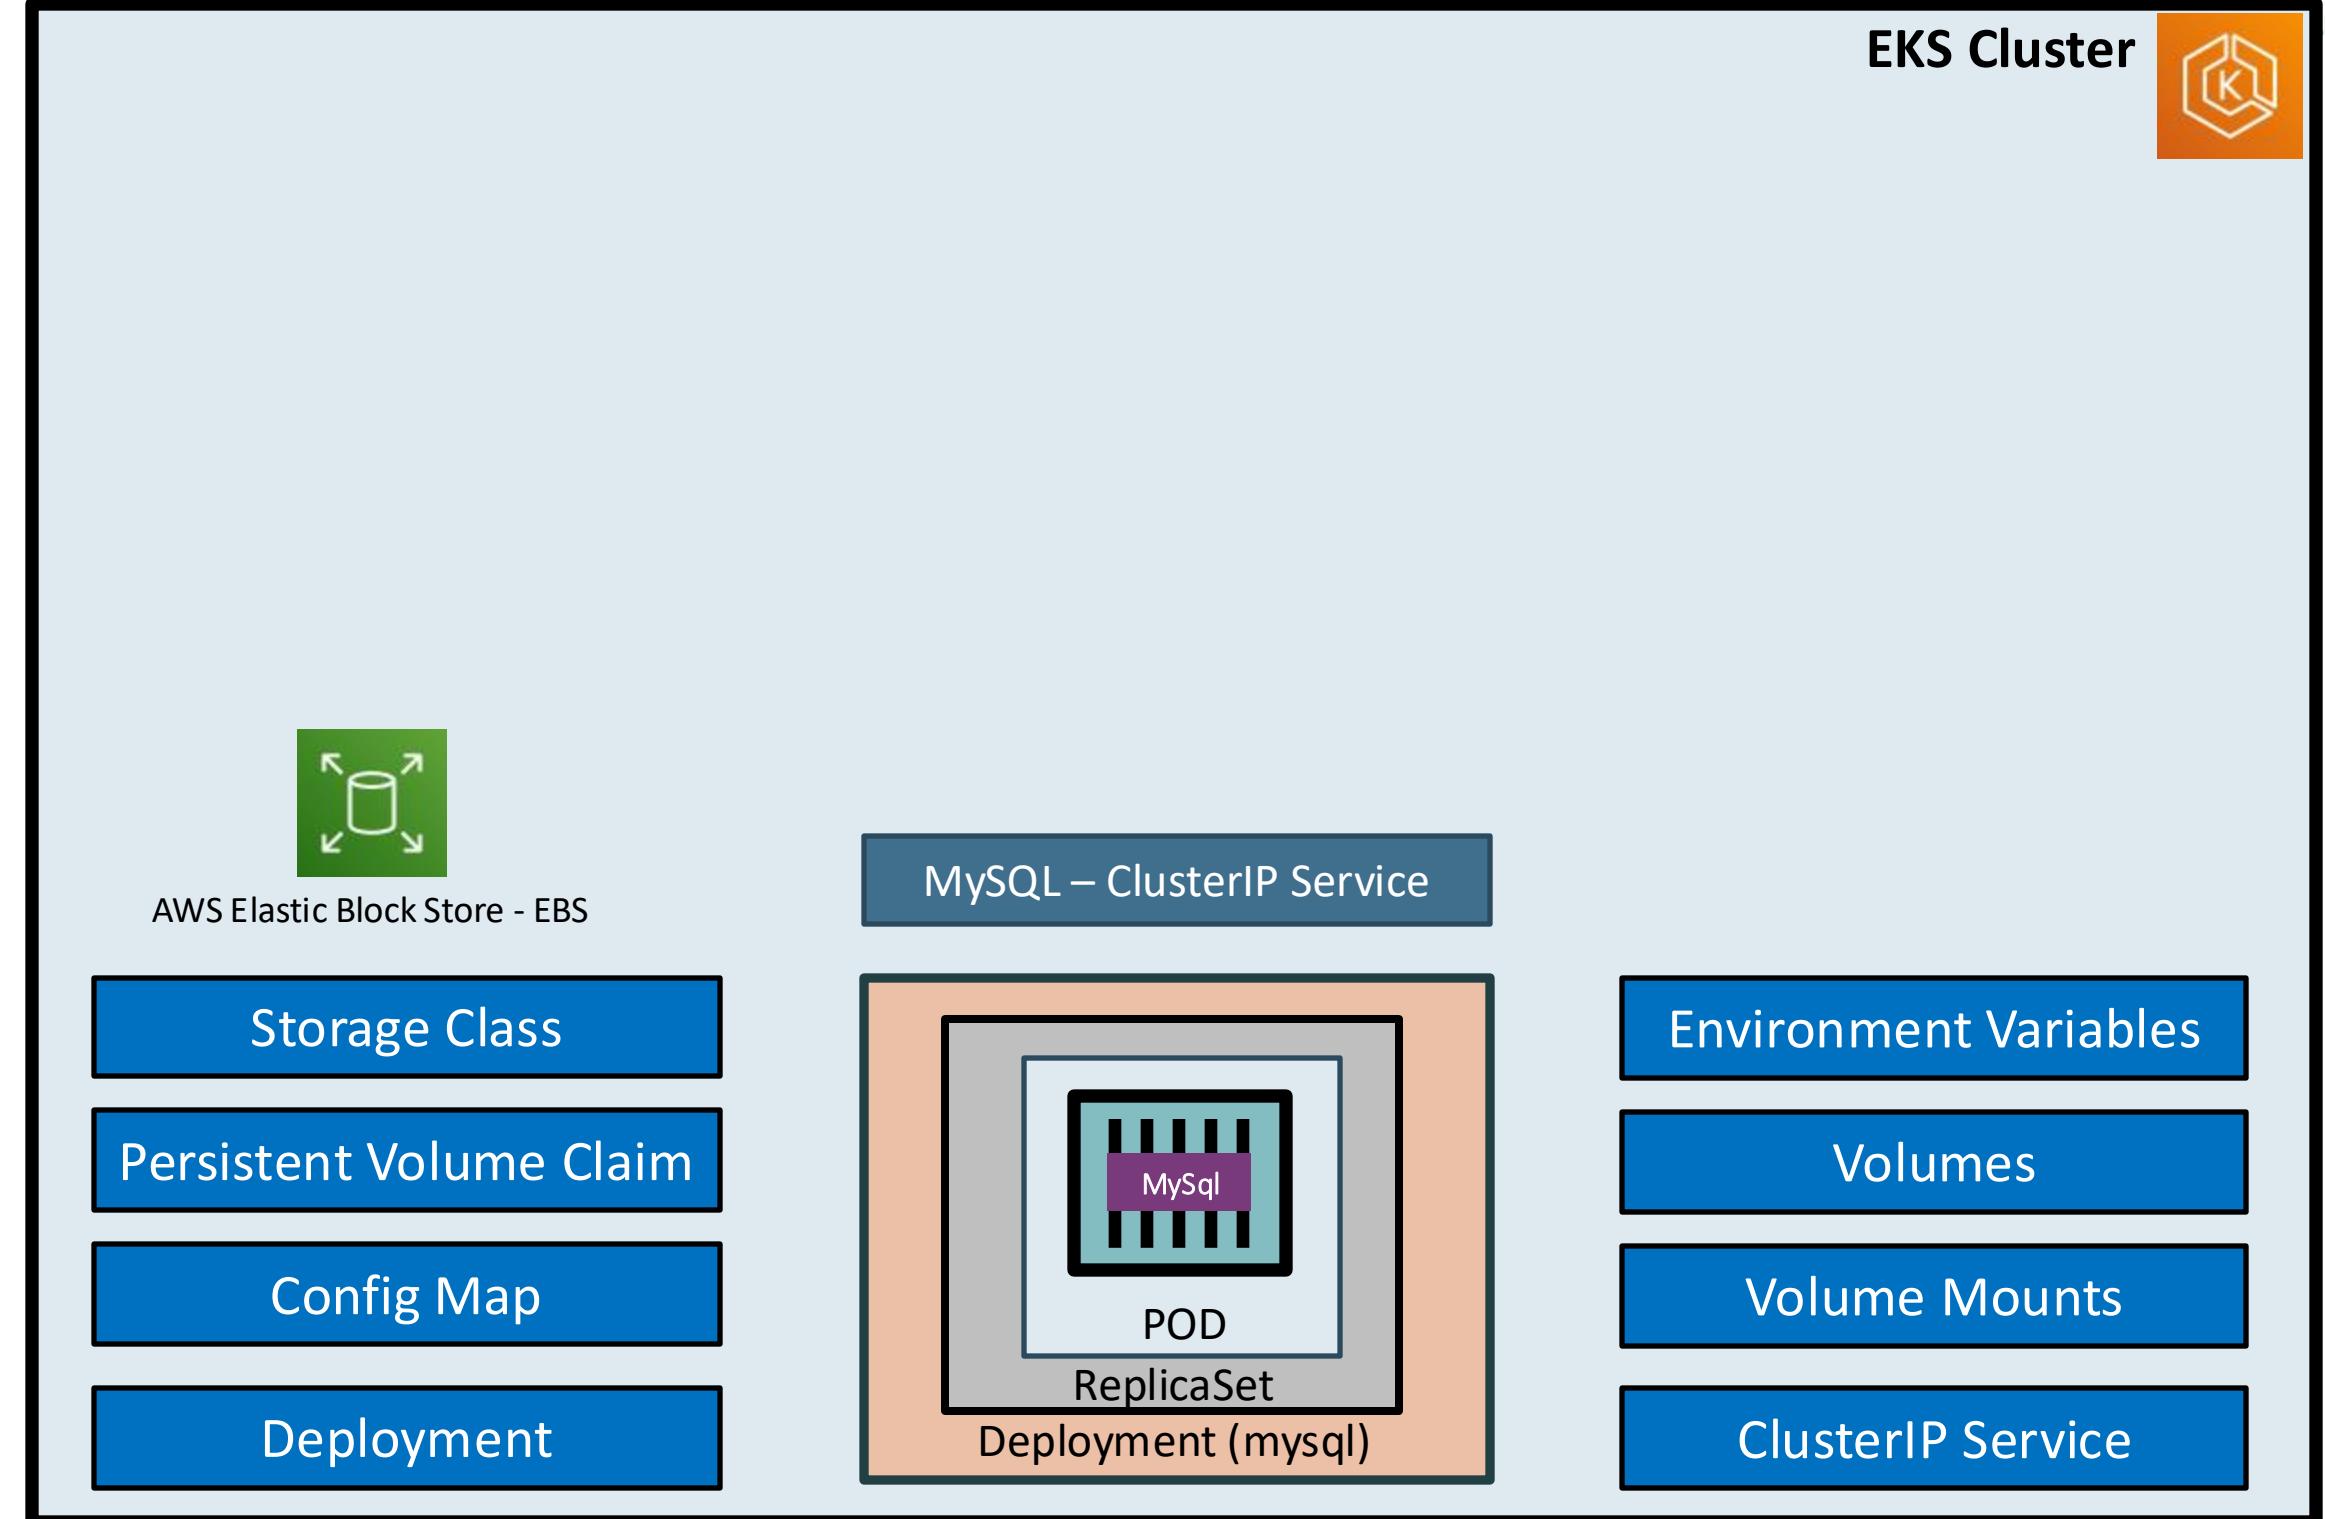

EKS Cluster



EKS Storage EBS CSI Driver

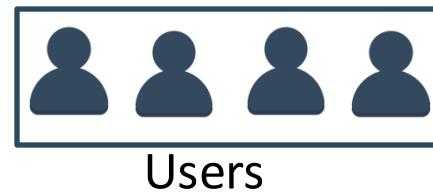

`http://<workernode-public-ip>:<NodePort>/usermgmt/<apis>`

UserMgmt – NodePort Service



POD
ReplicaSet

Deployment (UserMgmt)

NodePort Service

Deployment

Environment Variables



AWS Elastic Block Store - EBS

Storage Class

Persistent Volume Claim

Config Map

Deployment

MySQL – ClusterIP Service



POD
ReplicaSet


Deployment (mysql)

Environment Variables

Volumes

Volume Mounts

ClusterIP Service

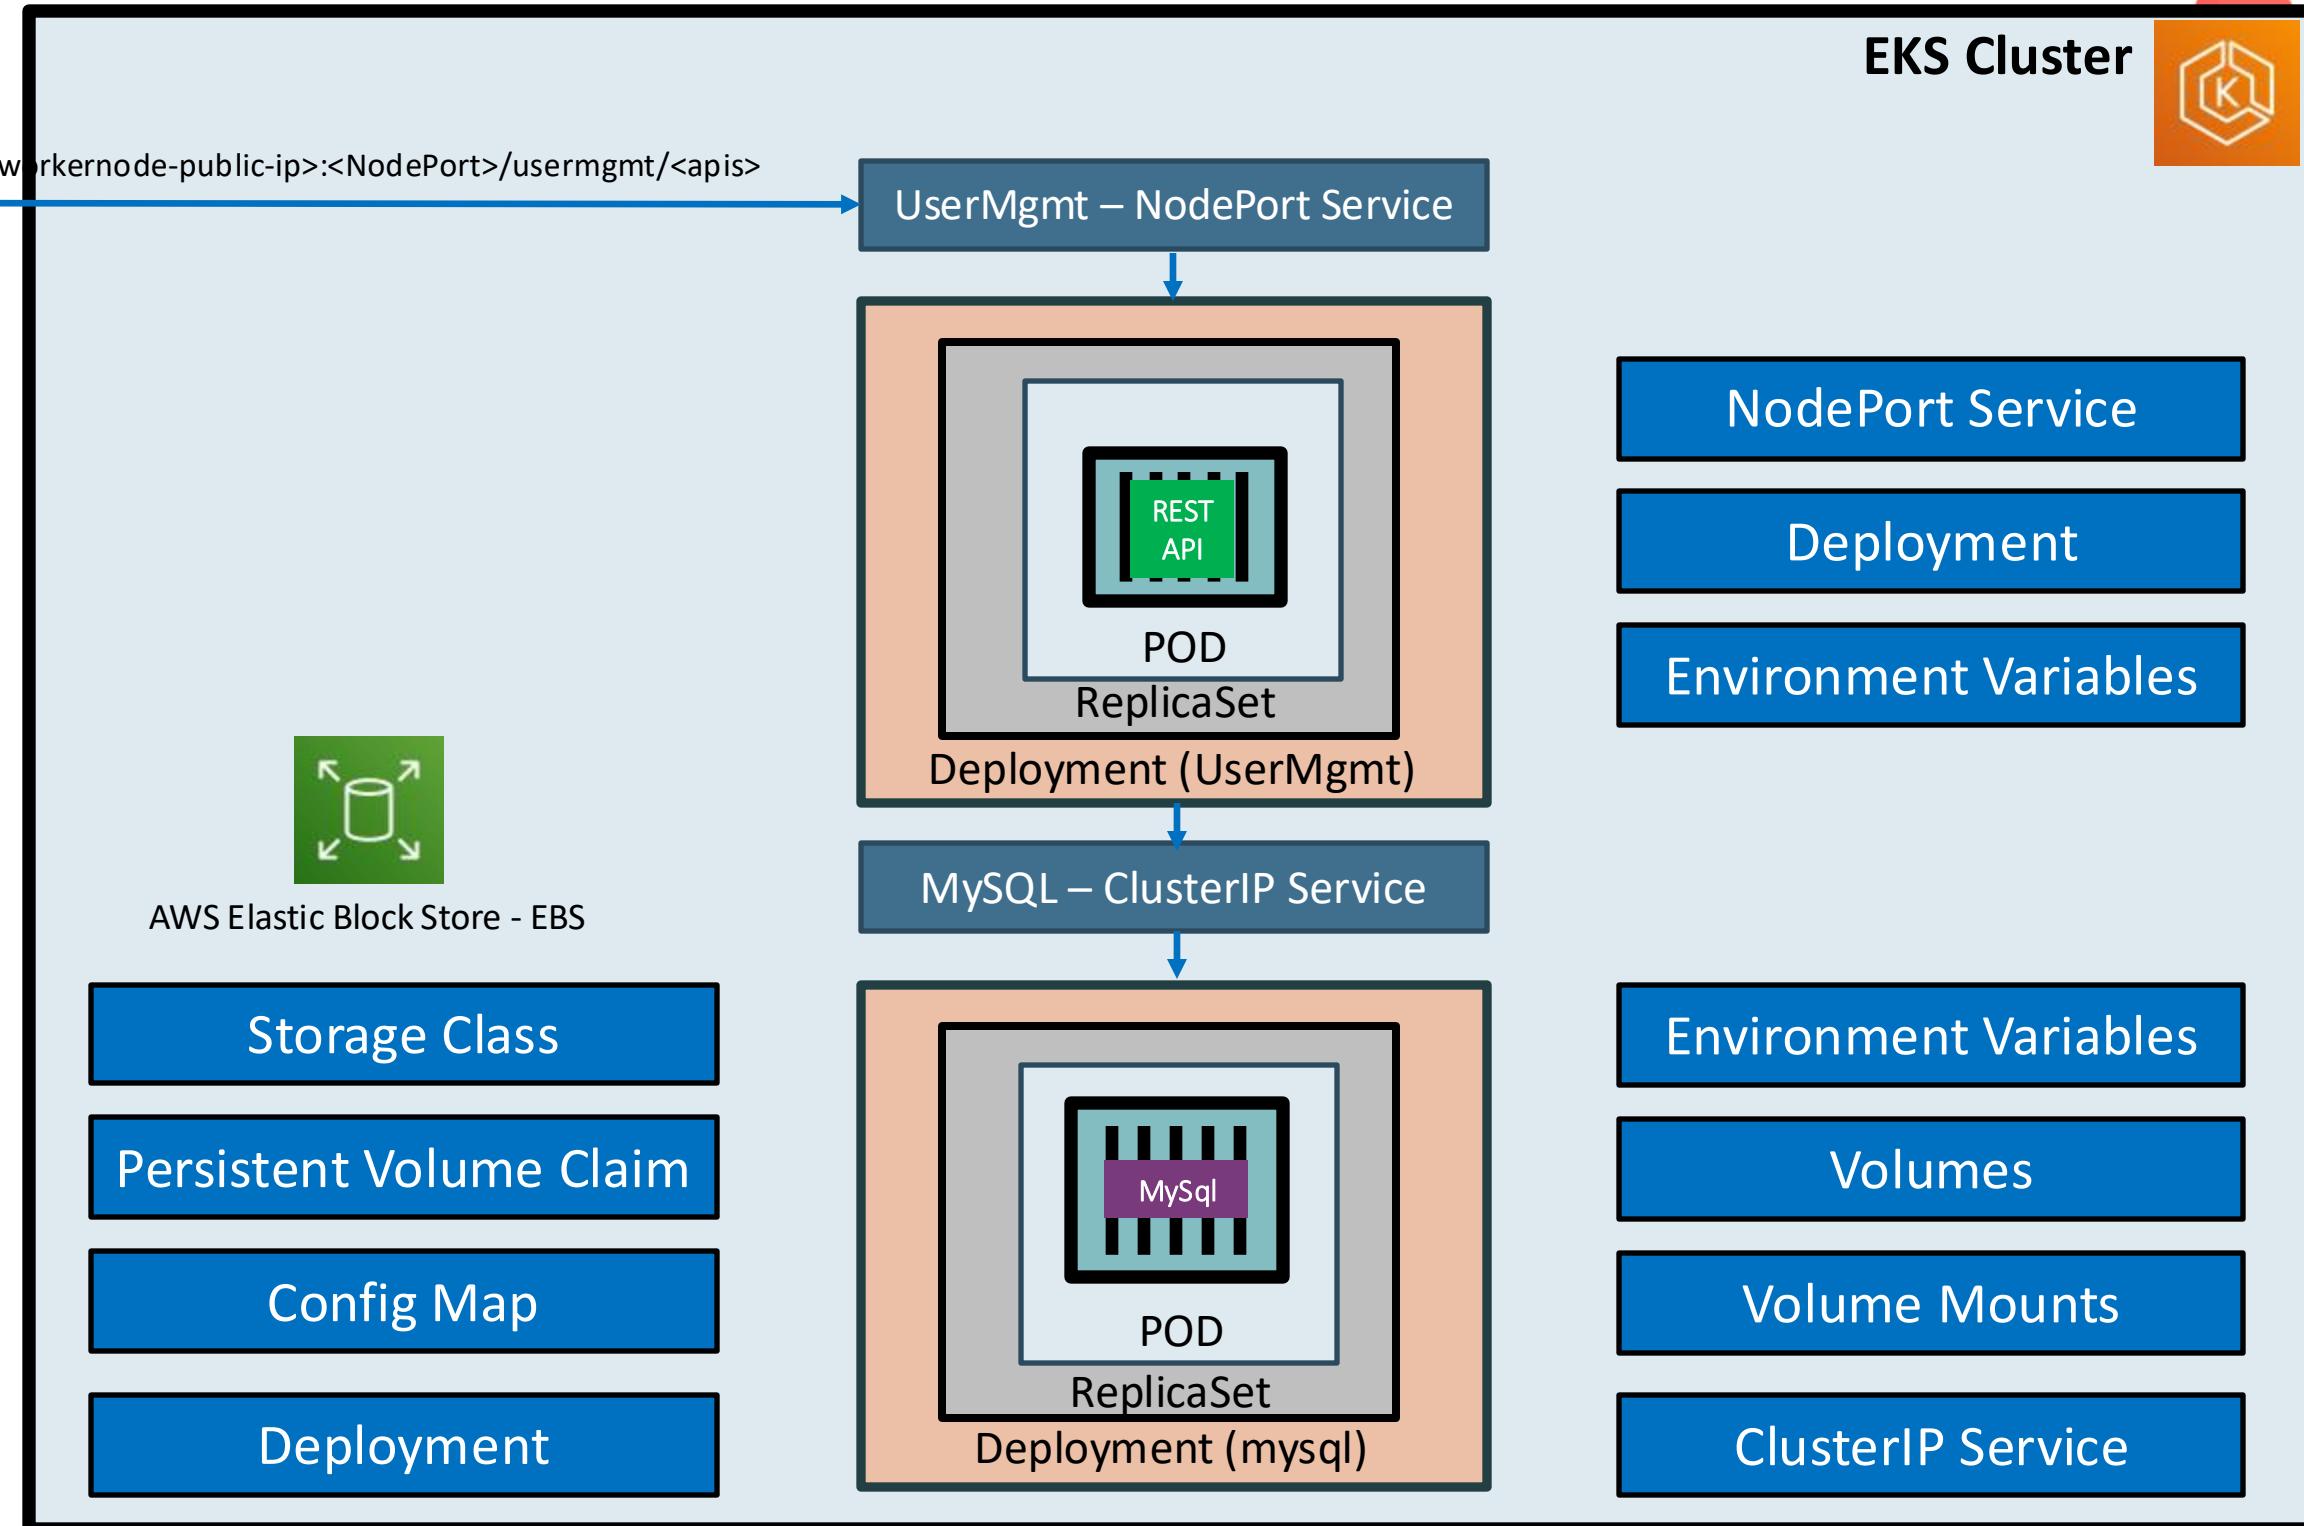



Elastic Block Store




AWS EKS Storage EBS CSI Driver Important k8s Concepts for Application Deployments



EKS Cluster



EKS Storage EBS CSI Driver

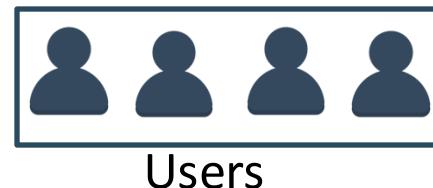

<http://<workernode-public-ip>:<NodePort>/usermgmt/<apis>>

- Secrets
- Init Containers
- Liveness & Readiness Probes
- Requests & Limits



AWS Elastic Block Store - EBS

- Storage Class
- Persistent Volume Claim
- Config Map
- Deployment

UserMgmt – NodePort Service



POD
ReplicaSet

Deployment (UserMgmt)

MySQL – ClusterIP Service



POD
ReplicaSet

Deployment (mysql)

Namespaces

NodePort Service

Deployment

Environment Variables


Environment Variables

Volumes

Volume Mounts

ClusterIP Service

Probes

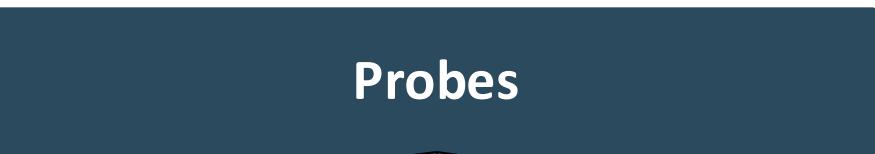

Liveness Probe

Kubelet uses liveness probes to know when to restart a container

Liveness probes could catch a **deadlock**, where an application is running, but unable to make progress and **restarting container** helps in such state

Readiness Probe

Kubelet uses readiness probes to know when a container is ready to accept traffic

When a Pod is not ready, it is **removed** from Service load balancers based on this **readiness probe signal**.

Startup Probe

Kubelet uses startup probes to know when a container application has started

Firstly this probe **disables** liveness & readiness checks until it **succeeds** ensuring those pods don't interfere with app startup.

Options to define Probes

Check using Commands

```
/bin/sh –c nc -z localhost 8095
```

Check using HTTP GET Request

```
httpget path:/health-status
```

Check using TCP

```
tcpSocket Port: 8095
```

Kubernetes Namespaces






Namespaces - Introduction

- Namespaces are also called **Virtual clusters** in our **physical** k8s cluster
- We use this in environments where we have **many users** spread across multiple teams or projects
- Clusters with **tens of users** ideally don't need to use namespaces
- Benefits**
 - Creates **isolation boundary** from other k8s objects
 - We can limit the resources like **CPU, Memory** on per namespace basis (**Resource Quota**).

```
kubectl get namespace
```

NAME	STATUS	AGE
default	Active	141m
kube-node-lease	Active	141m
kube-public	Active	141m
kube-system	Active	141m

Namespaces

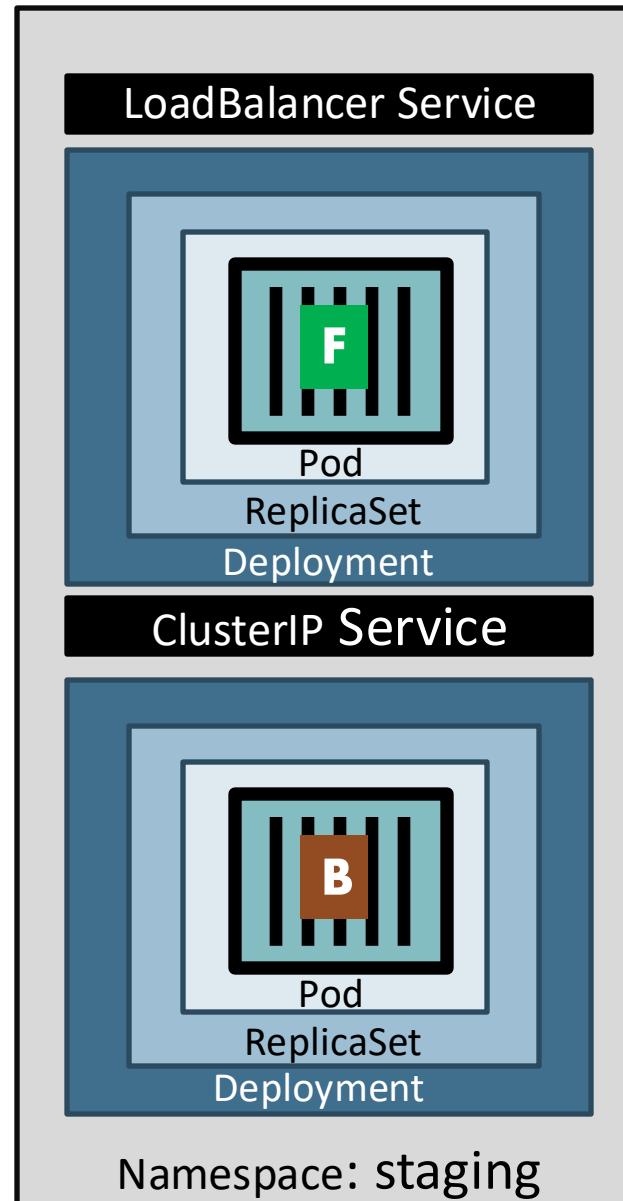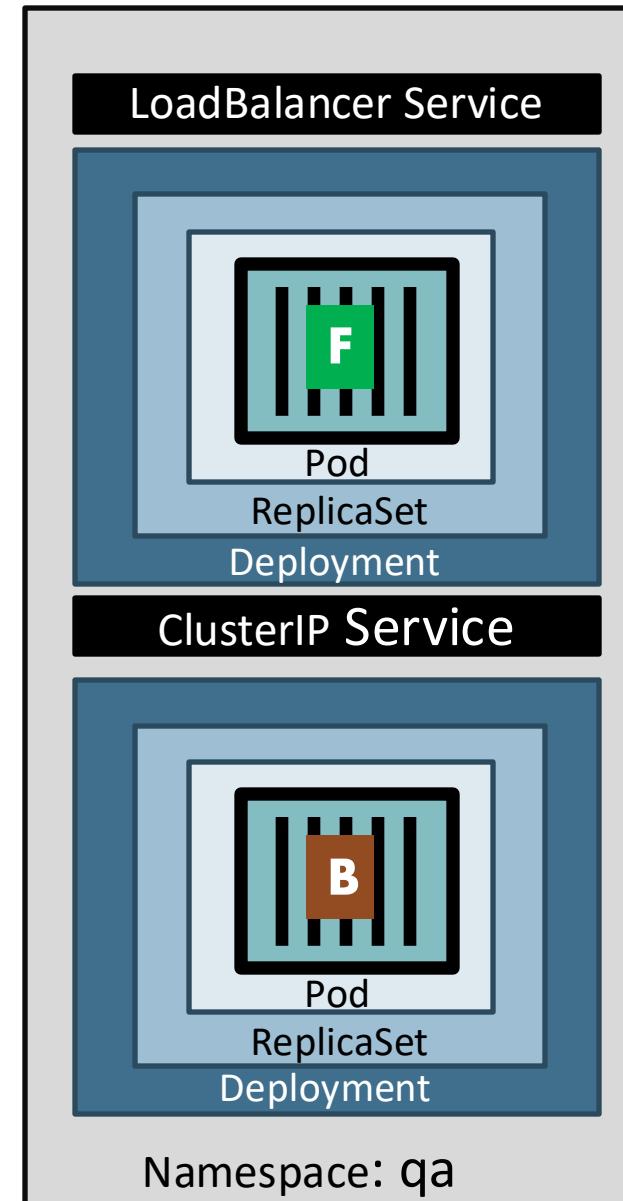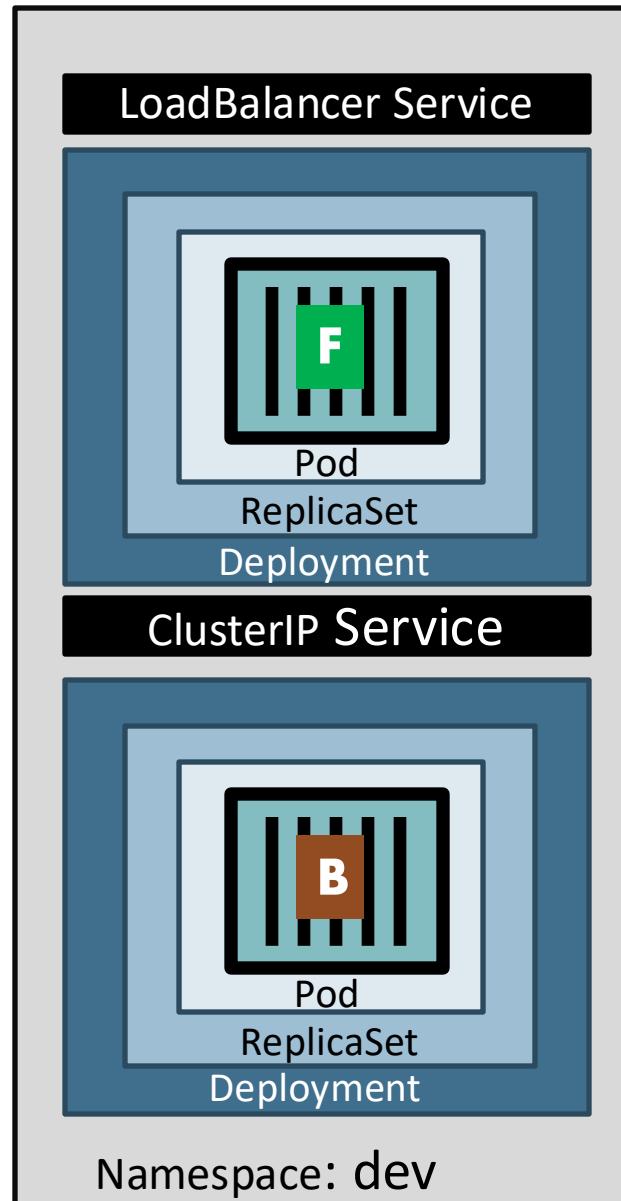

Namespace Manifest - Declarative

```

1 apiVersion: v1
2 kind: Namespace
3 metadata:
4   name: dev3


```

Namespace Manifest - Imperative


```
kubectl create namespace dev1
```

Limit Range

LoadBalancer Service

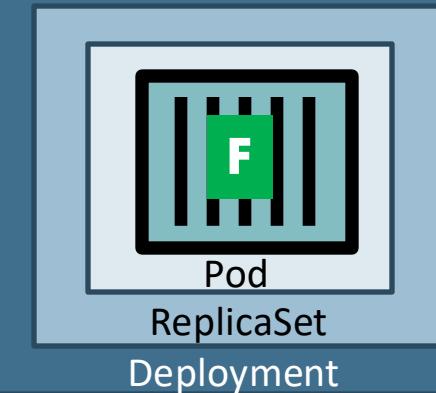

ClusterIP Service

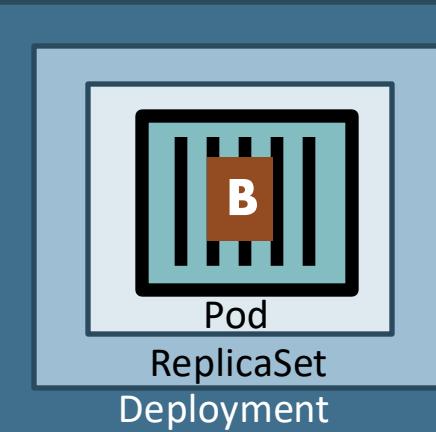


CPU	Memory
default	Min/Max


Limit Range (Per Container)

Namespace: dev

LoadBalancer Service

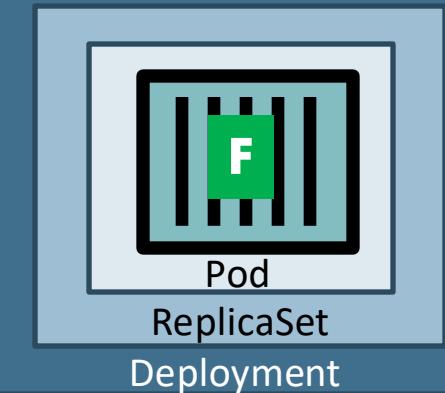

ClusterIP Service

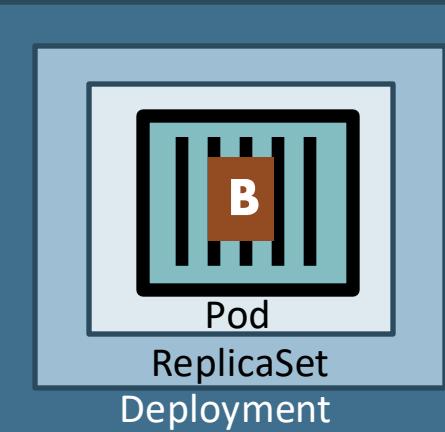


CPU	Memory
default	Min/Max


Limit Range (Per Container)

Namespace: qa

LoadBalancer Service

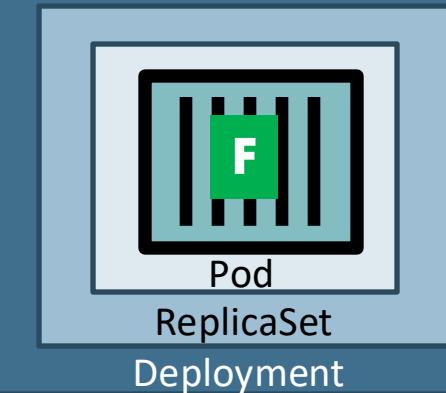

ClusterIP Service

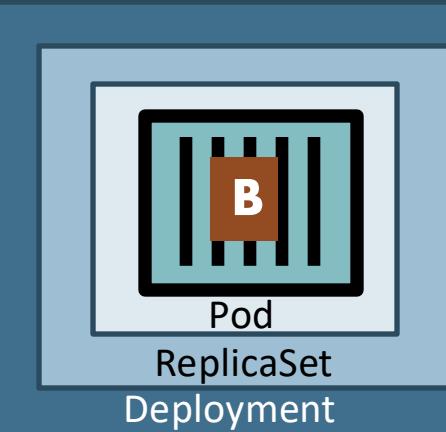

CPU	Memory
default	Min/Max

Limit Range (Per Container)

Namespace: staging




Limit Range Manifest

```

apiVersion: v1
kind: LimitRange
metadata:
  name: default-cpu-mem-limit-range
  namespace: dev3
spec:
  limits:
  - default:
      memory: "512Mi"
      cpu: "500m"
    defaultRequest:
      memory: "256Mi"
      cpu: "300m"
  type: Container

```

Resource Quota

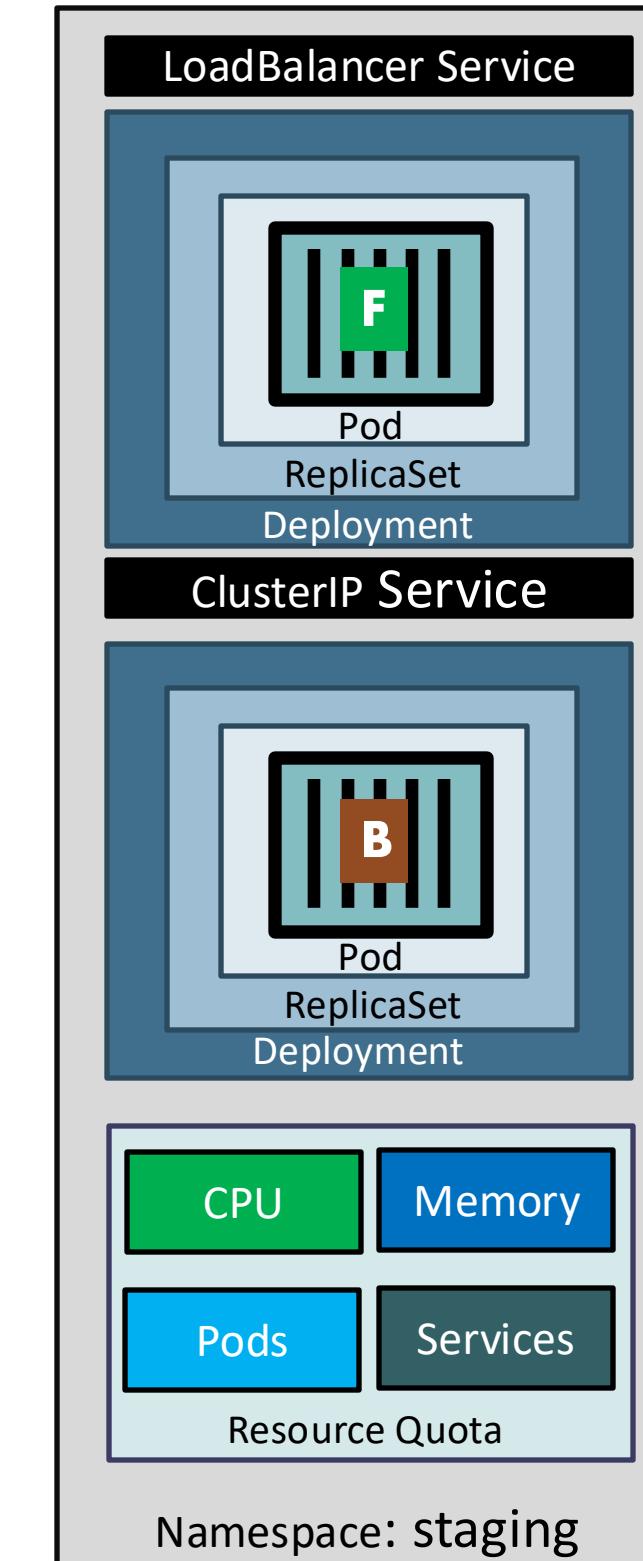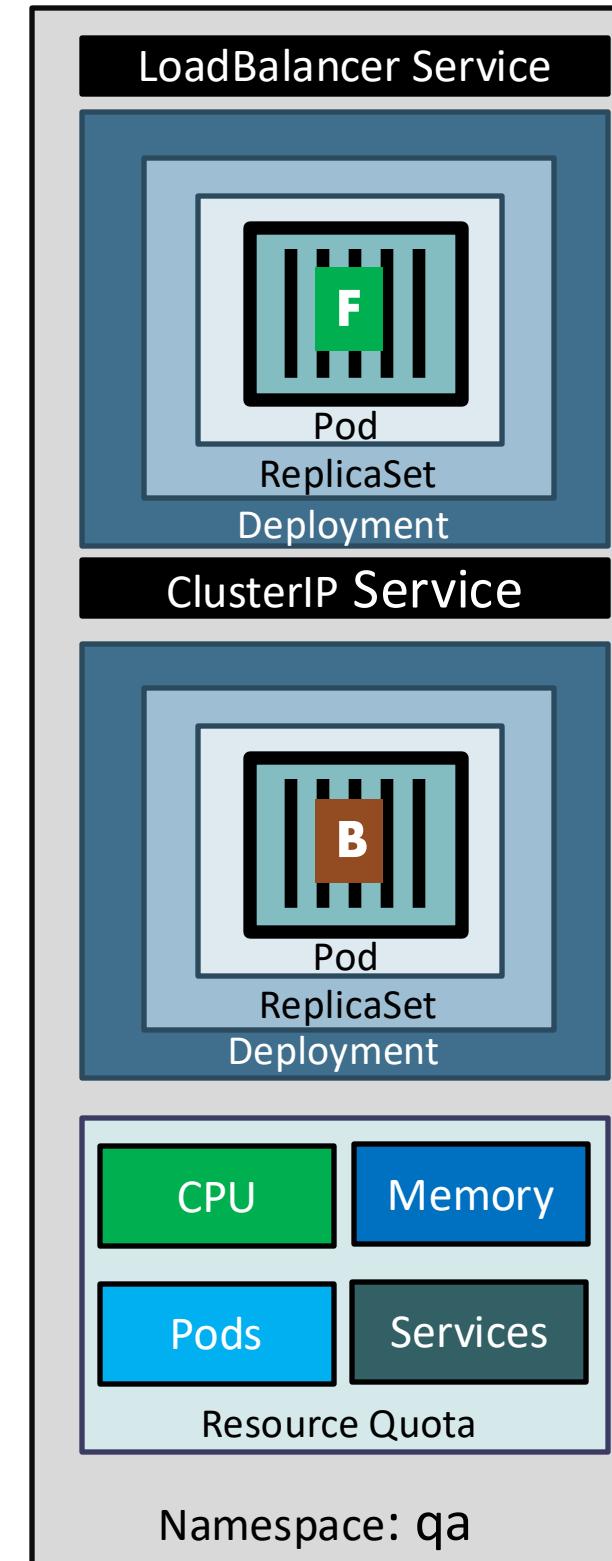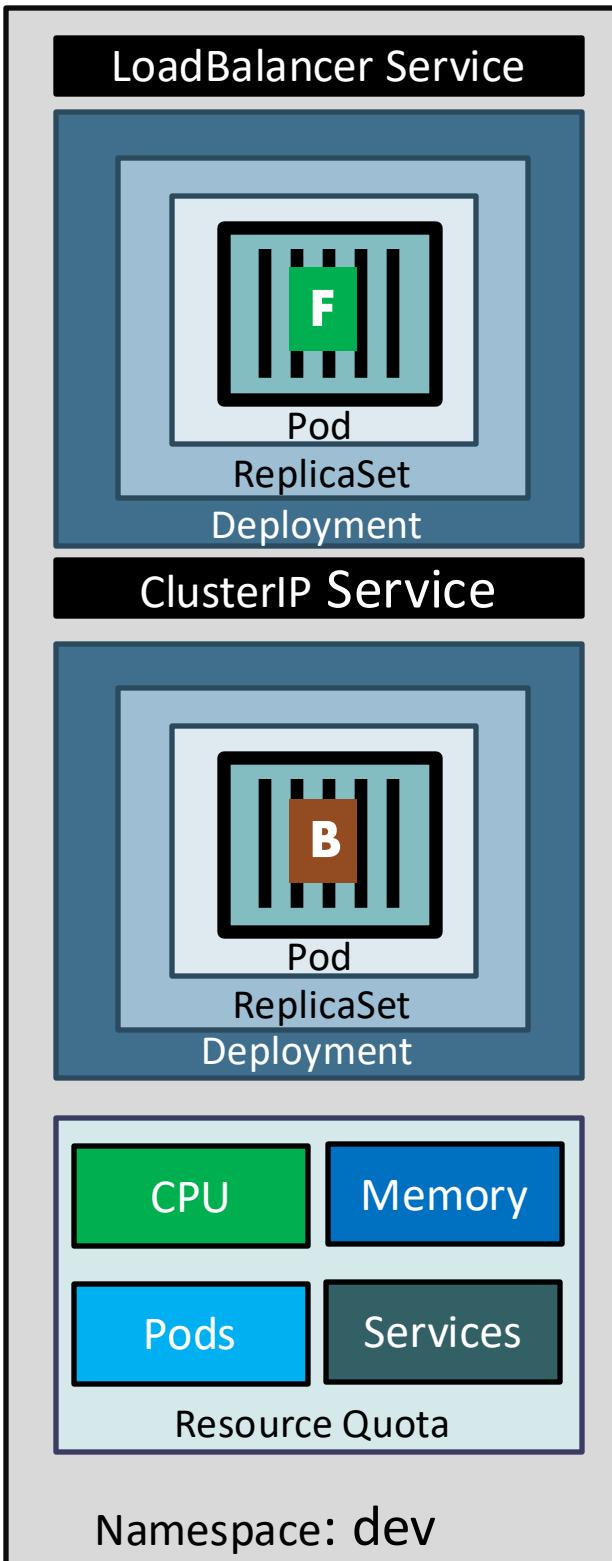

Resource Quota Manifest

```
apiVersion: v1
kind: ResourceQuota
metadata:
  name: ns-resource-quota
  namespace: dev3
spec:
  hard:
    requests.cpu: "1"
    requests.memory: 1Gi
    limits.cpu: "2"
    limits.memory: 2Gi
  pods: "5"
  configmaps: "5"
  persistentvolumeclaims: "5"
  secrets: "5"
  services: "5"
```




Amazon RDS

AWS EKS & RDS Database






EKS Cluster

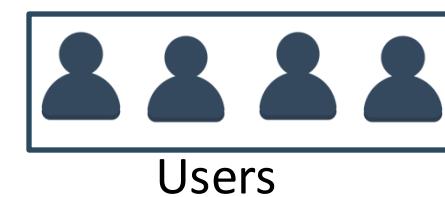

http://<worker-node-public-ip>:<NodePort>/usermgmt/<apis>

UserMgmt – NodePort Service

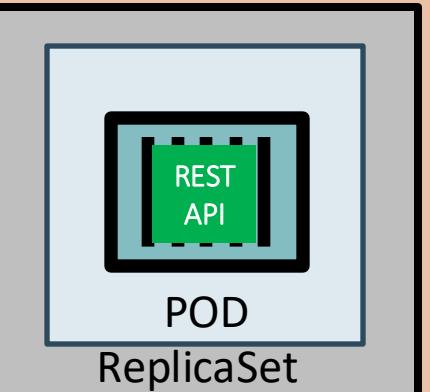

Deployment (UserMgmt)

NodePort Service

Deployment

Environment Variables

StatefulSets

Environment Variables

Volumes

Volume Mounts

ClusterIP Service

EKS Storage EBS CSI Driver

- Drawbacks of EBS CSI for MySQL DB
- Complex setup to achieve HA
- Complex Multi-Az support for EBS
- Complex Master-Master MySQL setup
- Complex Master-Slave MySQL setup
- No Automatic Backup & Recovery
- No Auto-Upgrade MySQL



AWS Elastic Block Store - EBS


Storage Class

Persistent Volume Claim


Config Map


Deployment

MySQL – ClusterIP Service

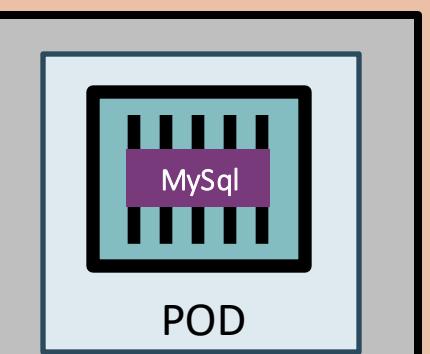


Deployment (mysql)

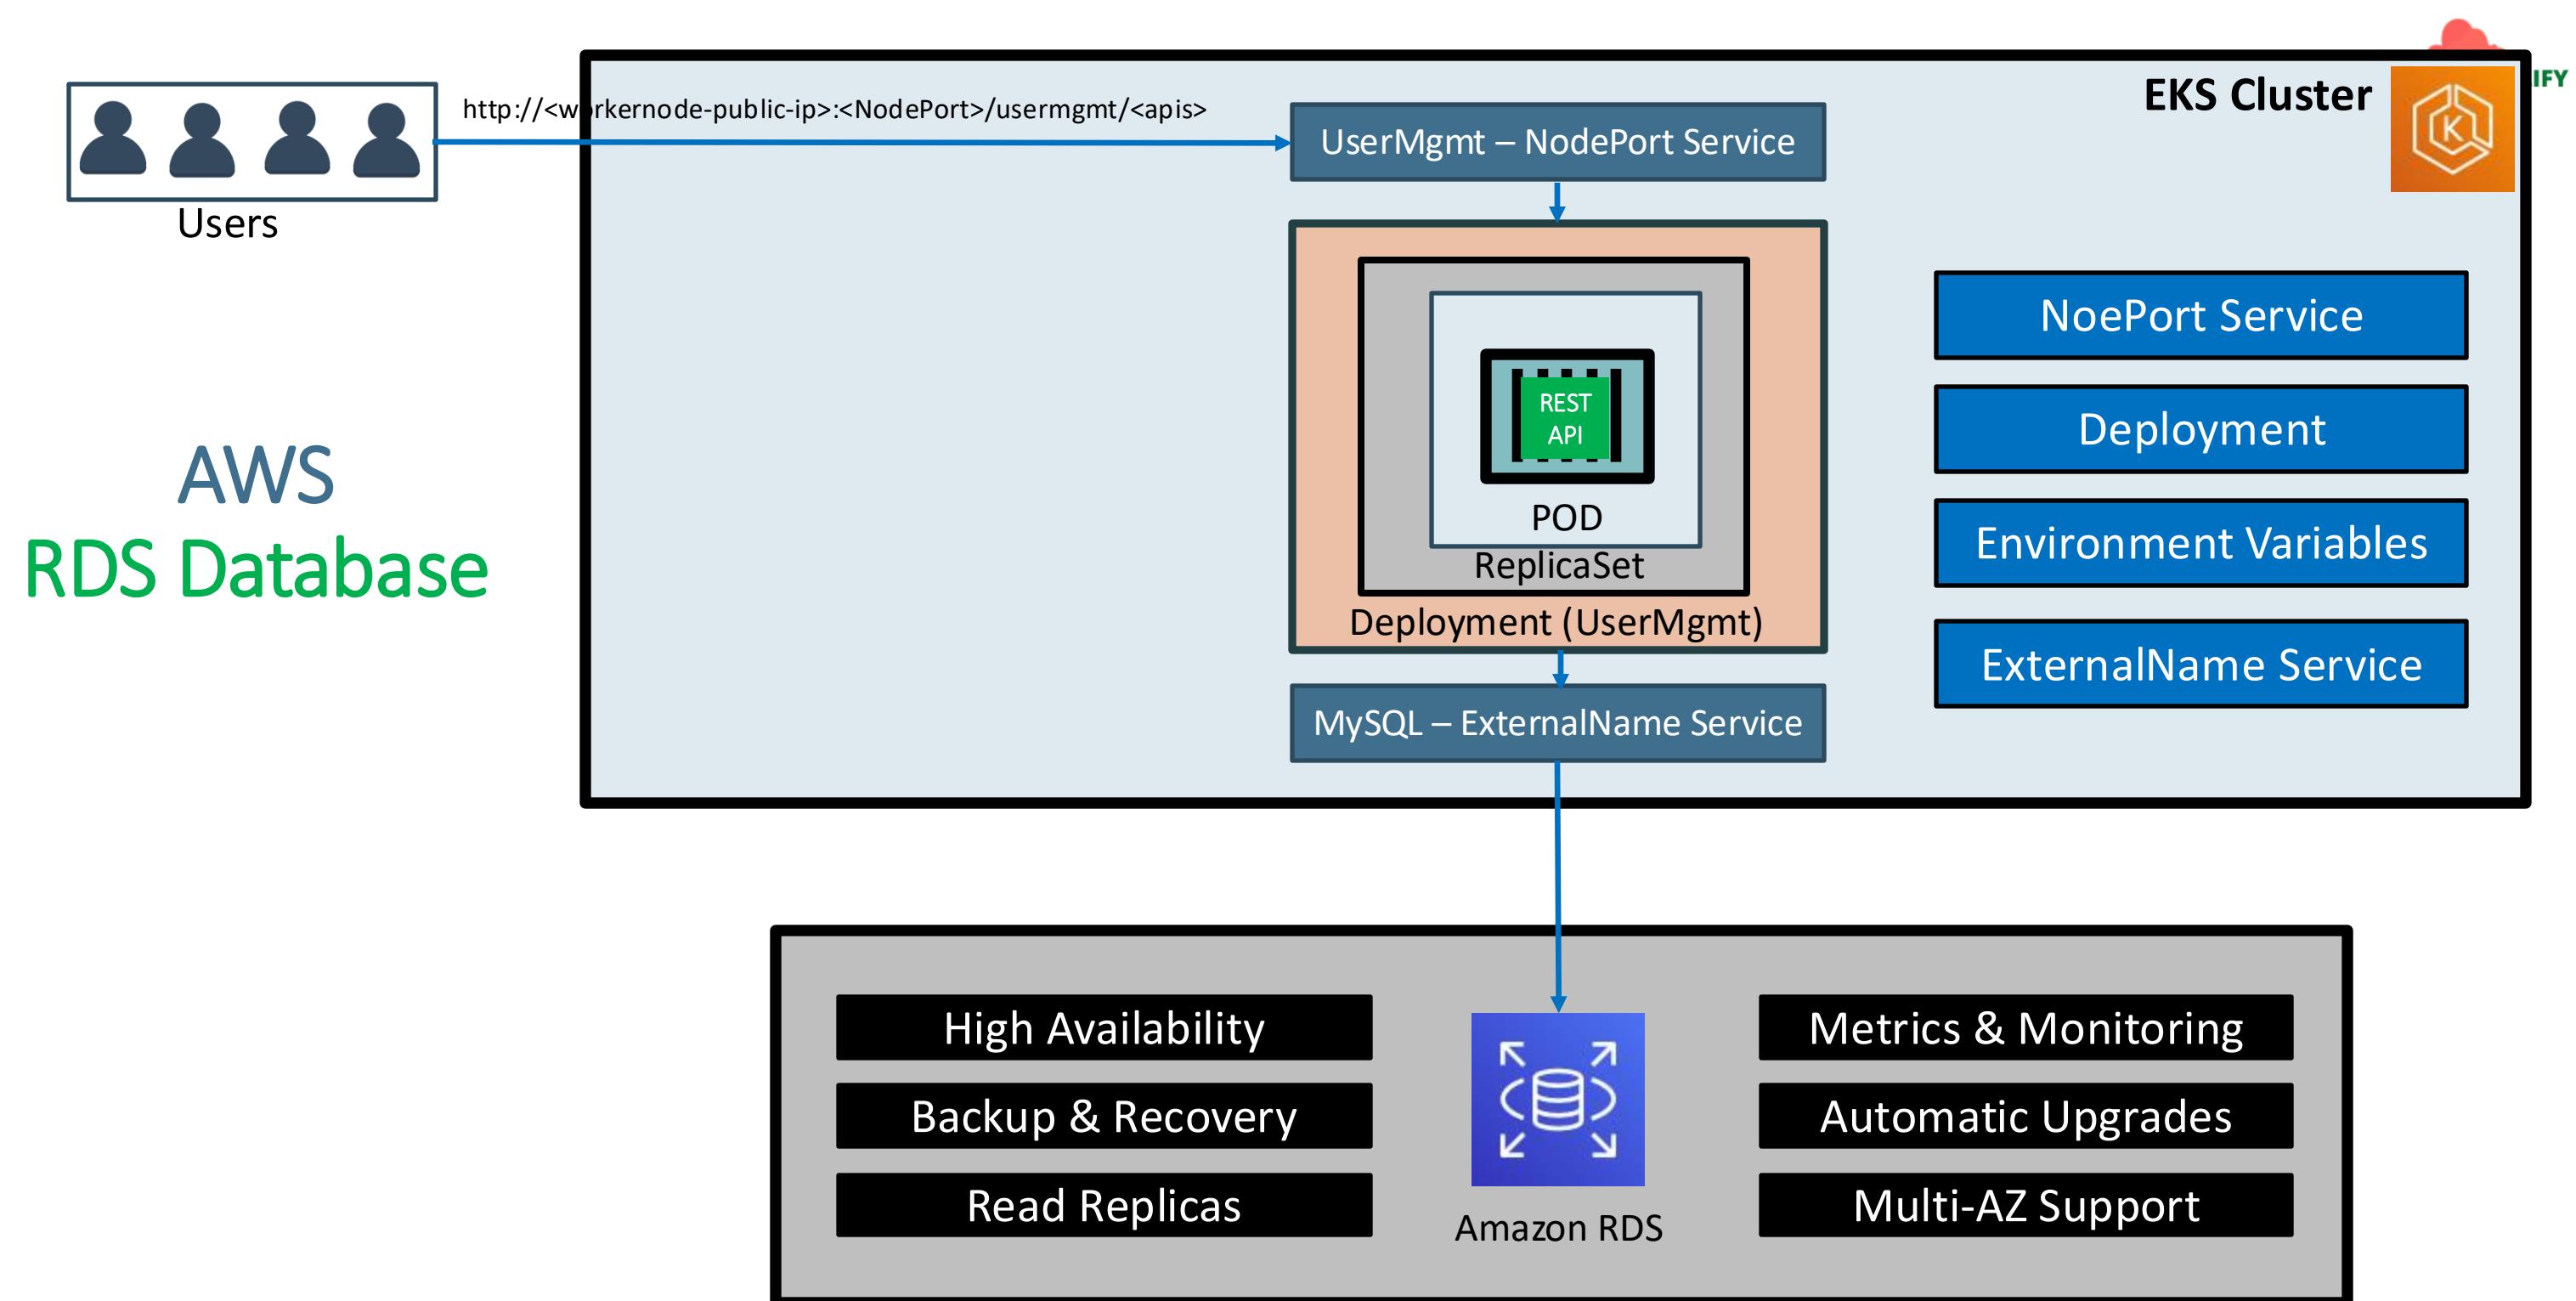


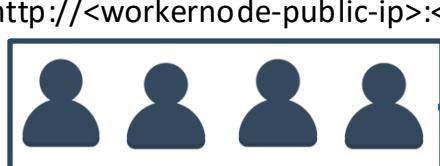


Users

AWS EKS Network Design With EKS Workload & RDS Database

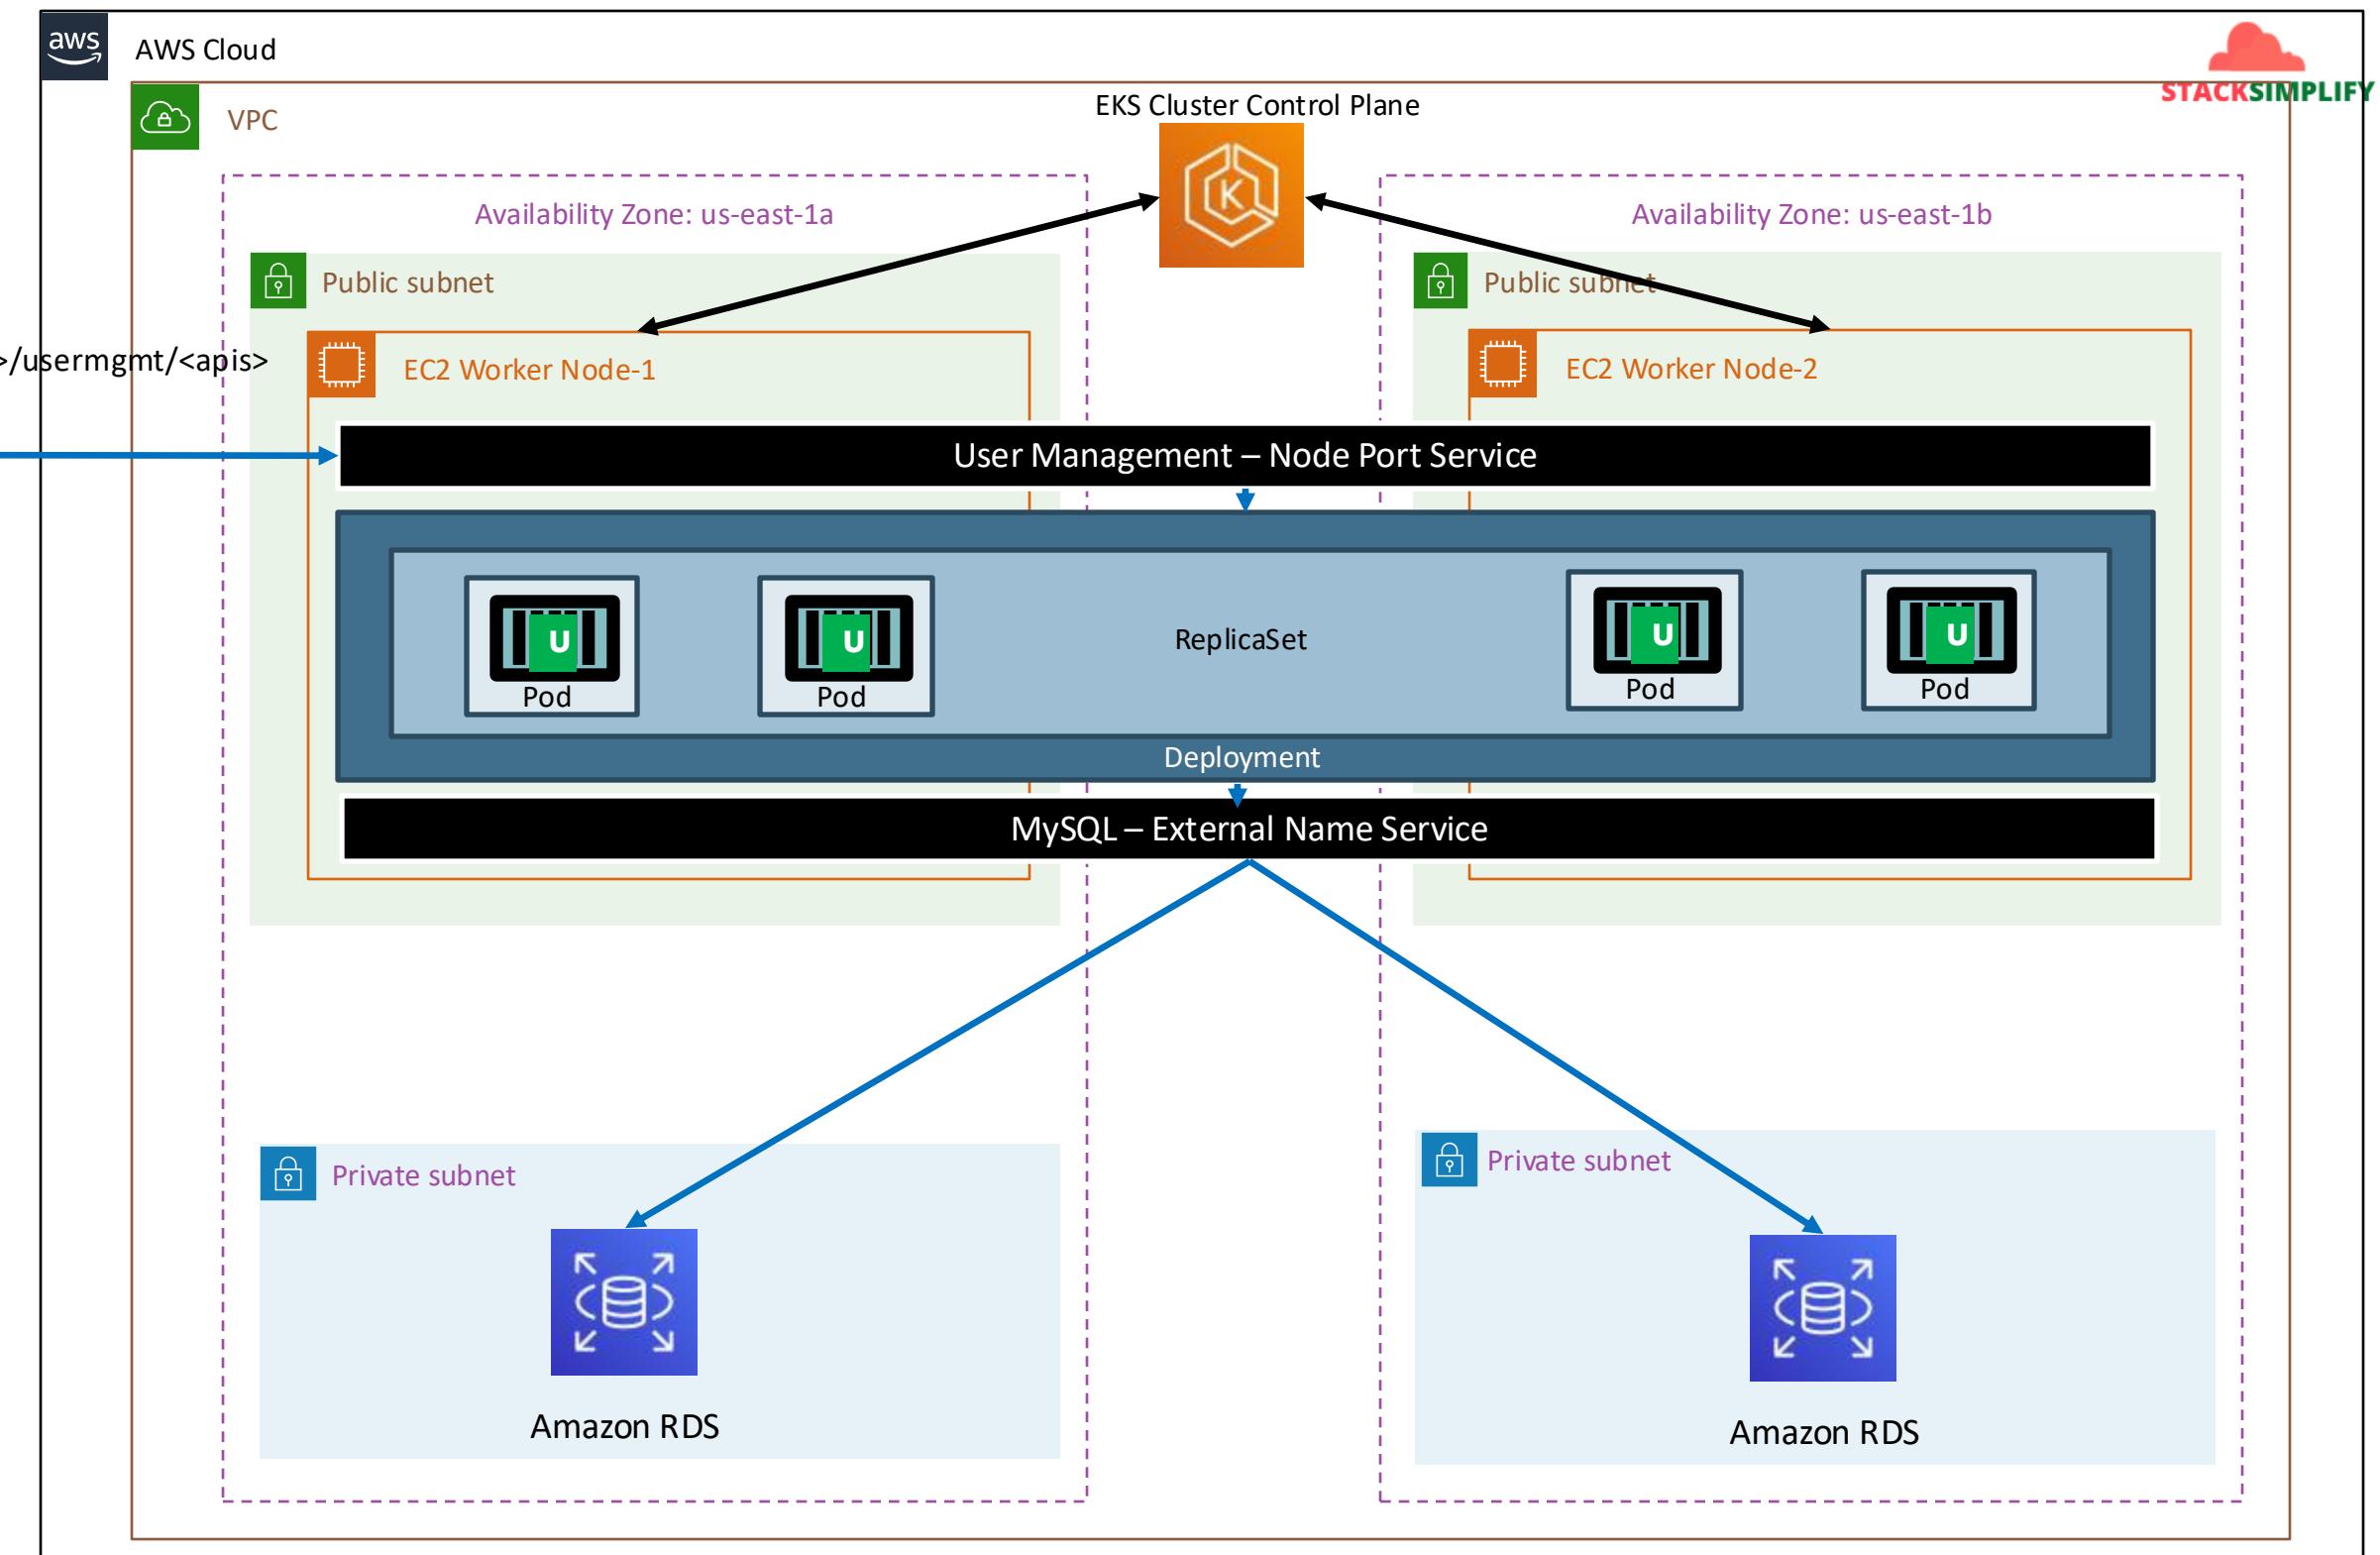


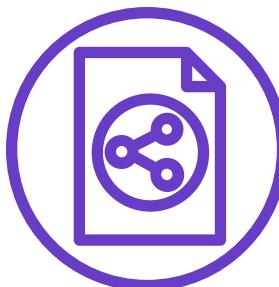

Classic
Load Balancer

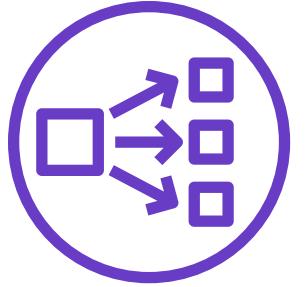


Network
Load Balancer

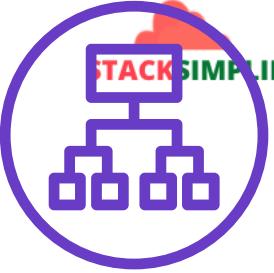

Application
Load Balancer




AWS Elastic Load Balancing Overview

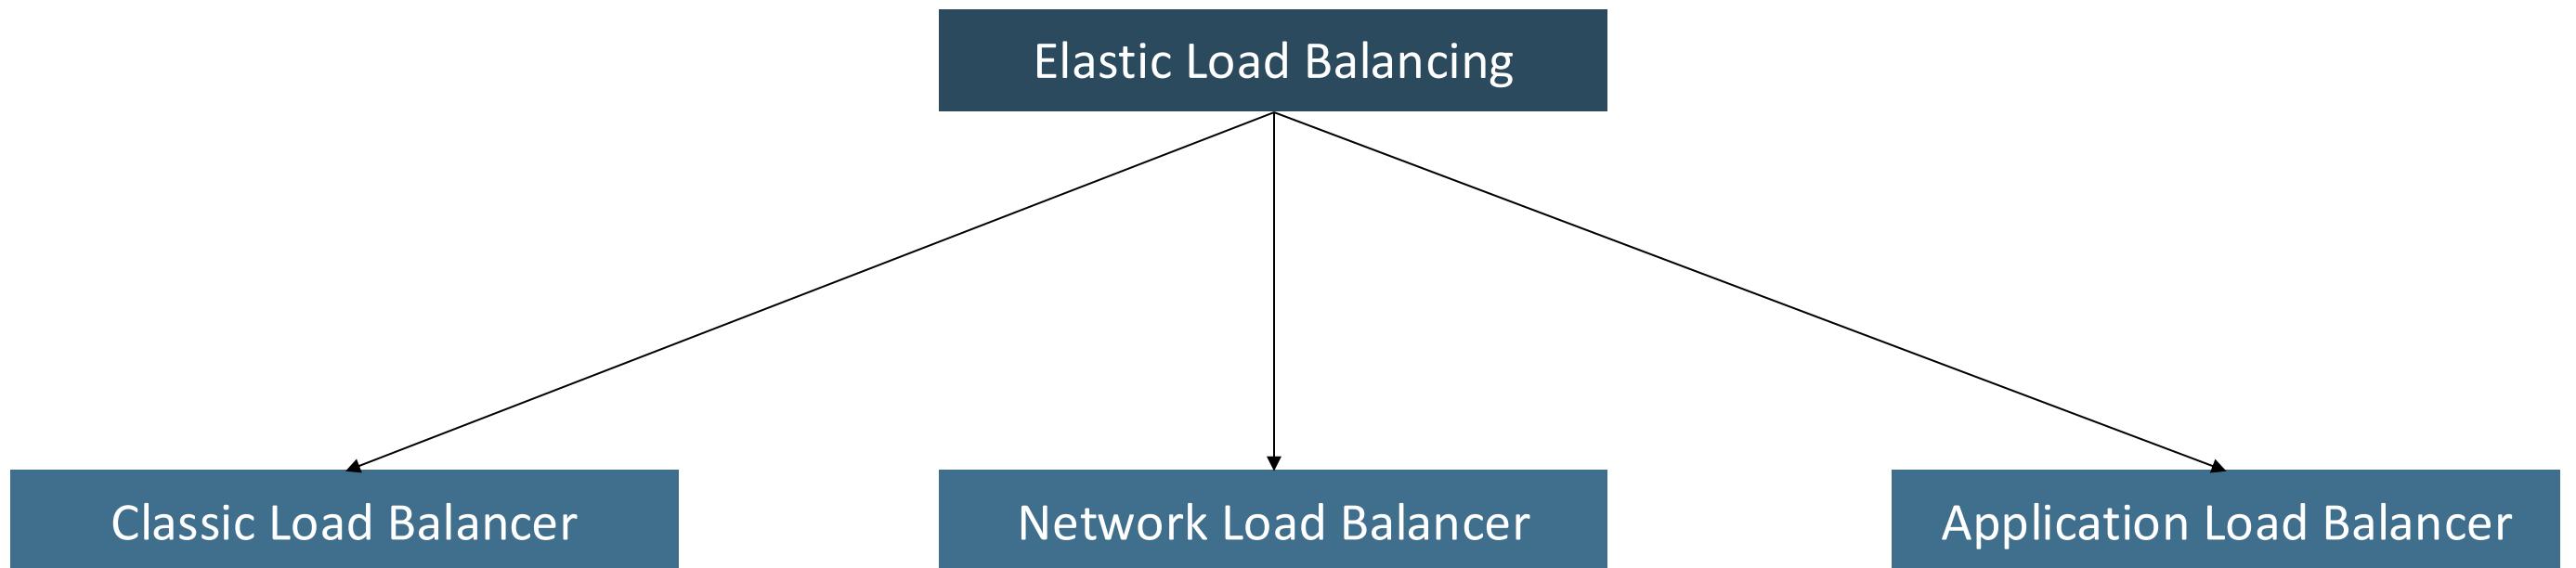


<https://aws.amazon.com/elasticloadbalancing/features/#compare>




Elastic Load
Balancing

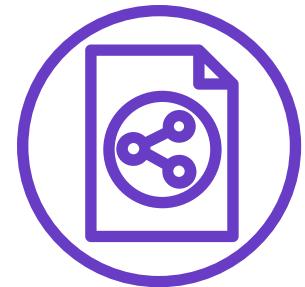

Classic
Load Balancer

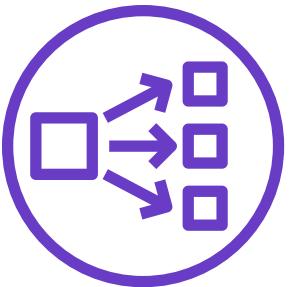

Network
Load Balancer

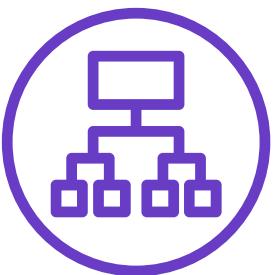

Application
Load Balancer




Amazon RDS




AWS EKS & **RDS & ELB** **Classic Load Balancer**



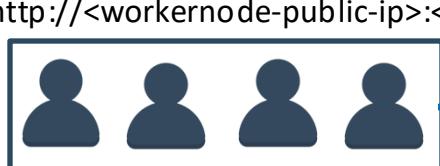


Users

AWS EKS Network Design With EKS Workload & RDS Database

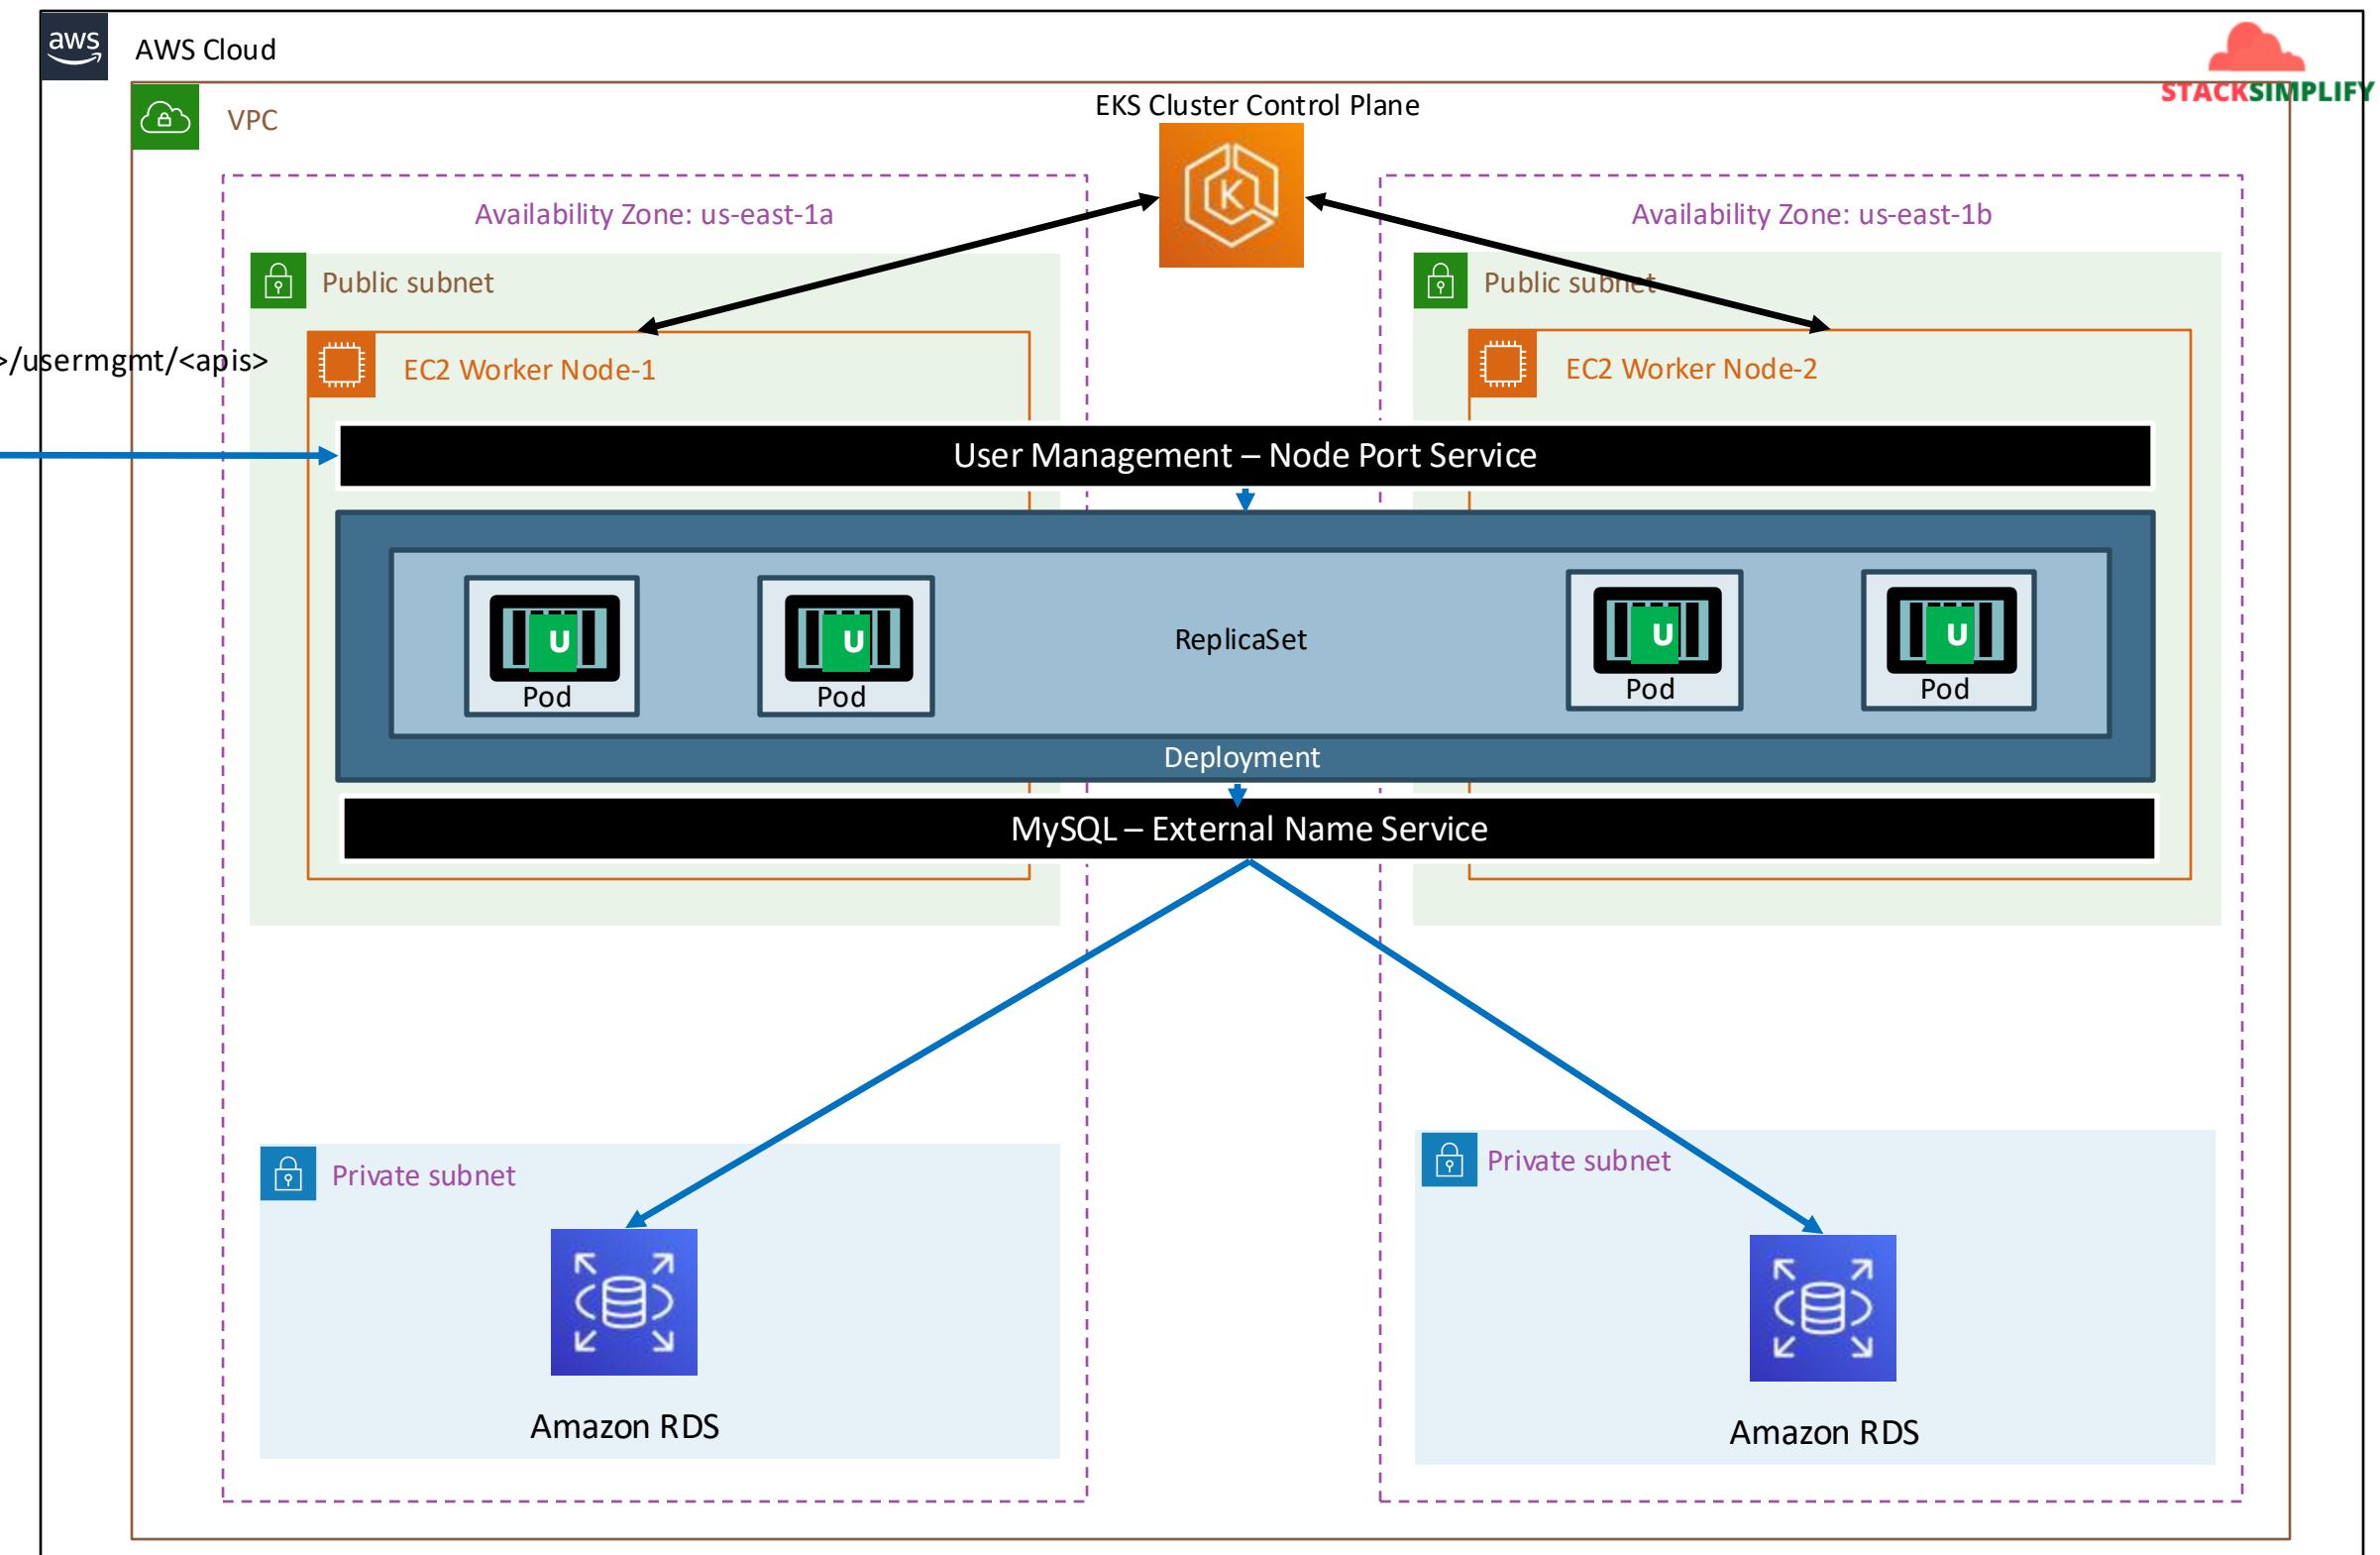


AWS EKS Network Design With EKS Workload RDS & ELB Classic Load Balancer

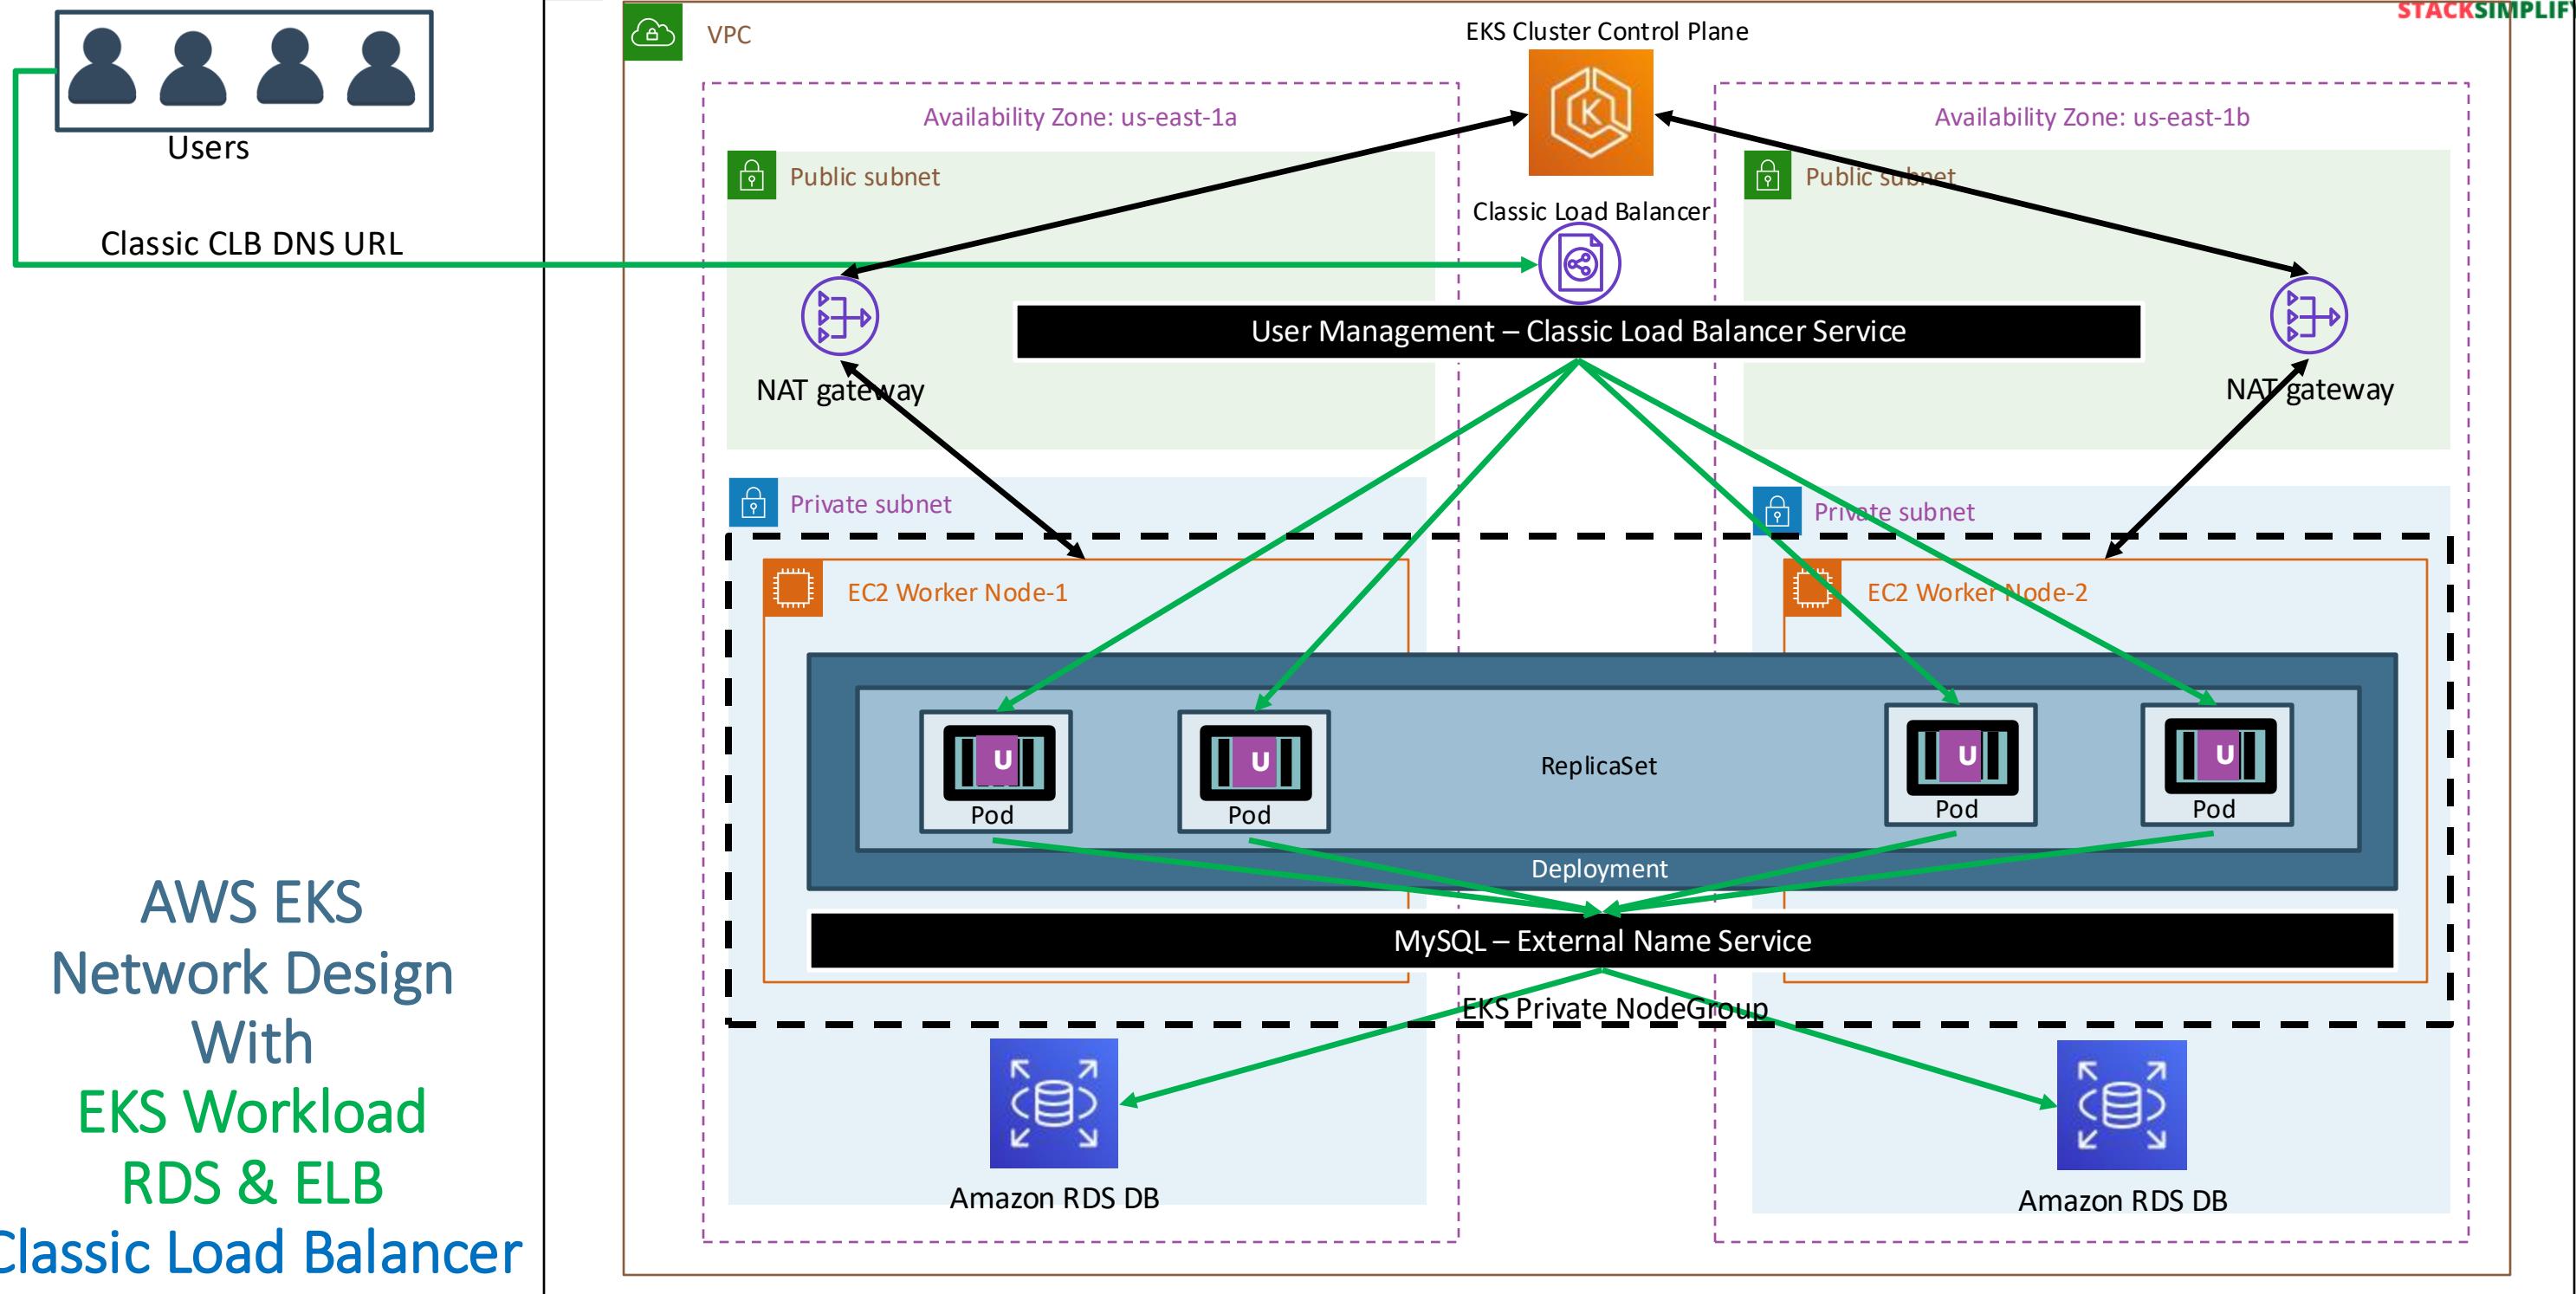





Elastic Load
Balancing

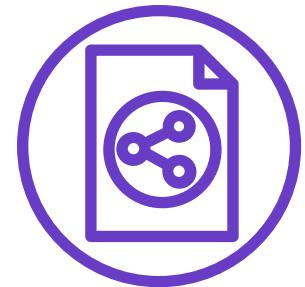


Classic
Load Balancer

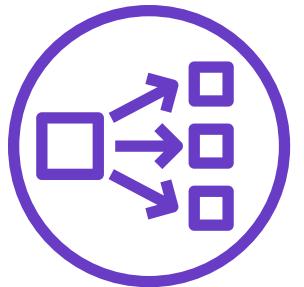

Network
Load Balancer

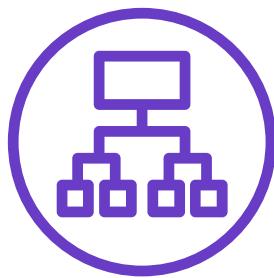

Application
Load Balancer

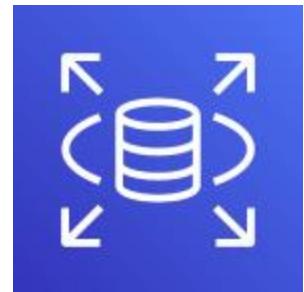

Amazon RDS




AWS EKS
&
RDS & ELB


Network Load Balancer




AWS EKS Network Design With EKS Workload RDS & ELB Network Load Balancer

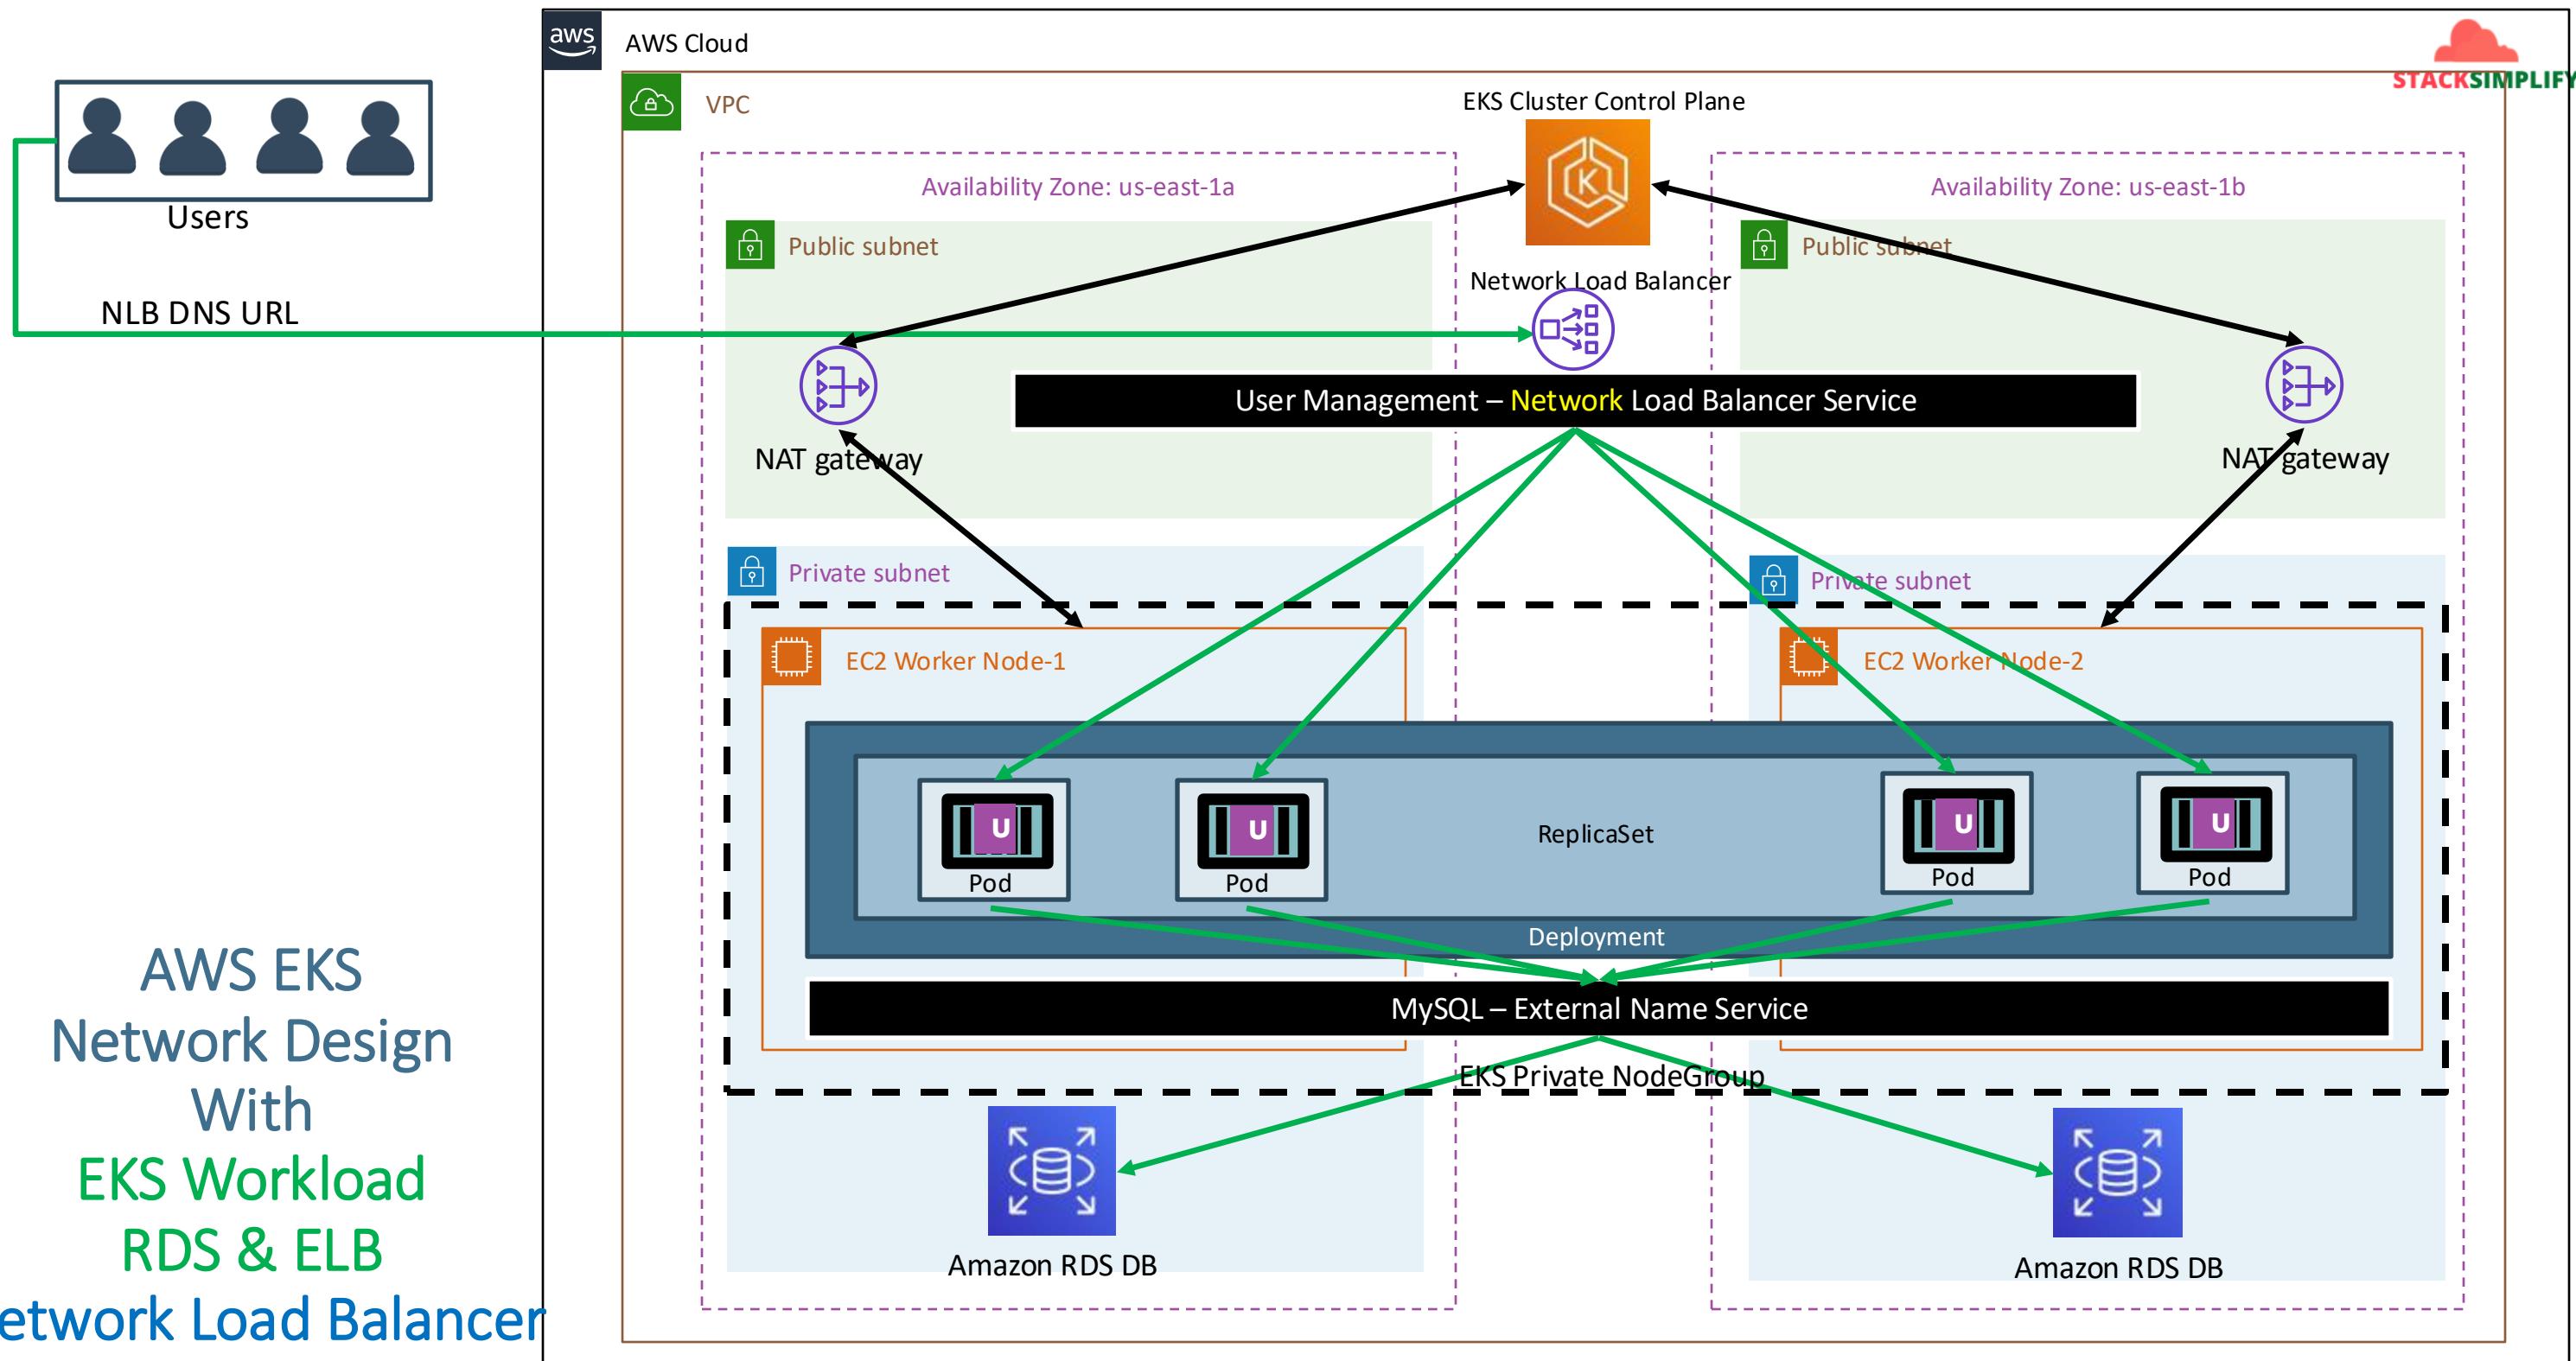


AWS Load Balancer Controller Updates - Start

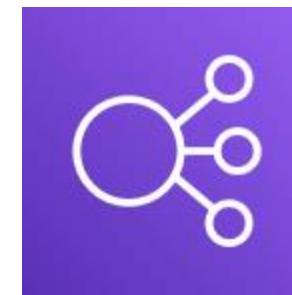

Elastic Load
Balancing

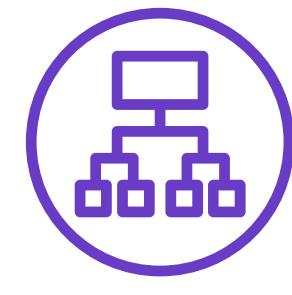

Application
Load Balancer

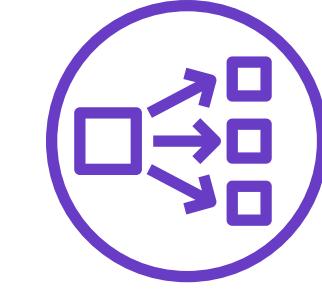

Network
Load Balancer



Kubernetes
Ingress



AWS EKS

Load Balancer Controller

Kubernetes Ingress

Application Load Balancer



14 Demos

AWS Load Balancer
Controller Install

Ingress Basics

Ingress Context Path
Routing

Ingress SSL

Ingress SSL Redirect

External DNS Install

Ingress + External DNS

D1

D2

D3

D4

D5

D6

D7

D8

D9

D10

D11

D12

D13

D14

k8s Service + External DNS

Ingress Name based Virtual
Host Routing

SSL Discovery - Host

SSL Discovery - TLS

Ingress Groups

Ingress Target Type - IP

Ingress Internal ALB


EKS
ALB
Ingress


Git Repo: <https://github.com/stacksimplify/aws-eks-kubernetes-masterclass/tree/master/08-NEW-ELB-Application-LoadBalancers>

-  08-01-Load-Balancer-Controller-Install
-  08-02-ALB-Ingress-Basics
-  08-03-ALB-Ingress-ContextPath-Based-R...
-  08-04-ALB-Ingress-SSL
-  08-05-ALB-Ingress-SSL-Redirect
-  08-06-Deploy-ExternalDNS-on-EKS
-  08-07-Use-ExternalDNS-for-k8s-Ingress


-  08-08-Use-ExternalDNS-for-k8s-Service
-  08-09-NameBasedVirtualHost-Routing
-  08-10-Ingress-SSL-Discovery-host
-  08-11-Ingress-SSL-Discovery-tls
-  08-12-IngressGroups
-  08-13-Ingress-TargetType-IP
-  08-14-Ingress-Internal-LB

How Ingress Works?

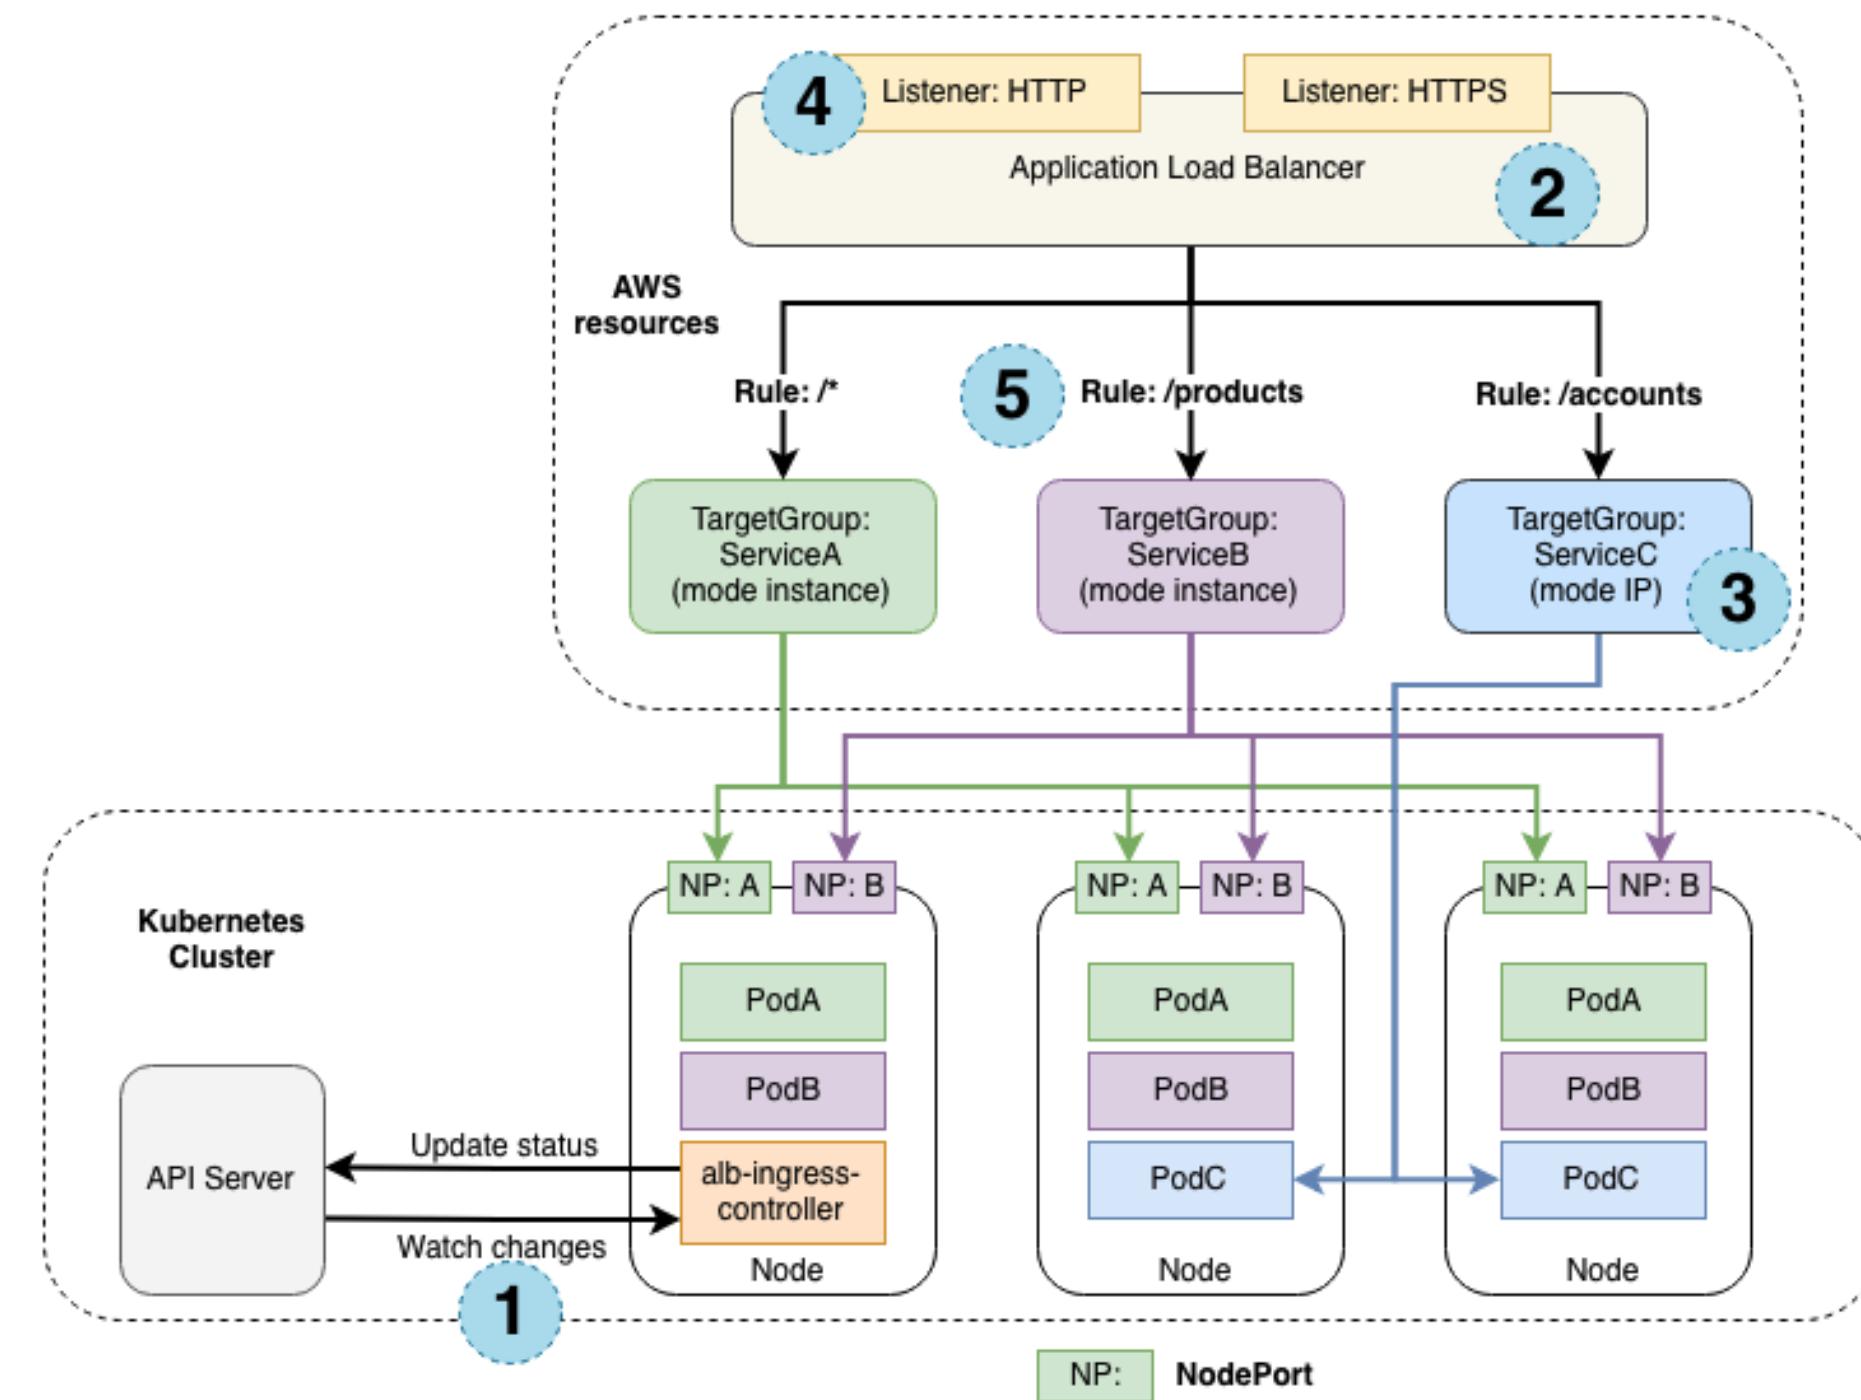


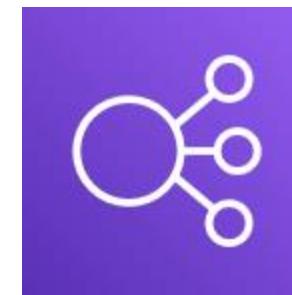

Elastic Load
Balancing

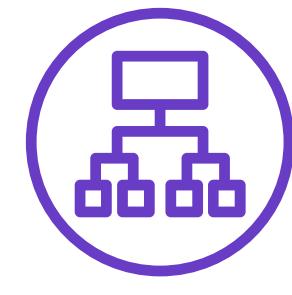

Application
Load Balancer

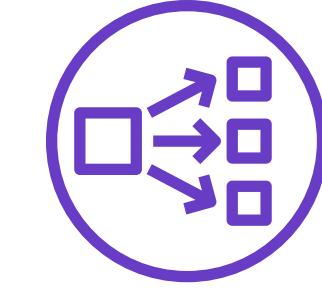

Network
Load Balancer



Kubernetes
Ingress



AWS EKS

Load Balancer Controller

Install



Kubernetes Ingress

AWS ALB Ingress Controller

AWS Application Load Balancer Only

Doesn't support latest Ingress API Version
(apiVersion: networking.k8s.io/v1) from
Kubernetes Version 1.22 onwards

No Development releases, Soon it will be
deprecated

Renamed & Redesigned

AWS Load Balancer Controller

AWS Application and Network Load
Balancers

K8s Ingress Resource

K8s Service Resource

Supports latest and greatest from Ingress
perspective

AWS Application Load Balancer

AWS Network Load Balancer


AWS Load Balancer Controller


kubectl
cli




Deploy Ingress k8s
manifest

STACKSIMPLIFY

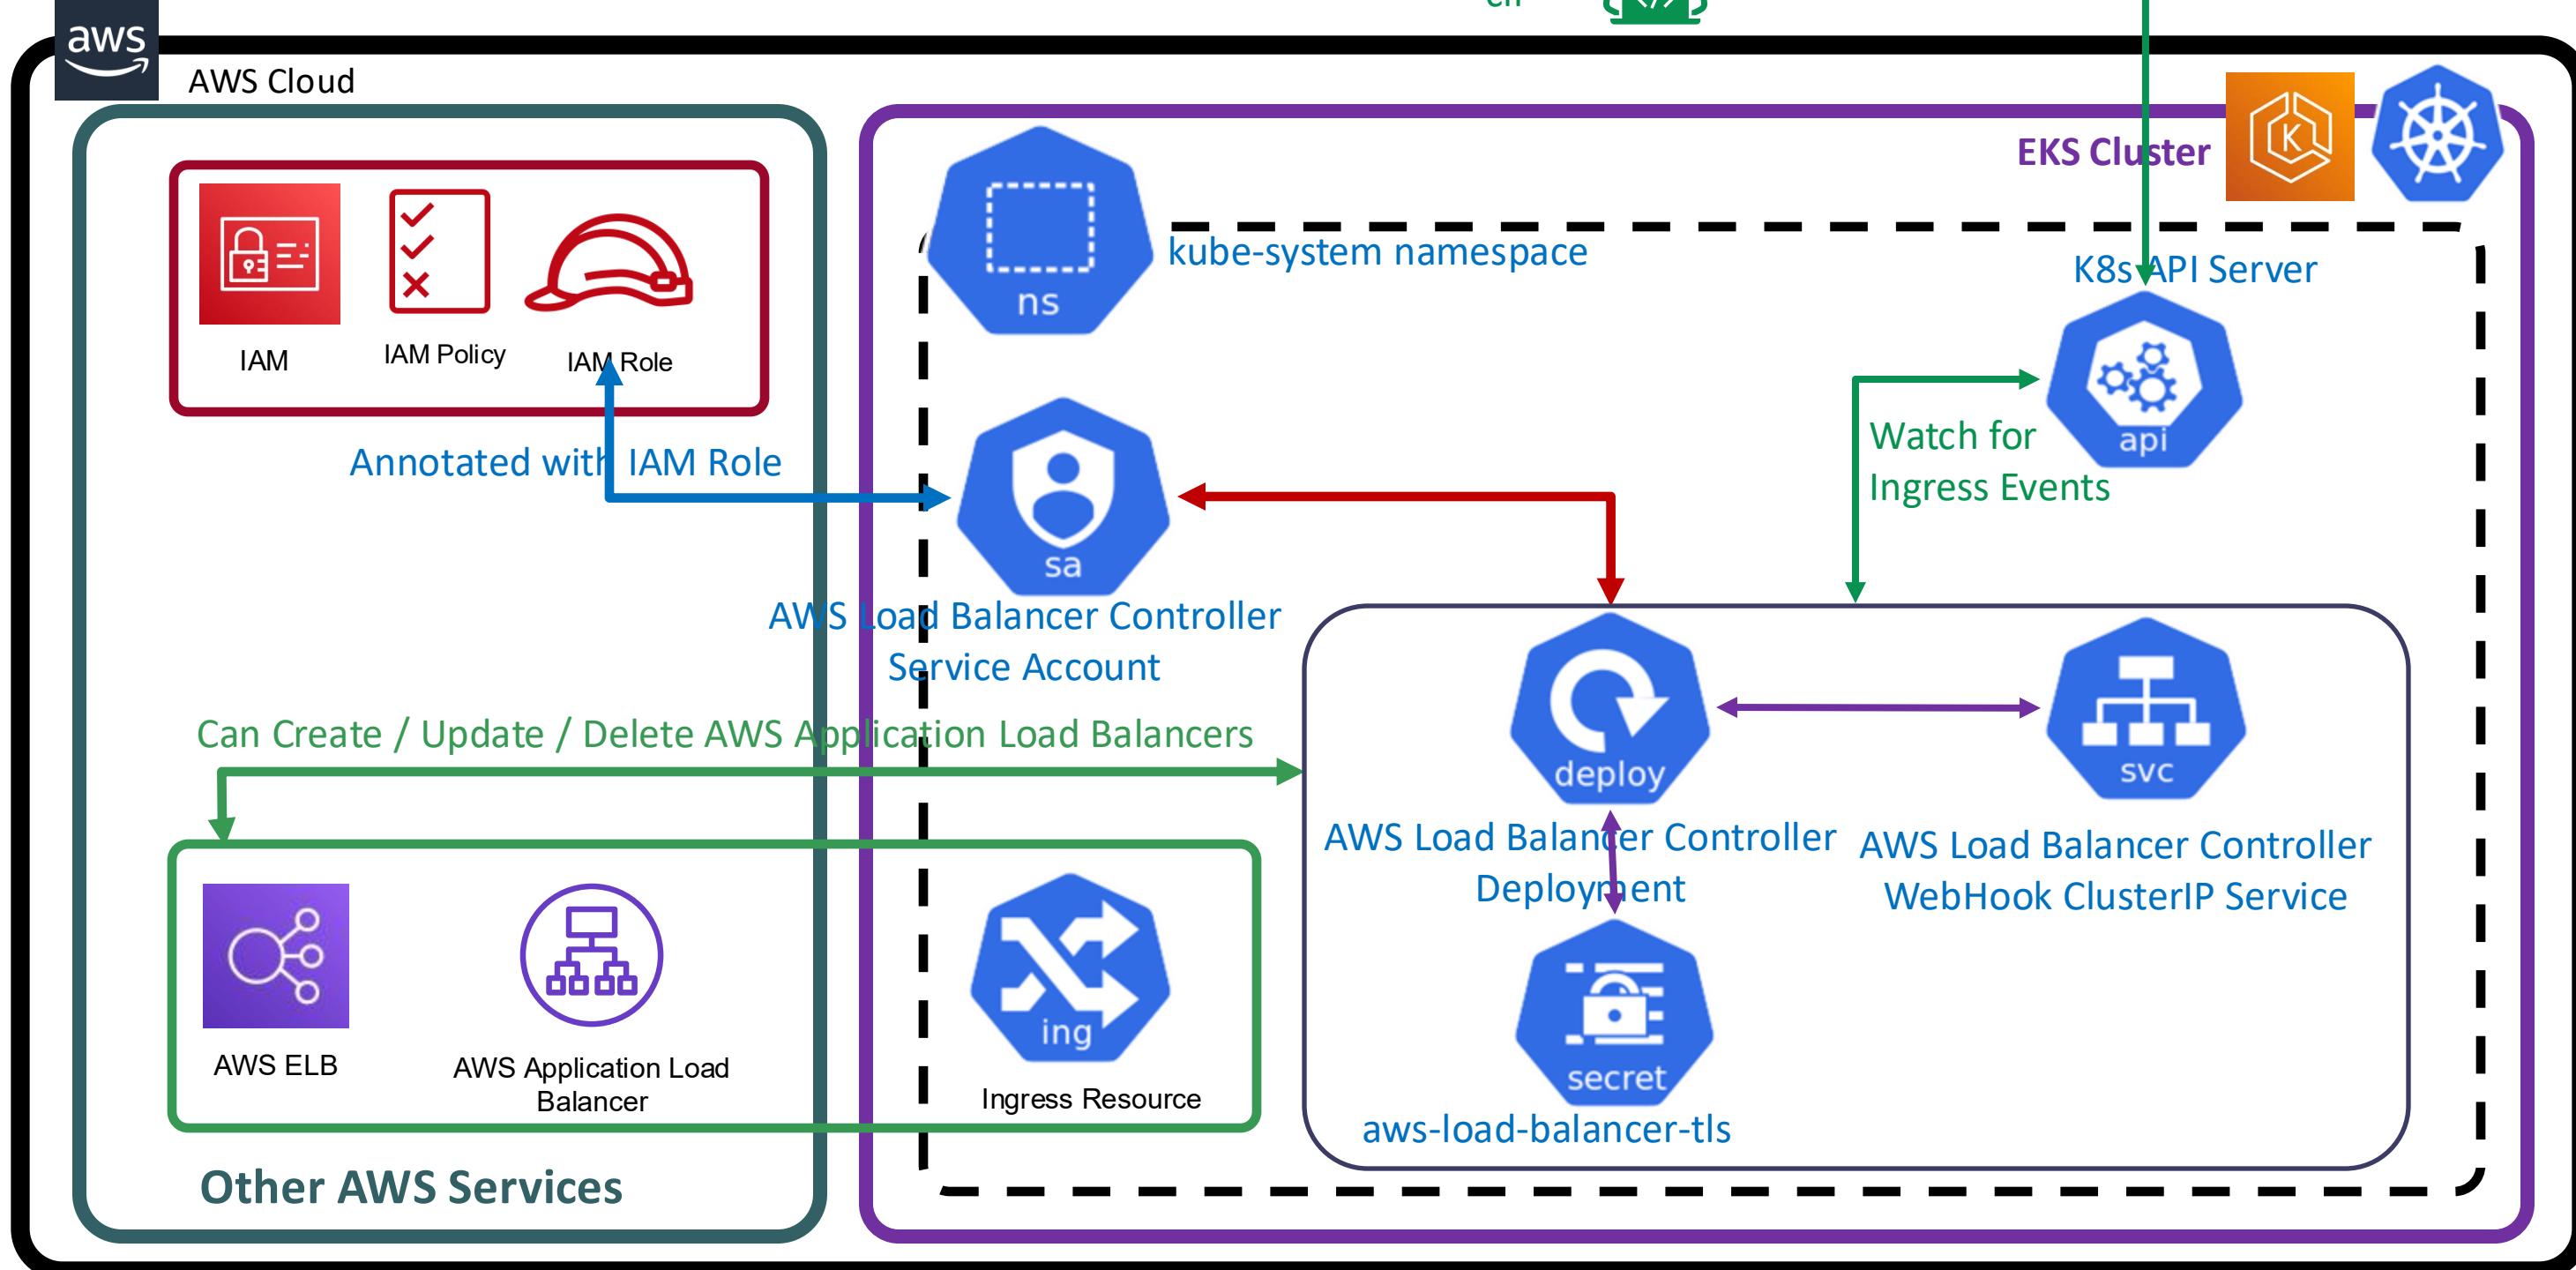


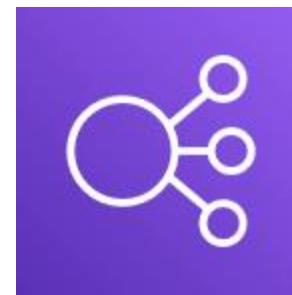

Elastic Load
Balancing

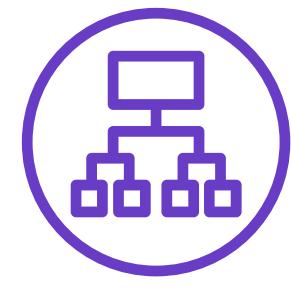

Application
Load Balancer

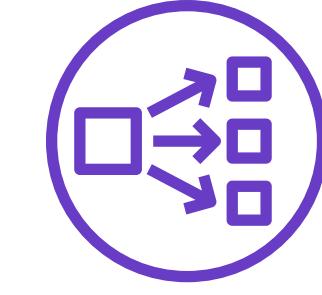

Network
Load Balancer



Kubernetes
Ingress



AWS EKS

Load Balancer Controller



Kubernetes Ingress Class

Kubernetes Ingress Class

AWS EKS ALB
Ingress Controller

NGINX Ingress
Controller

AKS Application
Gateway Ingress
Controller

If we have multiple Ingress Controllers running in our Kubernetes cluster, how to identify to which Ingress Controller our Ingress Resource/Service should be associated to ?

Kubernetes Object
Kind: IngressClass

More Ingress Controllers: <https://kubernetes.io/docs/concepts/services-networking/ingress-controllers/>

Kubernetes Ingress Class

```
apiVersion: networking.k8s.io/v1
kind: IngressClass
metadata:
  name: my-aws-ingress-class
  annotations:
    ingressclass.kubernetes.io/is-default-class: "true"
spec:
  controller: ingress.k8s.aws/alb
```


Ingress Class

```
apiVersion: networking.k8s.io/v1
kind: IngressClass
metadata:
  name: my-aws-ingress-class
  #annotations:
    #ingressclass.kubernetes.io/is-default-class: "true"
spec:
  controller: ingress.k8s.aws/alb
```


If **IngressClass** is not defined as **is-default-class:true** then in Ingress Resource we need to define the **spec.ingressClassName** in Ingress Resource

Ingress Resource


```
apiVersion: networking.k8s.io/v1
kind: Ingress
metadata:
  name: ingress-nginxapp1
  labels:
    app: app1-nginx
  annotations:
    alb.ingress.kubernetes.io/load-balancer-name: app1ingress
    alb.ingress.kubernetes.io/scheme: internet-facing
spec:
  ingressClassName: my-aws-ingress-class # Ingress Class
  defaultBackend:
    service:
      name: app1-nginx-nodeport-service
      port:
        number: 80
```

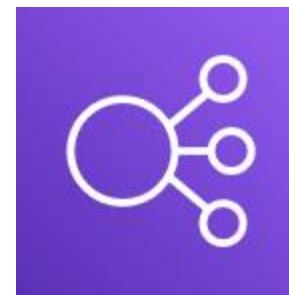

Elastic Load
Balancing

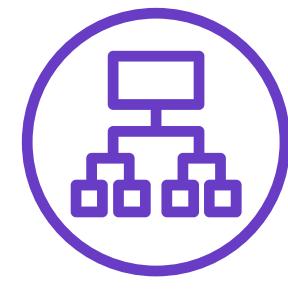

Application
Load Balancer

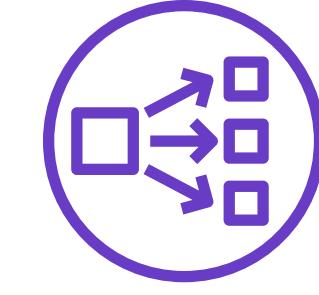

Network
Load Balancer



Kubernetes
Ingress



AWS EKS

Load Balancer Controller



Kubernetes Ingress Basics

Ingress Manifest – Key Items

Ingress Annotations
(Load Balancer Settings)

Ingress Spec
Ingress Class Name
(Which Ingress Controller to use)

Ingress Spec
(Define Ingress Routing Rules, Default Backend)

Annotations Reference: <https://kubernetes-sigs.github.io/aws-load-balancer-controller/v2.3/guide/ingress/annotations/#annotations>


Two Ingress Basic Demos


Demo-1

Demo-2


Ingress Service
with
Default Backend

Ingress Service
with
Ingress Rules

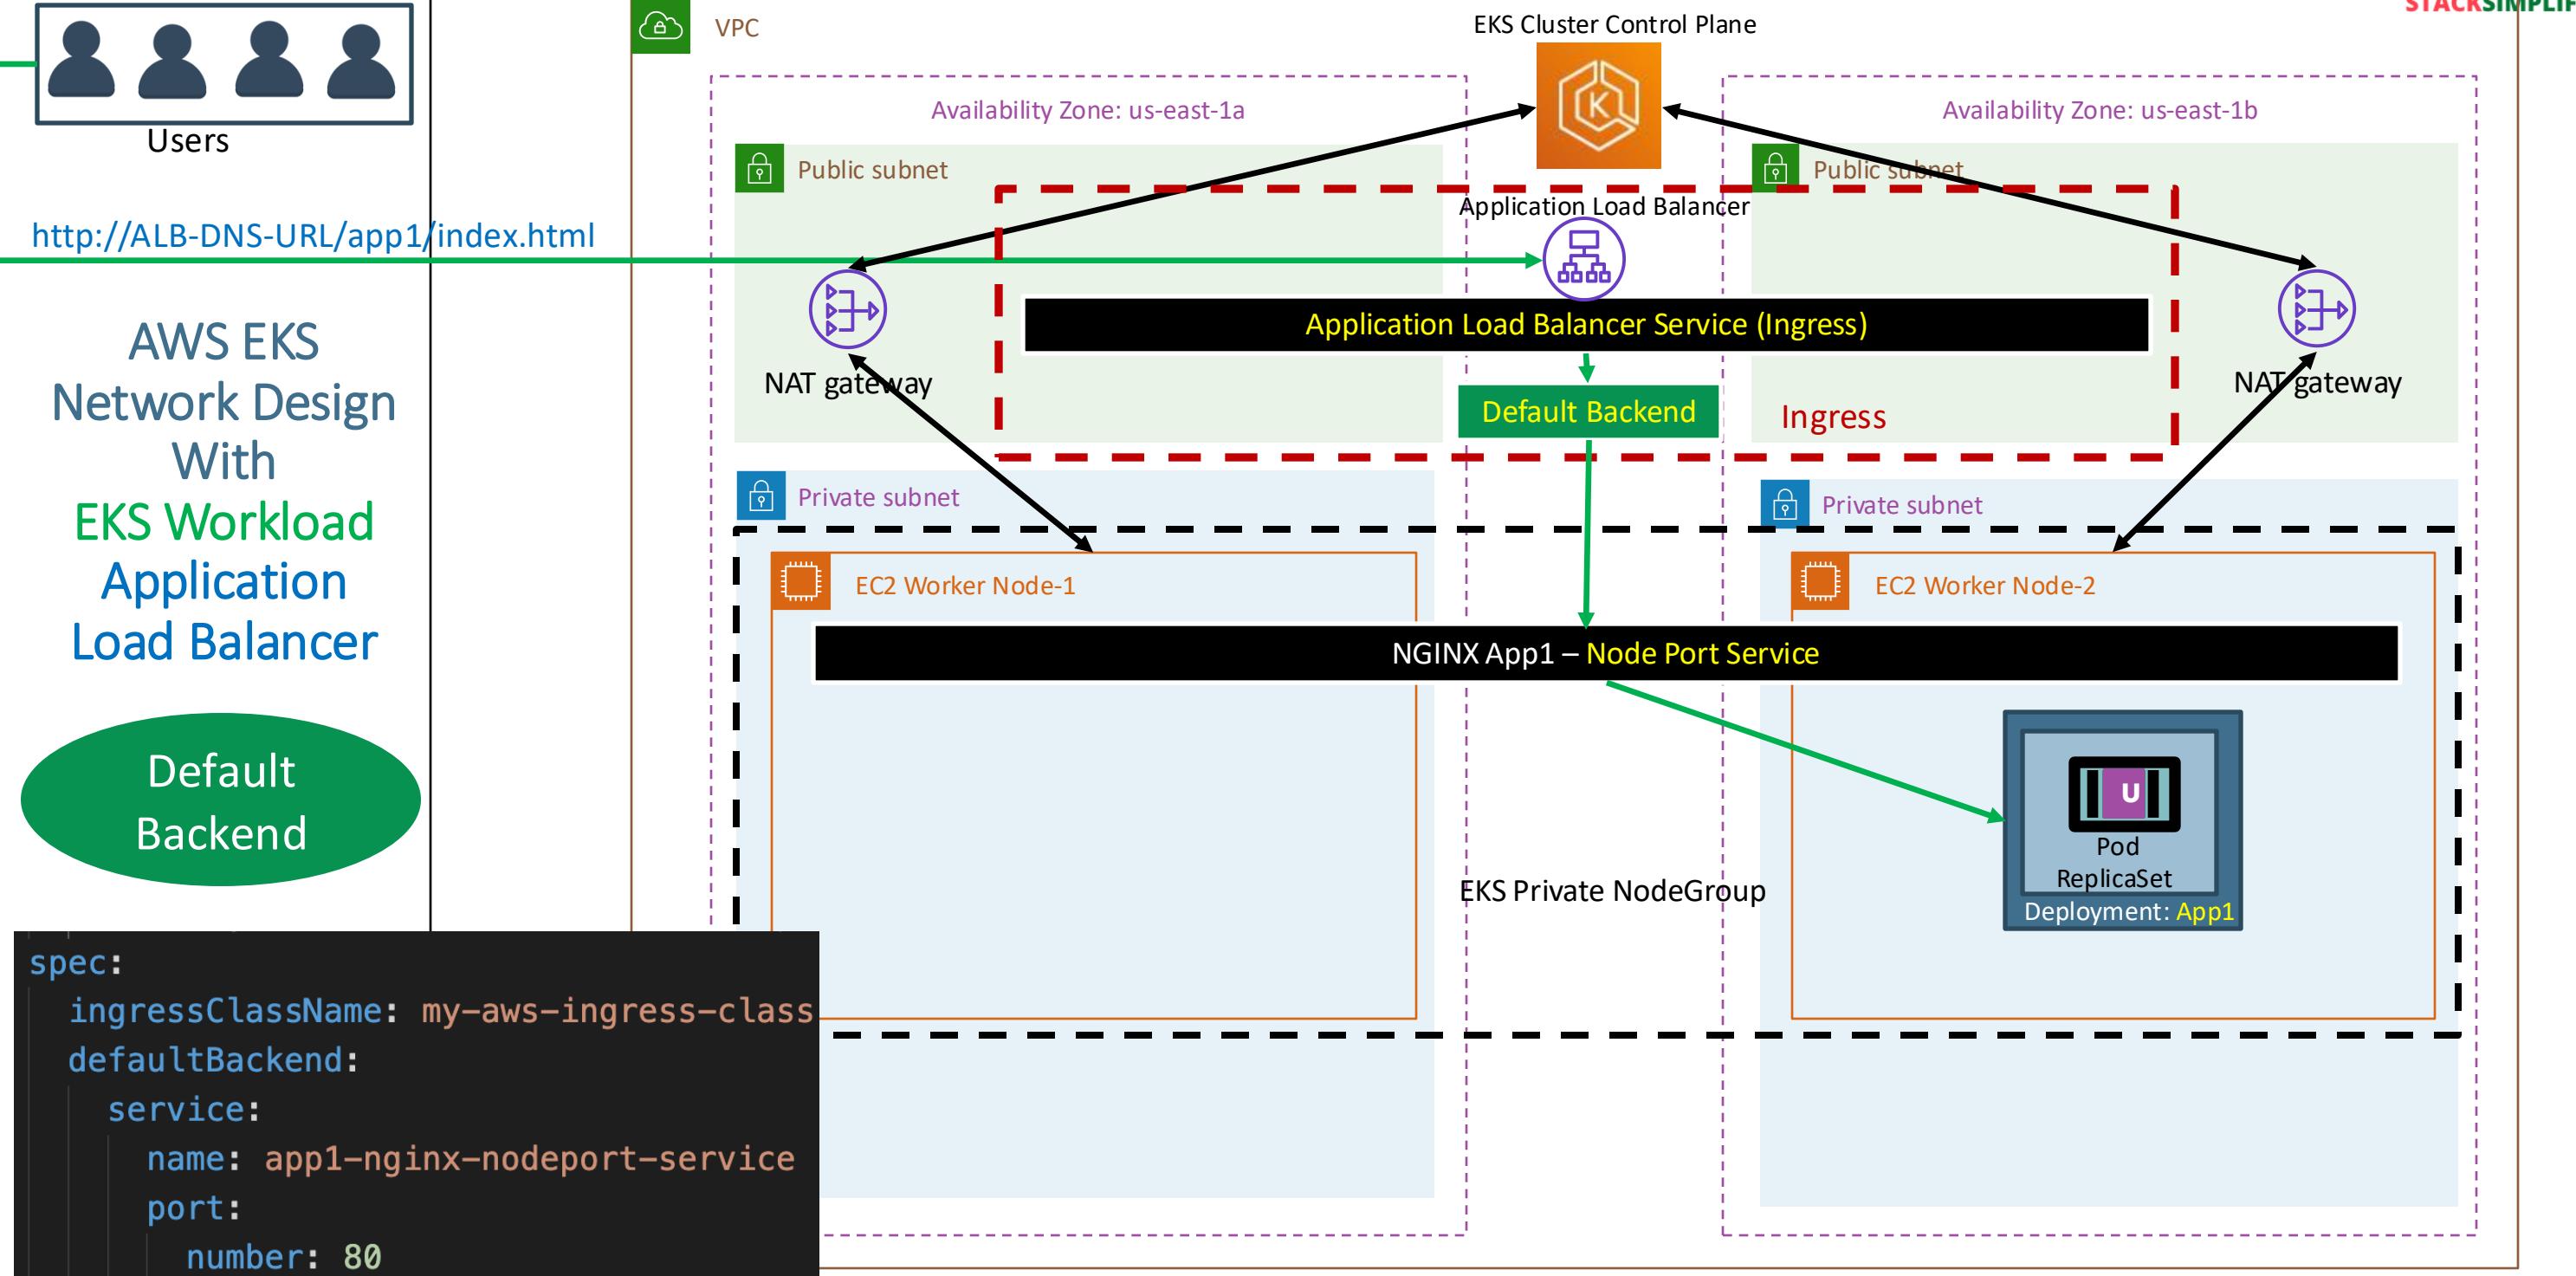


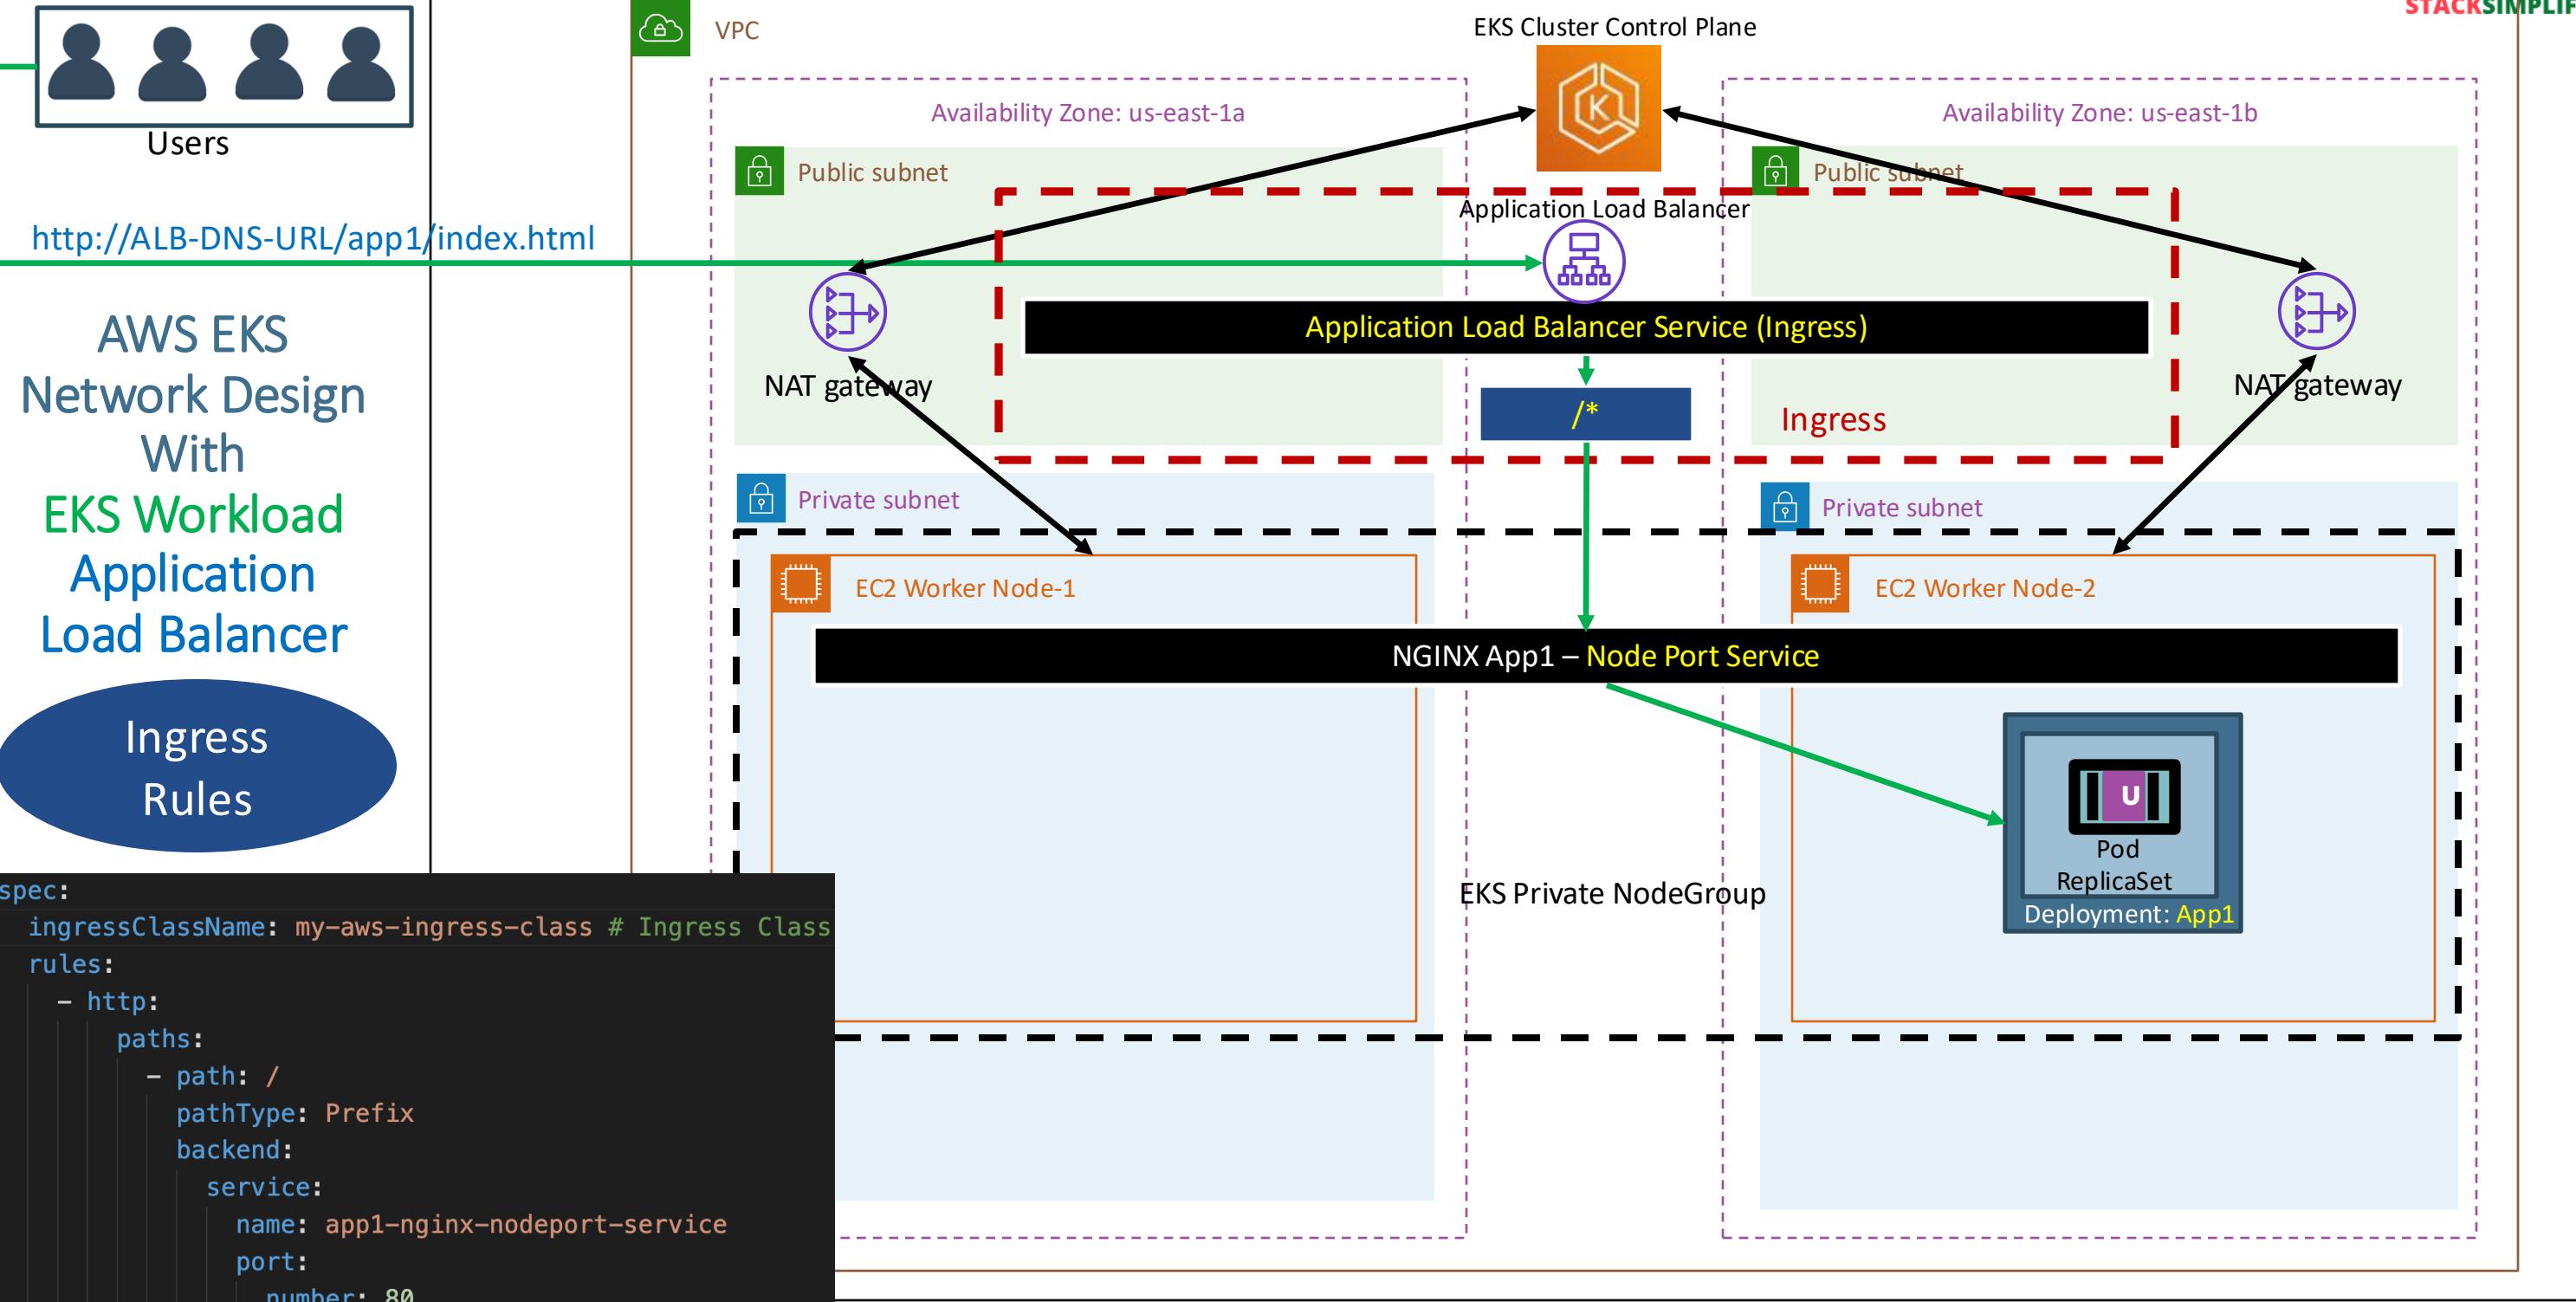


How AWS Load Balancer controller works?

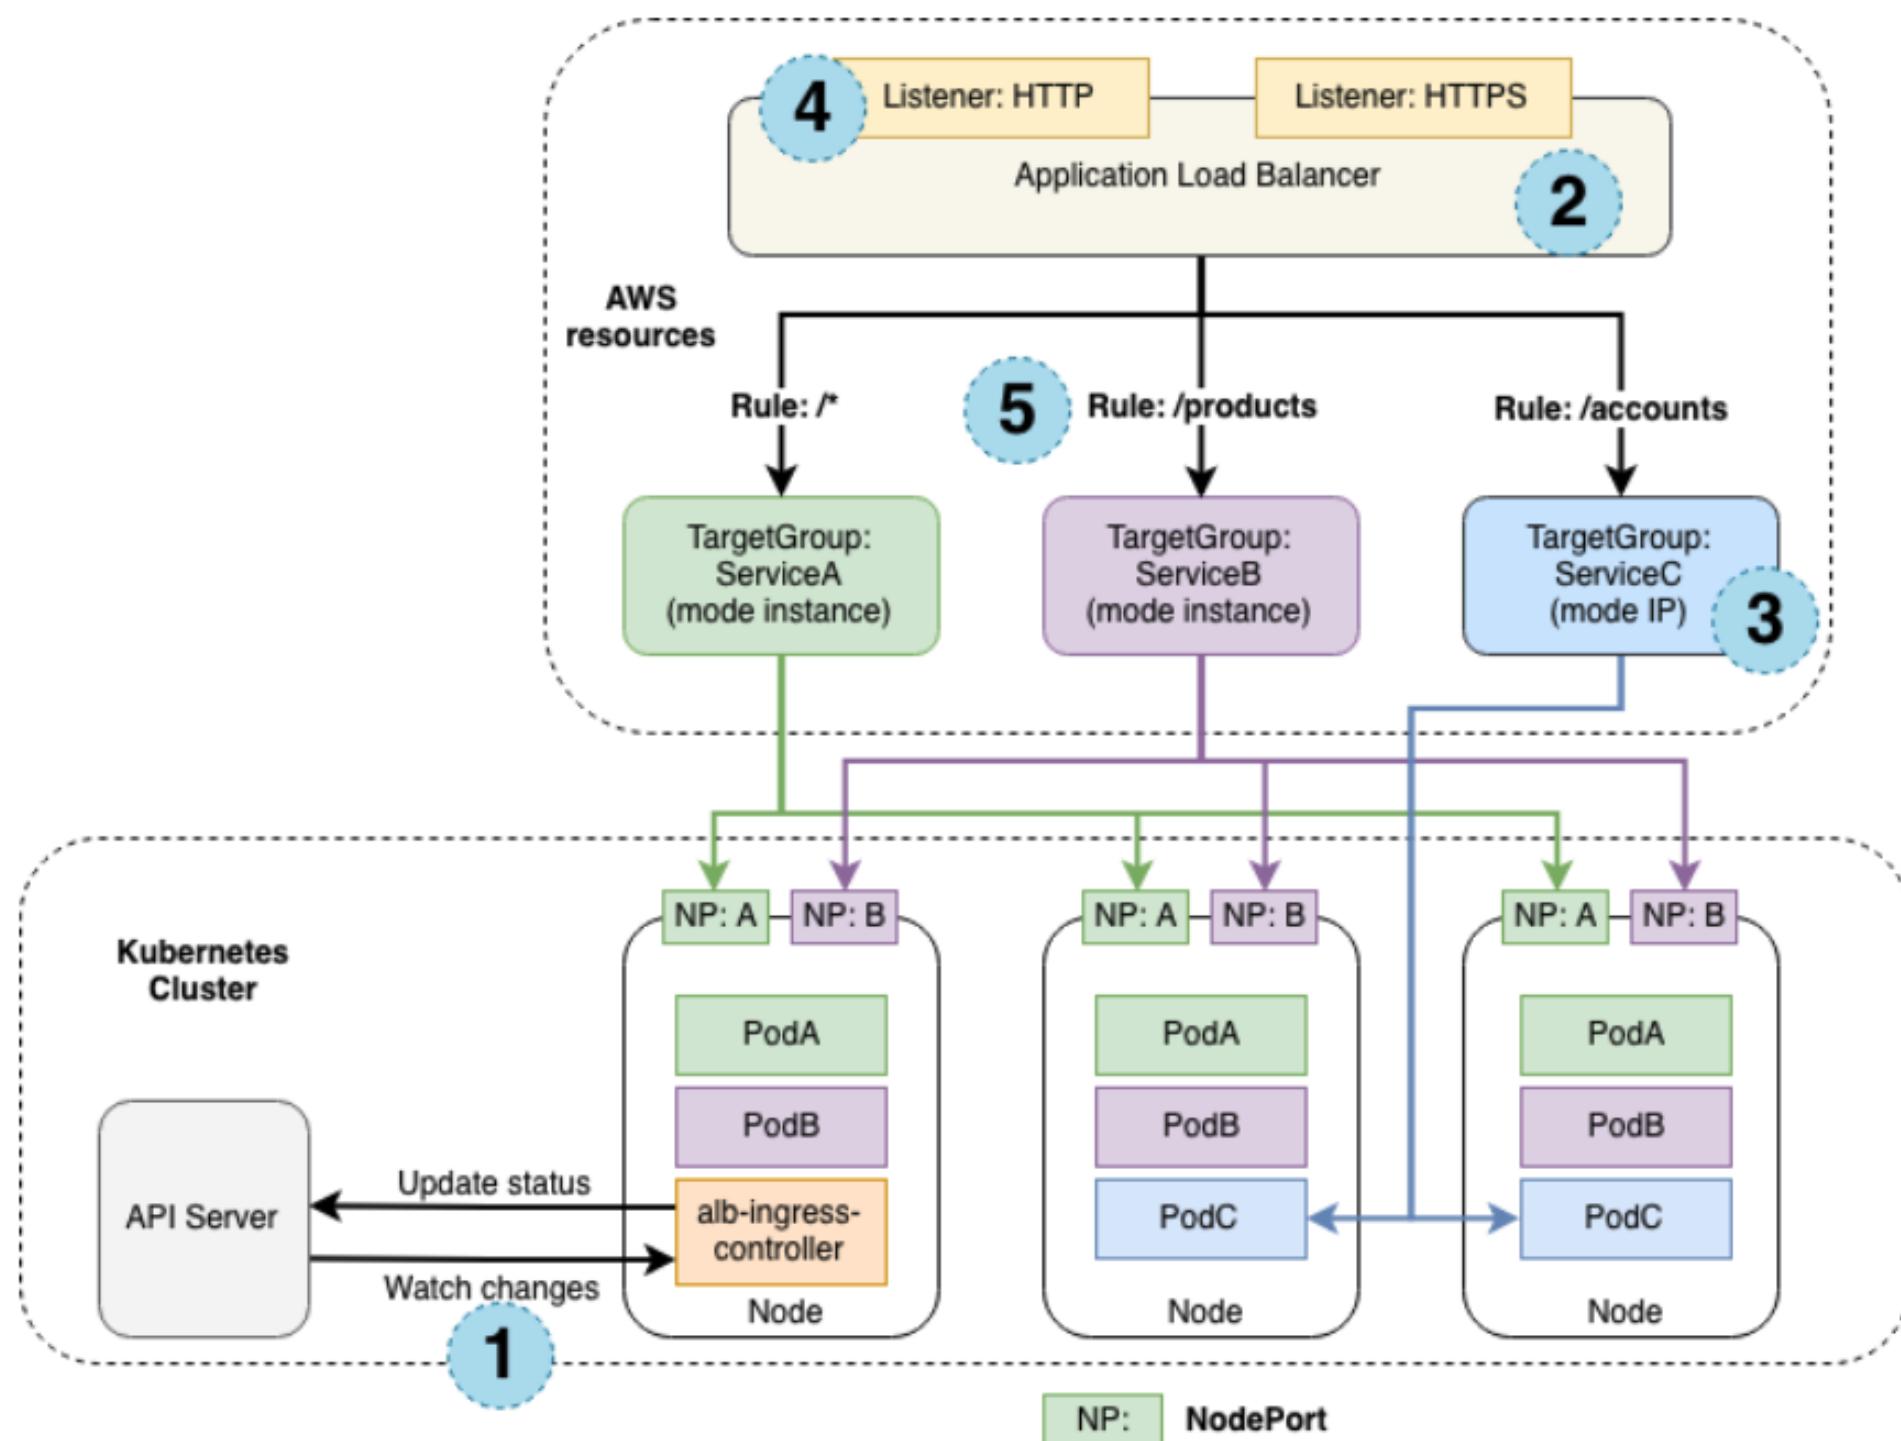


Reference: <https://kubernetes-sigs.github.io/aws-load-balancer-controller/v2.3/how-it-works/>

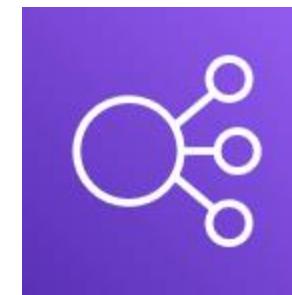

Elastic Load
Balancing

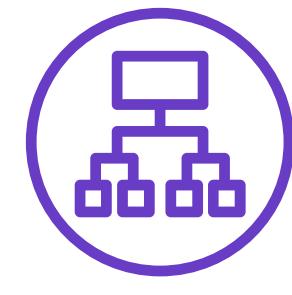

Application
Load Balancer

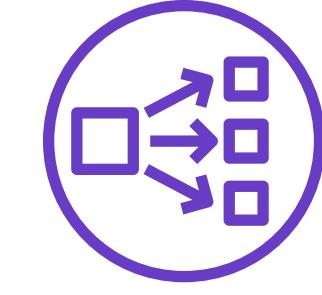

Network
Load Balancer



Kubernetes
Ingress




AWS EKS Load Balancer Controller




Kubernetes Ingress

Context Path based Routing

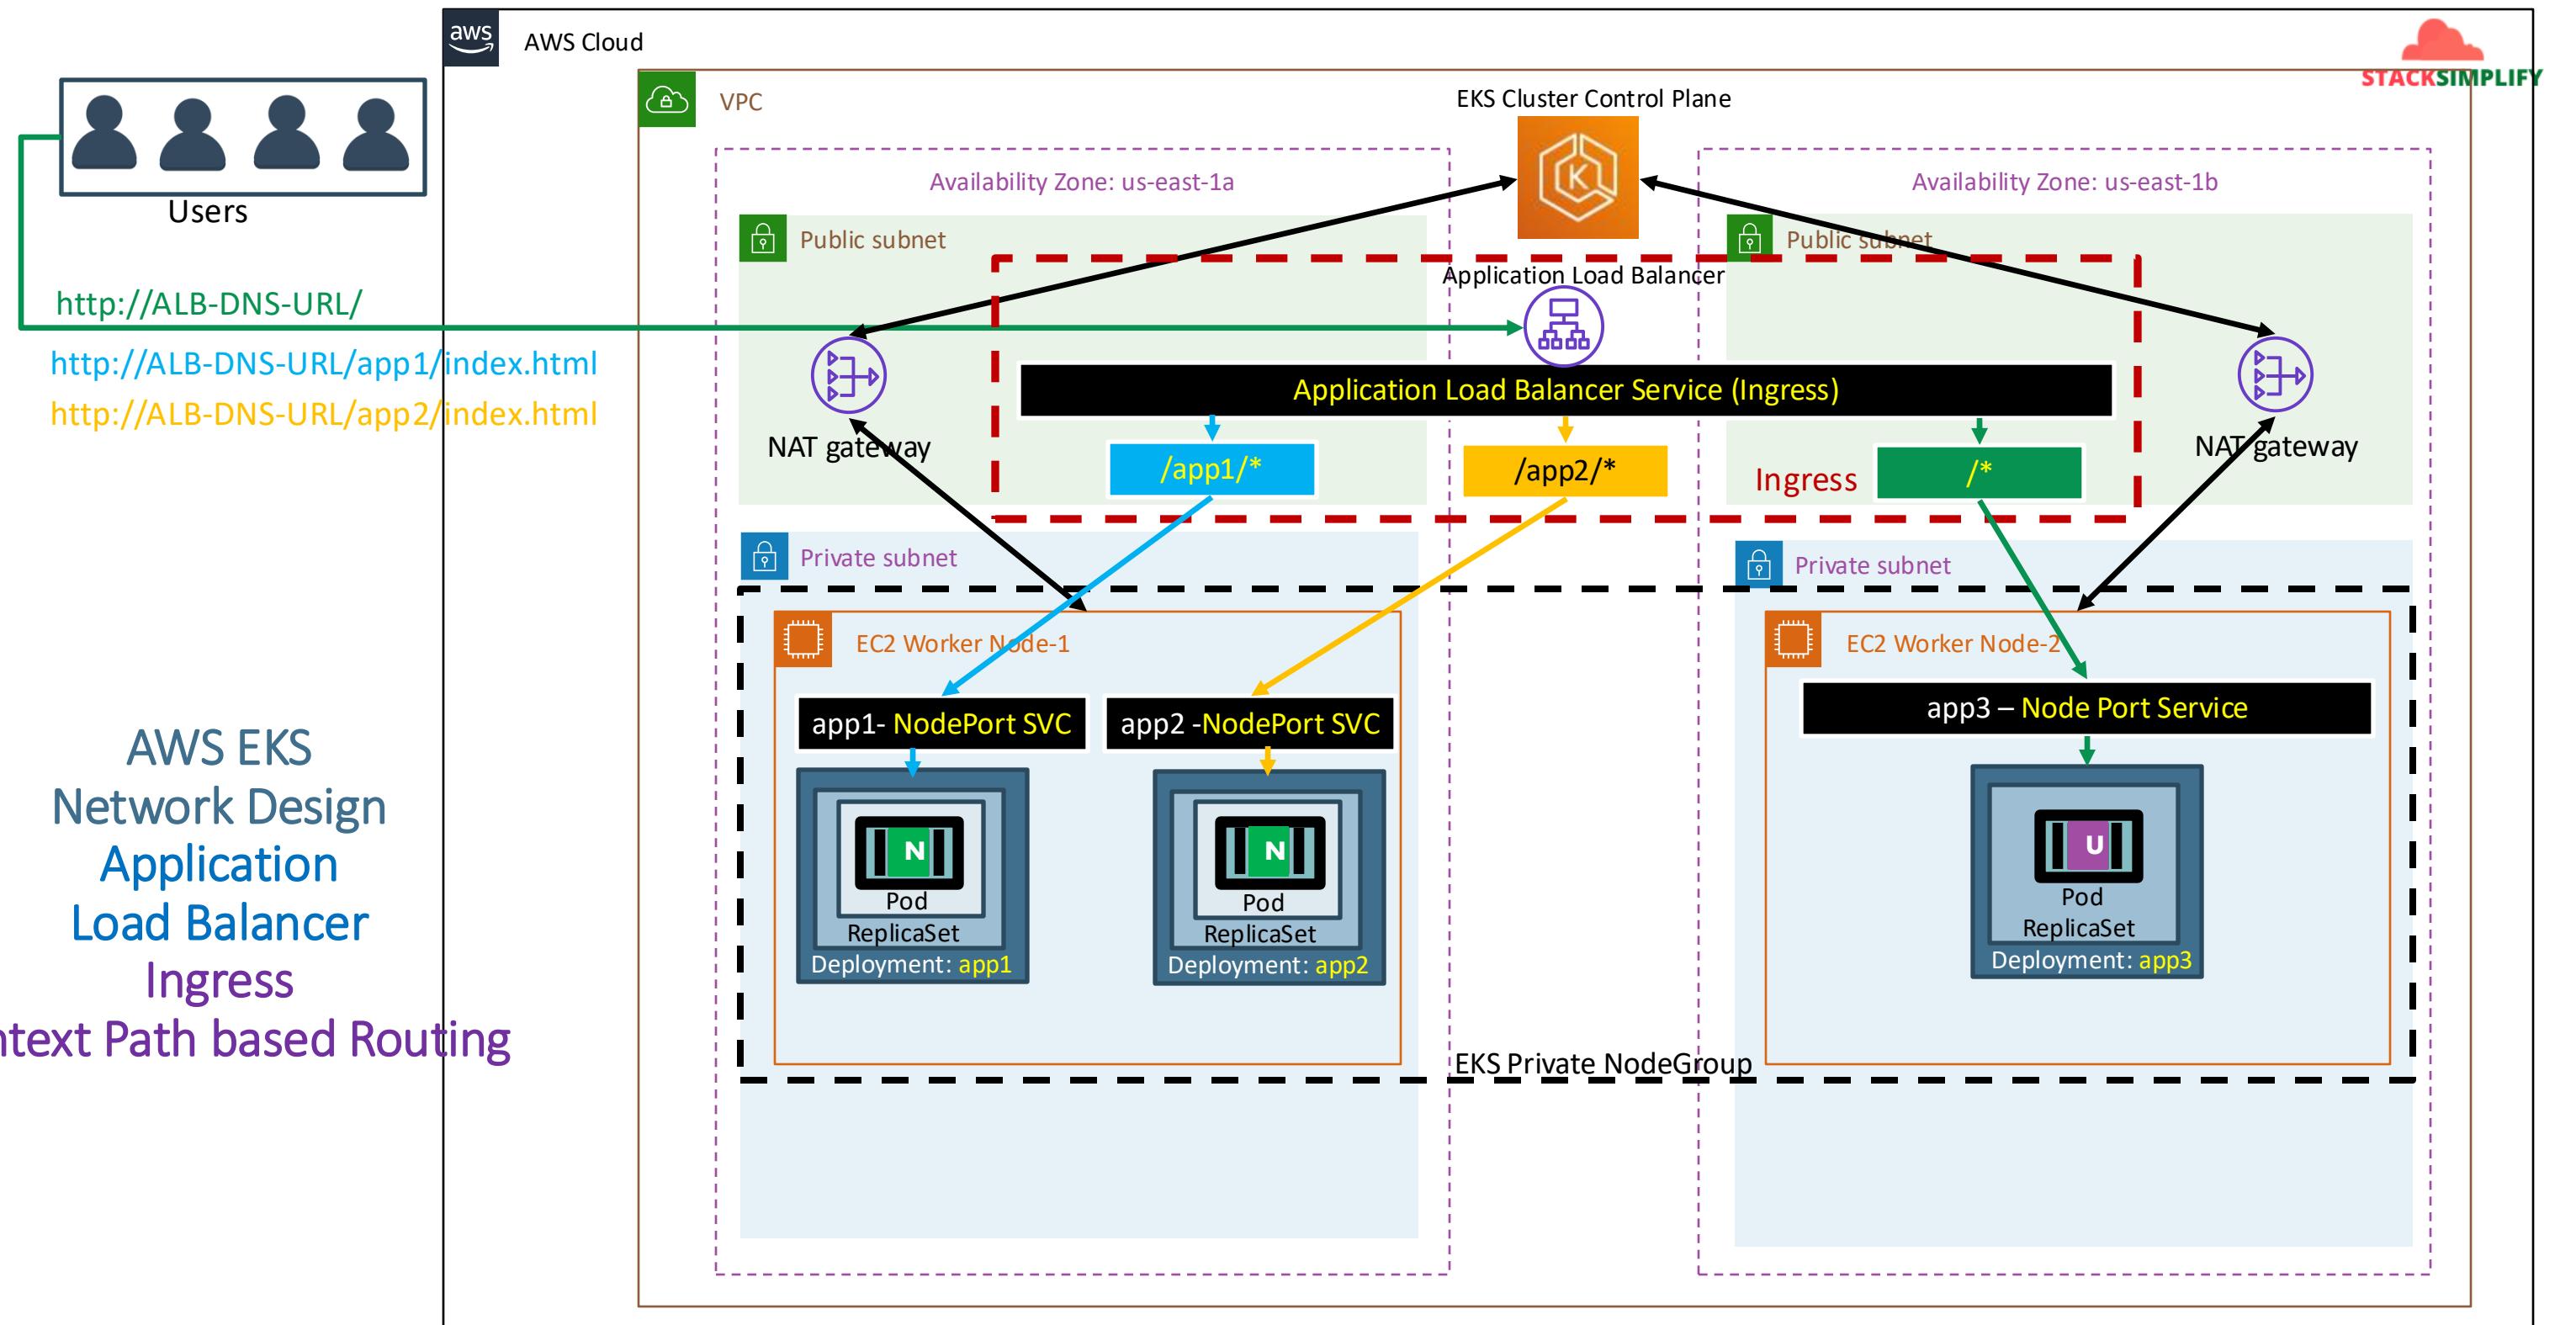


AWS EKS ALB Ingress – Context Path Based Routing

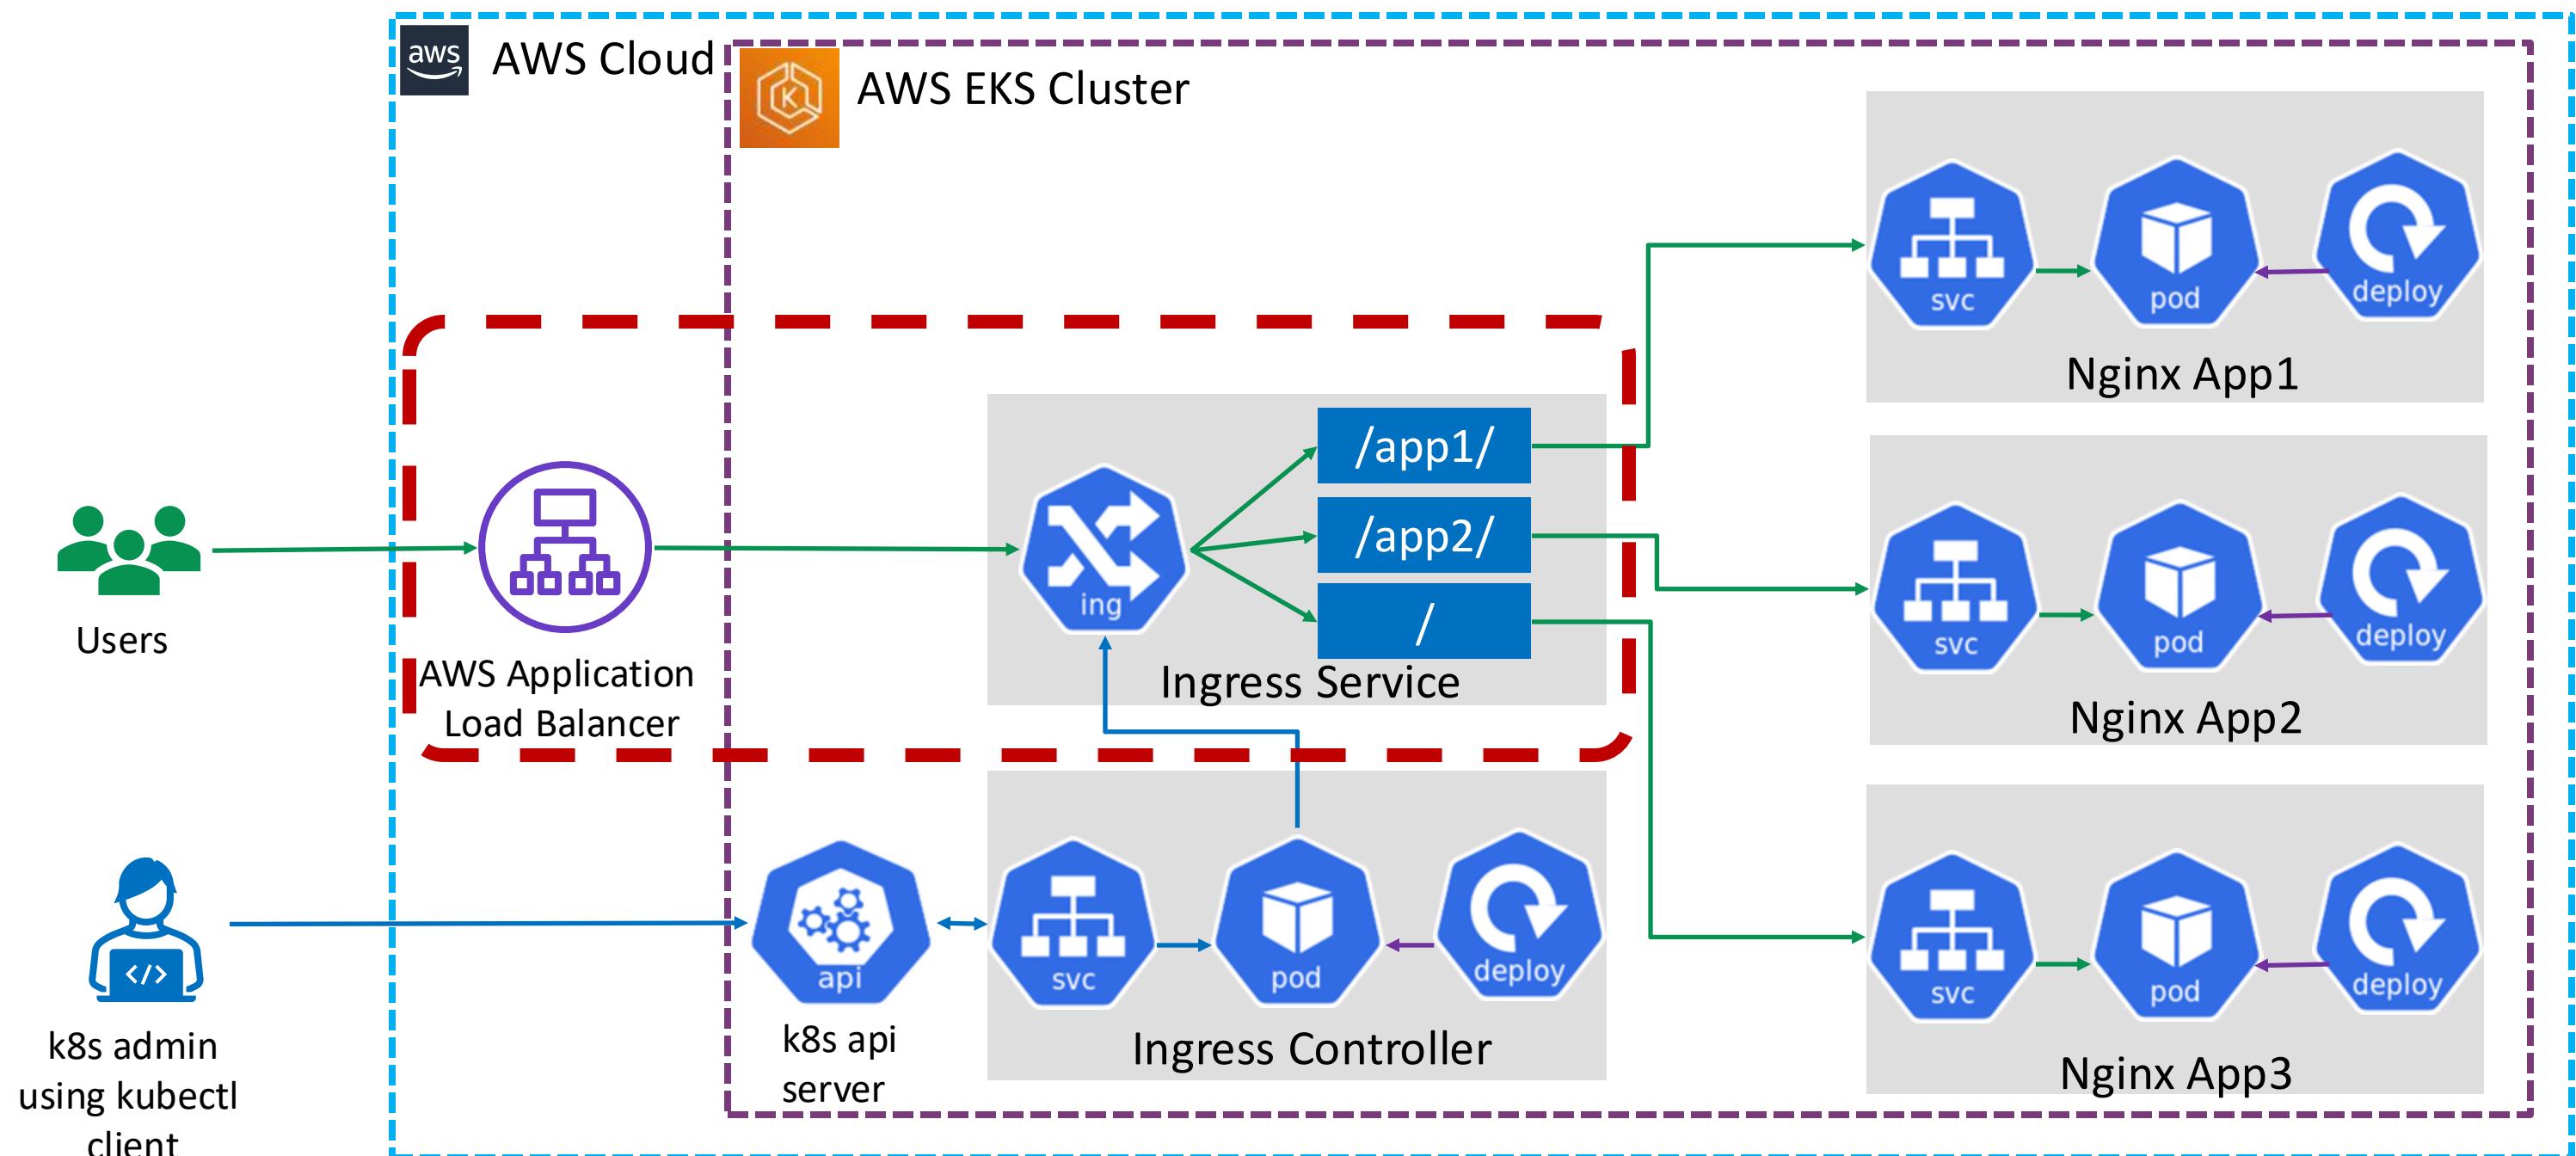




Elastic Load
Balancing

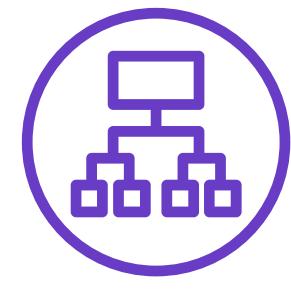

Application
Load Balancer

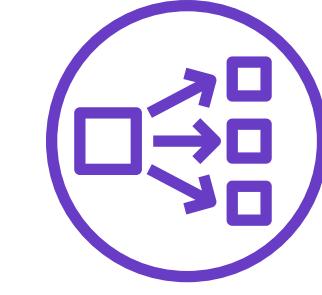

Network
Load Balancer



Kubernetes
Ingress



AWS EKS

Load Balancer Controller

Kubernetes Ingress

SSL



ALB Ingress SSL

Task-1: Register AWS Route53 DNS Domain

Task-2: Create SSL Certificate in AWS Certificate Manager

Task-3: Update SSL Annotations in Ingress Service


Task-4: Deploy k8s manifests and Test



AWS
Route 53



AWS
Certificate Manager

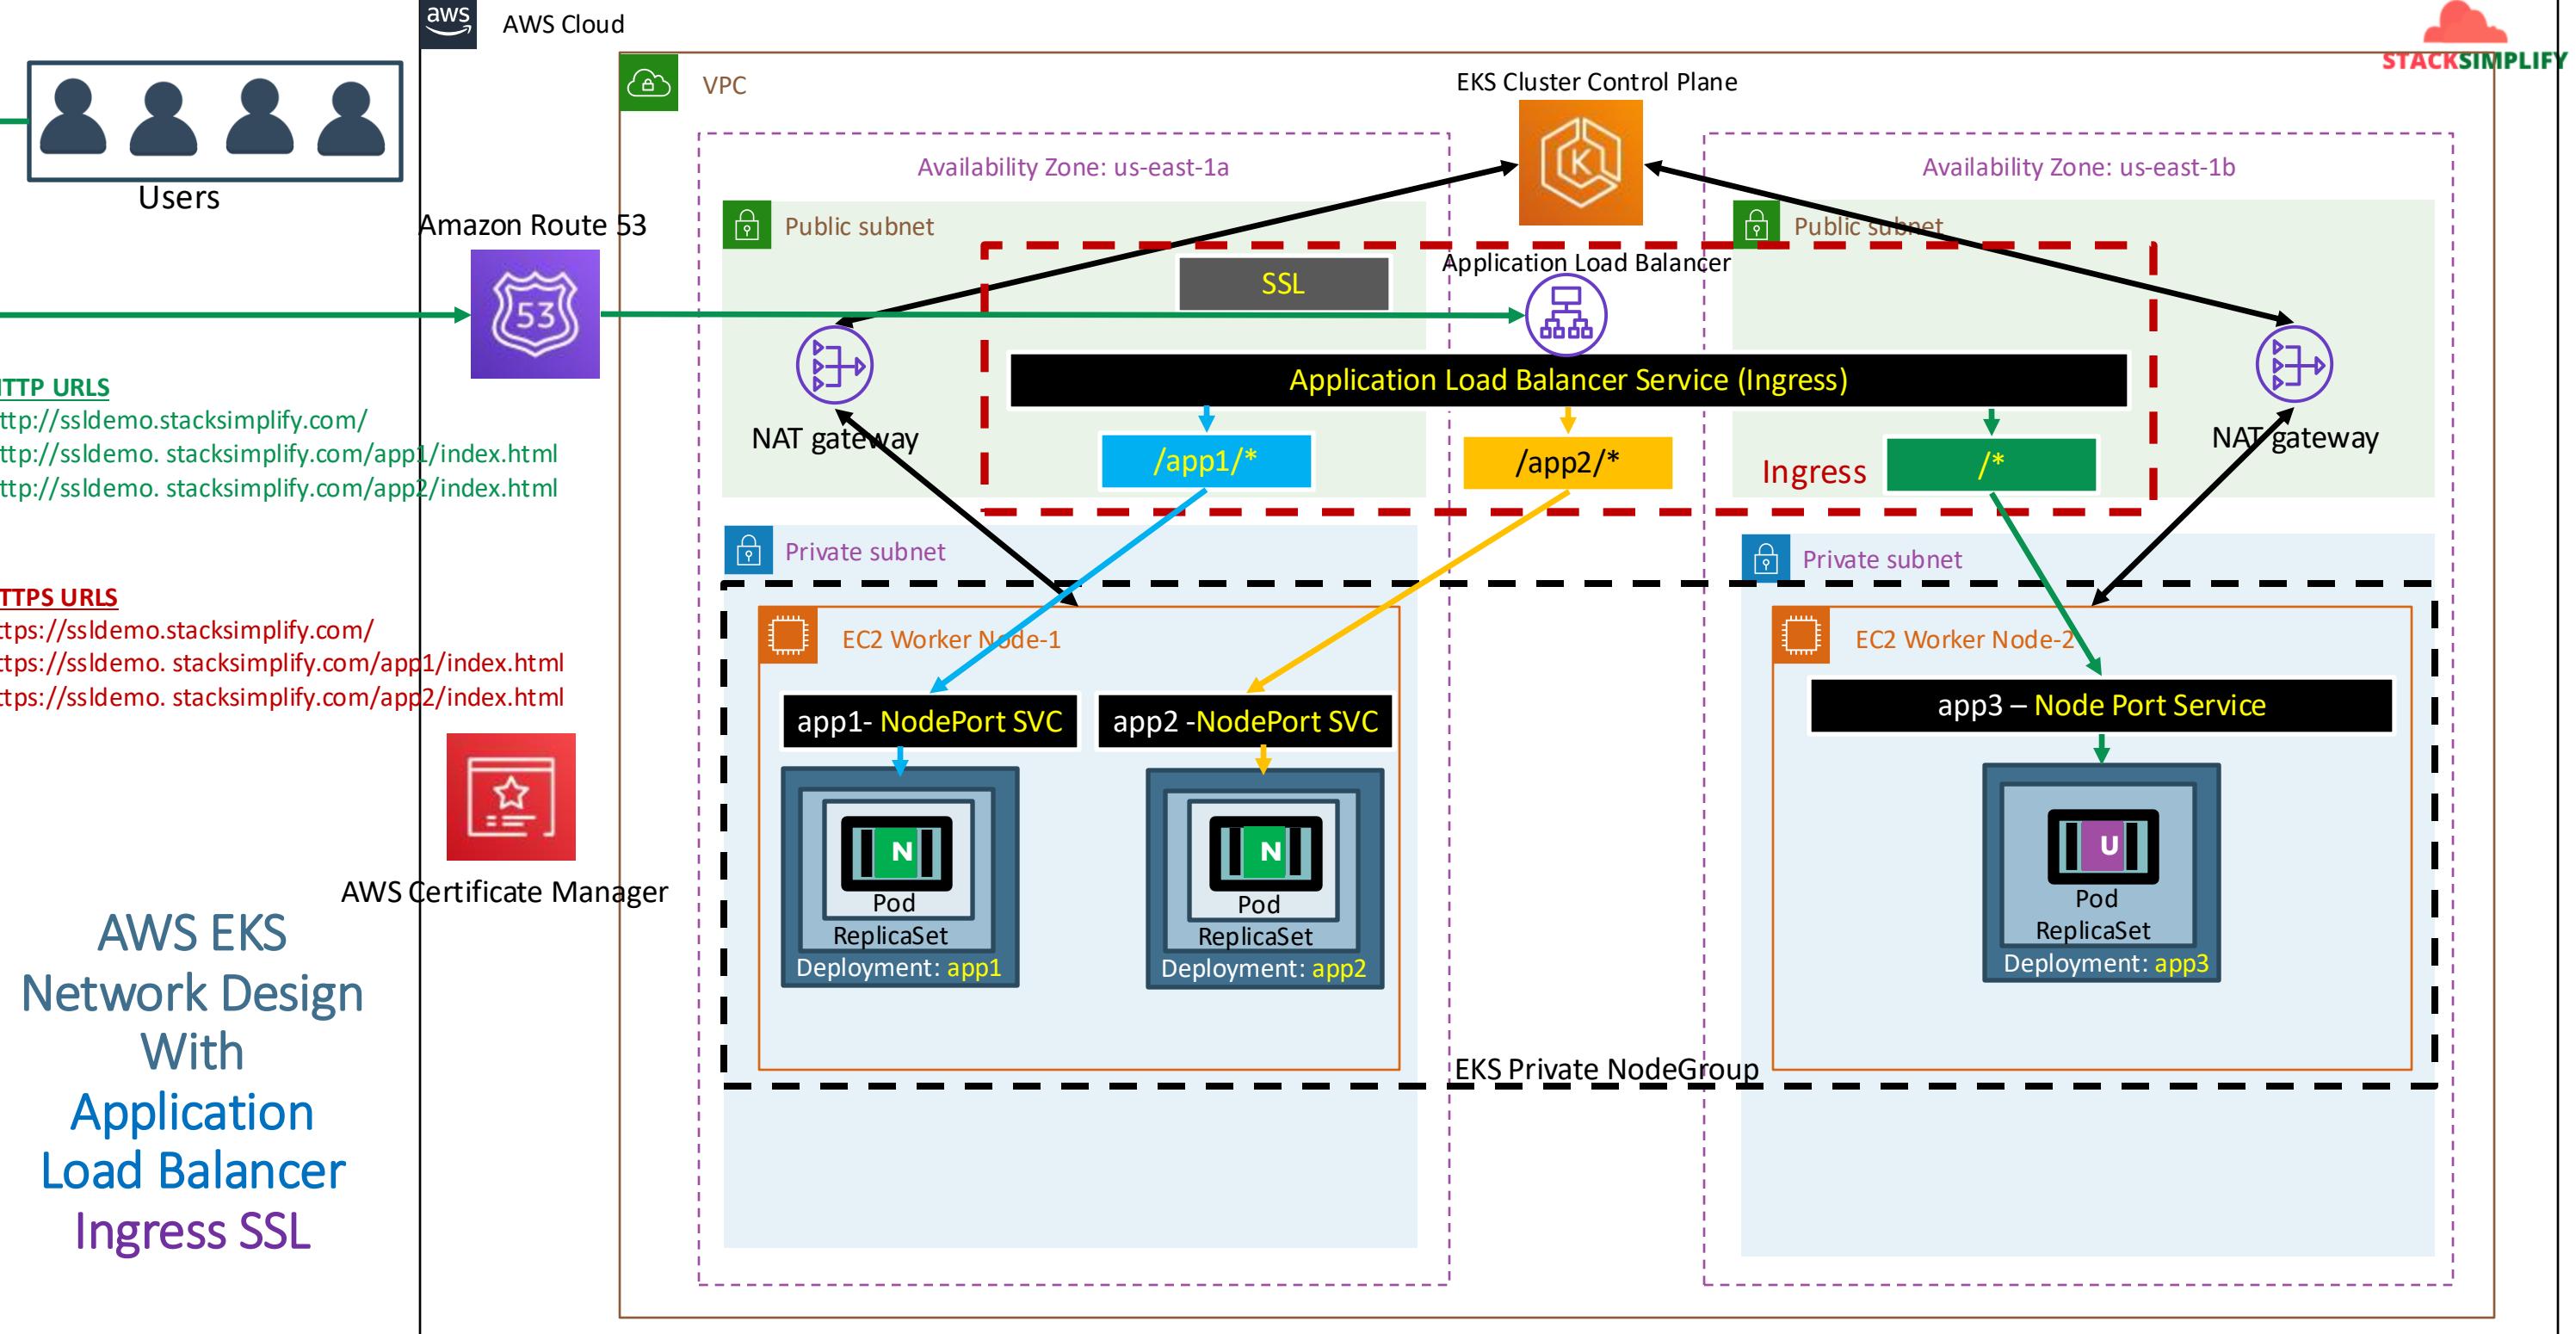


Register a Domain using AWS Route53




stacksimplify.com is already a registered domain used for our websites




We are going to use Domain named **kubeoncloud.com** to register a new domain using AWS Route53

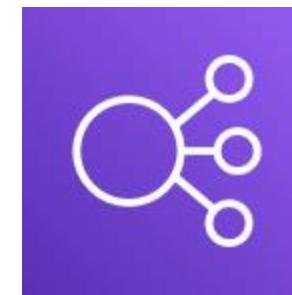

Elastic Load
Balancing

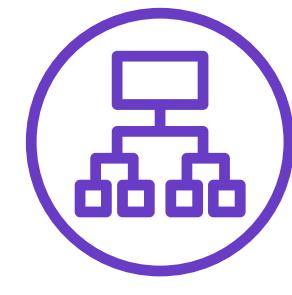

Application
Load Balancer

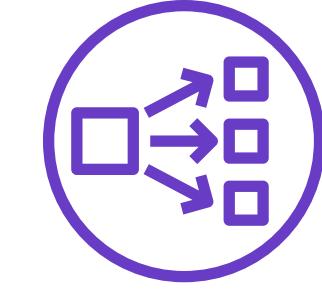

Network
Load Balancer



Kubernetes
Ingress




AWS EKS

Load Balancer Controller




Kubernetes Ingress SSL Redirect

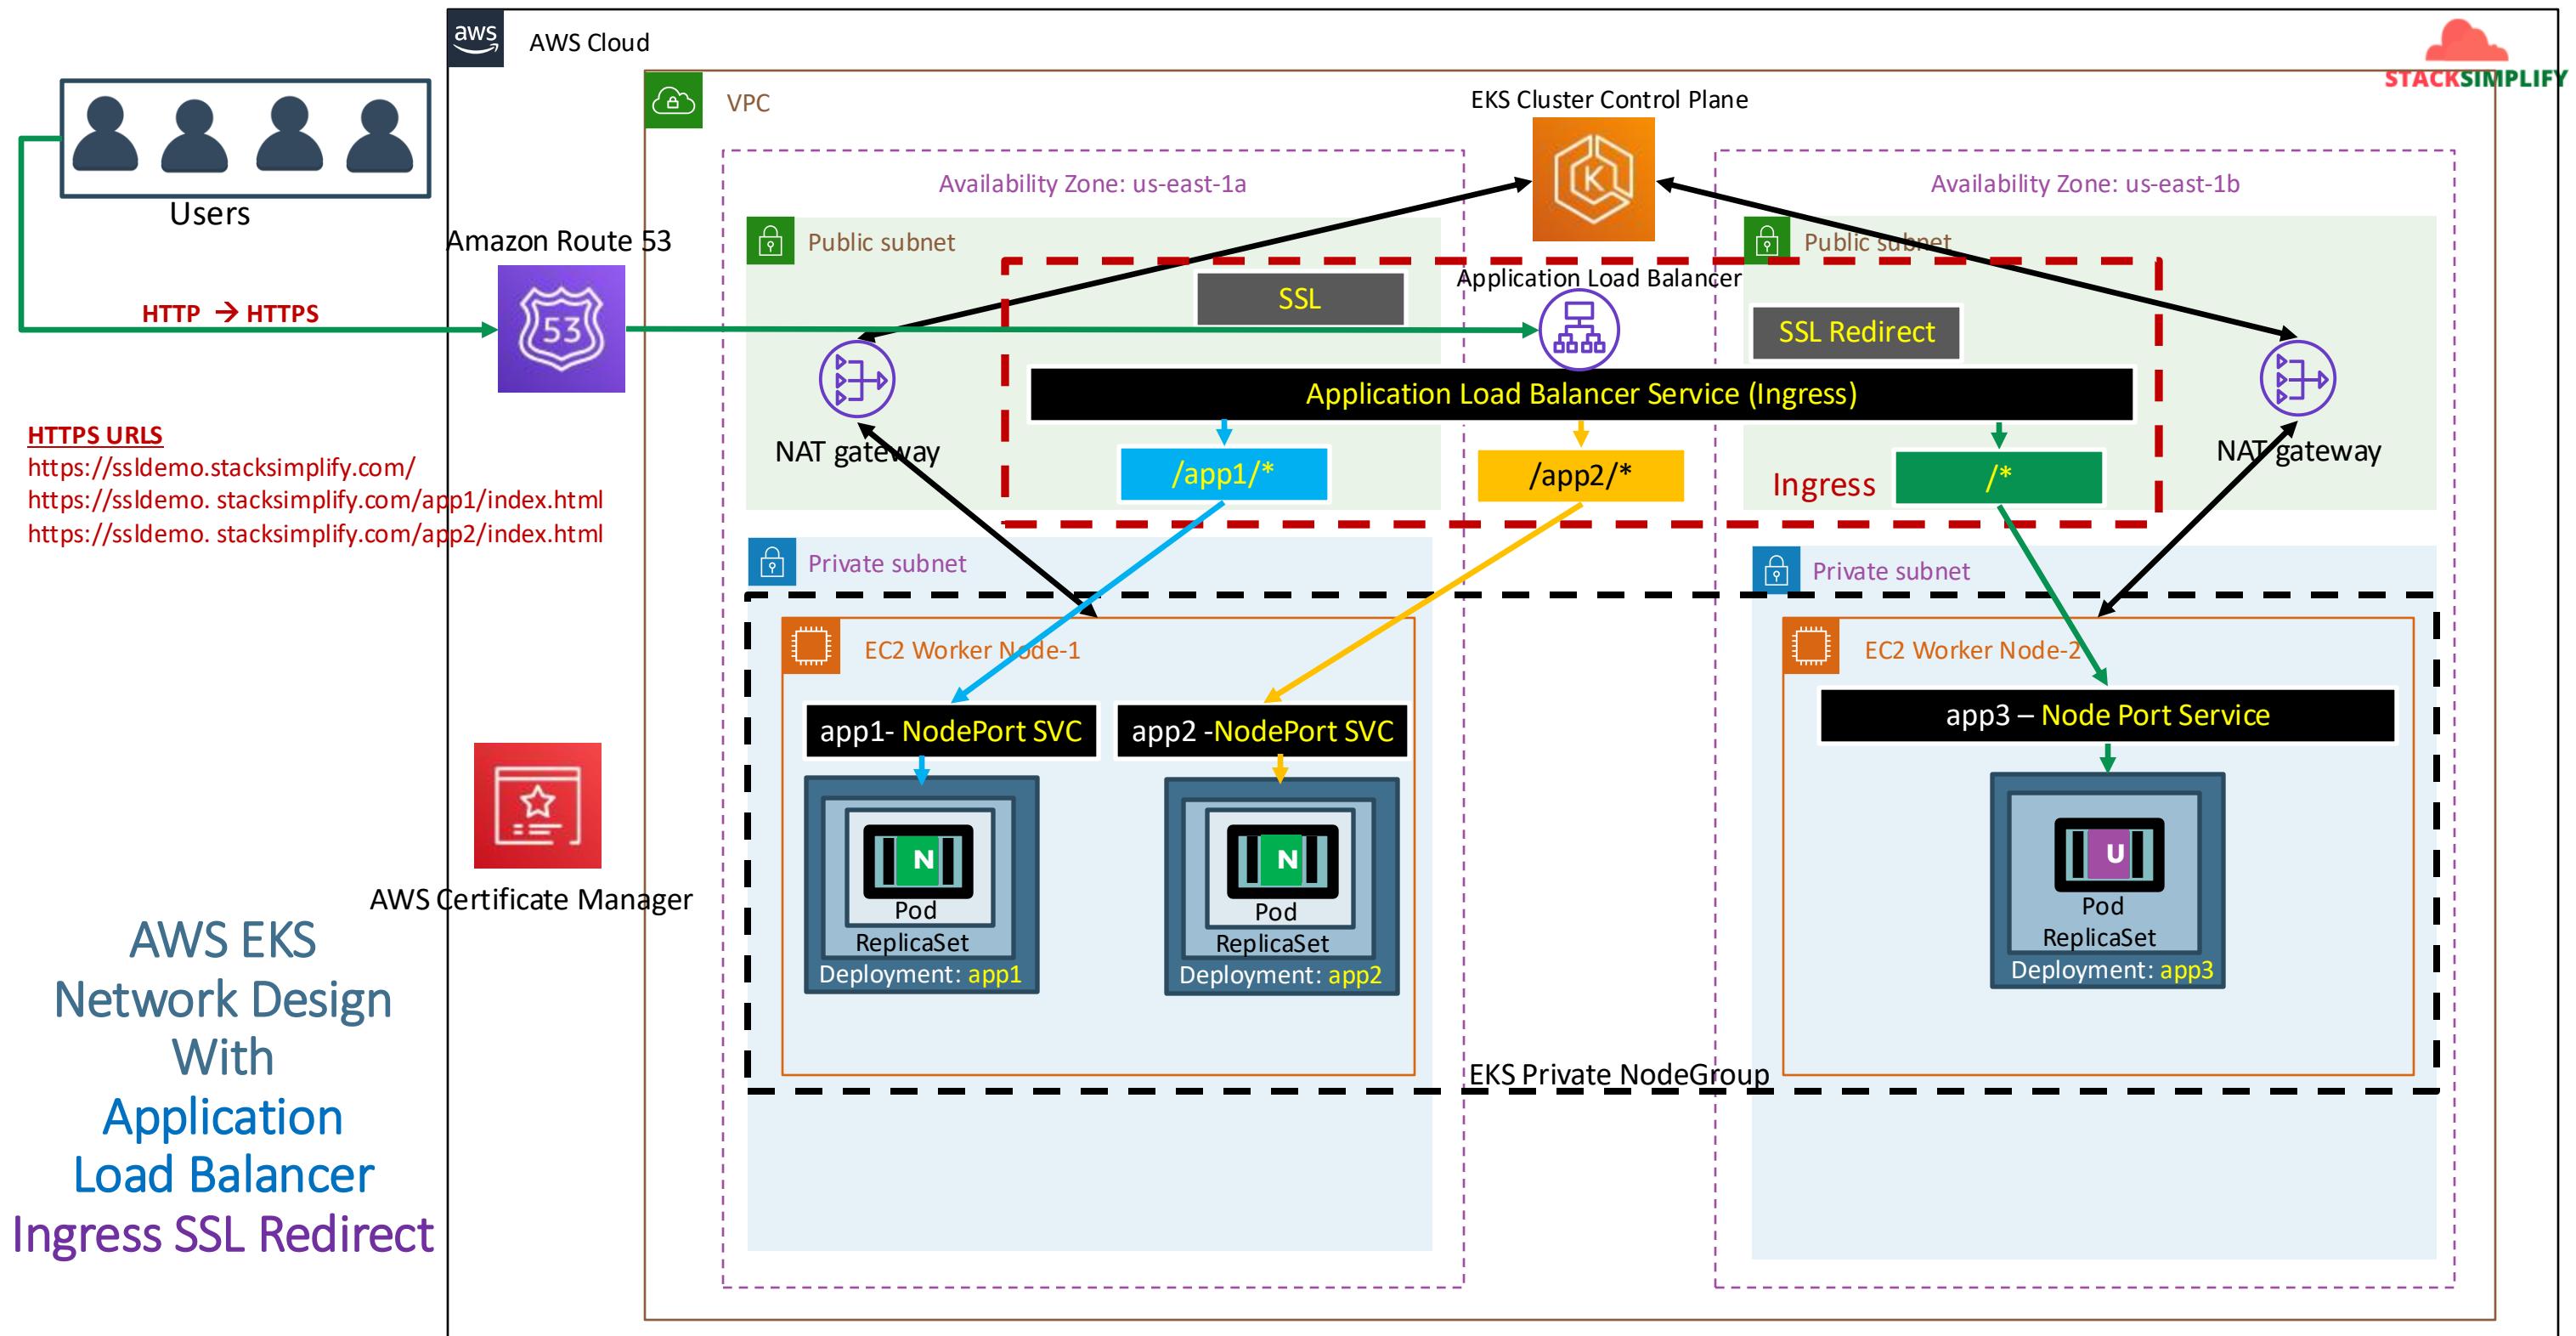




Elastic Load
Balancing

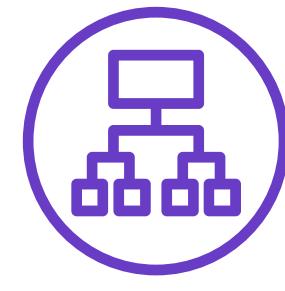

Application
Load Balancer

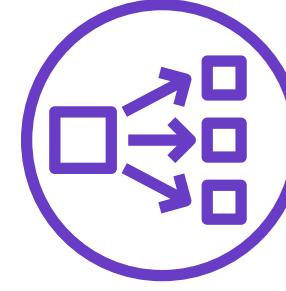

Network
Load Balancer



Kubernetes
Ingress



External
DNS



AWS EKS

Load Balancer Controller


External DNS Install



Kubernetes External DNS

In previous SSL Demos, we added AWS Route53 DNS Record **manually** (`ssldemo101.stack simplify.com`)

With External DNS we can **automatically** add it for a Kubernetes **Ingress Service** or Kubernetes **Service** by defining it as Annotation

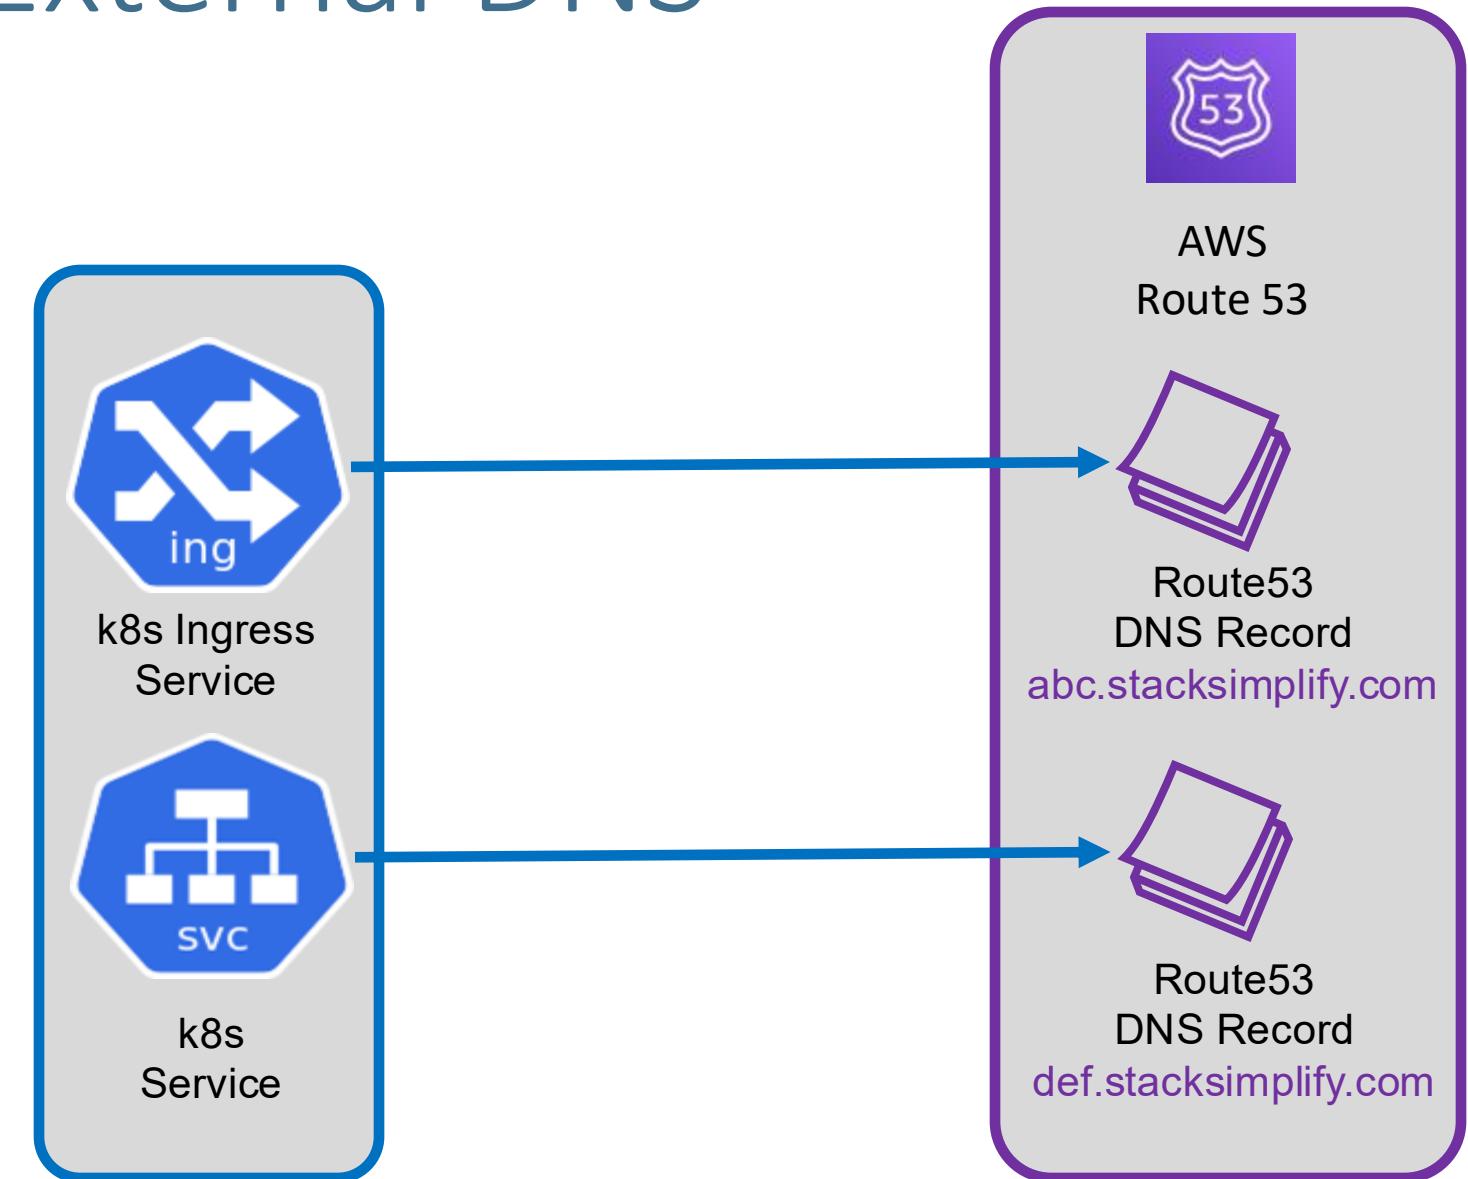


```
# External DNS - For creating a Record Set in Route53
```


```
external-dns.alpha.kubernetes.io/hostname: dnstest901.stack simplify.com
```

AWS EKS + External DNS




Deploy Ingress /service k8s
Manifest with external-dns
Annotations

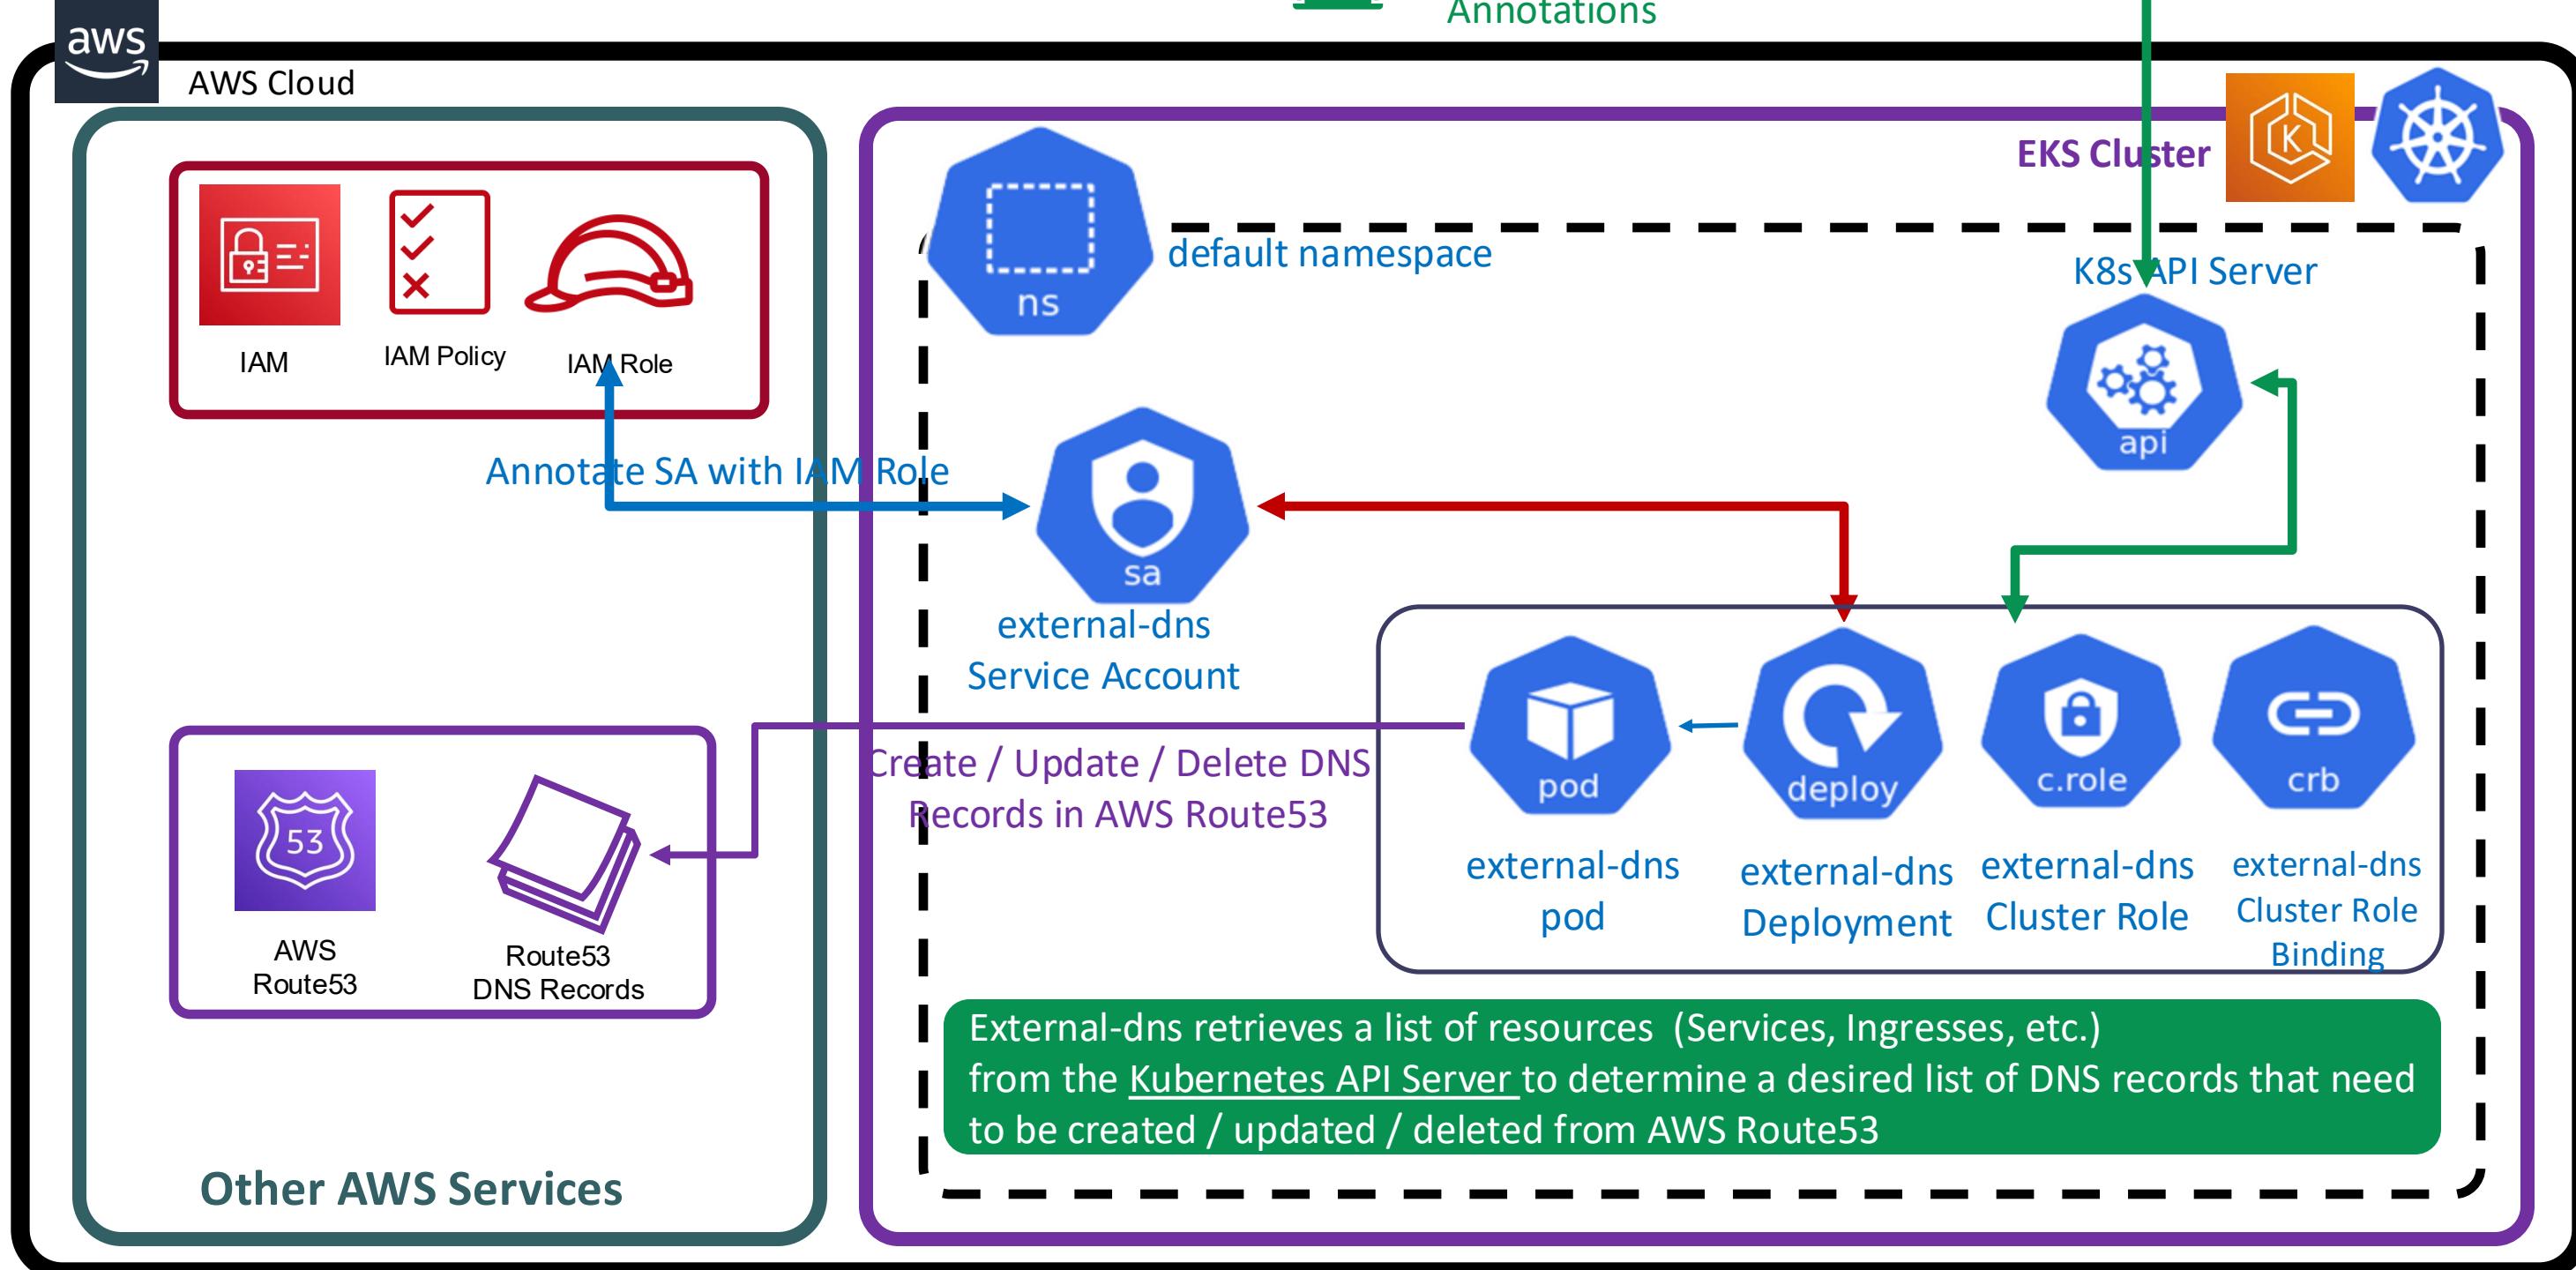


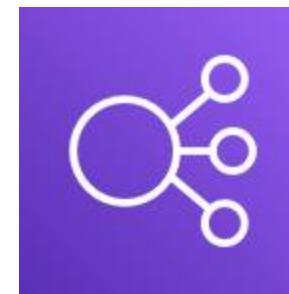

Elastic Load
Balancing

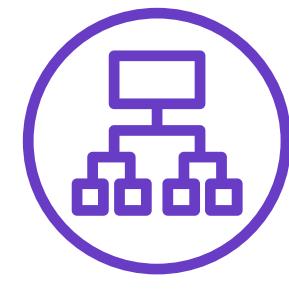

Application
Load Balancer

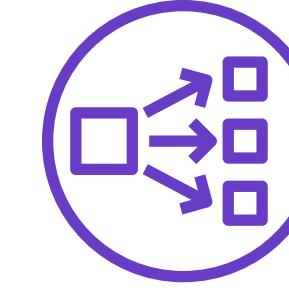

Network
Load Balancer



Kubernetes
Ingress




External
DNS




AWS EKS Load Balancer Controller


Kubernetes Ingress & External DNS



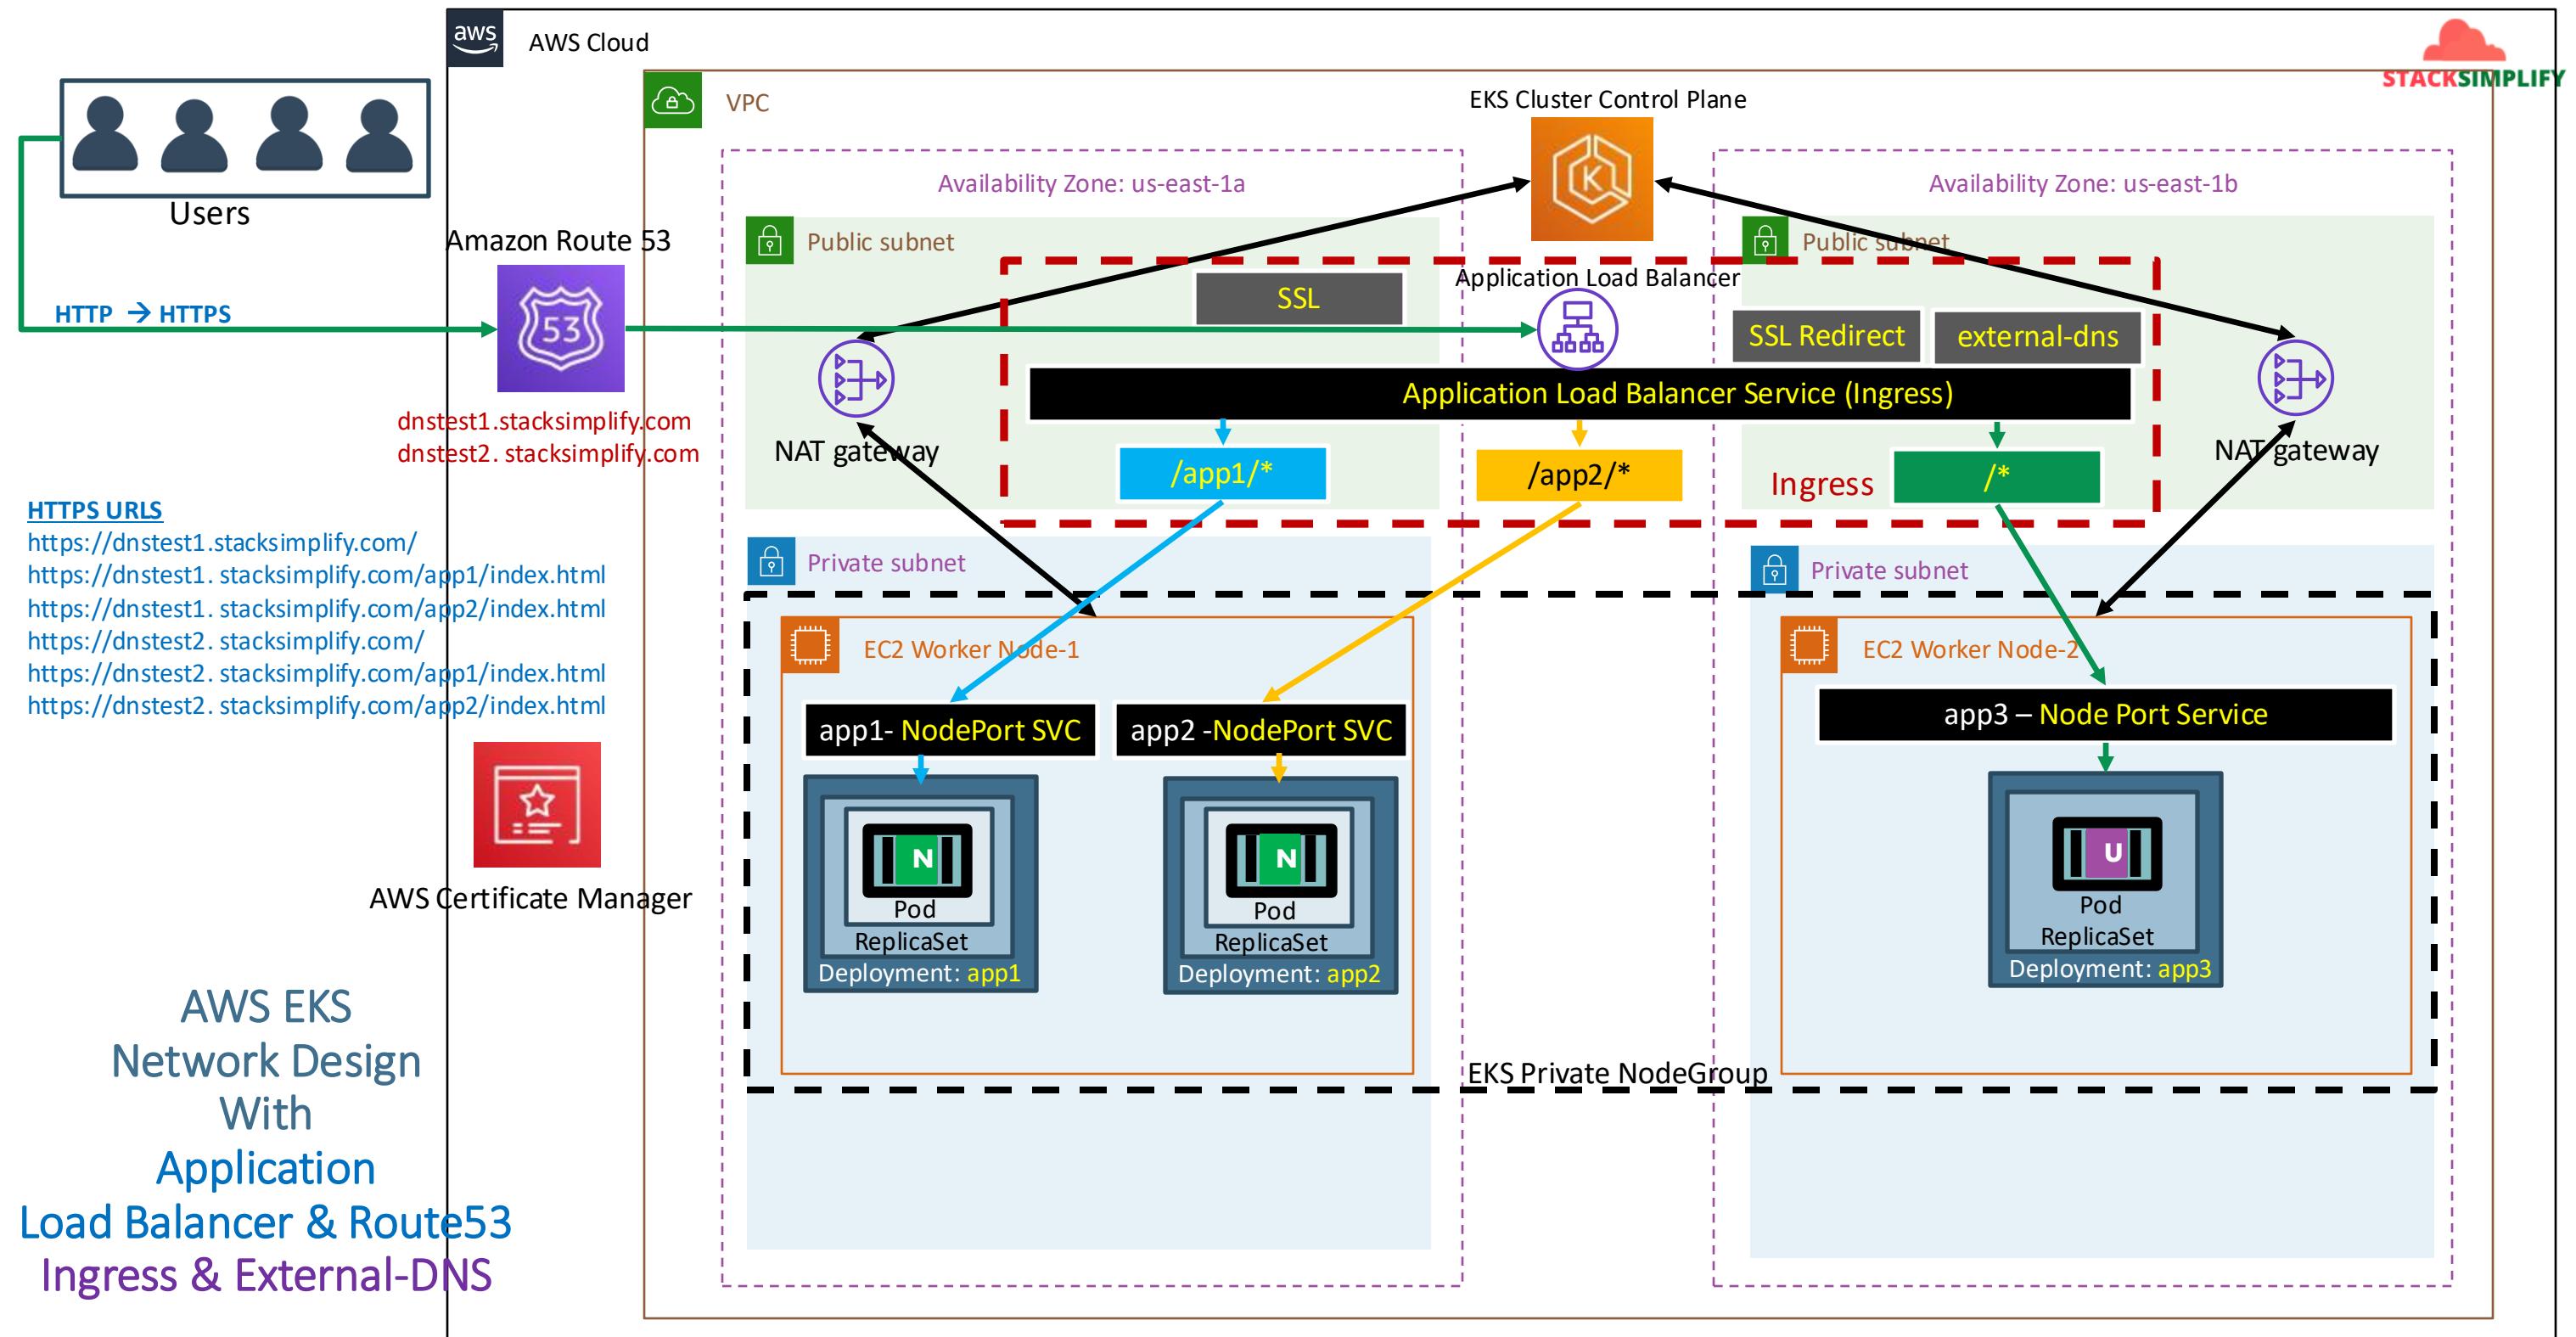


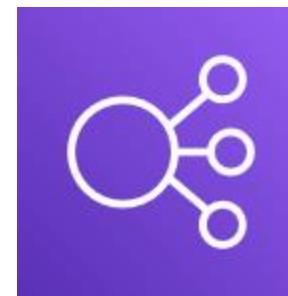

Elastic Load
Balancing

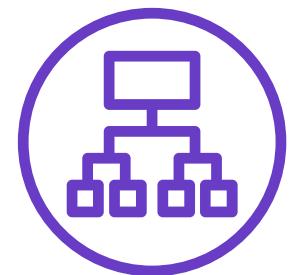


Application
Load Balancer

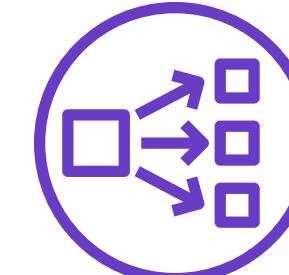

Network
Load Balancer



Kubernetes
Ingress

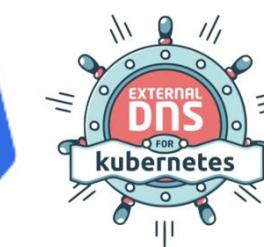

External
DNS



AWS EKS


Load Balancer Controller




Kubernetes Service & External DNS


Kubernetes Service with External DNS

```
apiVersion: v1
kind: Service
metadata:
  name: app1-nginx-loadbalancer-service
  labels:
    app: app1-nginx
  annotations:
    external-dns.alpha.kubernetes.io/hostname: externaldns-k8s-service-demo.stackimplify.
spec:
  type: LoadBalancer
  selector:
    app: app1-nginx
  ports:
    - port: 80
      targetPort: 80
```

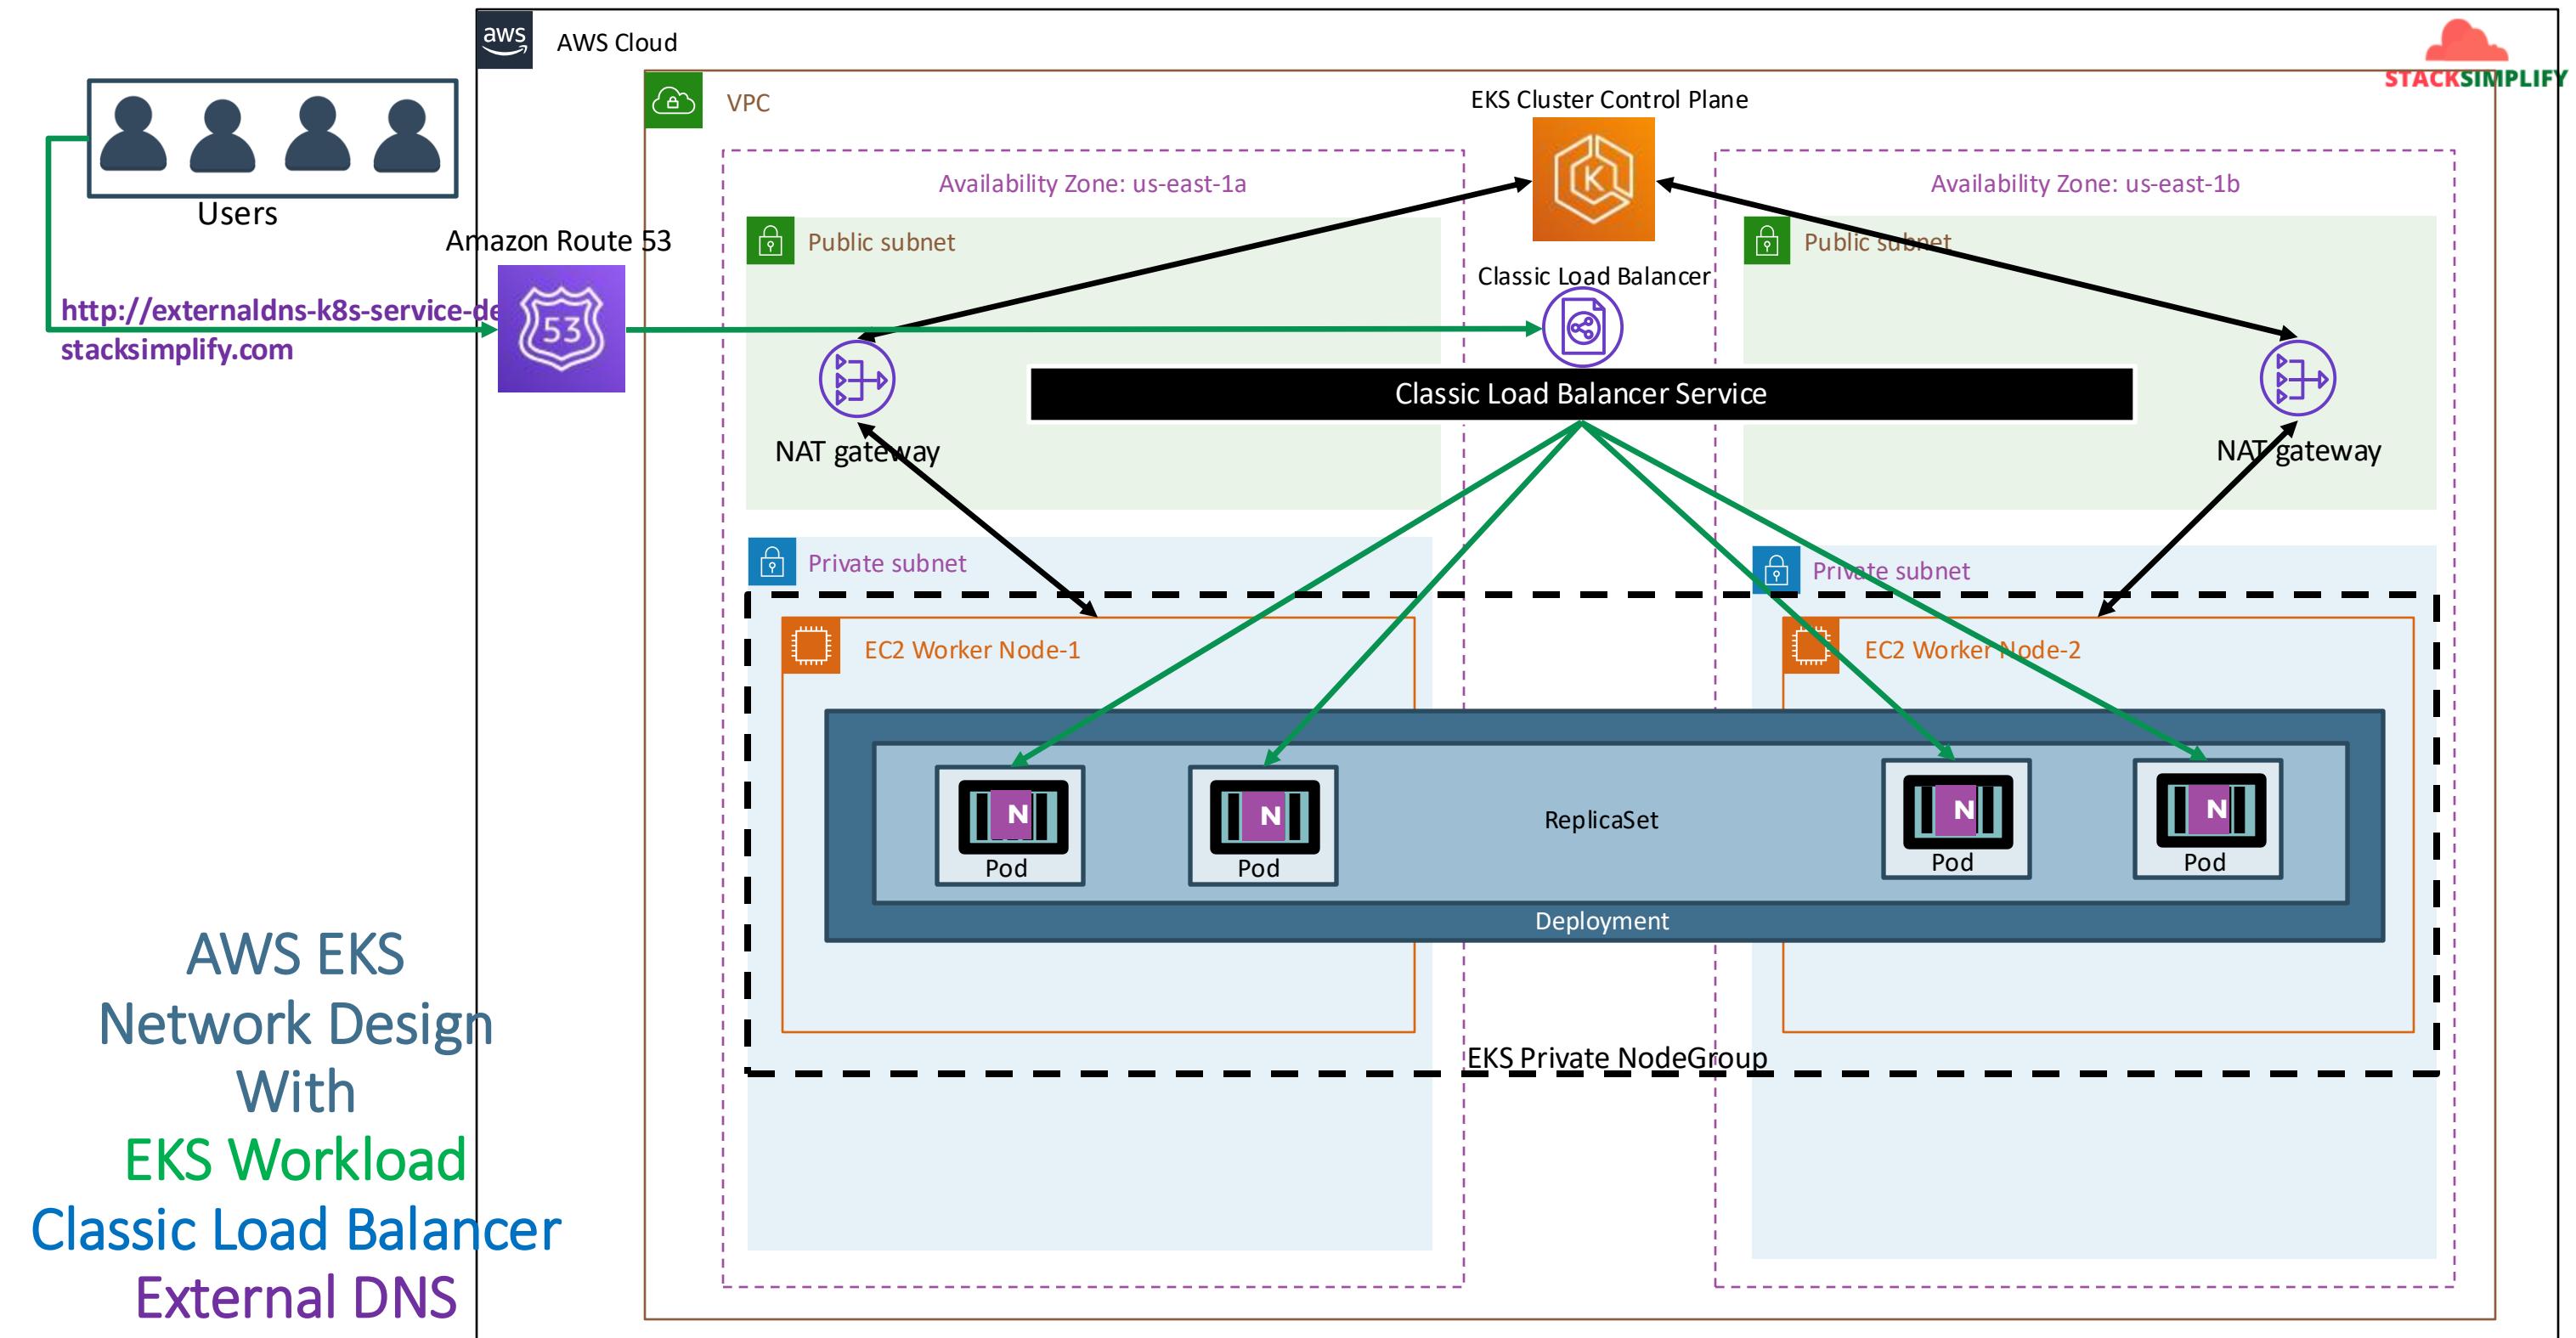


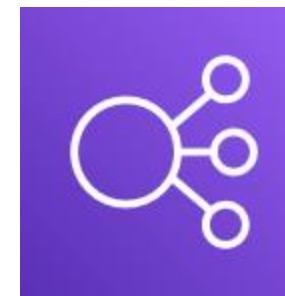

Elastic Load
Balancing

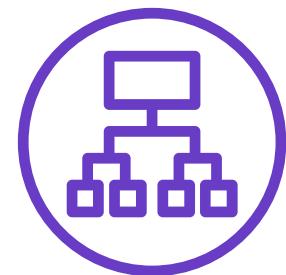


Application
Load Balancer

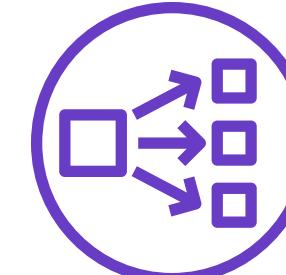

Network
Load Balancer



Kubernetes
Ingress

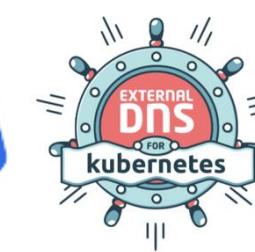

External
DNS




AWS EKS Load Balancer Controller

Kubernetes Ingress

Name based Virtual Host / Host Header Routing



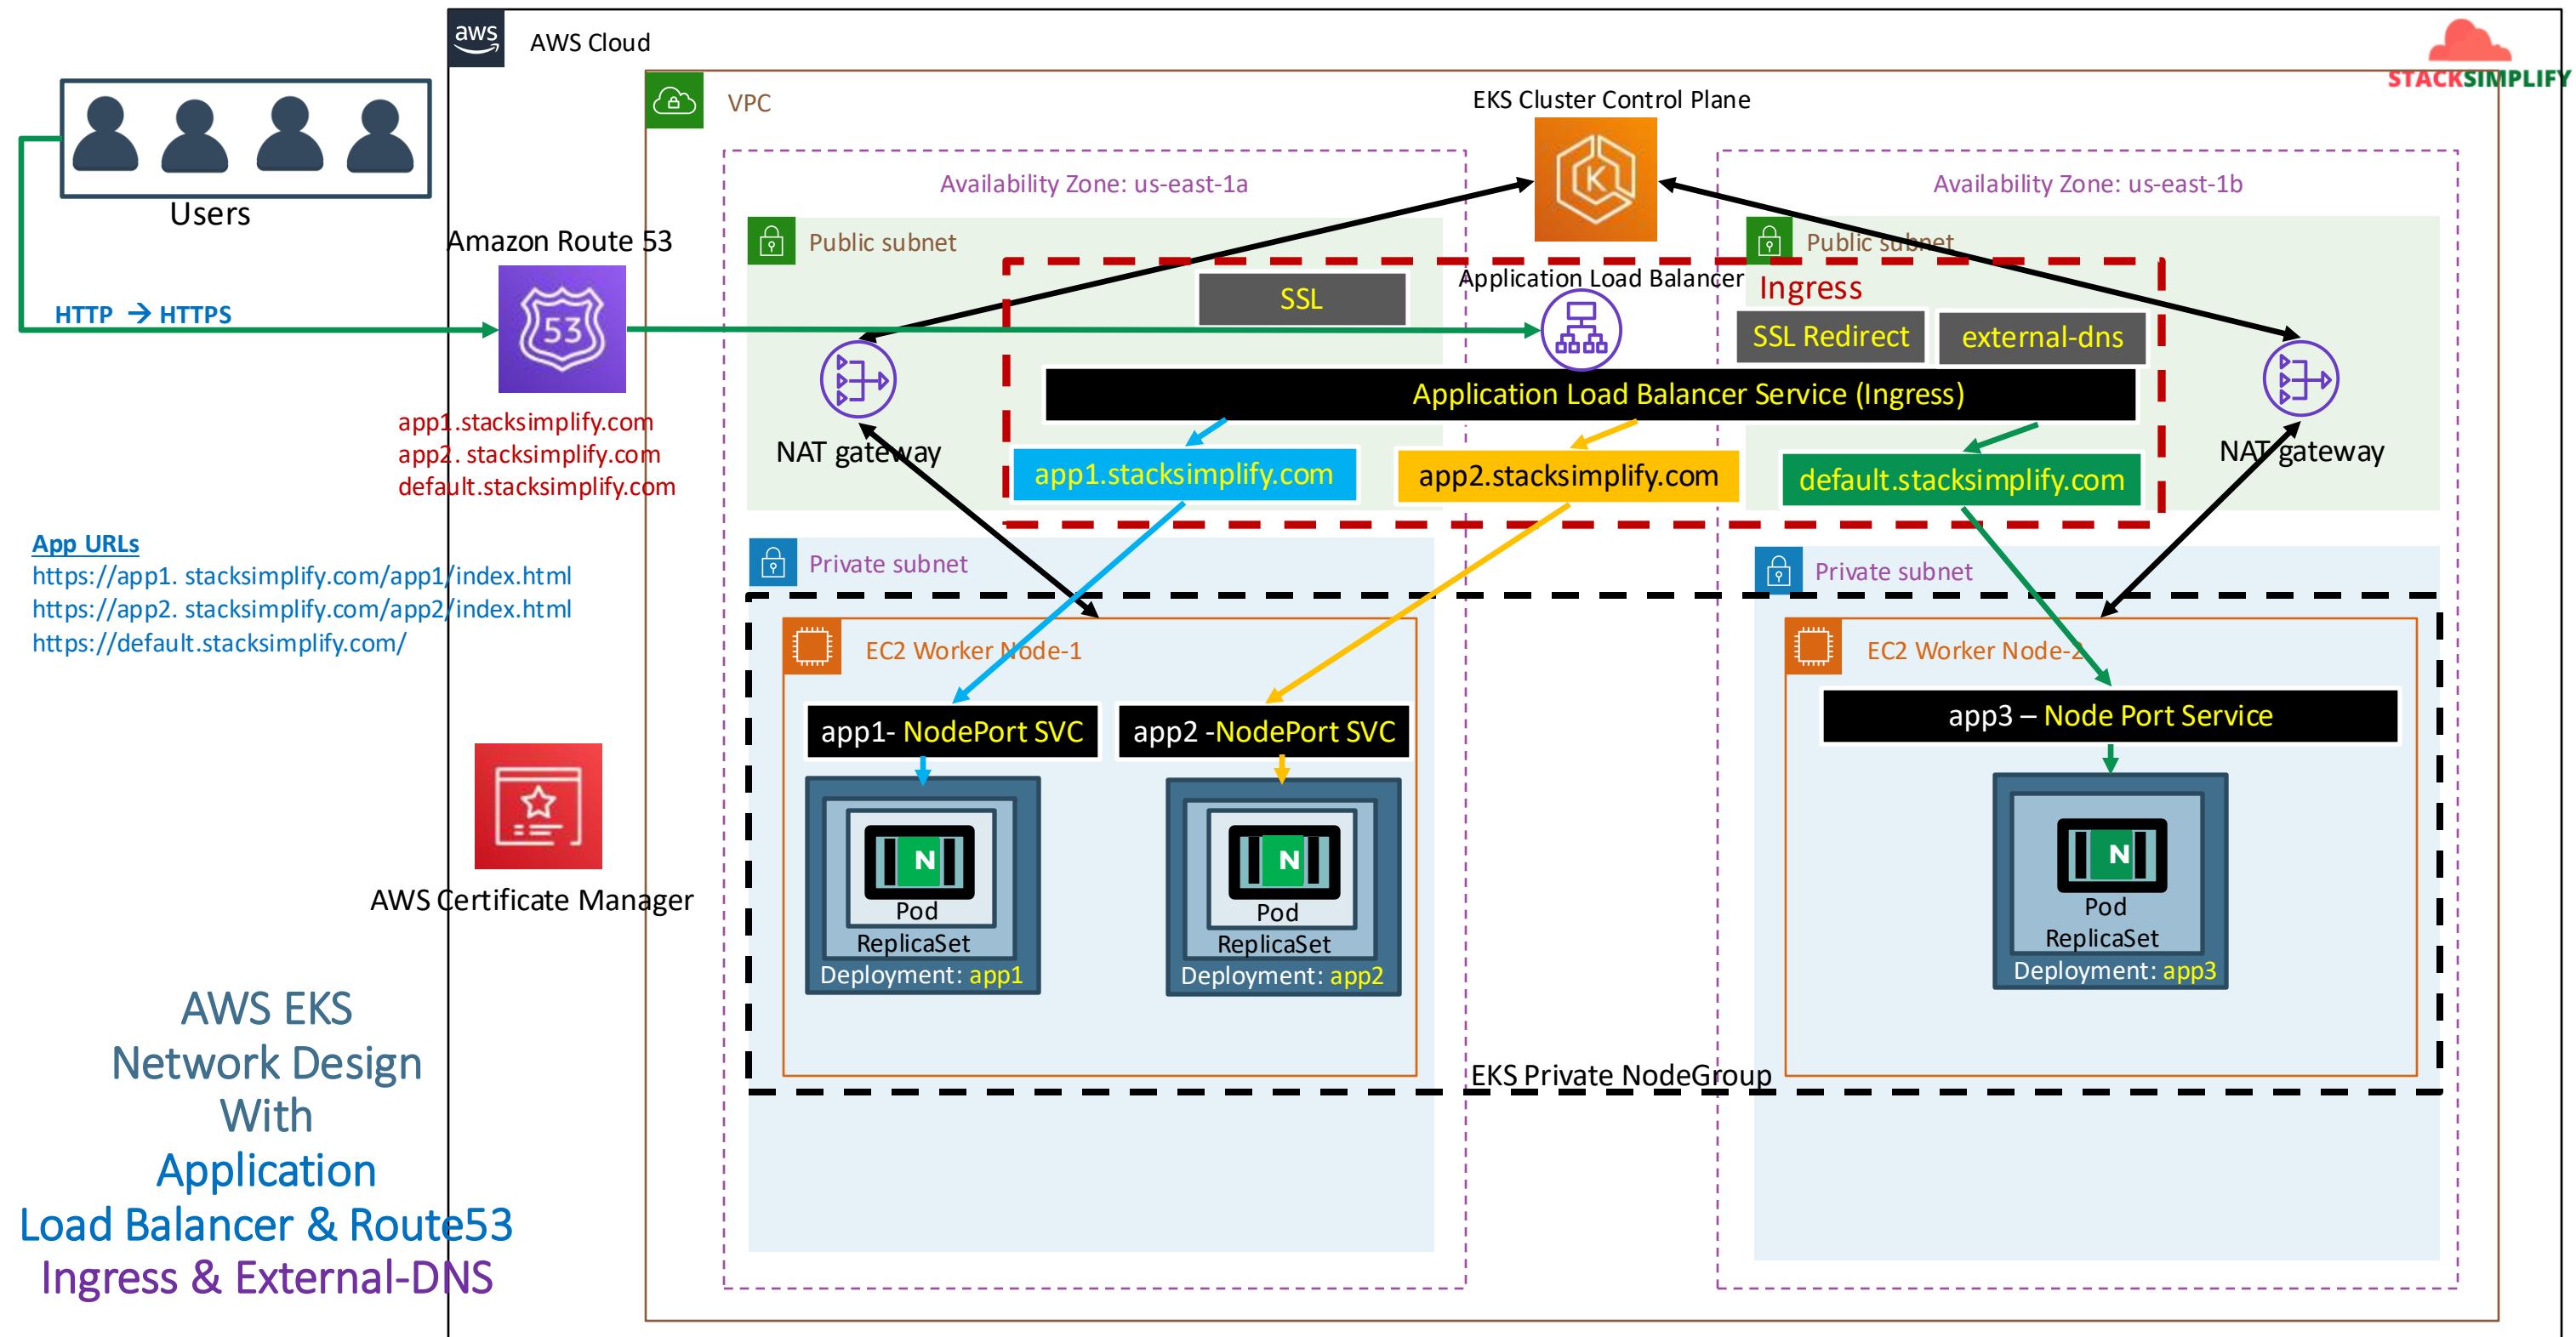

Name based Virtual Host Routing

```
rules:  
- host: app101.stack simplify.com  
  http:  
    paths:  
      - path: /  
        pathType: Prefix  
    backend:  
      service:  
        name: app1-nginx-nodeport-service  
        port:  
          number: 80  
  
- host: app201.stack simplify.com  
  http:  
    paths:  
      - path: /  
        pathType: Prefix  
    backend:  
      service:  
        name: app2-nginx-nodeport-service  
        port:  
          number: 80
```

Requests with **app101.stack simplify.com** will go to **App1 Node Port Service**


Requests with **app201.stack simplify.com** will go to **App2 Node Port Service**

Named based Virtual Host Routing


```
# External DNS - For creating a Record Set in Route53
external-dns.alpha.kubernetes.io/hostname: default101.stackimplify.com

spec:
  ingressClassName: my-aws-ingress-class    # Ingress Class
  defaultBackend:
    service:
      name: app3-nginx-nodeport-service
    port:
      number: 80
```


Requests with **default101.stackimplify.com** will go to App3 Node Port Service (Default Backend)

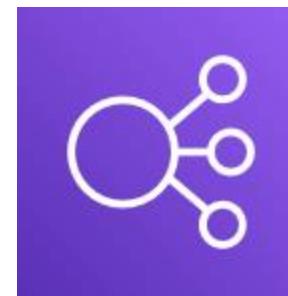

Elastic Load
Balancing

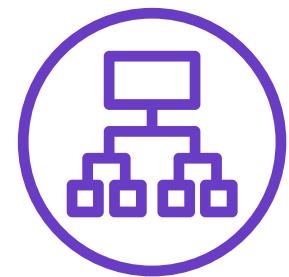


Application
Load Balancer

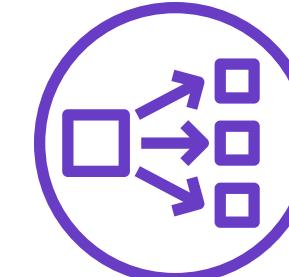

Network
Load Balancer



Kubernetes
Ingress

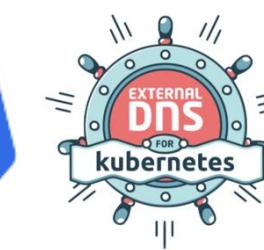

External
DNS



AWS EKS Load Balancer Controller

Kubernetes Ingress SSL Discovery – Host & TLS



Ingress SSL Certificate Discovery using Host



```
rules:  
- host: app101.stack simplify.com  
  http:  
    paths:  
    - path: /  
      pathType: Prefix  
      backend:  
        service:  
          name: app1-nginx-nodeport-service  
          port:  
            number: 80  
- host: app201.stack simplify.com  
  http:  
    paths:  
    - path: /  
      pathType: Prefix  
      backend:  
        service:  
          name: app2-nginx-nodeport-service  
          port:  
            number: 80
```

Demo-1: SSL Discovery – Host

TLS certificates for ALB Listeners can be automatically discovered with **hostnames** from Ingress resources if the **alb.ingress.kubernetes.io/certificate-arn** annotation is not specified.

The controller will attempt to discover **TLS certificates** from the **tls** field in Ingress and **host** field in Ingress rules.

Important Note: You need to explicitly specify to use HTTPS listener with listen-ports annotation.
alb.ingress.kubernetes.io/listen-ports: '[{"HTTPS":443}]'

Ingress SSL Certificate Discovery using tls

```
# External DNS – For creating a Record Set in Route53
external-dns.alpha.kubernetes.io/hostname: certdiscovery-tls-901.stack simplify.com


spec:
  ingressClassName: my-aws-ingress-class    # Ingress Class
  defaultBackend:
    service:
      name: app3-nginx-nodeport-service
      port:
        number: 80
    tls:
      - hosts:
          - "*.stacksimplify.com"
rules:
  - http:
      paths:
        - path: /app1
          pathType: Prefix
          backend:
            service:
              name: app1-nginx-nodeport-service
```

Demo-2: SSL
Discovery – tls


Comment certificate-arn Annotation

Comment **alb.ingress.kubernetes.io/certificate-arn**
Annotation when using host / tls options


```
## SSL Settings
alb.ingress.kubernetes.io/listen-ports: '[{"HTTPS":443}, {"HTTP":80}]'
#alb.ingress.kubernetes.io/certificate-arn: arn:aws:acm:us-east-1:180789647333:certificate/632a3ff6-3f6d-464c-9121-b9d97481a76b
#alb.ingress.kubernetes.io/ssl-policy: ELBSecurityPolicy-TLS-1-1-2017-01 #Optional (Picks default if not used)
# SSL Redirect Setting
alb.ingress.kubernetes.io/ssl-redirect: '443'
```

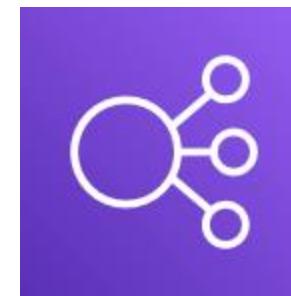

Elastic Load
Balancing

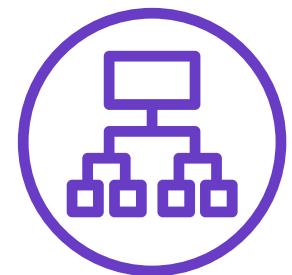

Application
Load Balancer

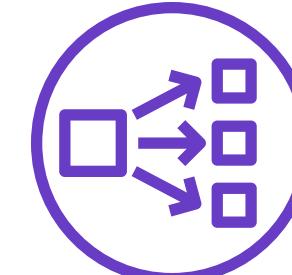

Network
Load Balancer



Kubernetes
Ingress



External
DNS



AWS EKS Load Balancer Controller

Kubernetes Ingress Ingress Groups



Without Ingress Groups




Single Ingress Resource for all three Apps

Example: If we have 50 apps which needs different rules in them and all should be part of single ALB, maintaining such huge k8s manifest file with configs becomes tedious and confusing.



Any changes to App3 we need to update the “my-apps” ingress resource

With **Ingress Groups** we can simplify our Kubernetes Ingress Manifest when dealing with **multiple apps** requiring single ALB

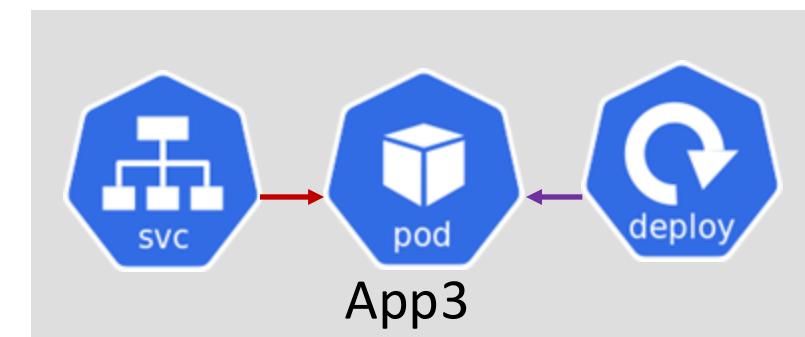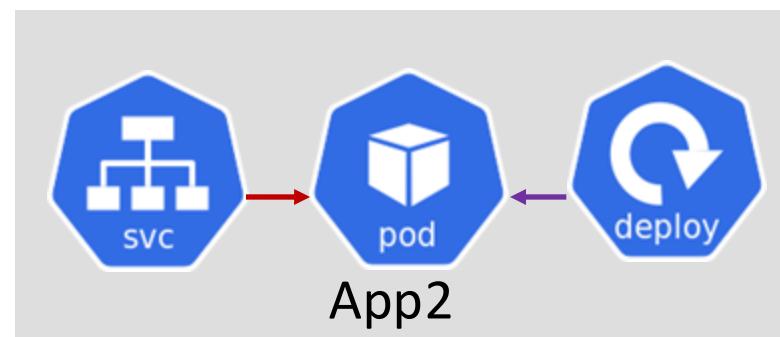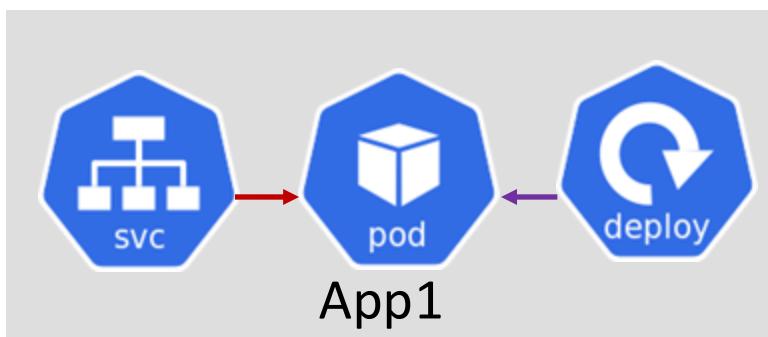

With Ingress Groups

alb.ingress.kubernetes.io/load-balancer-name: ingress-groups-demo

Ingress Group: myapps.web

Priority: 10



Ingress Service: app1-ingress

Priority: 20






Ingress Service: app2-ingress

Priority: 30



Ingress Service: app3-ingress

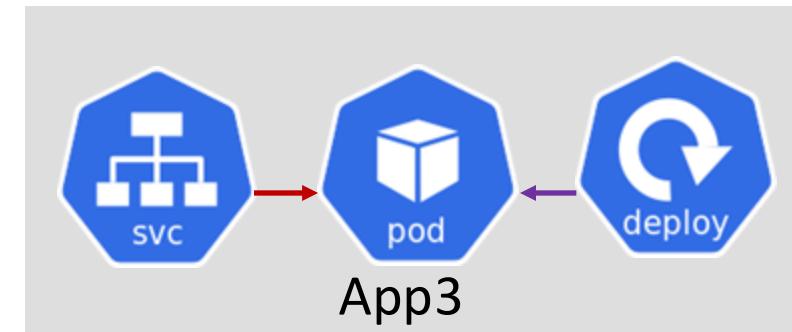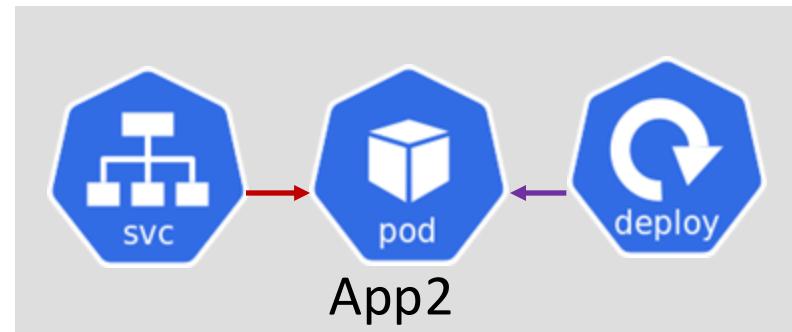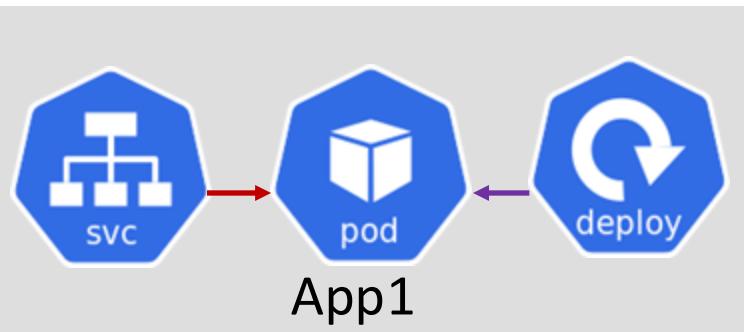

Ingress Groups

1

IngressGroup feature enables you to group multiple Ingress resources together.

2

The controller will automatically merge Ingress rules for all Ingresses within IngressGroup and support them with a single ALB.

3

VERY VERY IMPORTANT NOTE: In addition, most annotations defined on an Ingress only applies to the paths defined by that Ingress.


Sample

```
# Ingress Groups
alb.ingress.kubernetes.io/group.name: myapps.web
alb.ingress.kubernetes.io/group.order: '10'
```


Ingress Groups

```
✓ 08-12-IngressGroups
  ✓ kube-manifests
    ✓ app1
      ! 01-Nginx-App1-Deployment-and-NodePortService.yml
      ! 02-App1-Ingress.yml
    ✓ app2
      ! 01-Nginx-App2-Deployment-and-NodePortService.yml
      ! 02-App2-Ingress.yml
    ✓ app3
      ! 01-Nginx-App3-Deployment-and-NodePortService.yml
      ! 03-App3-Ingress-default-backend.yml
```


3 Ingress Kubernetes
Manifests creates 3
Ingress Resources and
merge to create a Single
AWS ALB.

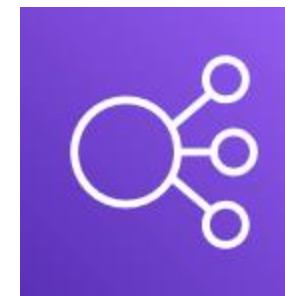

Elastic Load
Balancing

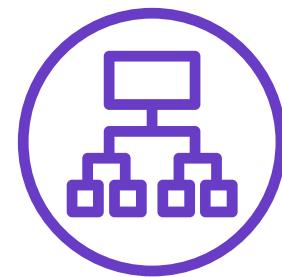

Application
Load Balancer

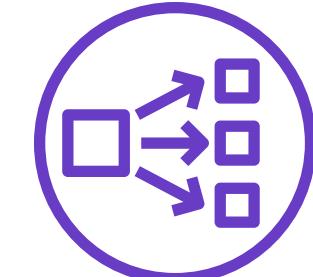

Network
Load Balancer



Kubernetes
Ingress



External
DNS



AWS EKS Load Balancer Controller

Kubernetes Ingress

Target Type: IP




ALB Ingress Target Types

What is
alb.ingress.kubernetes.io/target-type
Annotation ?

target-type specifies how to route
traffic to pods.

ALB Ingress Target Types

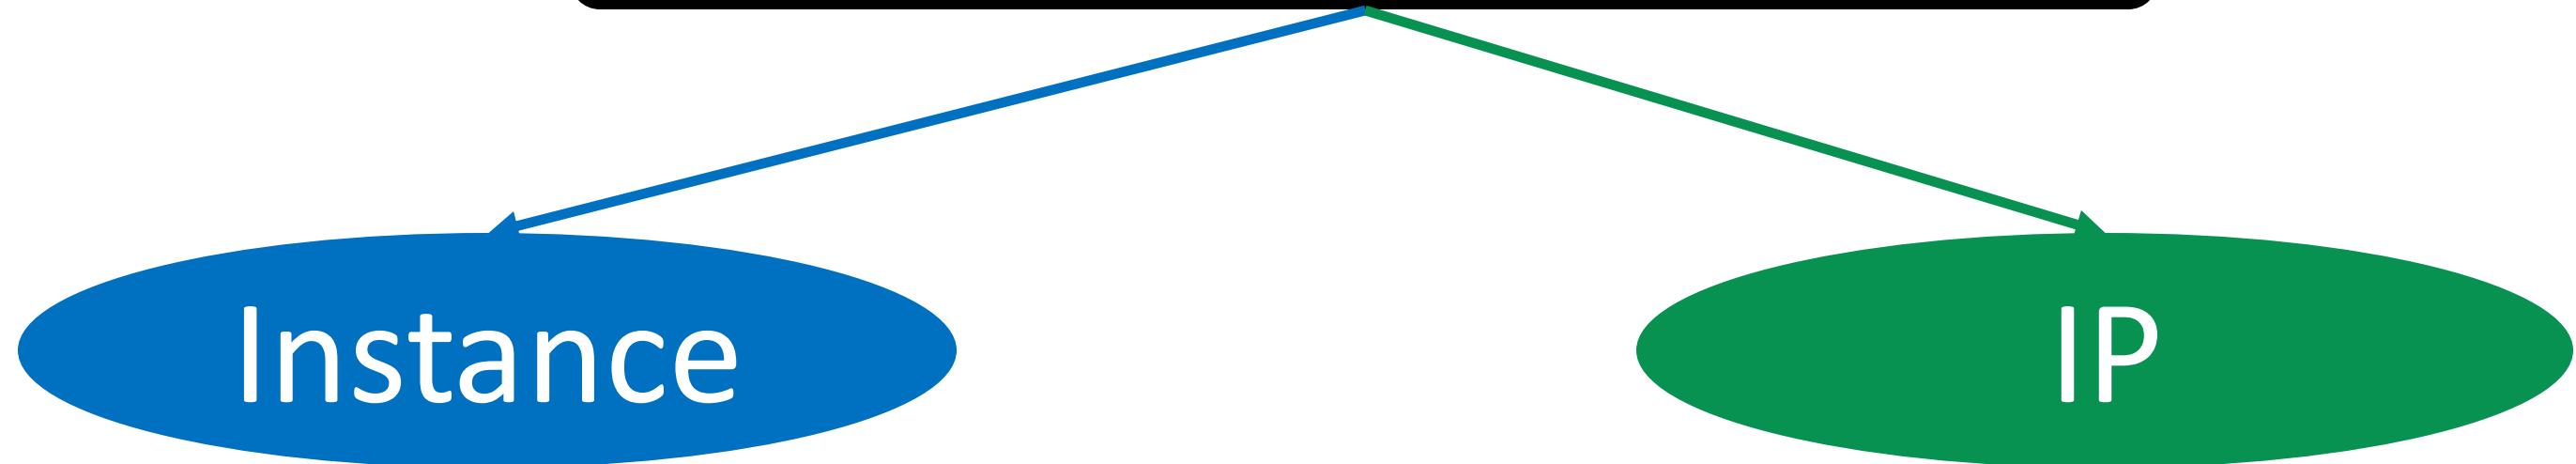

ALB Ingress Target Types

Instance

instance mode will route traffic to all ec2 instances within cluster on NodePort opened for your service.

service must be of type "NodePort" or "LoadBalancer" to use instance mode

Default Target Type is Instance Mode which means no need to define this annotation in Ingress, by default it takes Instance Mode

```
# Target Type: Instance  
alb.ingress.kubernetes.io/target-type: instance
```


IP

ip mode will route traffic directly to the pod IP.


ip mode is required for sticky sessions to work with Application Load Balancers.

Need to define the annotation explicitly as target-type: ip


```
# Target Type: IP  
alb.ingress.kubernetes.io/target-type: ip
```

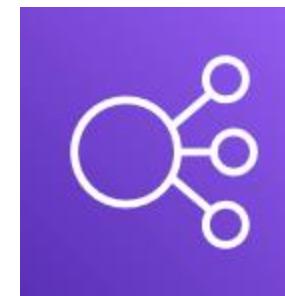

Elastic Load
Balancing

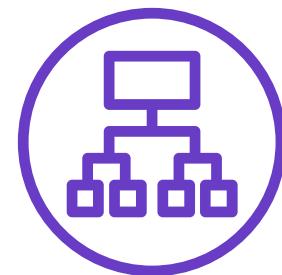

Application
Load Balancer

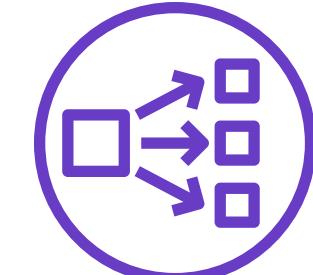

Network
Load Balancer



Kubernetes
Ingress



External
DNS




AWS EKS Load Balancer Controller

Kubernetes Ingress
Internal Application
Load Balancer



Ingress ALB Internal Load Balancer

```
apiVersion: networking.k8s.io/v1
kind: Ingress
metadata:
  name: ingress-internal-lb-demo
annotations:
  # Load Balancer Name
  alb.ingress.kubernetes.io/load-balancer-name: ingress-internal-lb
  # Ingress Core Settings
  #kubernetes.io/ingress.class: "alb" (OLD INGRESS CLASS NOTATION -
  # Creates External Application Load Balancer
  #alb.ingress.kubernetes.io/scheme: internet-facing
  # Creates Internal Application Load Balancer
  #alb.ingress.kubernetes.io/scheme: internal
  # Health Check Settings
  alb.ingress.kubernetes.io/healthcheck-protocol: HTTP
  alb.ingress.kubernetes.io/healthcheck-port: traffic-port
```

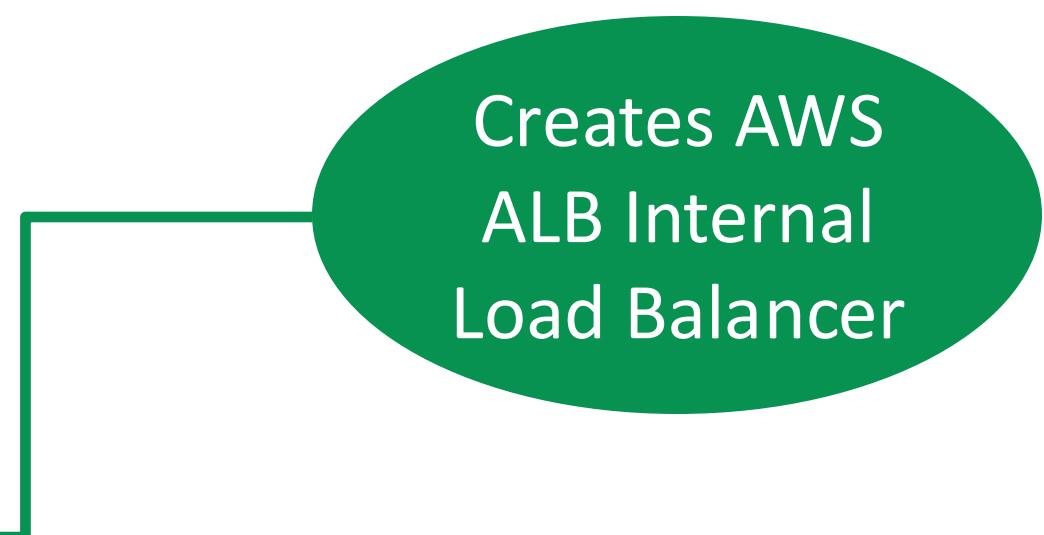

Creates AWS
ALB Internal
Load Balancer

Curl Pod

```
apiVersion: v1
kind: Pod
metadata:
  name: curl-pod
spec:
  containers:
  - name: curl
    image: curlimages/curl
    command: [ "sleep", "600" ]
```

We **cannot** connect to Internal LB directly from internet to test it.

We will deploy a **curl pod** in EKS Cluster so we can connect to curl pod in EKS Cluster and test the **Internal LB Endpoint** using **curl** command.

Command to Test Ingress AWS Internal ALB using curl pod

```
# Deploy curl-pod
kubectl apply -f kube-manifests-curl

# Will open up a terminal session into the container
kubectl exec -it curl-pod -- sh




# We can now curl external addresses or internal services:
curl http://google.com/
curl <INTERNAL-INGRESS-LB-DNS>

# Default Backend Curl Test
curl internal-ingress-internal-lb-1839544354.us-east-1.elb.amazonaws.com

# App1 Curl Test
curl internal-ingress-internal-lb-1839544354.us-east-1.elb.amazonaws.com/app1/index.html

# App2 Curl Test
curl internal-ingress-internal-lb-1839544354.us-east-1.elb.amazonaws.com/app2/index.html
```

AWS Load Balancer Controller Updates - End

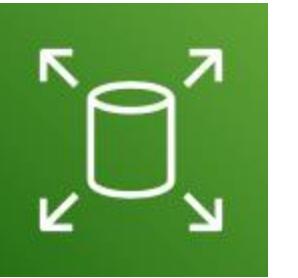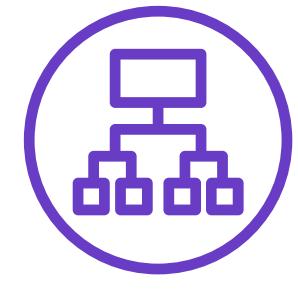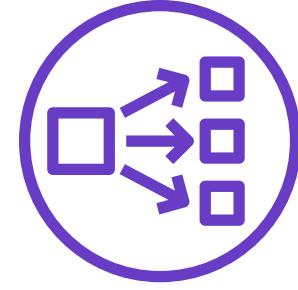

Elastic Load
Balancing

Classic
Load Balancer

Network
Load Balancer

Application
Load Balancer

Certificate
Manager

Route53

Elastic Block
Store

Amazon RDS

AWS EKS

Fargate Profiles

Serverless





Fargate
Profiles

What is Fargate?

- Fargate is a **Serverless** compute platform for containers on AWS
- Fargate provides **on-demand, right-sized compute capacity** for containers
- EKS integrates Kubernetes with Fargate by using **controllers** that are built by AWS using the **upstream, extensible model** provided by Kubernetes.
- These controllers run as part of the **EKS managed Kubernetes control plane** and are responsible for **scheduling** native Kubernetes pods onto Fargate.
- The **Fargate controllers** include a **new scheduler** that runs alongside the **default Kubernetes scheduler** in addition to several mutating and validating admission controllers.
- When we start a pod that **meets the criteria for running on Fargate**, the Fargate controllers running in the cluster recognize, update, and **schedule the pod onto Fargate**.

AWS EKS on Fargate

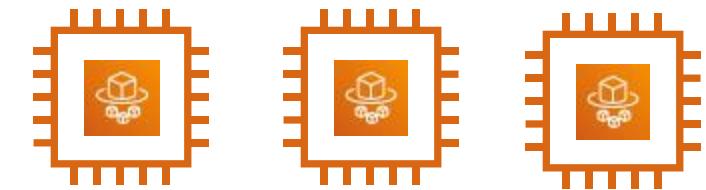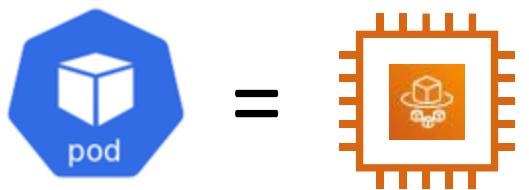

Bring existing pods

- We don't need to change our existing pods
- Fargate works with existing workflows and services that run on kubernetes


Production Ready

- Launch pods easily.
- Easily run pods across Azs for HA
- Each pod runs in an isolated compute environment


Rightsized and Integrated

- Only pay for resources you need to run your pods
- Includes native AWS integrations for networking and security


EKS Deployment Options

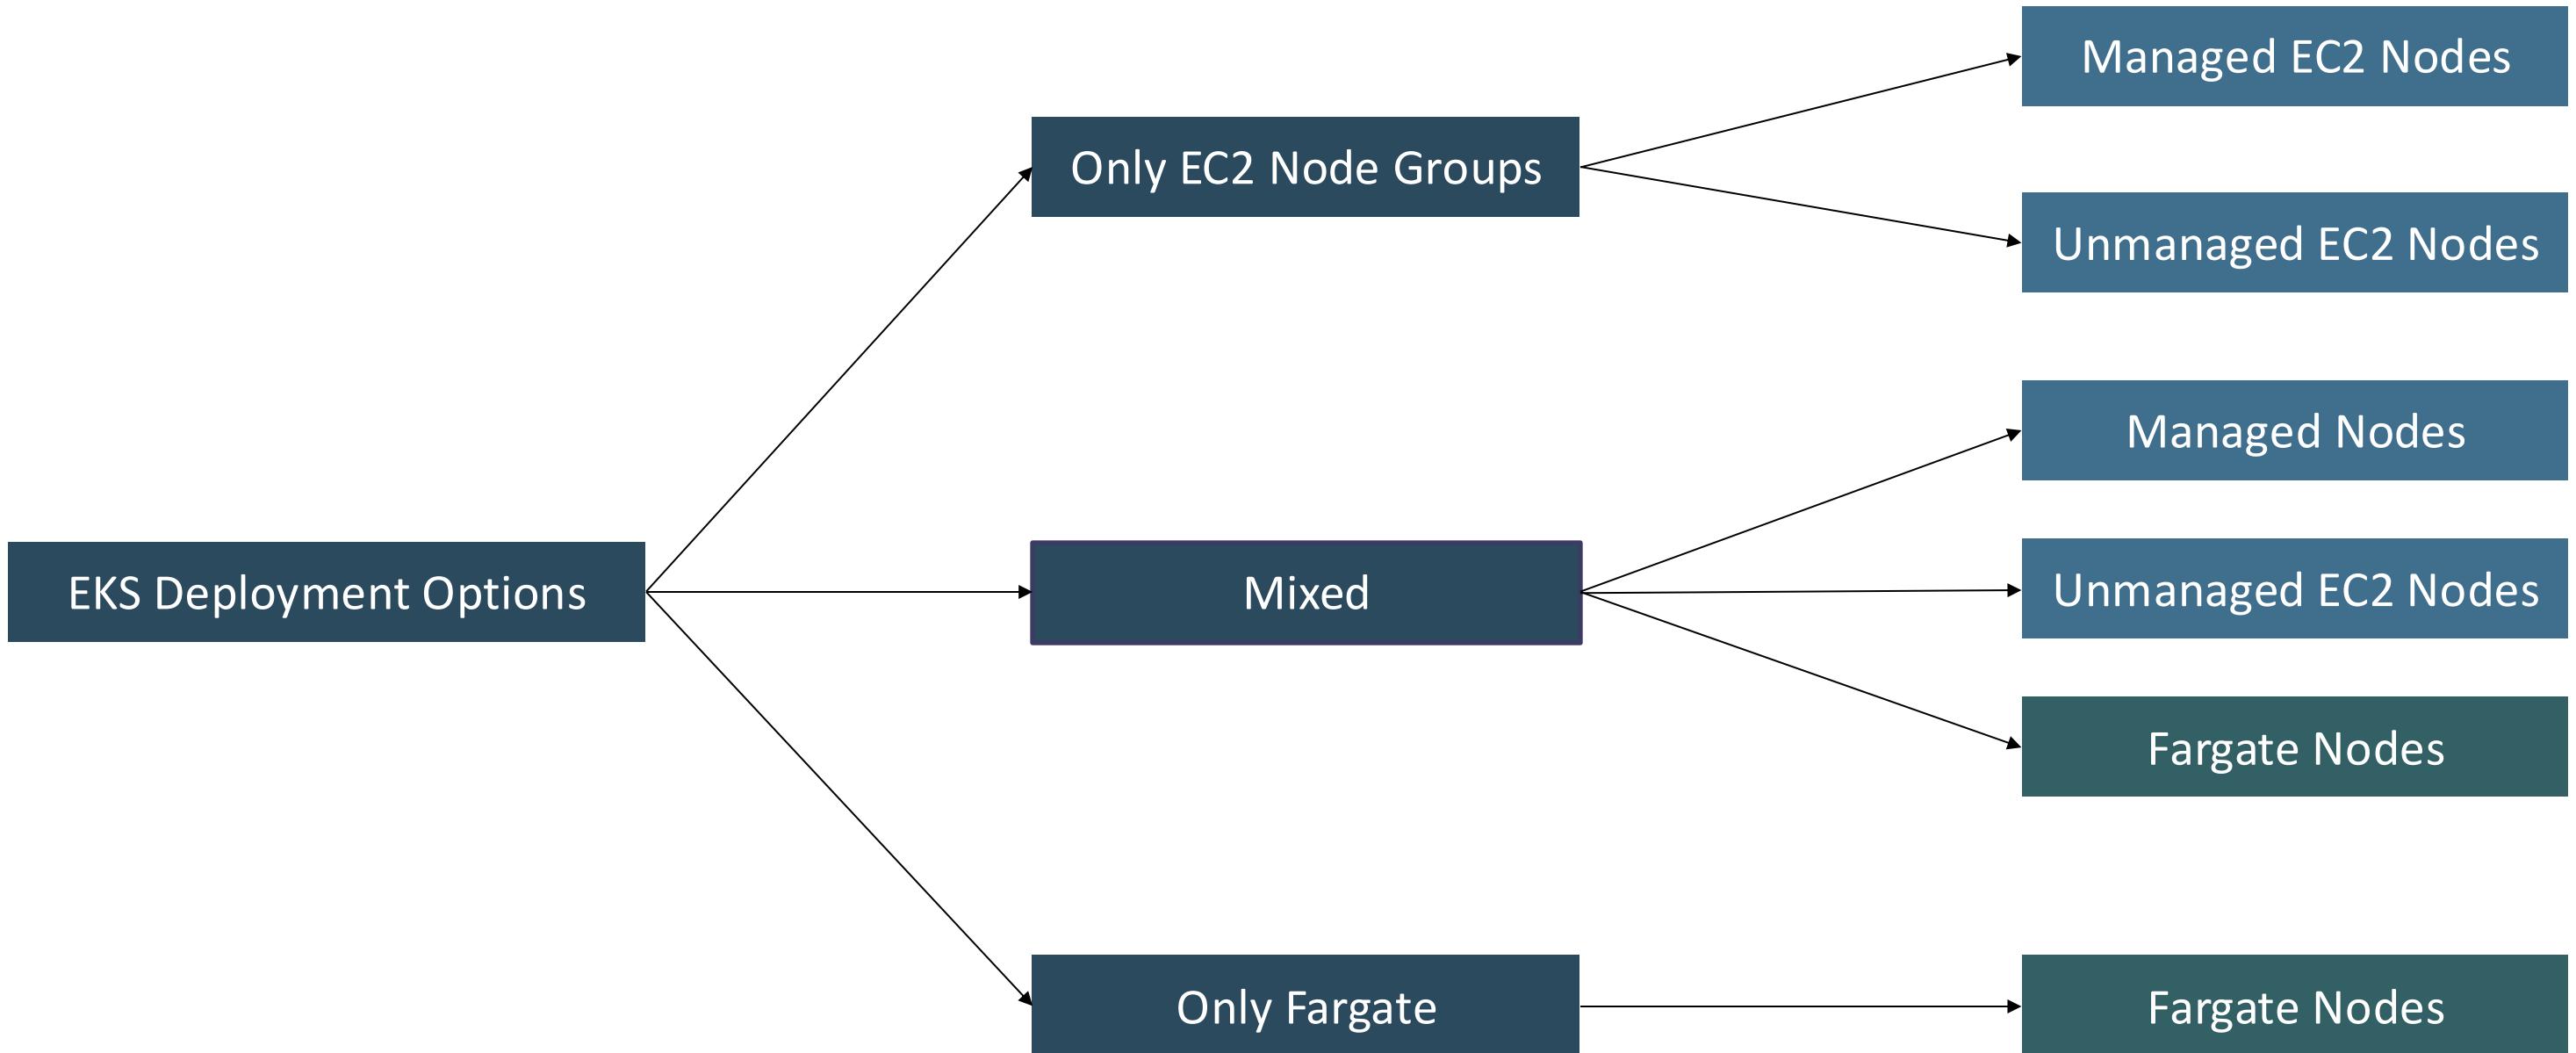


EKS Deployment Options – EC2 Node Groups

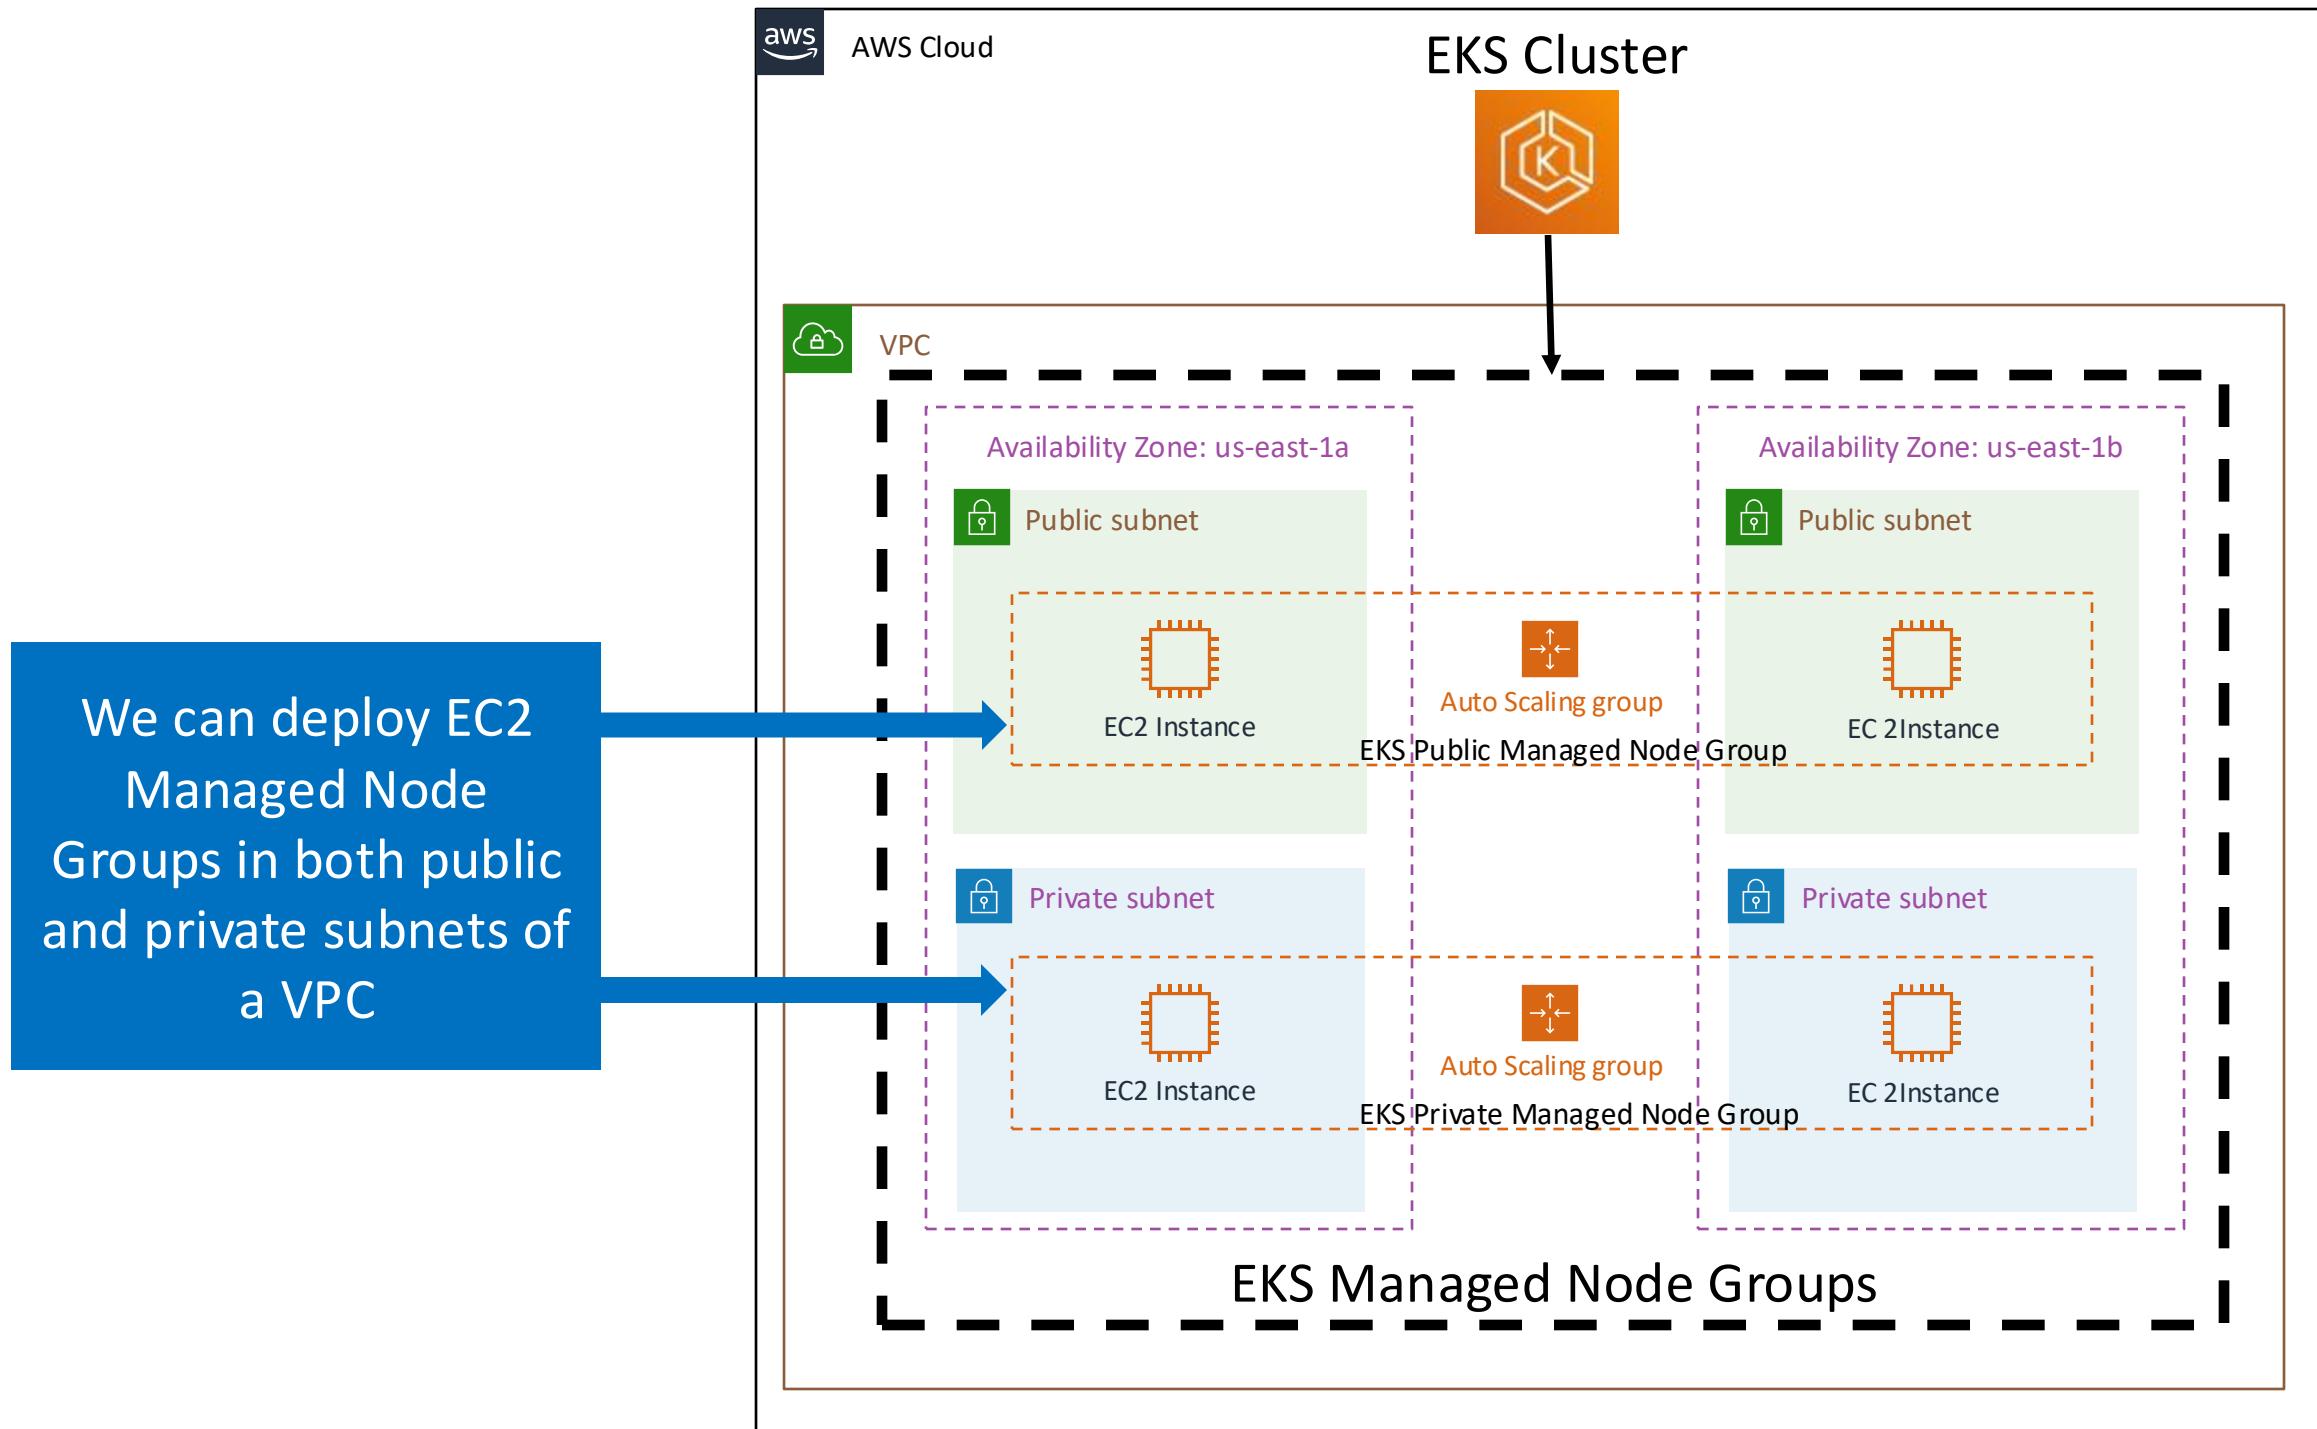

EKS Deployment Options – Only Fargate

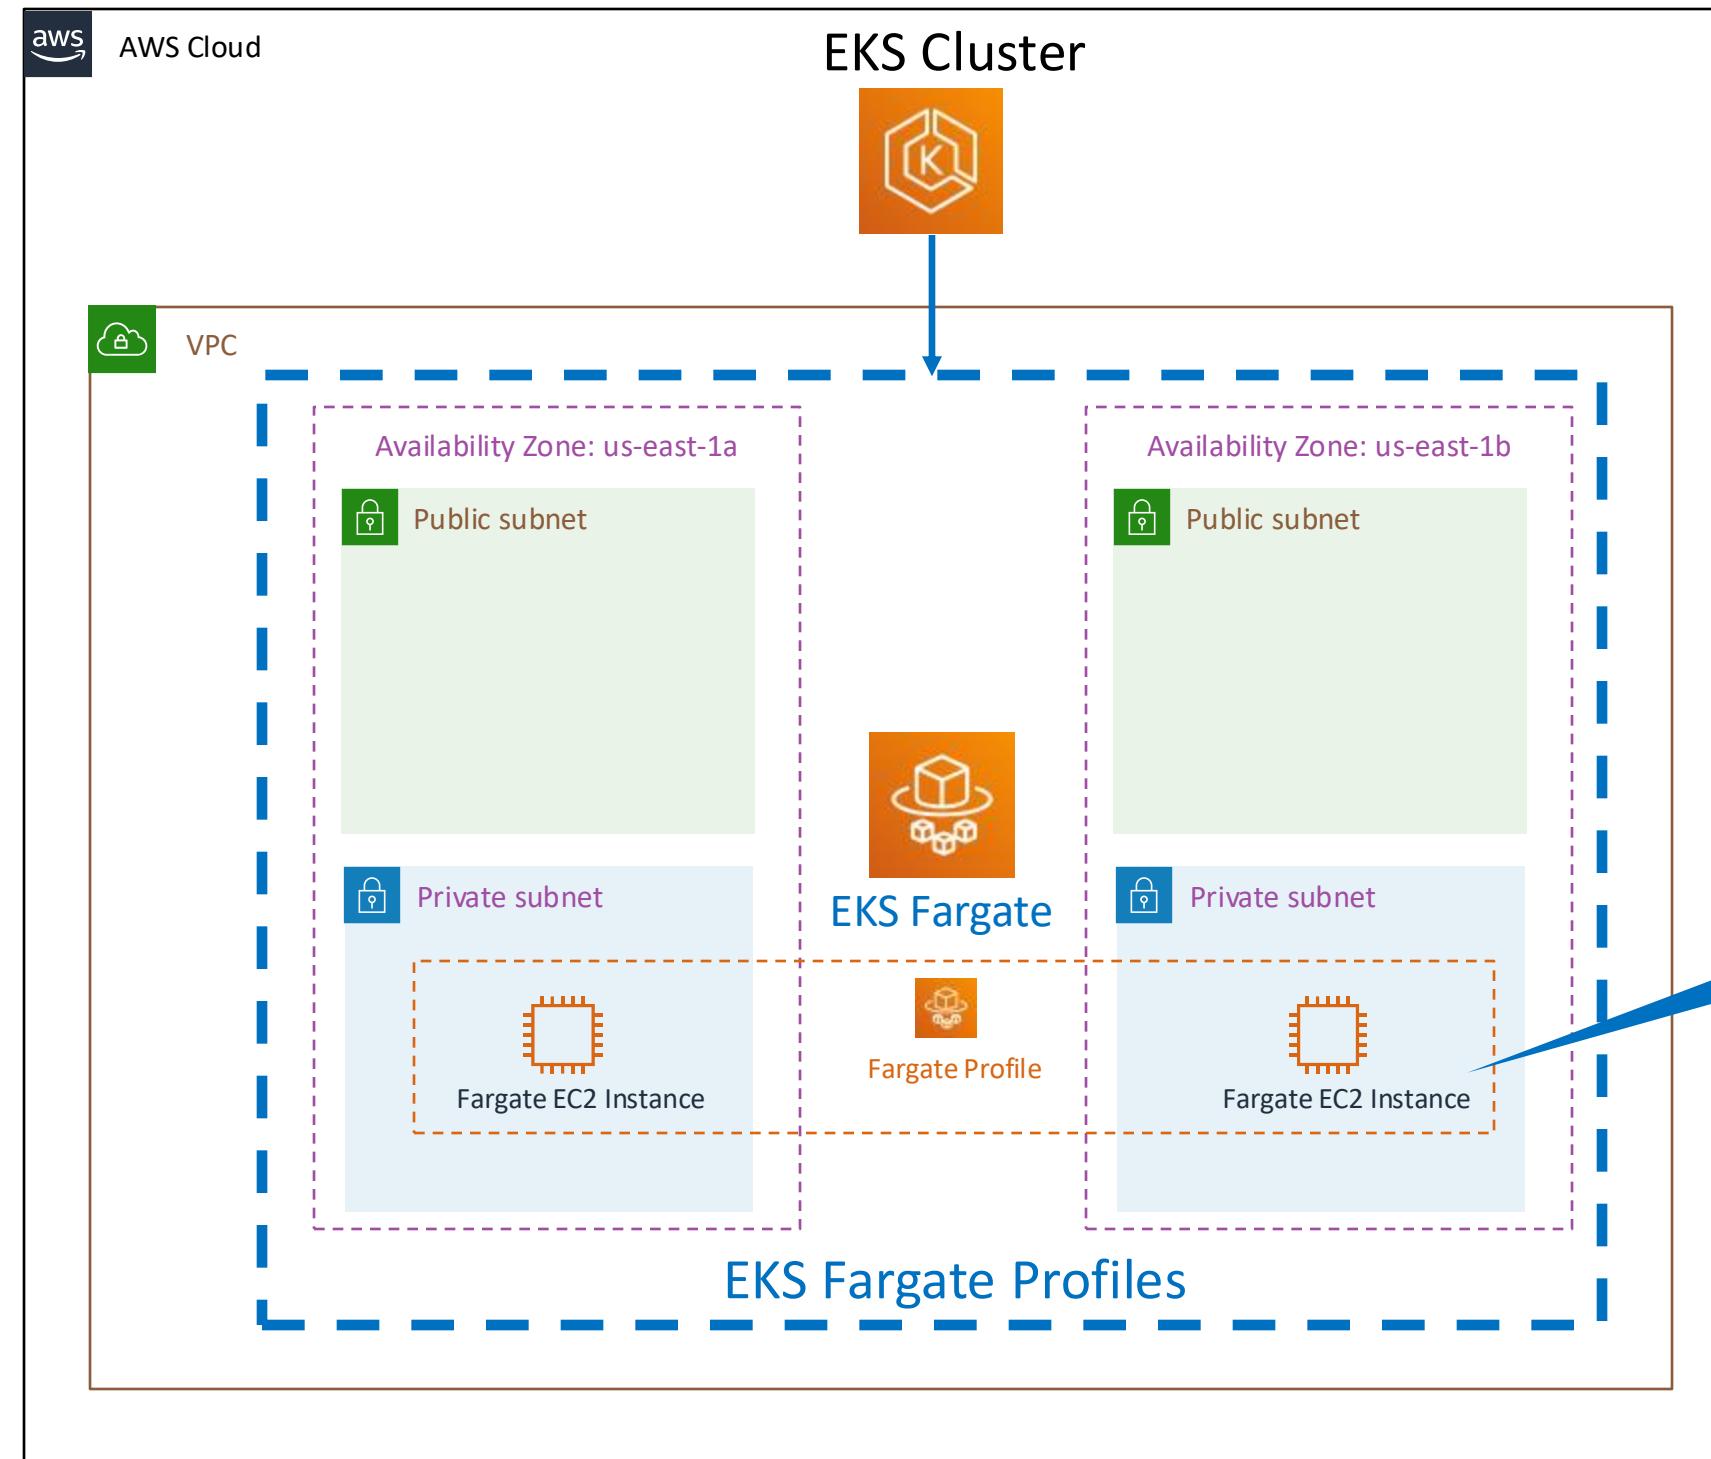

EKS Deployment Options - Mixed

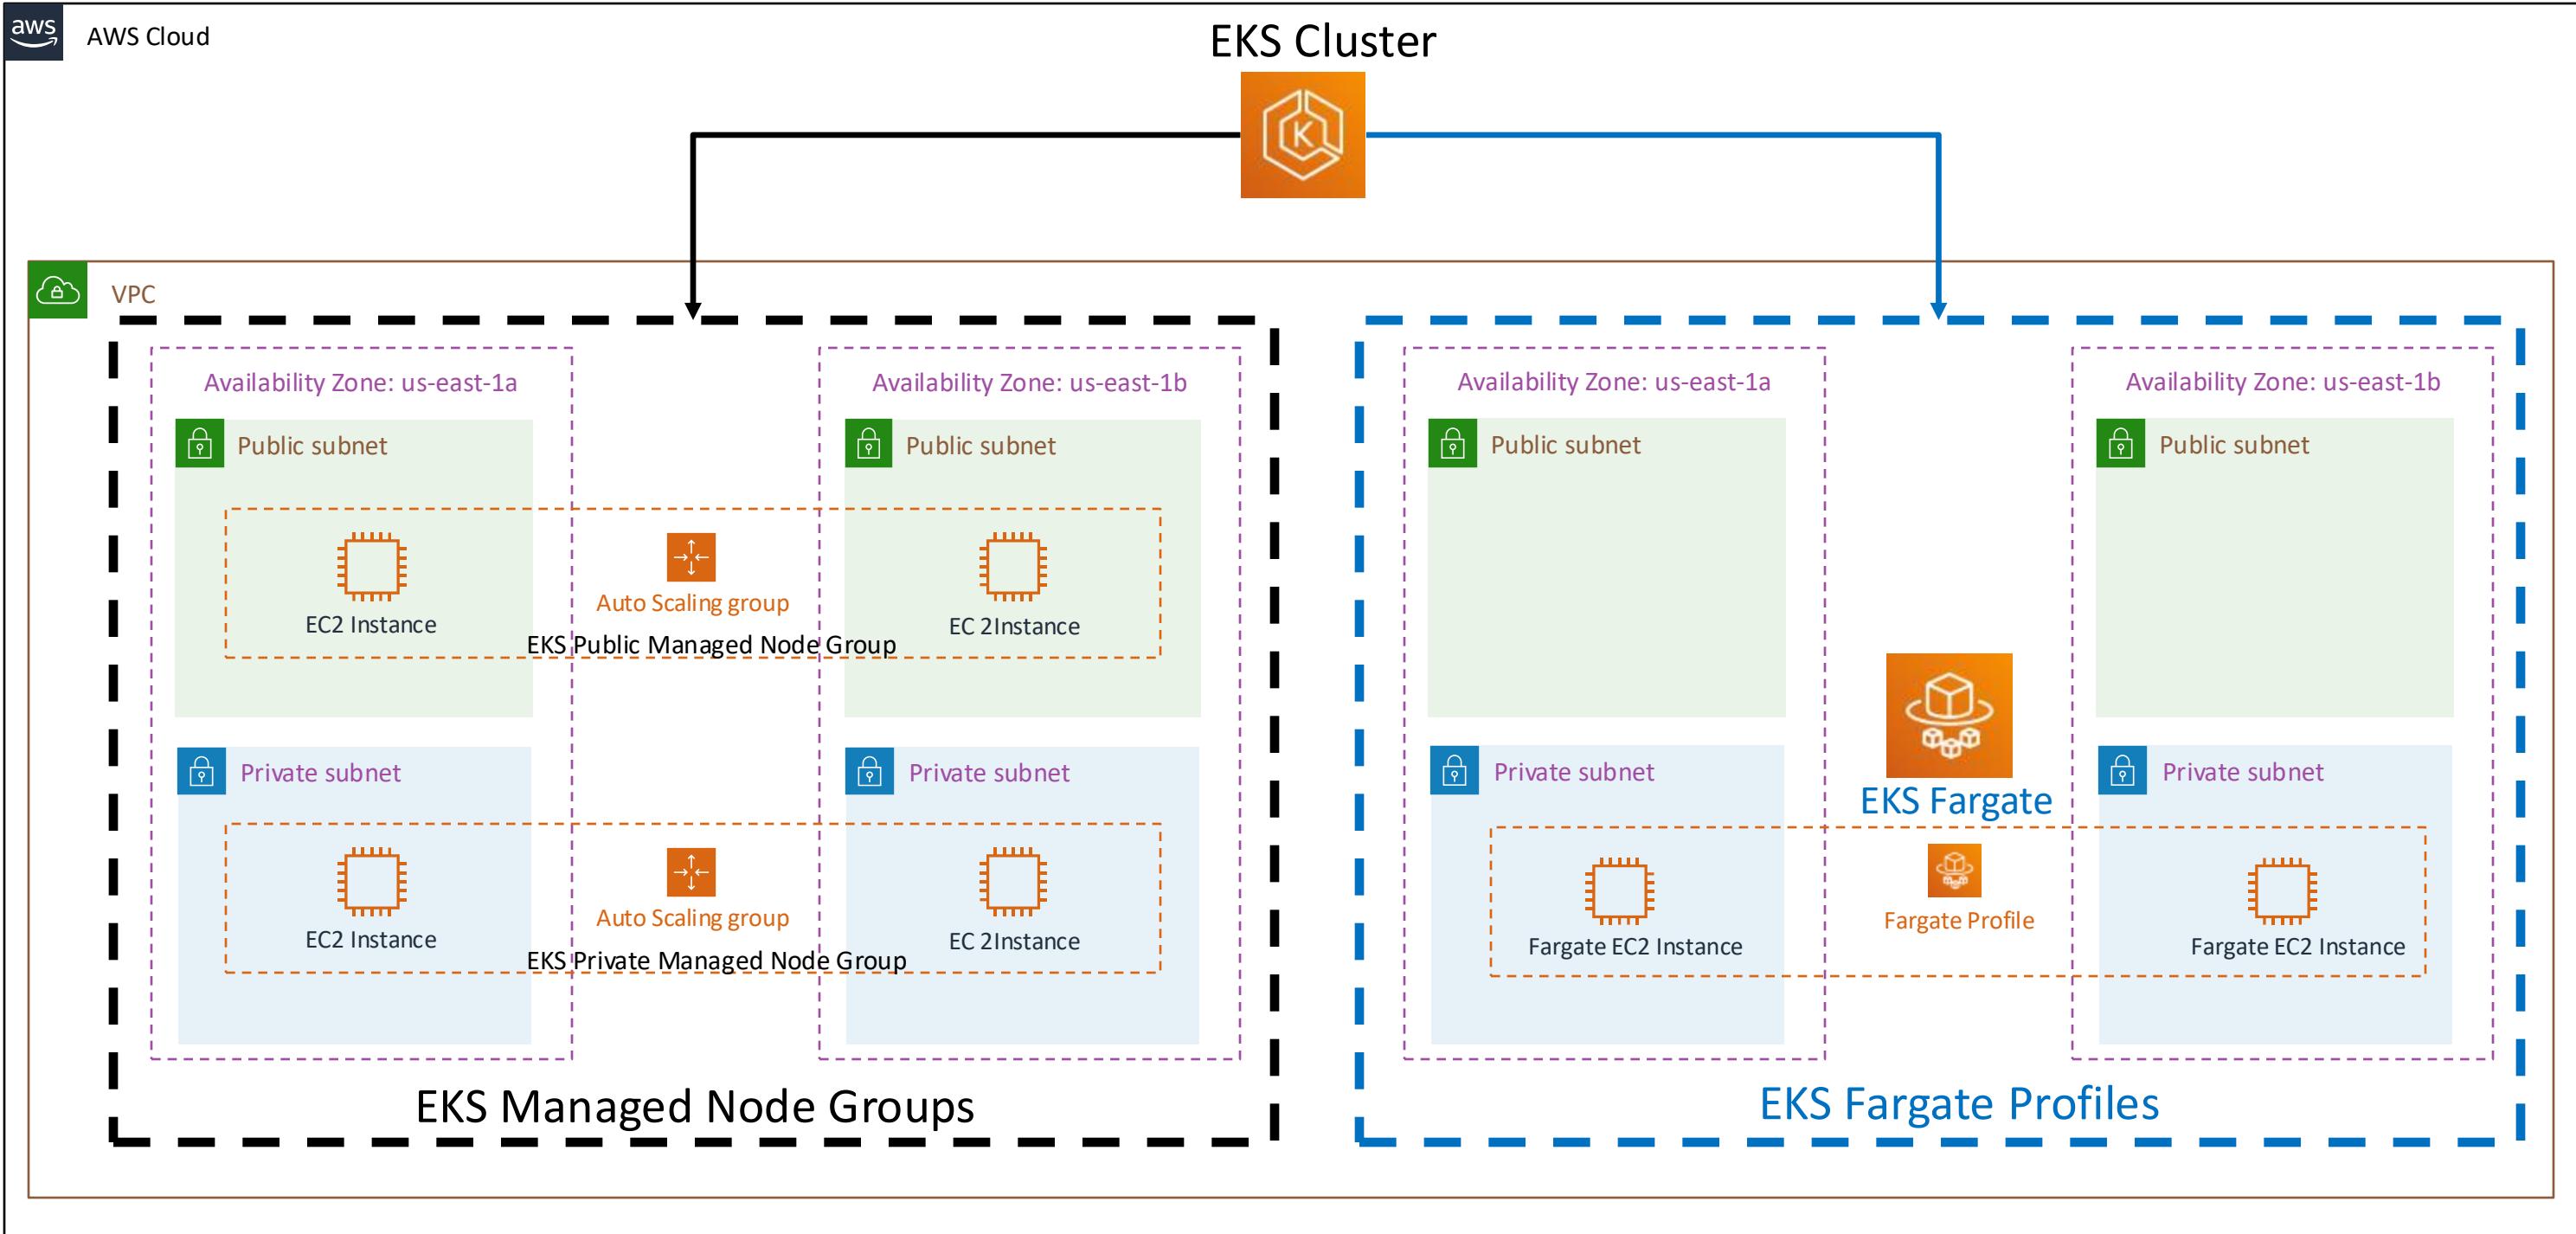

EKS Fargate vs Managed vs Unmanaged Nodes


	Fargate	Managed nodes	Unmanaged nodes
Units of work	Pod	Pod and EC2	Pod and EC2
Unit of charge	Pod	EC2	EC2
Host lifecycle	There is no visible host	AWS (SSH is allowed)	Customer
Host AMI	There is no visible host	AWS vetted AMIs	Customer BYO
Host : Pods	1 : 1	1 : many	1 : many

EKS Fargate Considerations


- There are many considerations we need to be **aware of** before we decide our Kubernetes workloads to run on Fargate.
- Documentation Link
- <https://docs.aws.amazon.com/eks/latest/userguide/fargate.html>




Elastic Load
Balancing

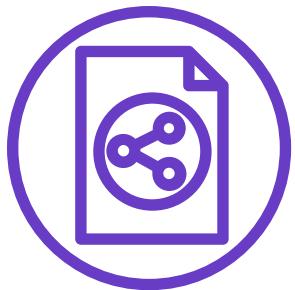

Classic
Load Balancer

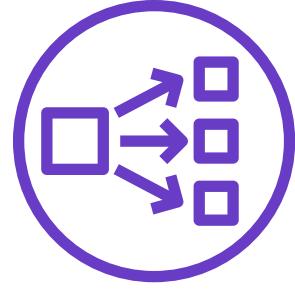

Network
Load Balancer

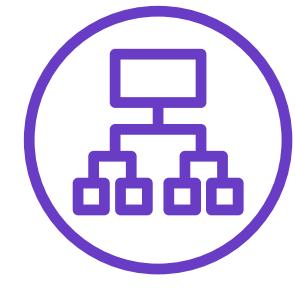

Application
Load Balancer



Certificate
Manager



Route53



Elastic Block
Store



Amazon RDS

AWS EKS


Fargate Profiles

Basics




Fargate
Profiles


EKS Deployment Options - Mixed

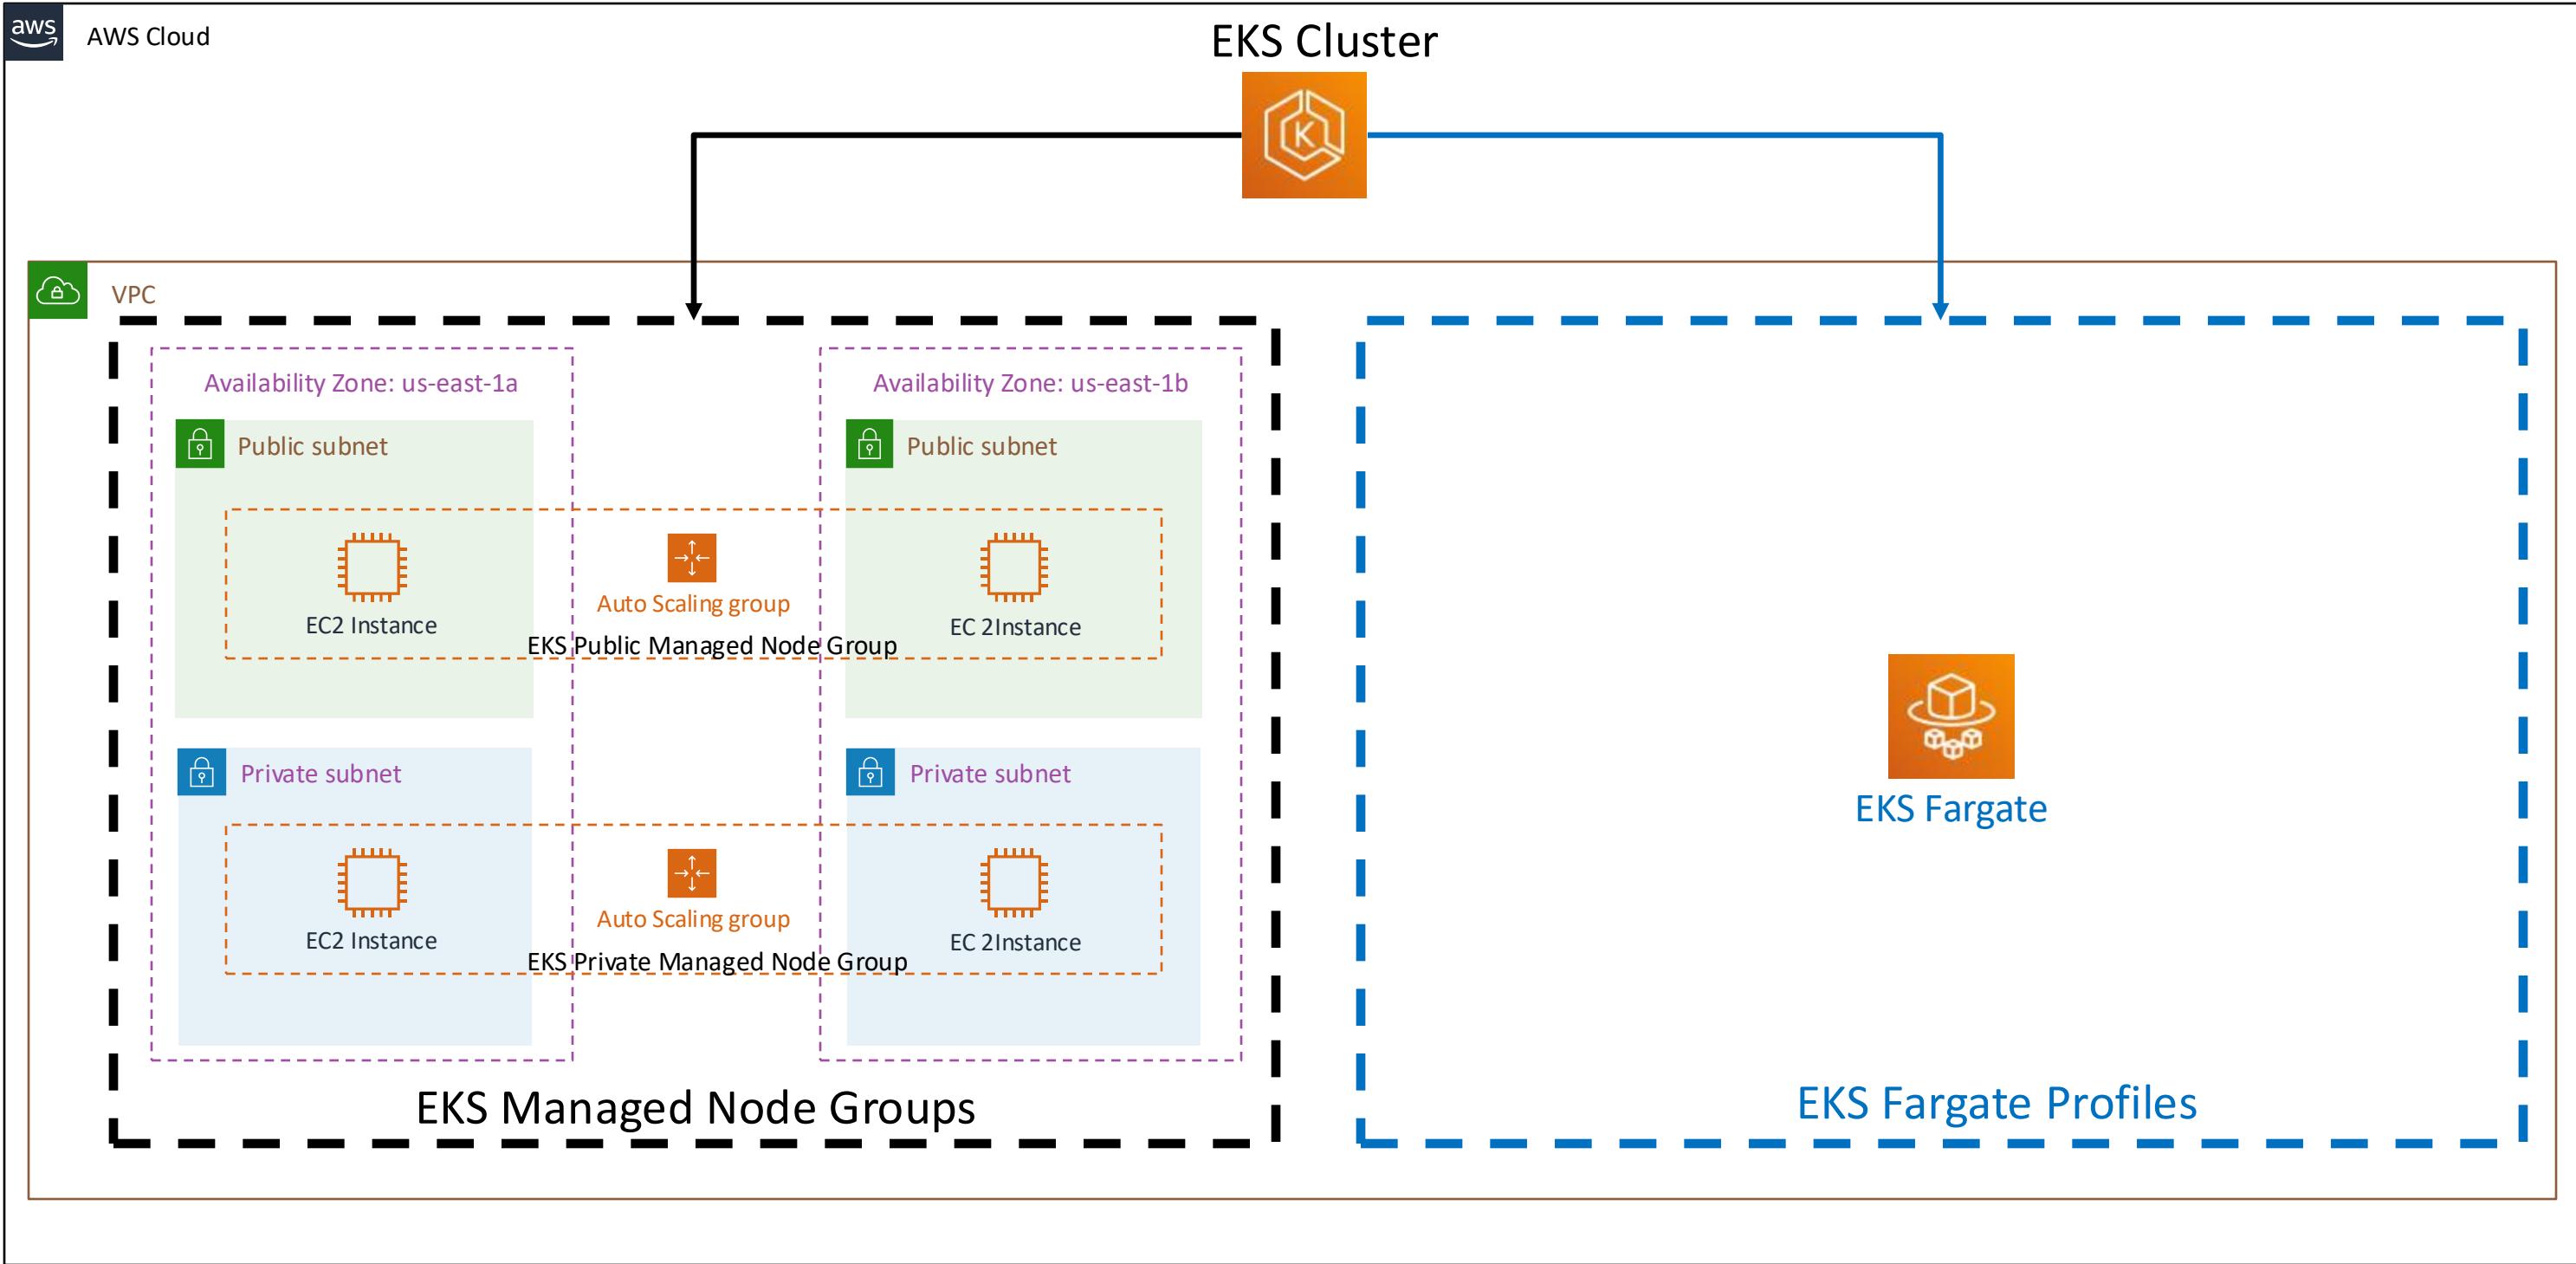

EKS Deployment Options - Mixed


Fargate Profiles can be deployed to EKS Cluster only when we have at least one private subnet

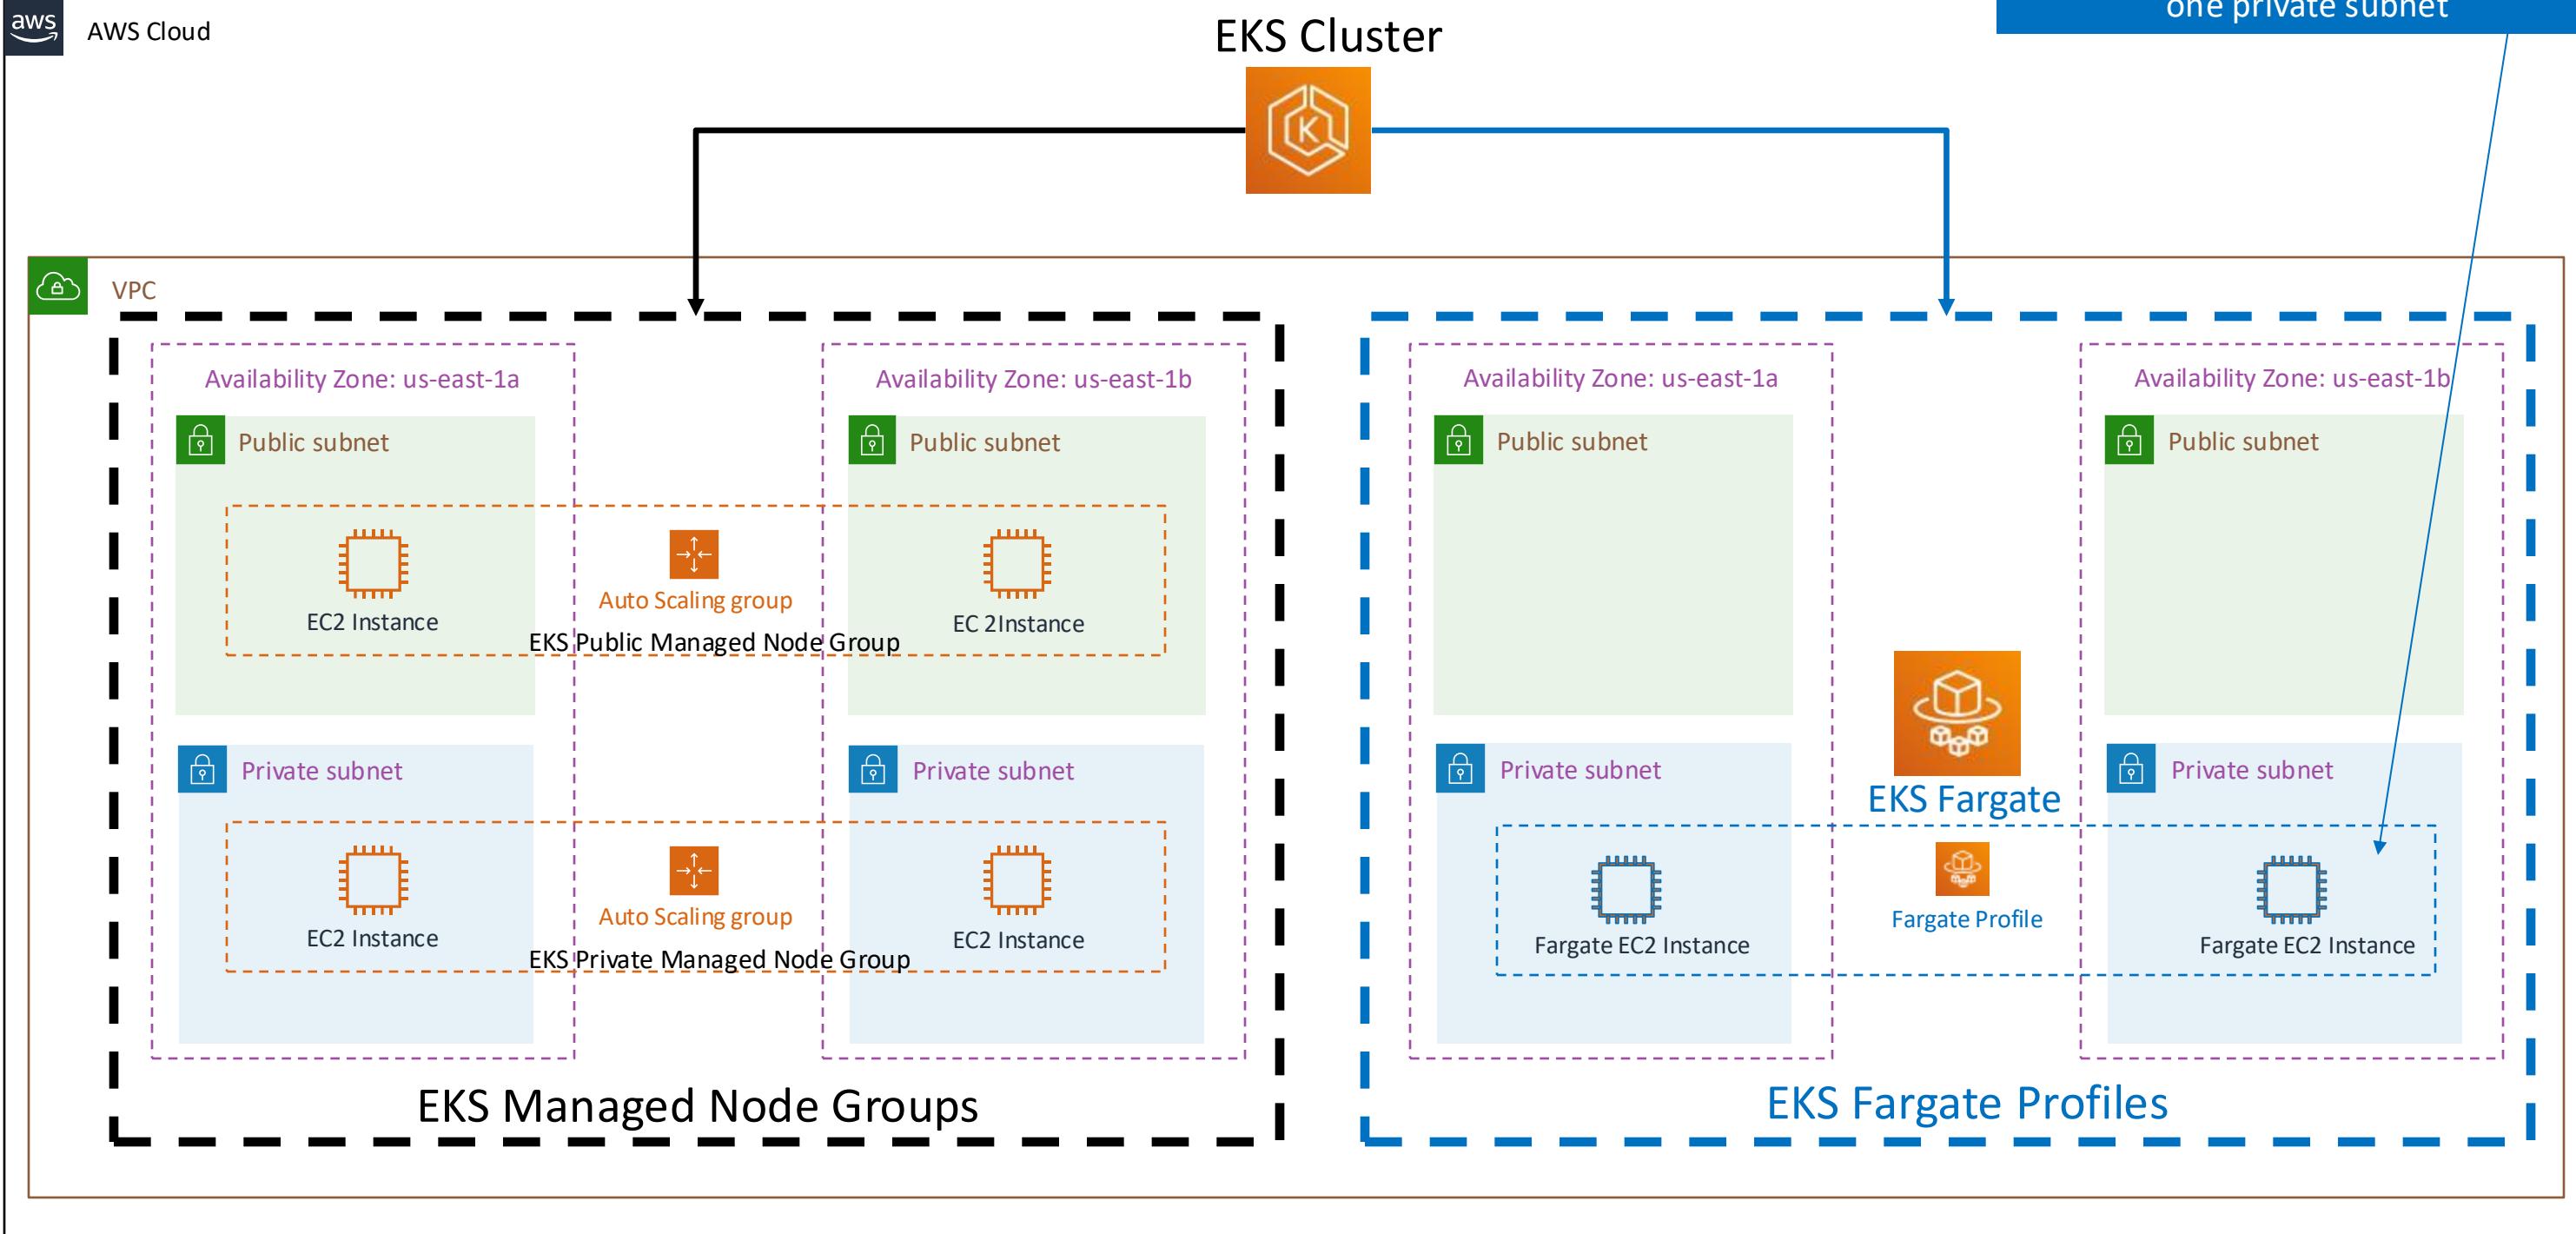

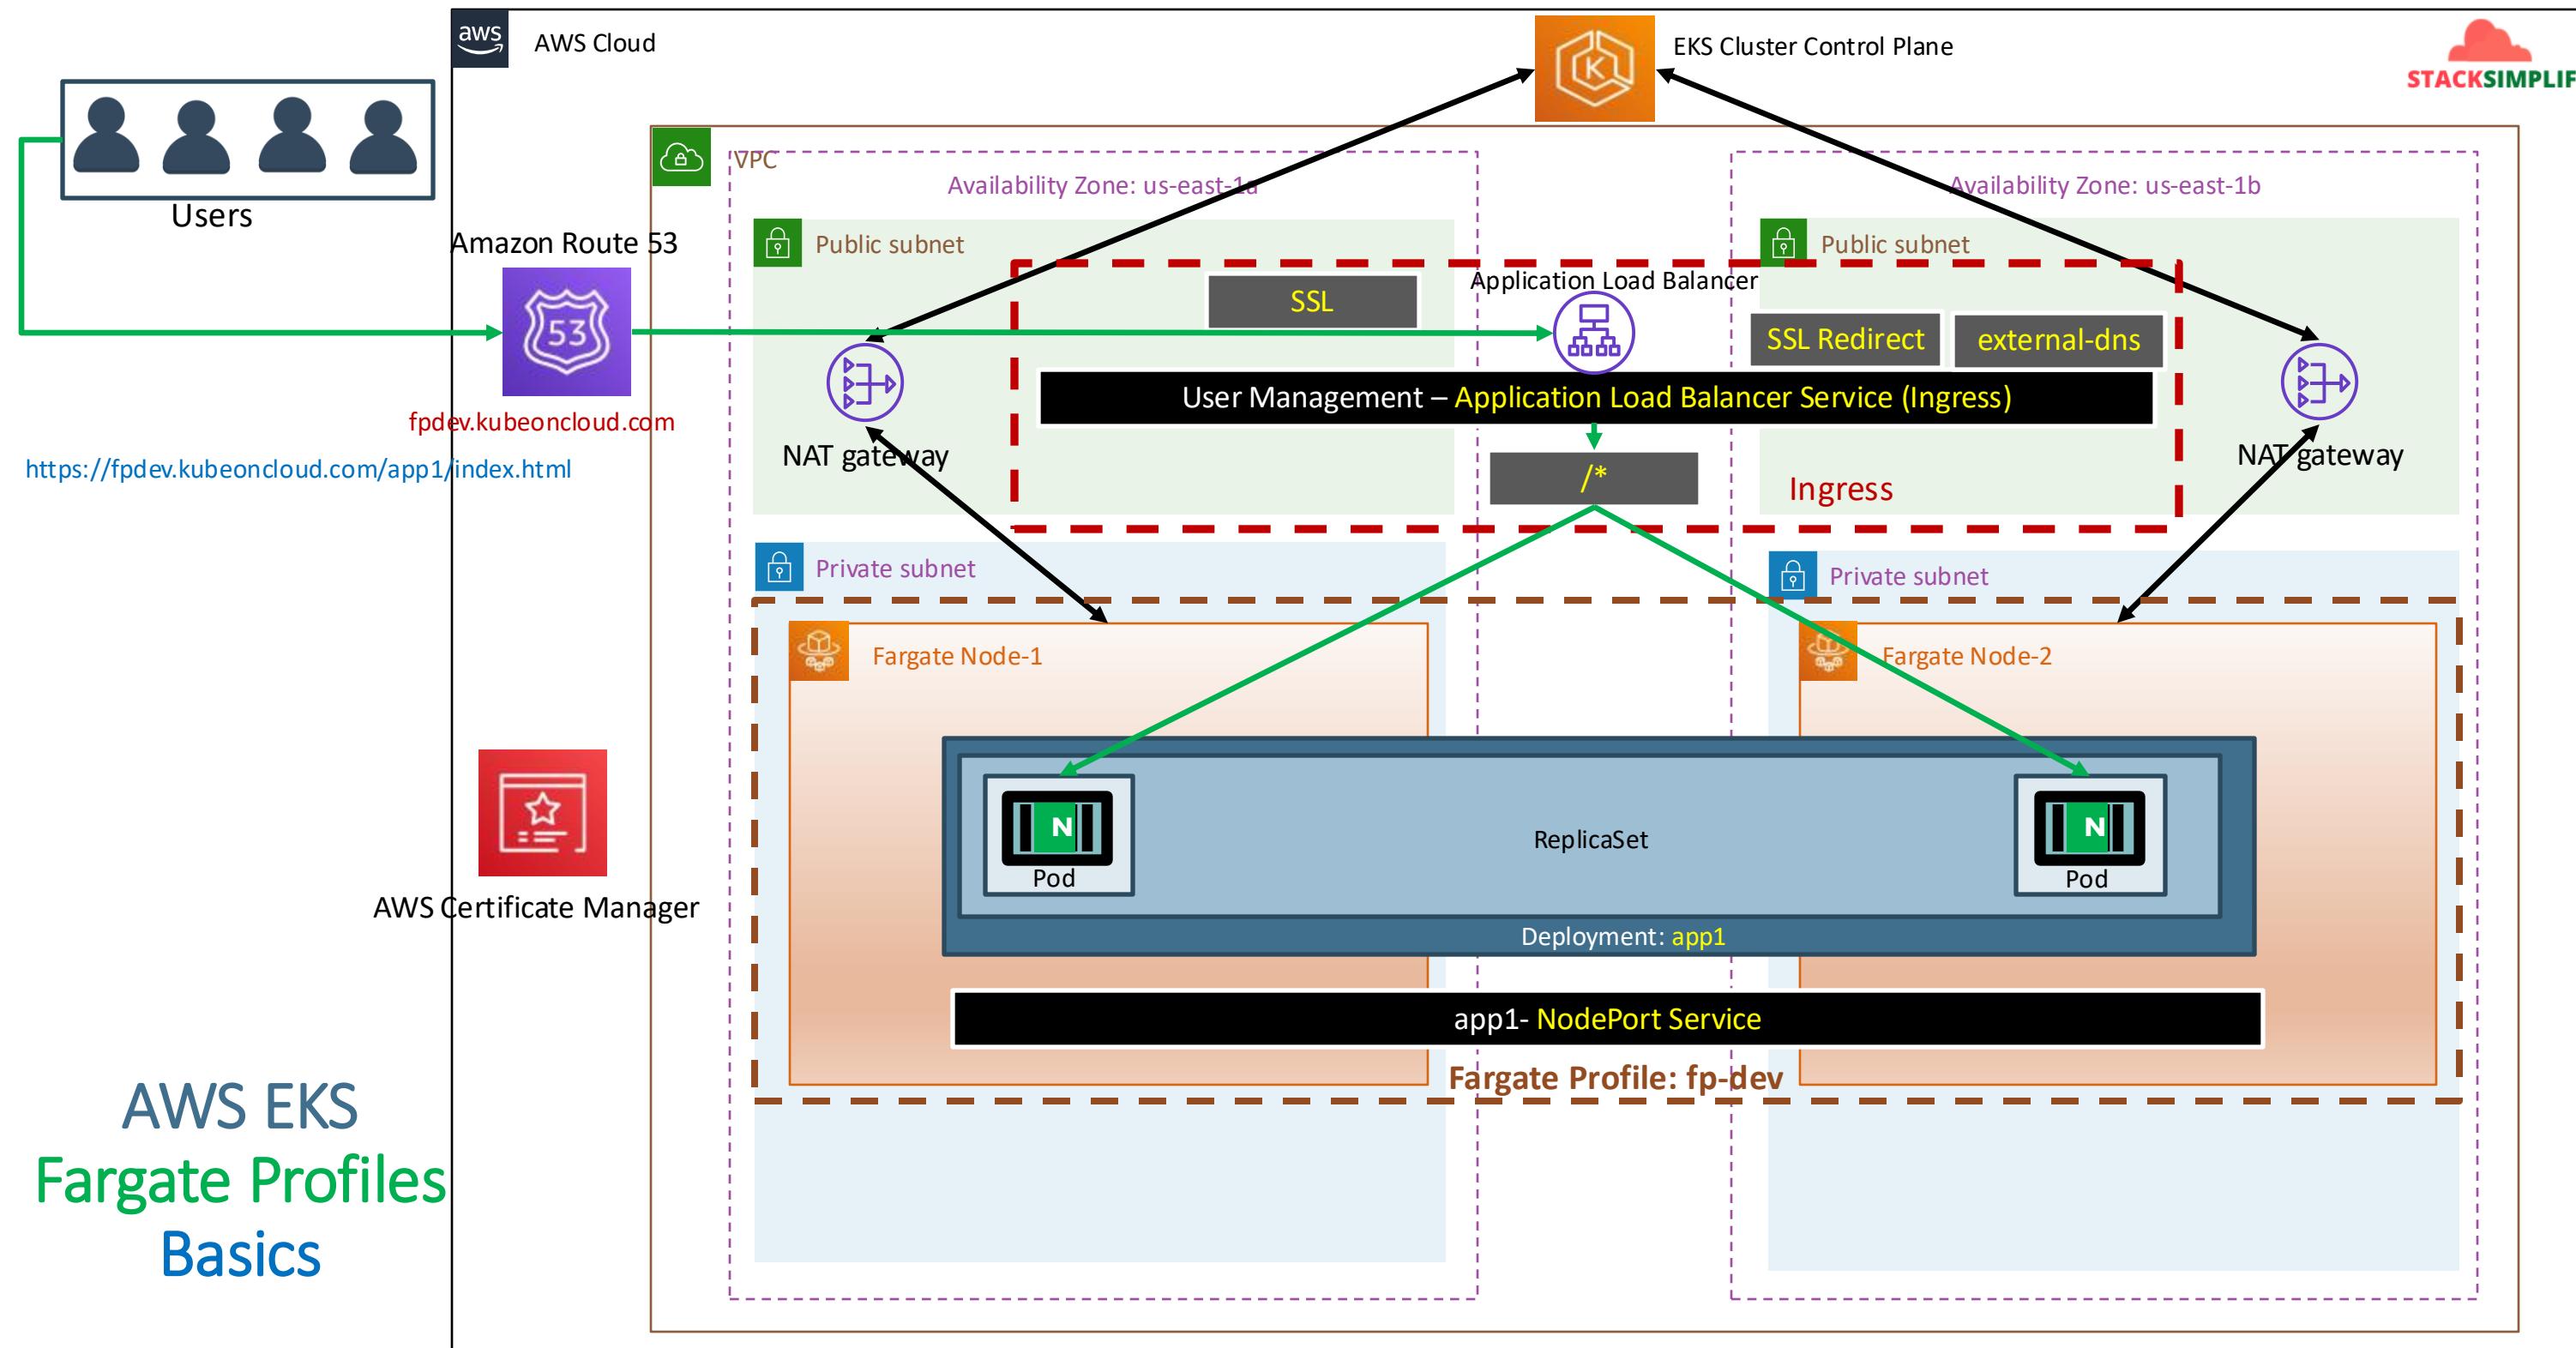





Elastic Load
Balancing

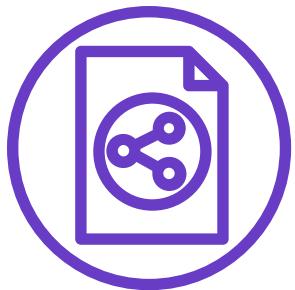

Classic
Load Balancer

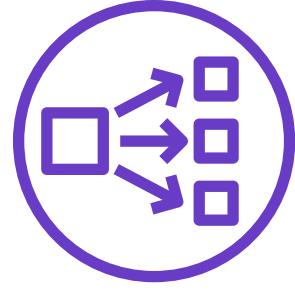

Network
Load Balancer

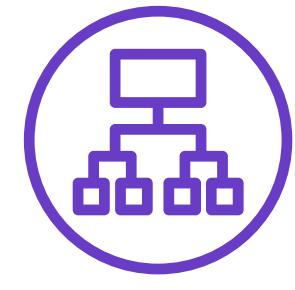

Application
Load Balancer



Certificate
Manager



Route53



Elastic Block
Store



Amazon RDS

AWS EKS

Fargate Profiles

Advanced with YAML




Fargate
Profiles

Users



EKS Deployment Options – Mixed Mode - 3 Apps

STACKSIMPLIFY

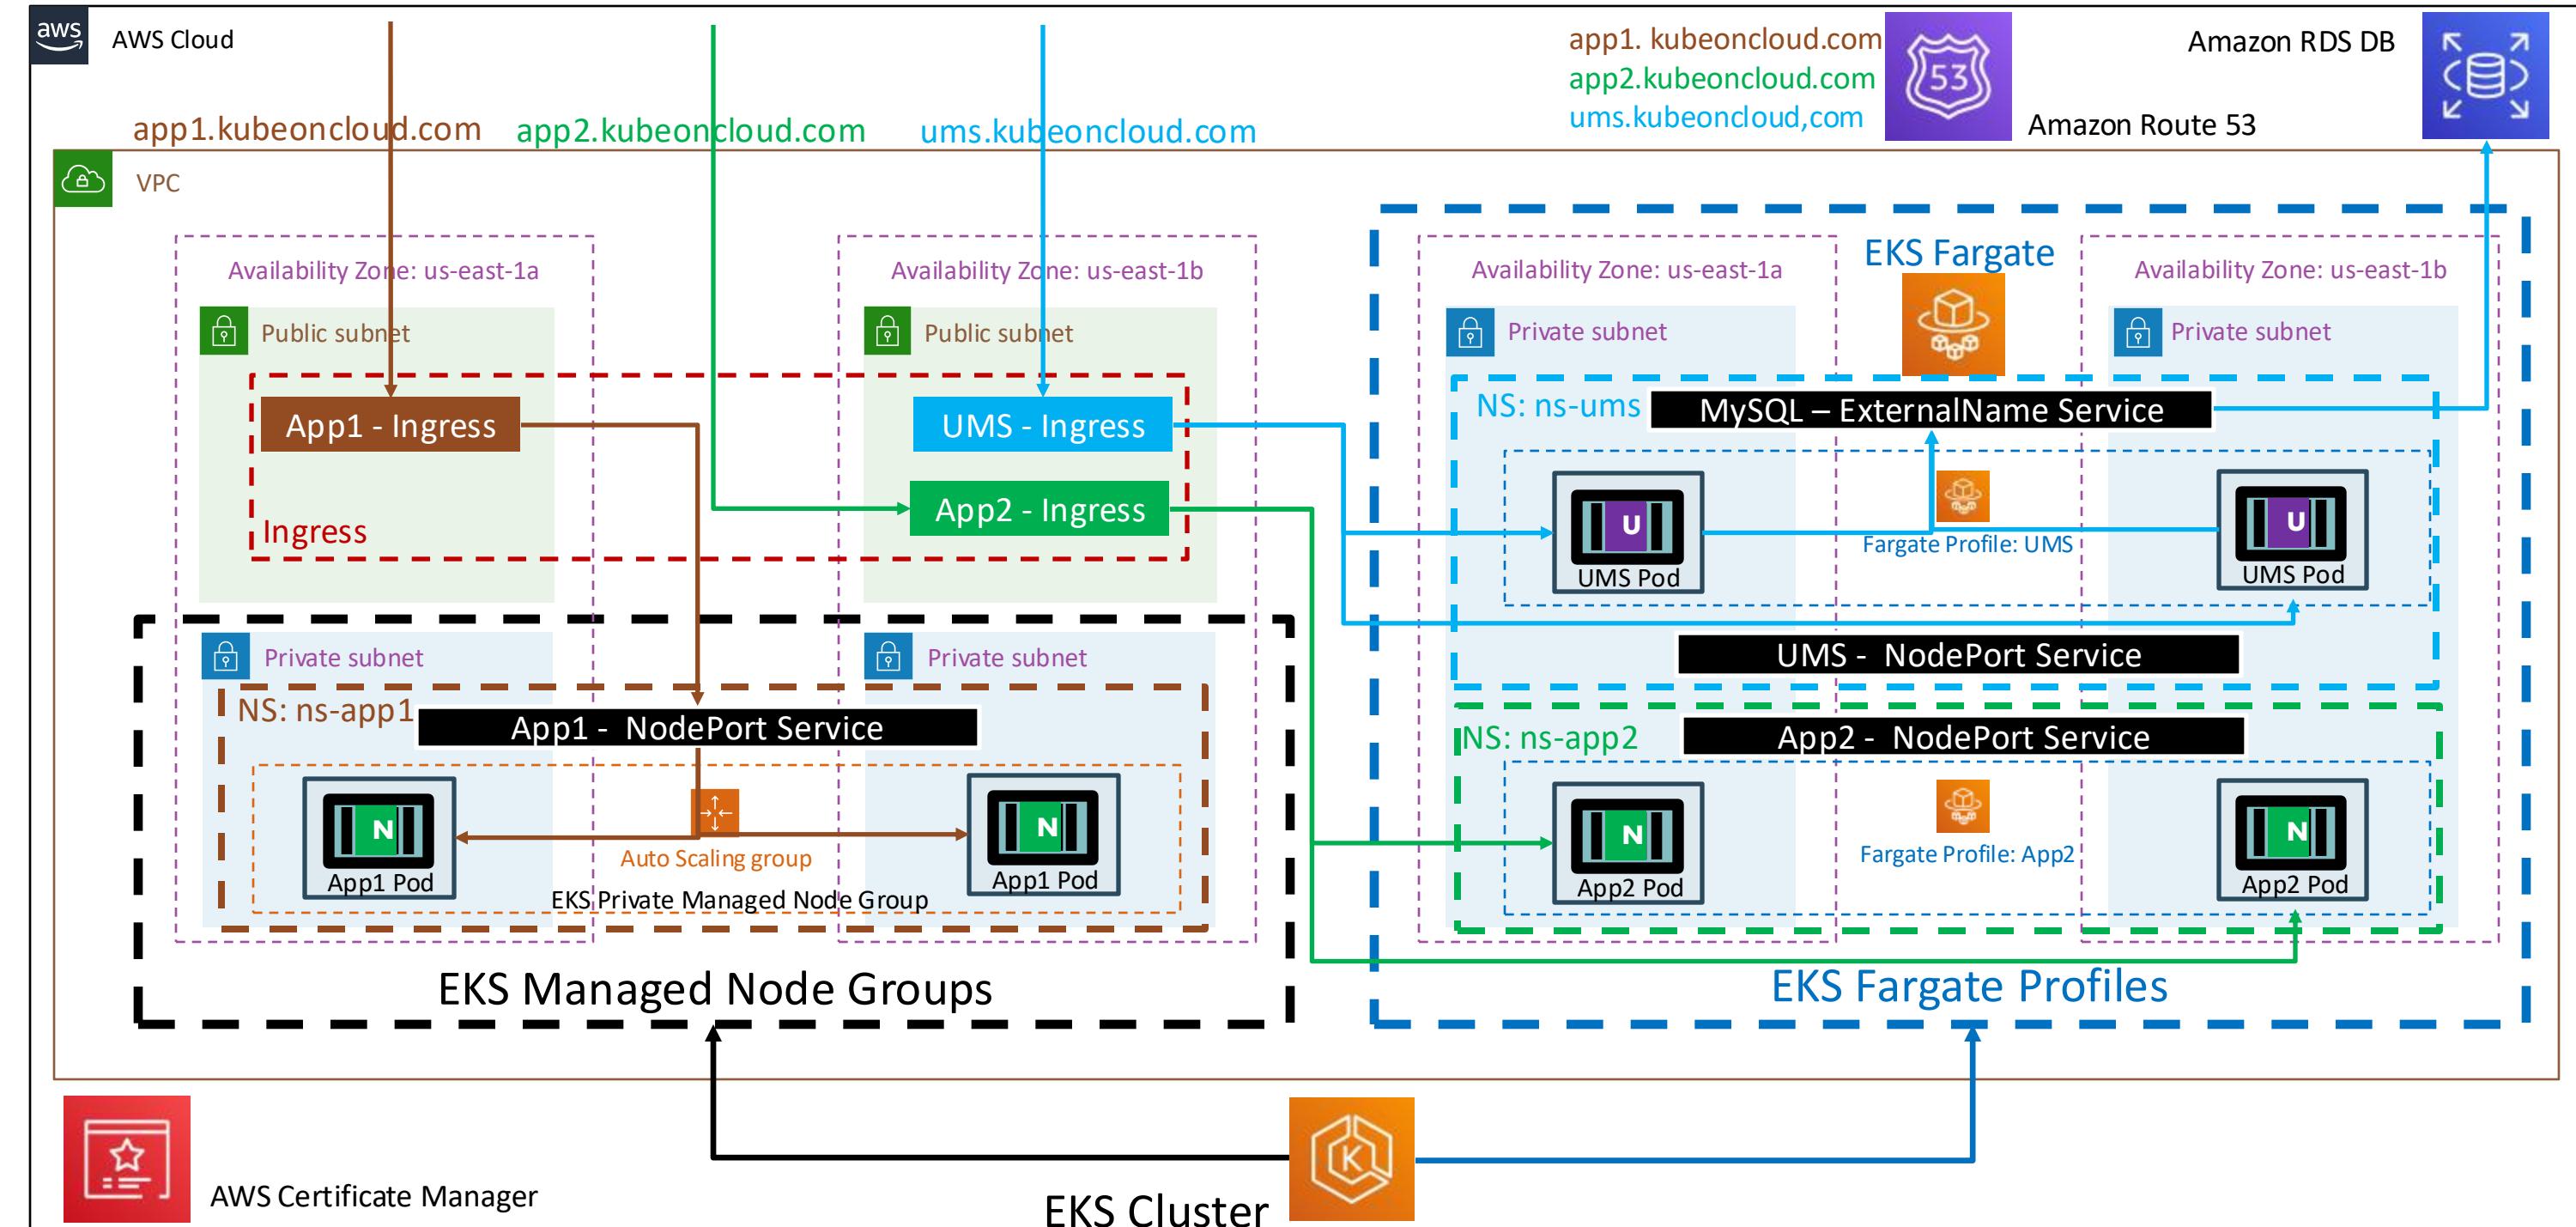


EKS Deployment – Mixed – Ingress with Cross Namespaces


Users




app1.kubeoncloud.com
app2.kubeoncloud.com
ums.kubeoncloud.com

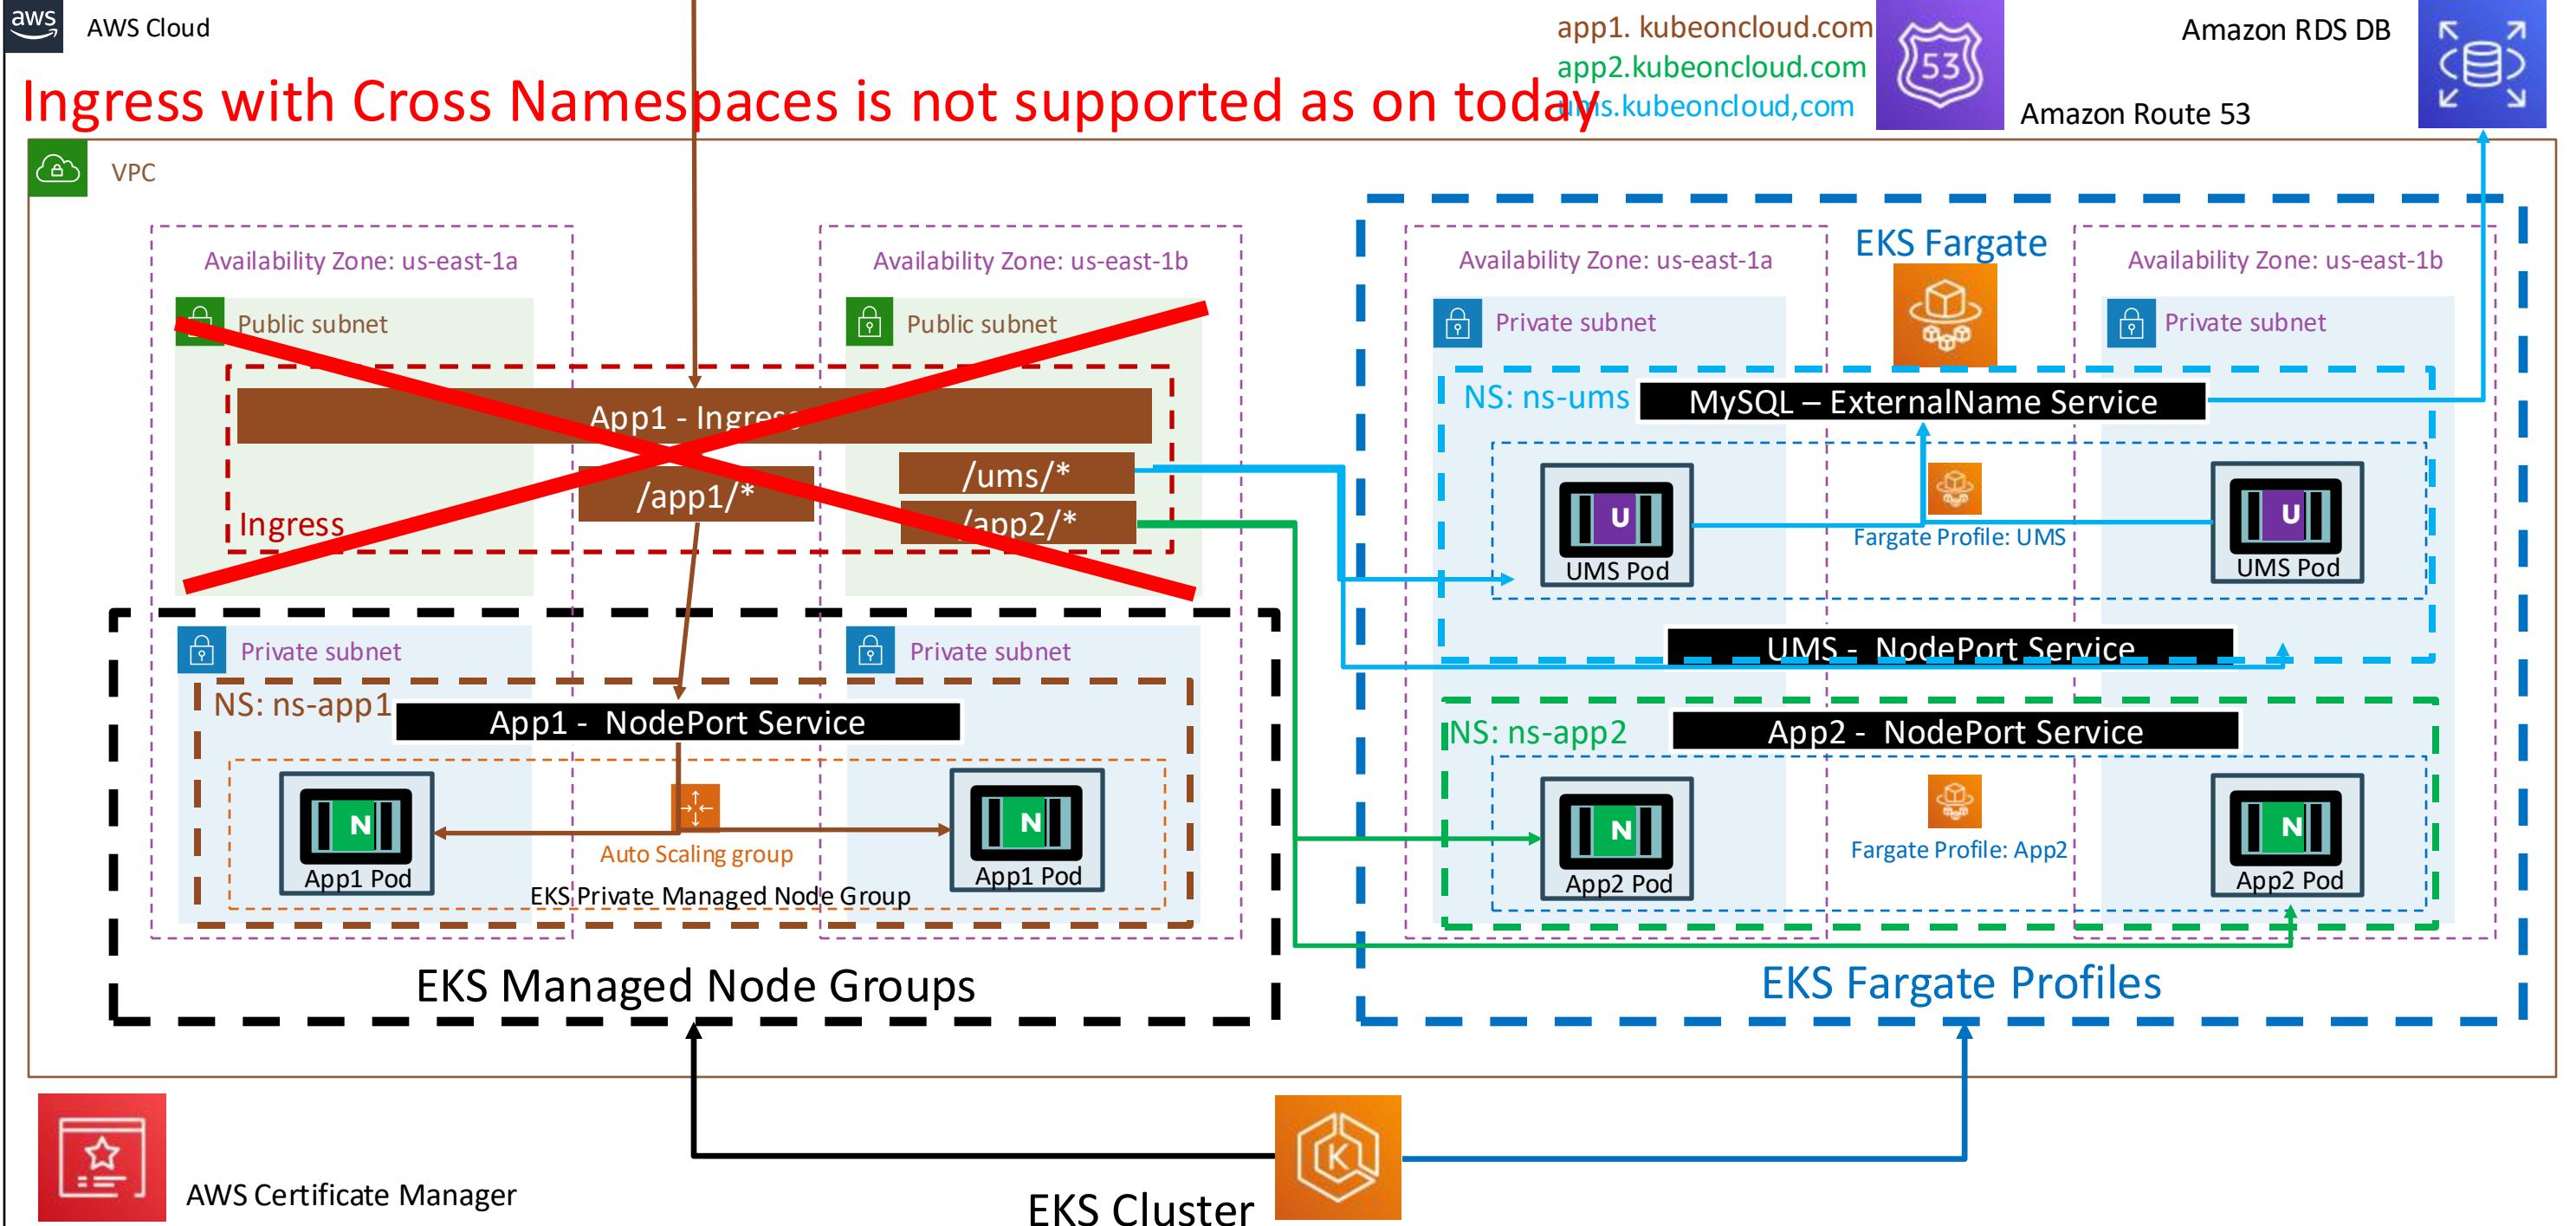

AWS Load Balancer Controller & AWS Network Load Balancer – NEW TOPIC ADDITION - START

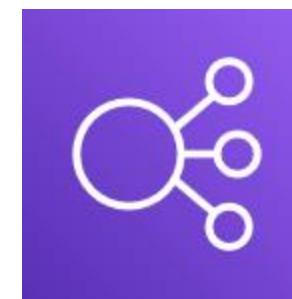

Elastic Load
Balancing

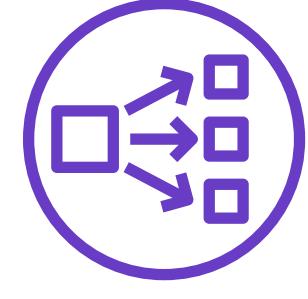

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS

Load Balancer Controller

Kubernetes Service

Network Load Balancer



Demo-1: NLB Basics

Demo-2: NLB TLS
SSL


Demo-3: NLB &
External DNS


6 Demos

Demo-4: NLB &
Elastic IP


Demo-5: Internal
NLB

Demo-6: NLB &
Fargate

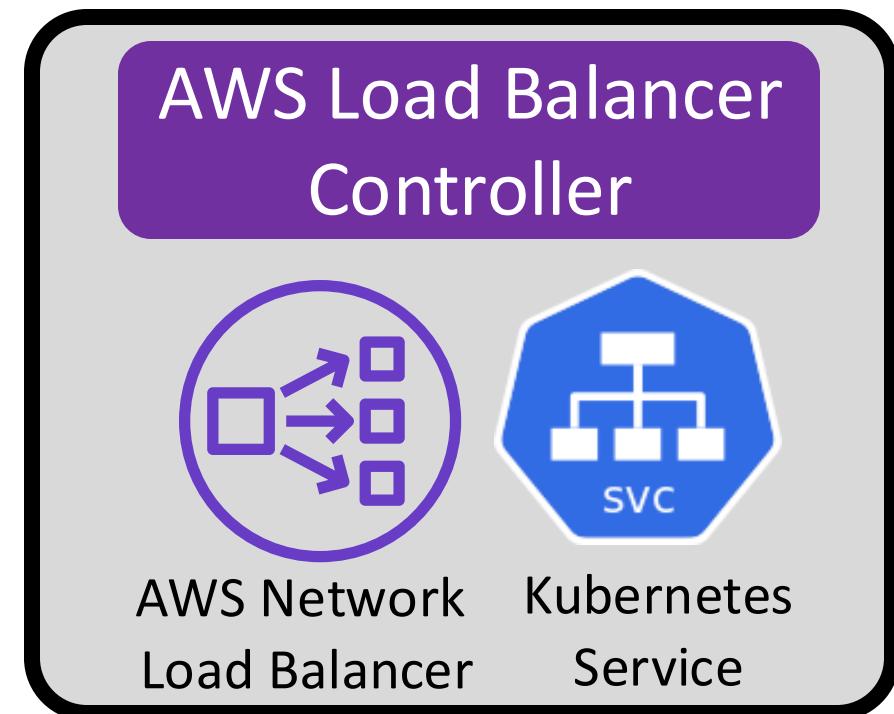

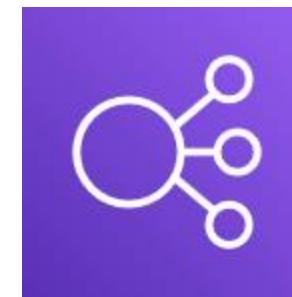

Elastic Load
Balancing

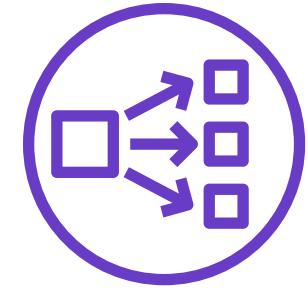

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS

Load Balancer Controller

Kubernetes Service

Network Load Balancer - Basics



Network Load Balancer

What is Network Load Balancer ?

Network traffic is load balanced at L4 of the OSI model.

Supports TCP, UDP and TLS Protocols

ELB Features Comparison for Additional Understanding:

<https://aws.amazon.com/elasticloadbalancing/features/>

Options for creating Network Load Balancer using Kubernetes on EKS Cluster

AWS cloud provider load balancer controller

Legacy Controller which can create AWS Classic LB and Network LB

Creates very basic Network Load Balancer

This controller will receive only critical bug fixes and in long run it will be deprecated

This controller will not have any new features added to it

- ✓ 07-ELB-Classic-and-Network-LoadBalancers
 - > 07-01-Create-EKS-Private-NodeGroup
 - > 07-02-Classic-LoadBalancer-CLB
 - > 07-03-Network-LoadBalancer-NLB

AWS Load Balancer Controller

Latest and greatest which can create AWS ALB and NLB

Supports Protocols TCP, UDP & TLS (SSL) and for Health Check it supports TCP, HTTP & HTTPS


Supports Instance and IP Mode(For Fargate)

Supports Internal, External NLB and Custom Subnet Discovery

Supports Static Elastic IP and Access Control

Supports 25+ new Annotations
<https://kubernetes-sigs.github.io/aws-load-balancer-controller/v2.4/guide/service/annotations/>


How to ensure our Network LB created using Kubernetes Service will be associated with only latest AWS Load Balancer Controller ?

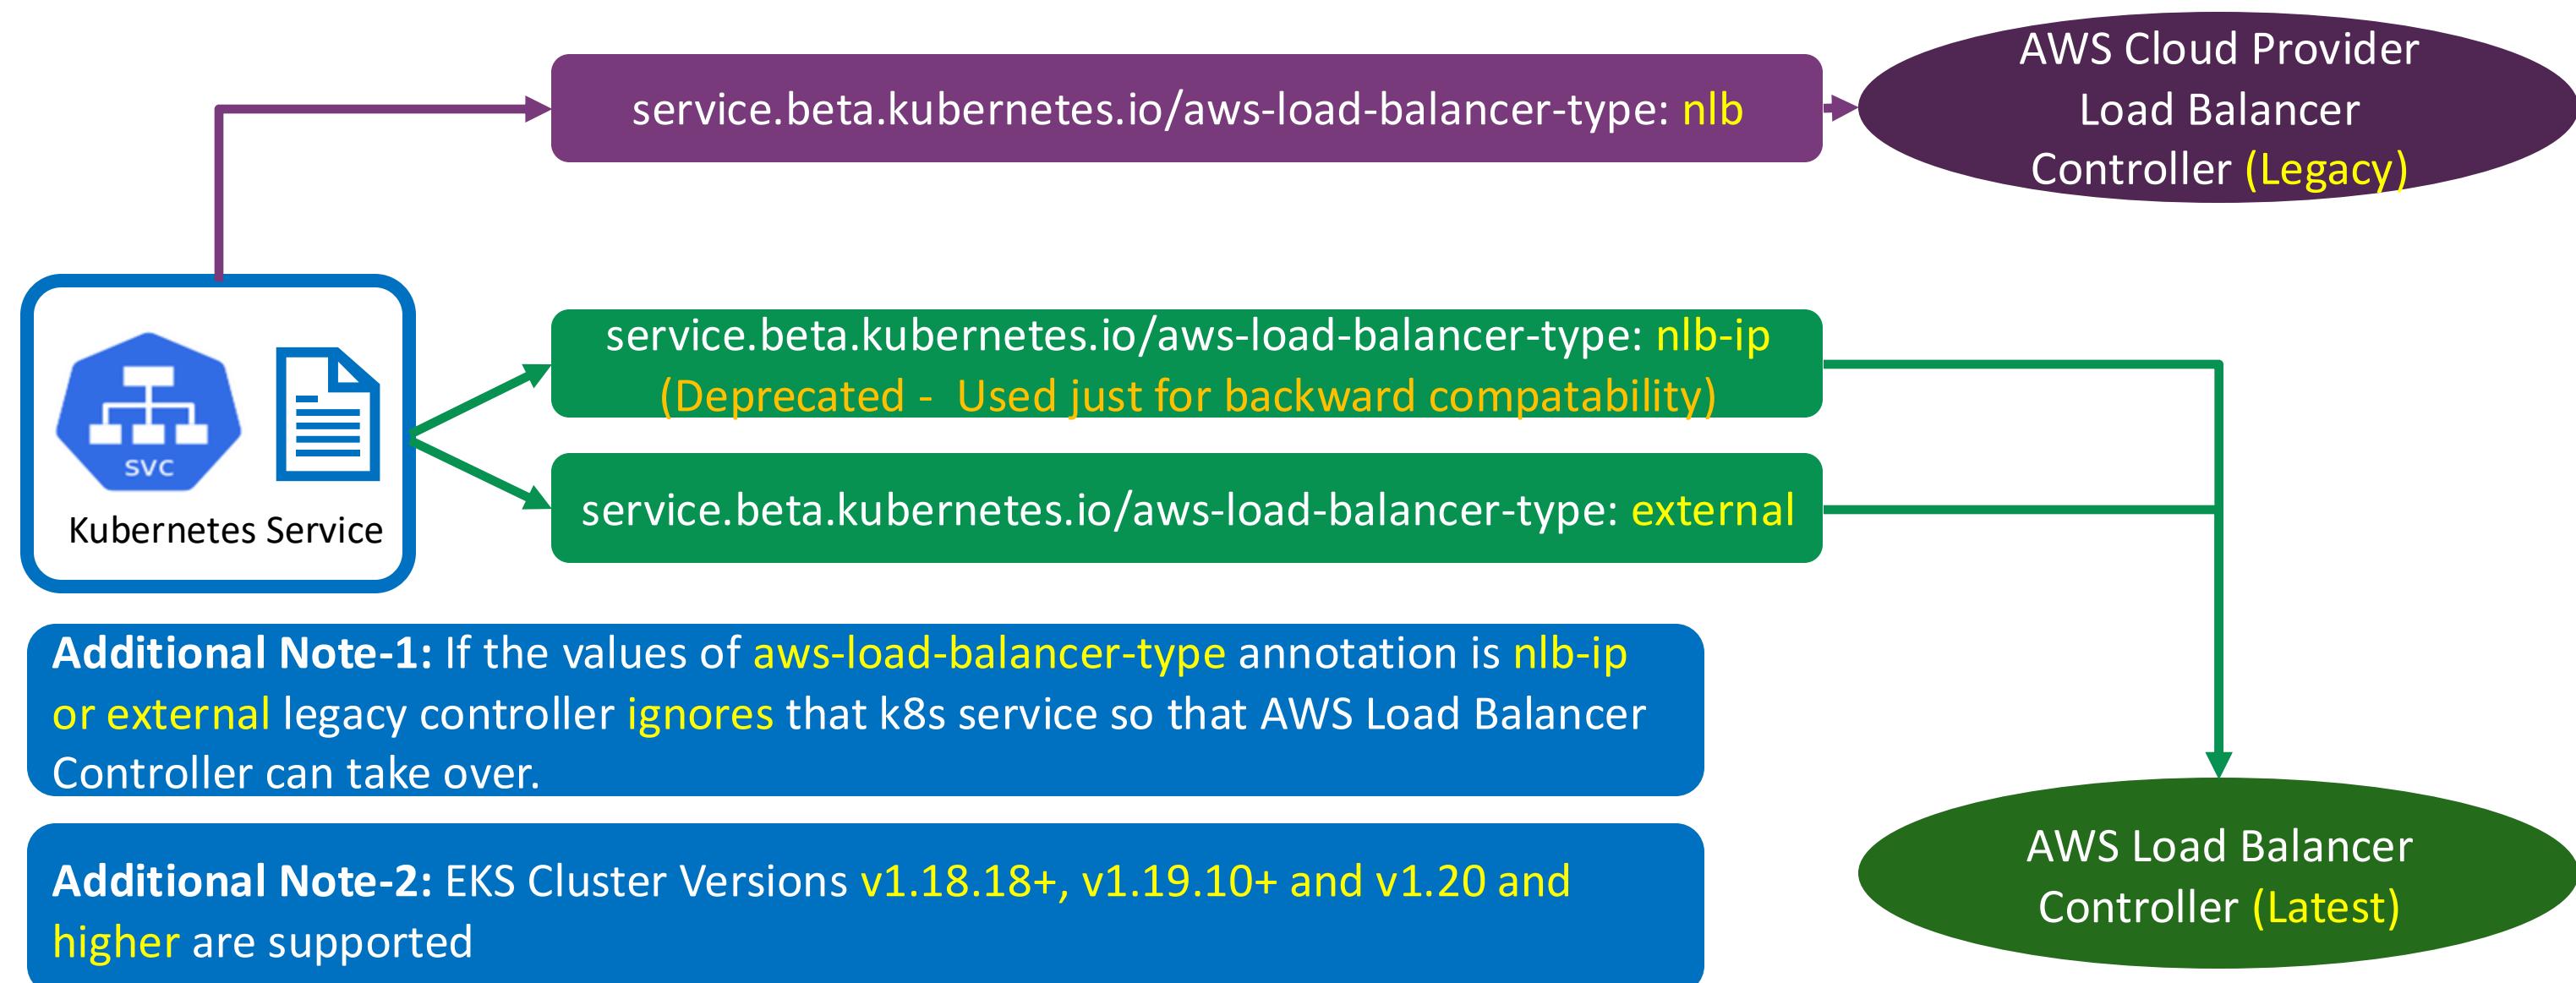

```
apiVersion: v1
kind: Service
metadata:
  name: lbc-network-lb-demo
  annotations:
    # Traffic Routing
    service.beta.kubernetes.io/aws-load-balancer-name: lbc-network-lb-demo
    service.beta.kubernetes.io/aws-load-balancer-type: external
    service.beta.kubernetes.io/aws-load-balancer-nlb-target-type: instance
    #service.beta.kubernetes.io/aws-load-balancer-subnets: subnet-xxxx, mySubnet ## Subnets are auto-detected
    # Health Check Settings
    service.beta.kubernetes.io/aws-load-balancer-healthcheck-protocol: http
    service.beta.kubernetes.io/aws-load-balancer-healthcheck-port: traffic-port
    service.beta.kubernetes.io/aws-load-balancer-healthcheck-path: /index.html
    service.beta.kubernetes.io/aws-load-balancer-healthcheck-healthy-threshold: "3"
    service.beta.kubernetes.io/aws-load-balancer-healthcheck-unhealthy-threshold: "3"
    service.beta.kubernetes.io/aws-load-balancer-healthcheck-interval: "10" # The controller currently supports 10s intervals
    # Access Control
    service.beta.kubernetes.io/load-balancer-source-ranges: 0.0.0.0/0
    service.beta.kubernetes.io/aws-load-balancer-scheme: "internet-facing"
    # AWS Resource Tags
    service.beta.kubernetes.io/aws-load-balancer-additional-resource-tags: Environment=dev,Team=test
spec:
  type: LoadBalancer
  selector:
    app: app3-nginx
  ports:
    - port: 80
      targetPort: 80
```

This Kubernetes Service creates Network Load Balancer which will be associated to latest AWS Load Balancer Controller

AWS EKS NLB – Basics

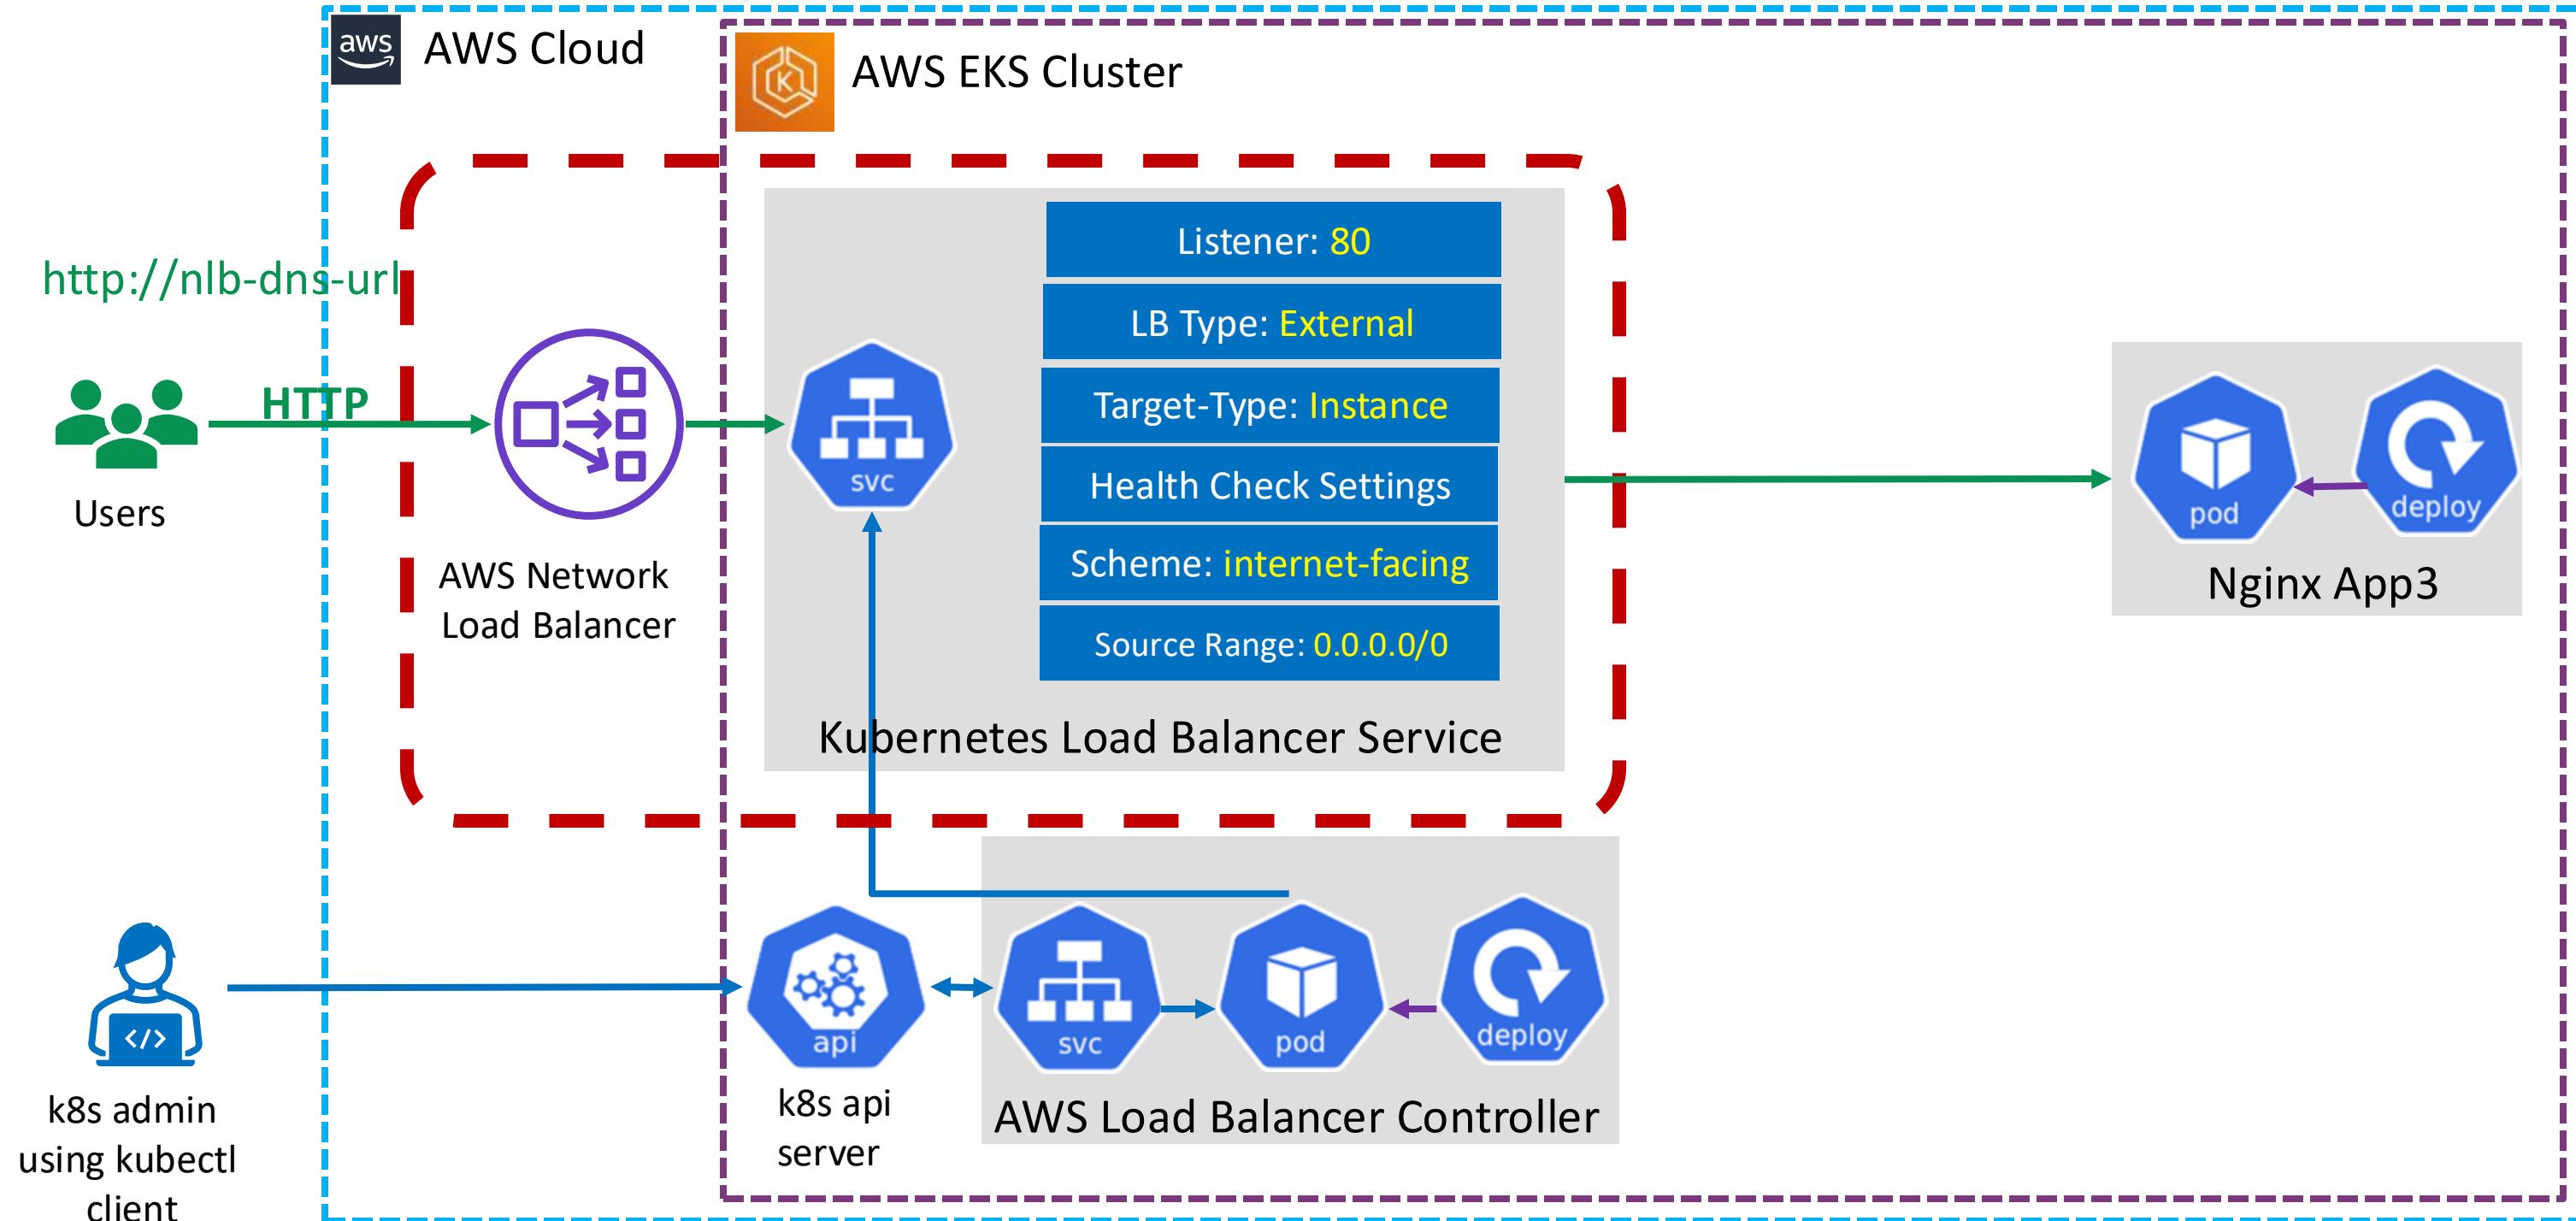




AWS Cloud

HTTP

Users

http://NLB-DNS-URL

AWS EKS Network LB Basics

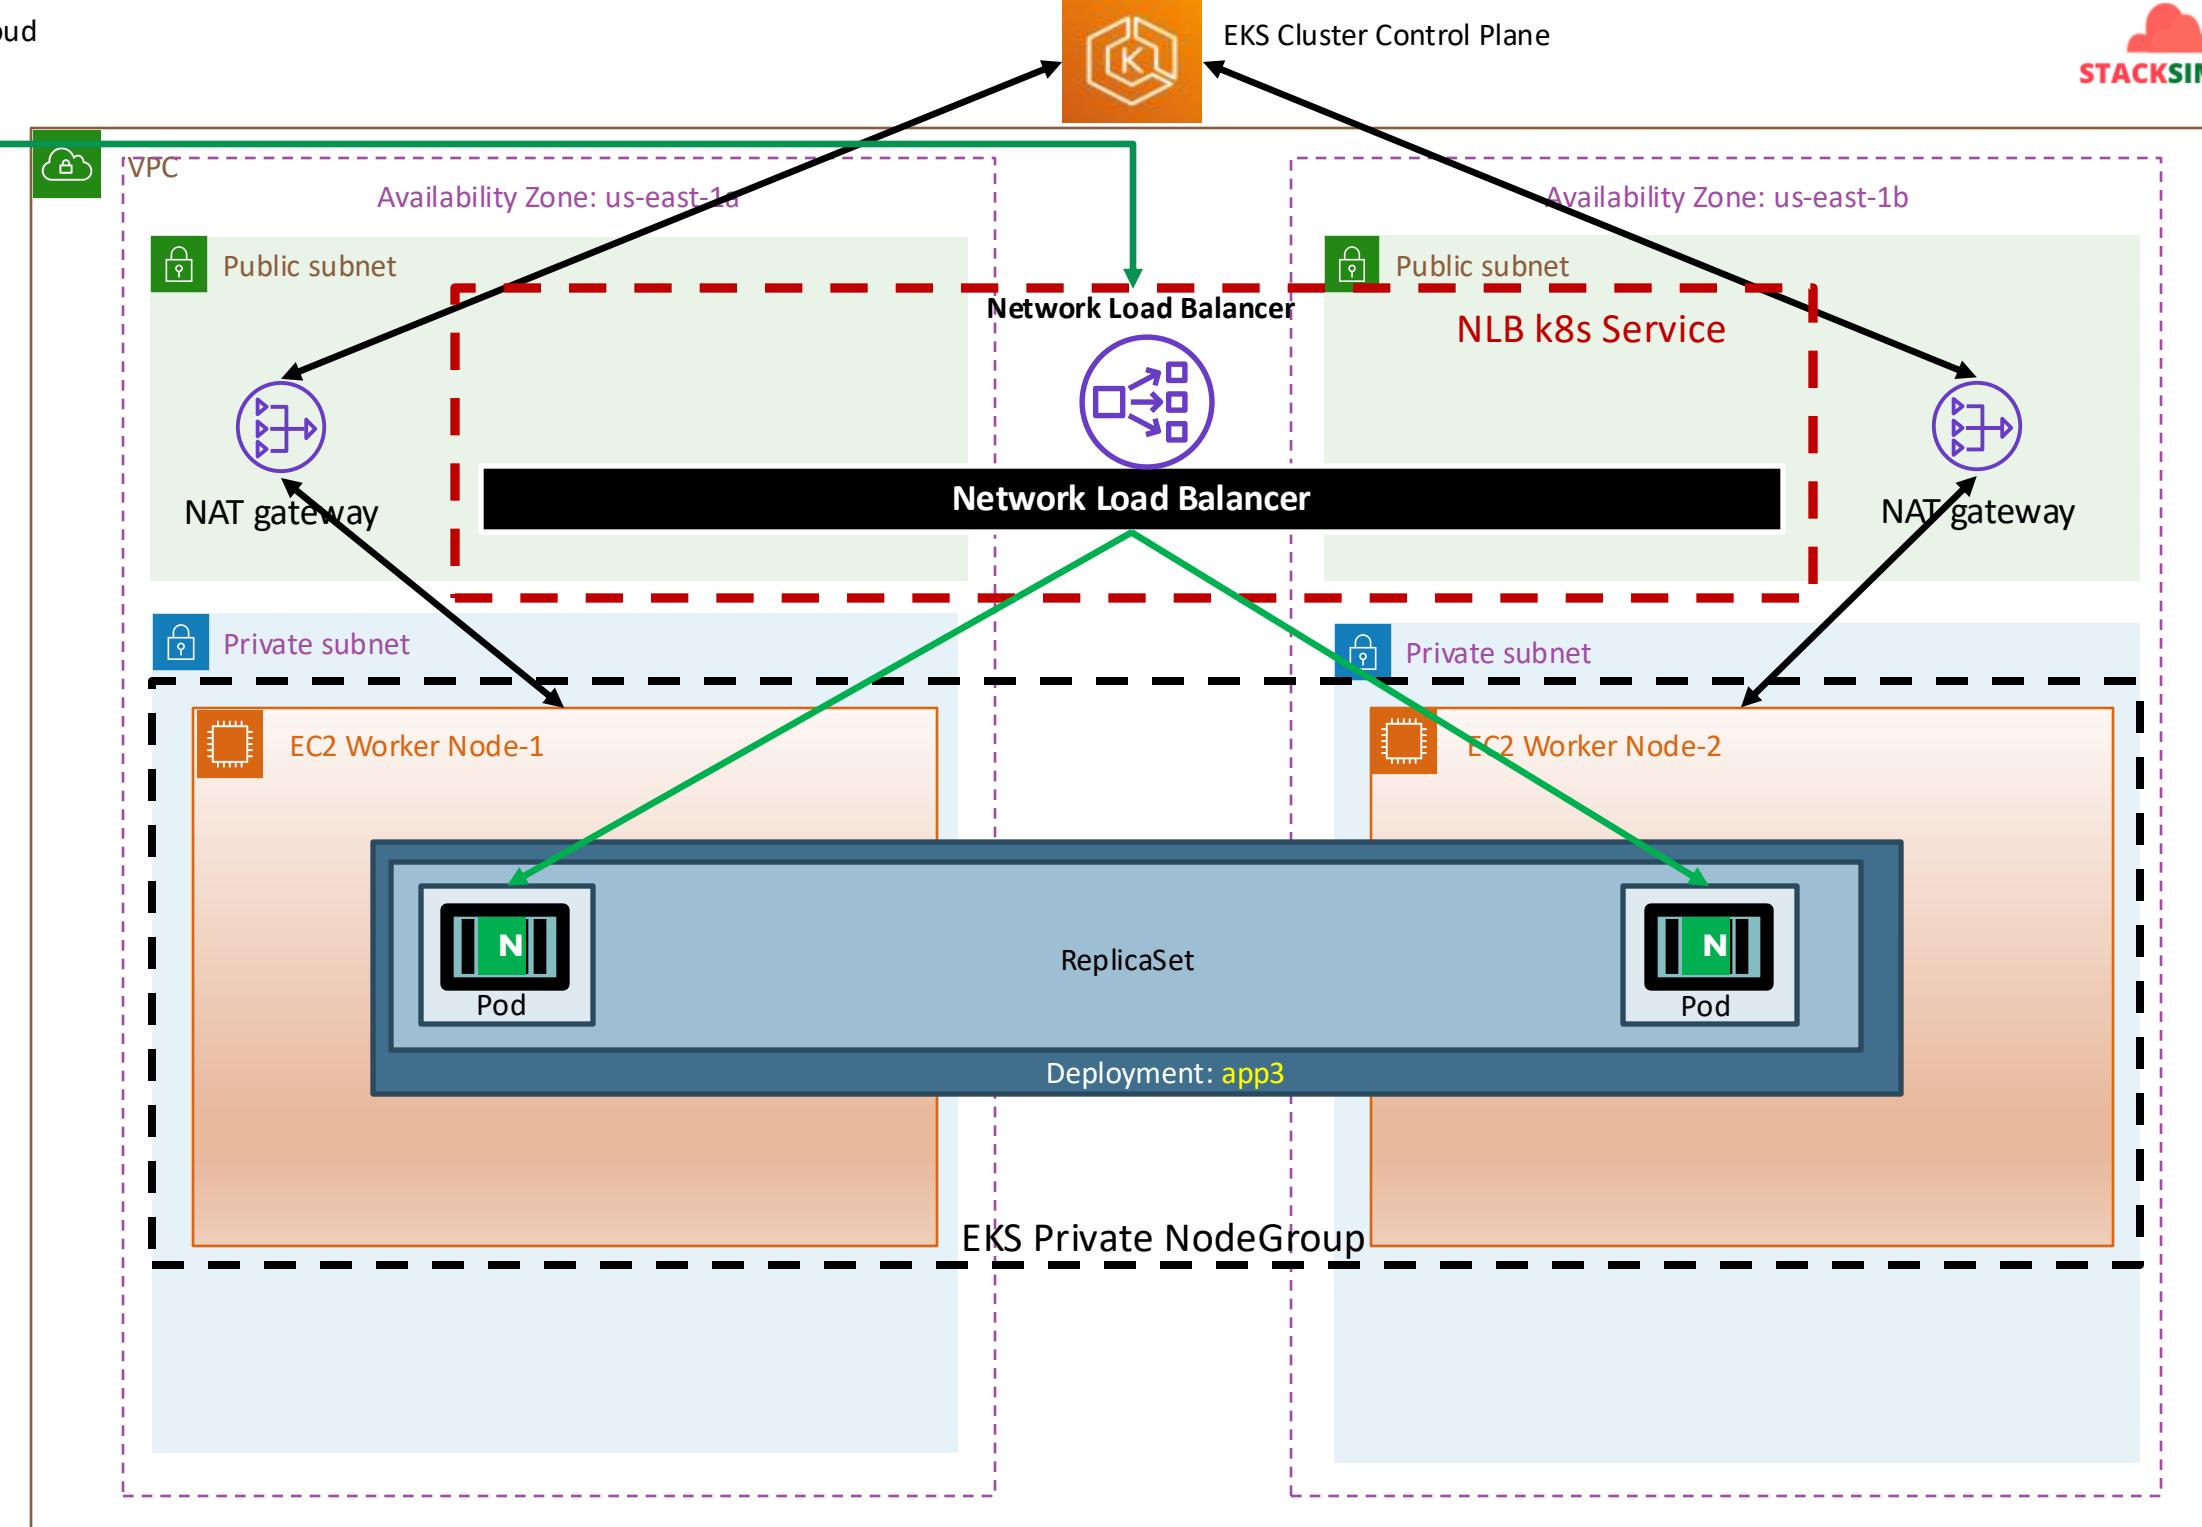

annotations:

```
# Traffic Routing
service.beta.kubernetes.io/aws-load-balancer-name: lbc-network-lb-demo
service.beta.kubernetes.io/aws-load-balancer-type: external
service.beta.kubernetes.io/aws-load-balancer-nlb-target-type: instance
#service.beta.kubernetes.io/aws-load-balancer-subnets: subnet-xxxx, mySubnet ## Subnets

# Health Check Settings
service.beta.kubernetes.io/aws-load-balancer-healthcheck-protocol: http
service.beta.kubernetes.io/aws-load-balancer-healthcheck-port: traffic-port
service.beta.kubernetes.io/aws-load-balancer-healthcheck-path: /index.html
service.beta.kubernetes.io/aws-load-balancer-healthcheck-healthy-threshold: "3"
service.beta.kubernetes.io/aws-load-balancer-healthcheck-unhealthy-threshold: "3"
service.beta.kubernetes.io/aws-load-balancer-healthcheck-interval: "10" # The controller

# Access Control
service.beta.kubernetes.io/load-balancer-source-ranges: 0.0.0.0/0
service.beta.kubernetes.io/aws-load-balancer-scheme: "internet-facing"


# AWS Resource Tags
service.beta.kubernetes.io/aws-load-balancer-additional-resource-tags: Environment=dev,
```

Kubernetes
Service of
Type NLB

Annotations



Elastic Load
Balancing

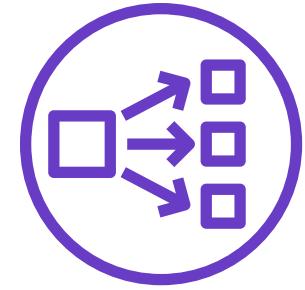

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS


Load Balancer Controller

Kubernetes Service

Network Load Balancer - TLS



AWS EKS NLB – TLS (HTTP + HTTPS)

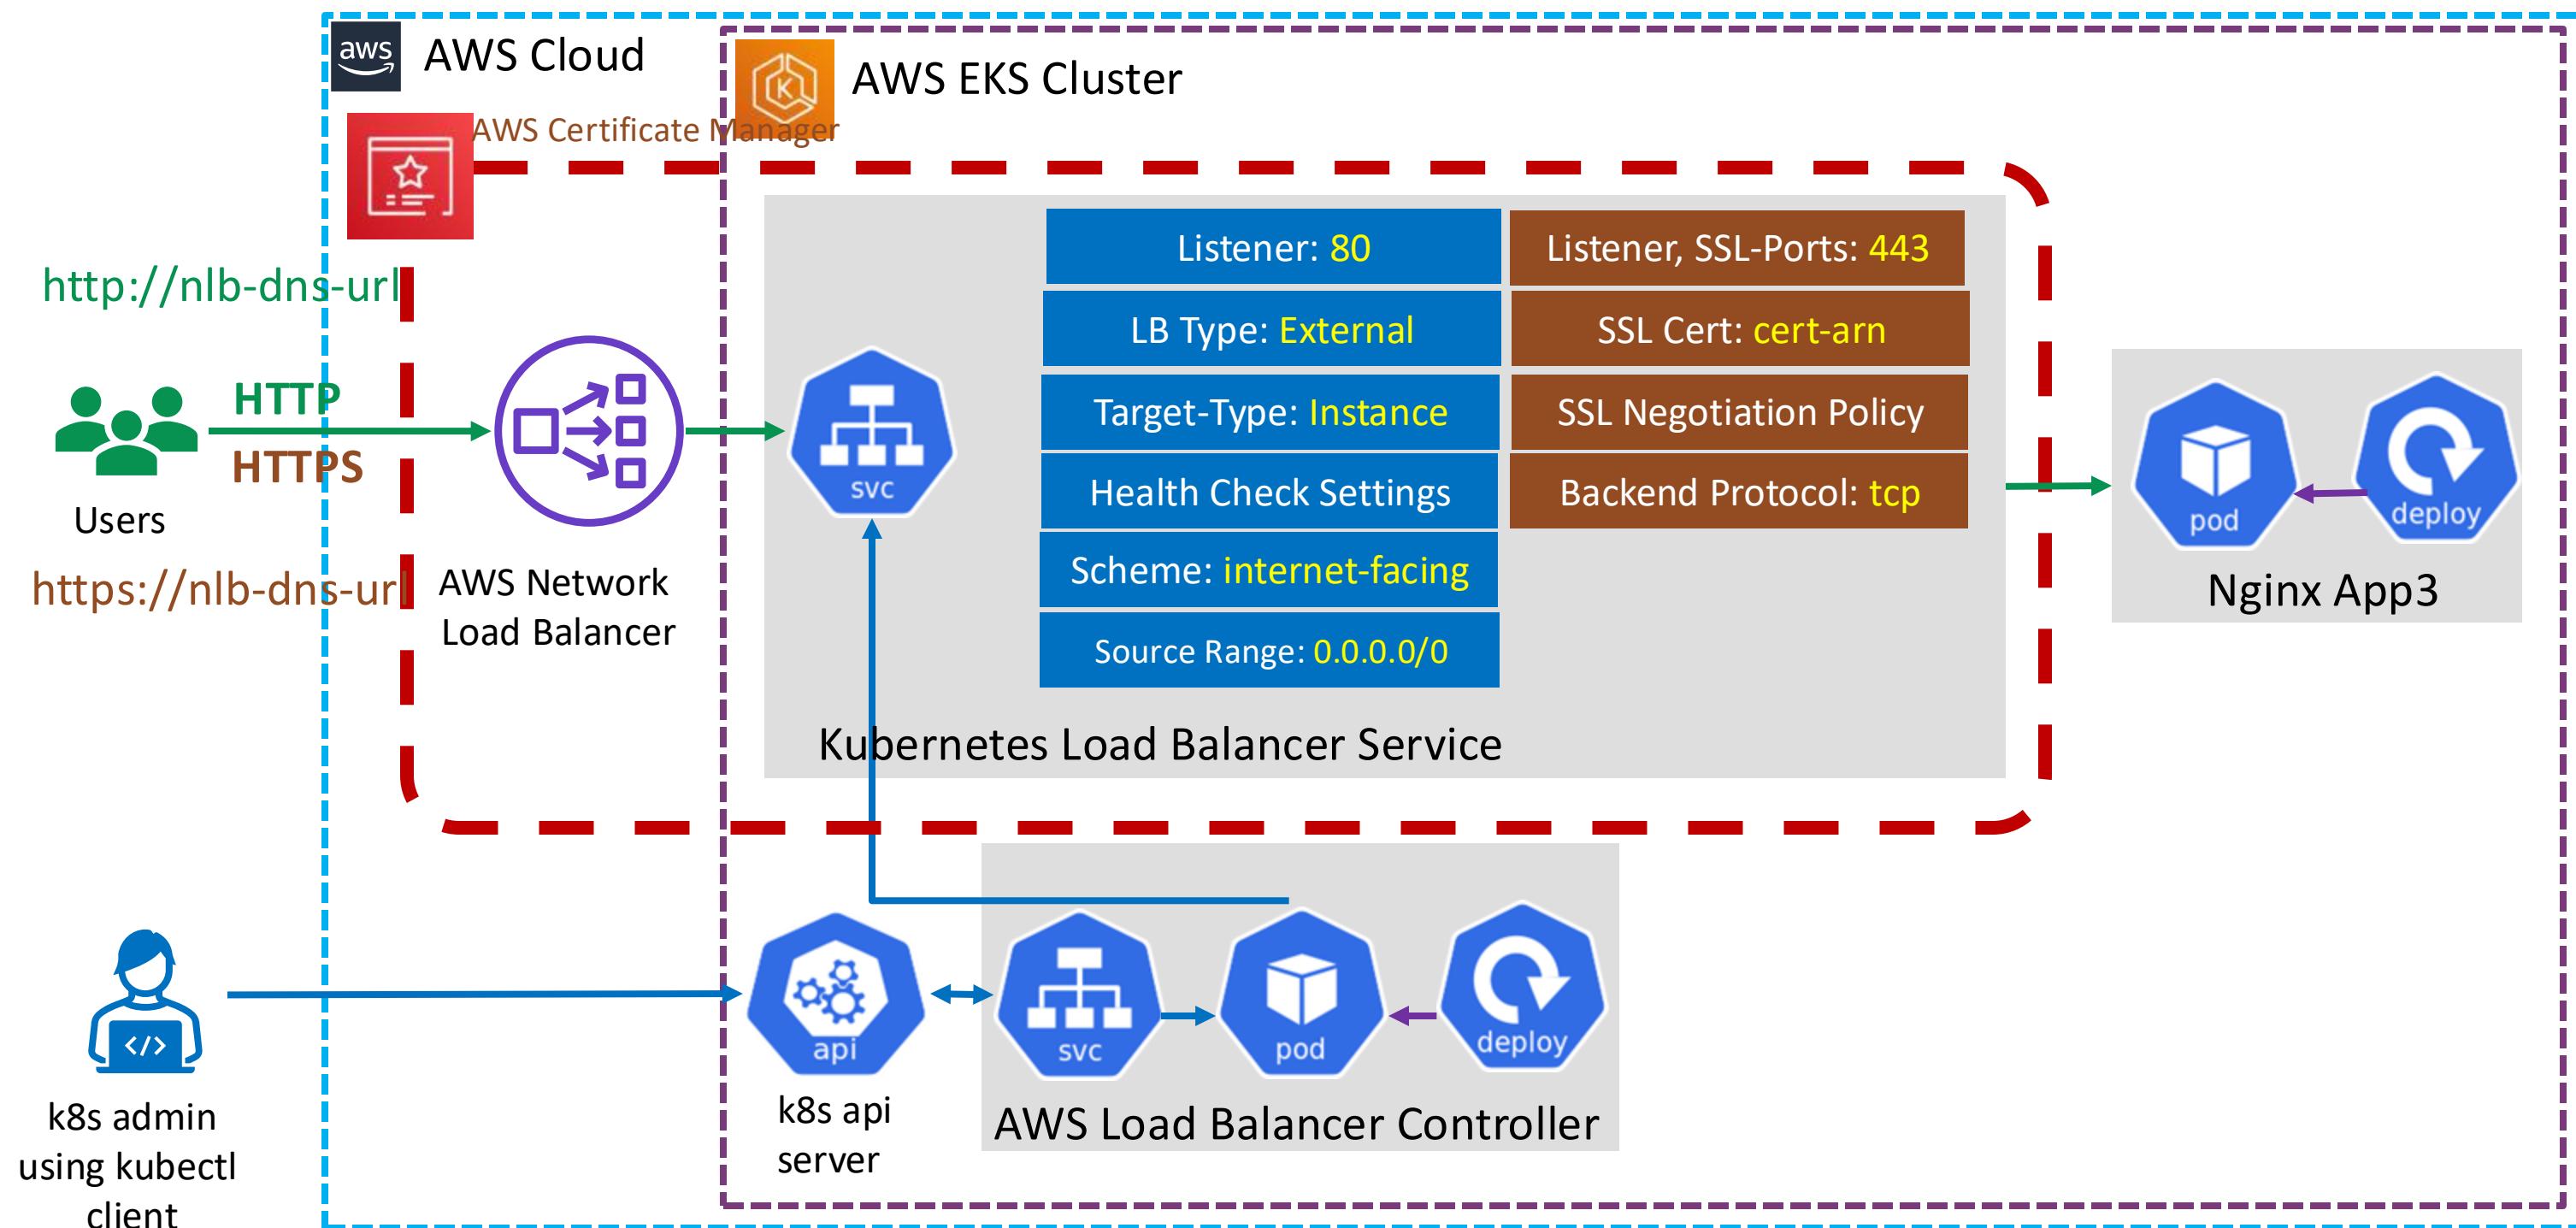



AWS Cloud

HTTP

HTTPS


Users

http://NLB-DNS-URL
https://NLB-DNS-URL



AWS Certificate Manager

AWS EKS Network LB With TLS

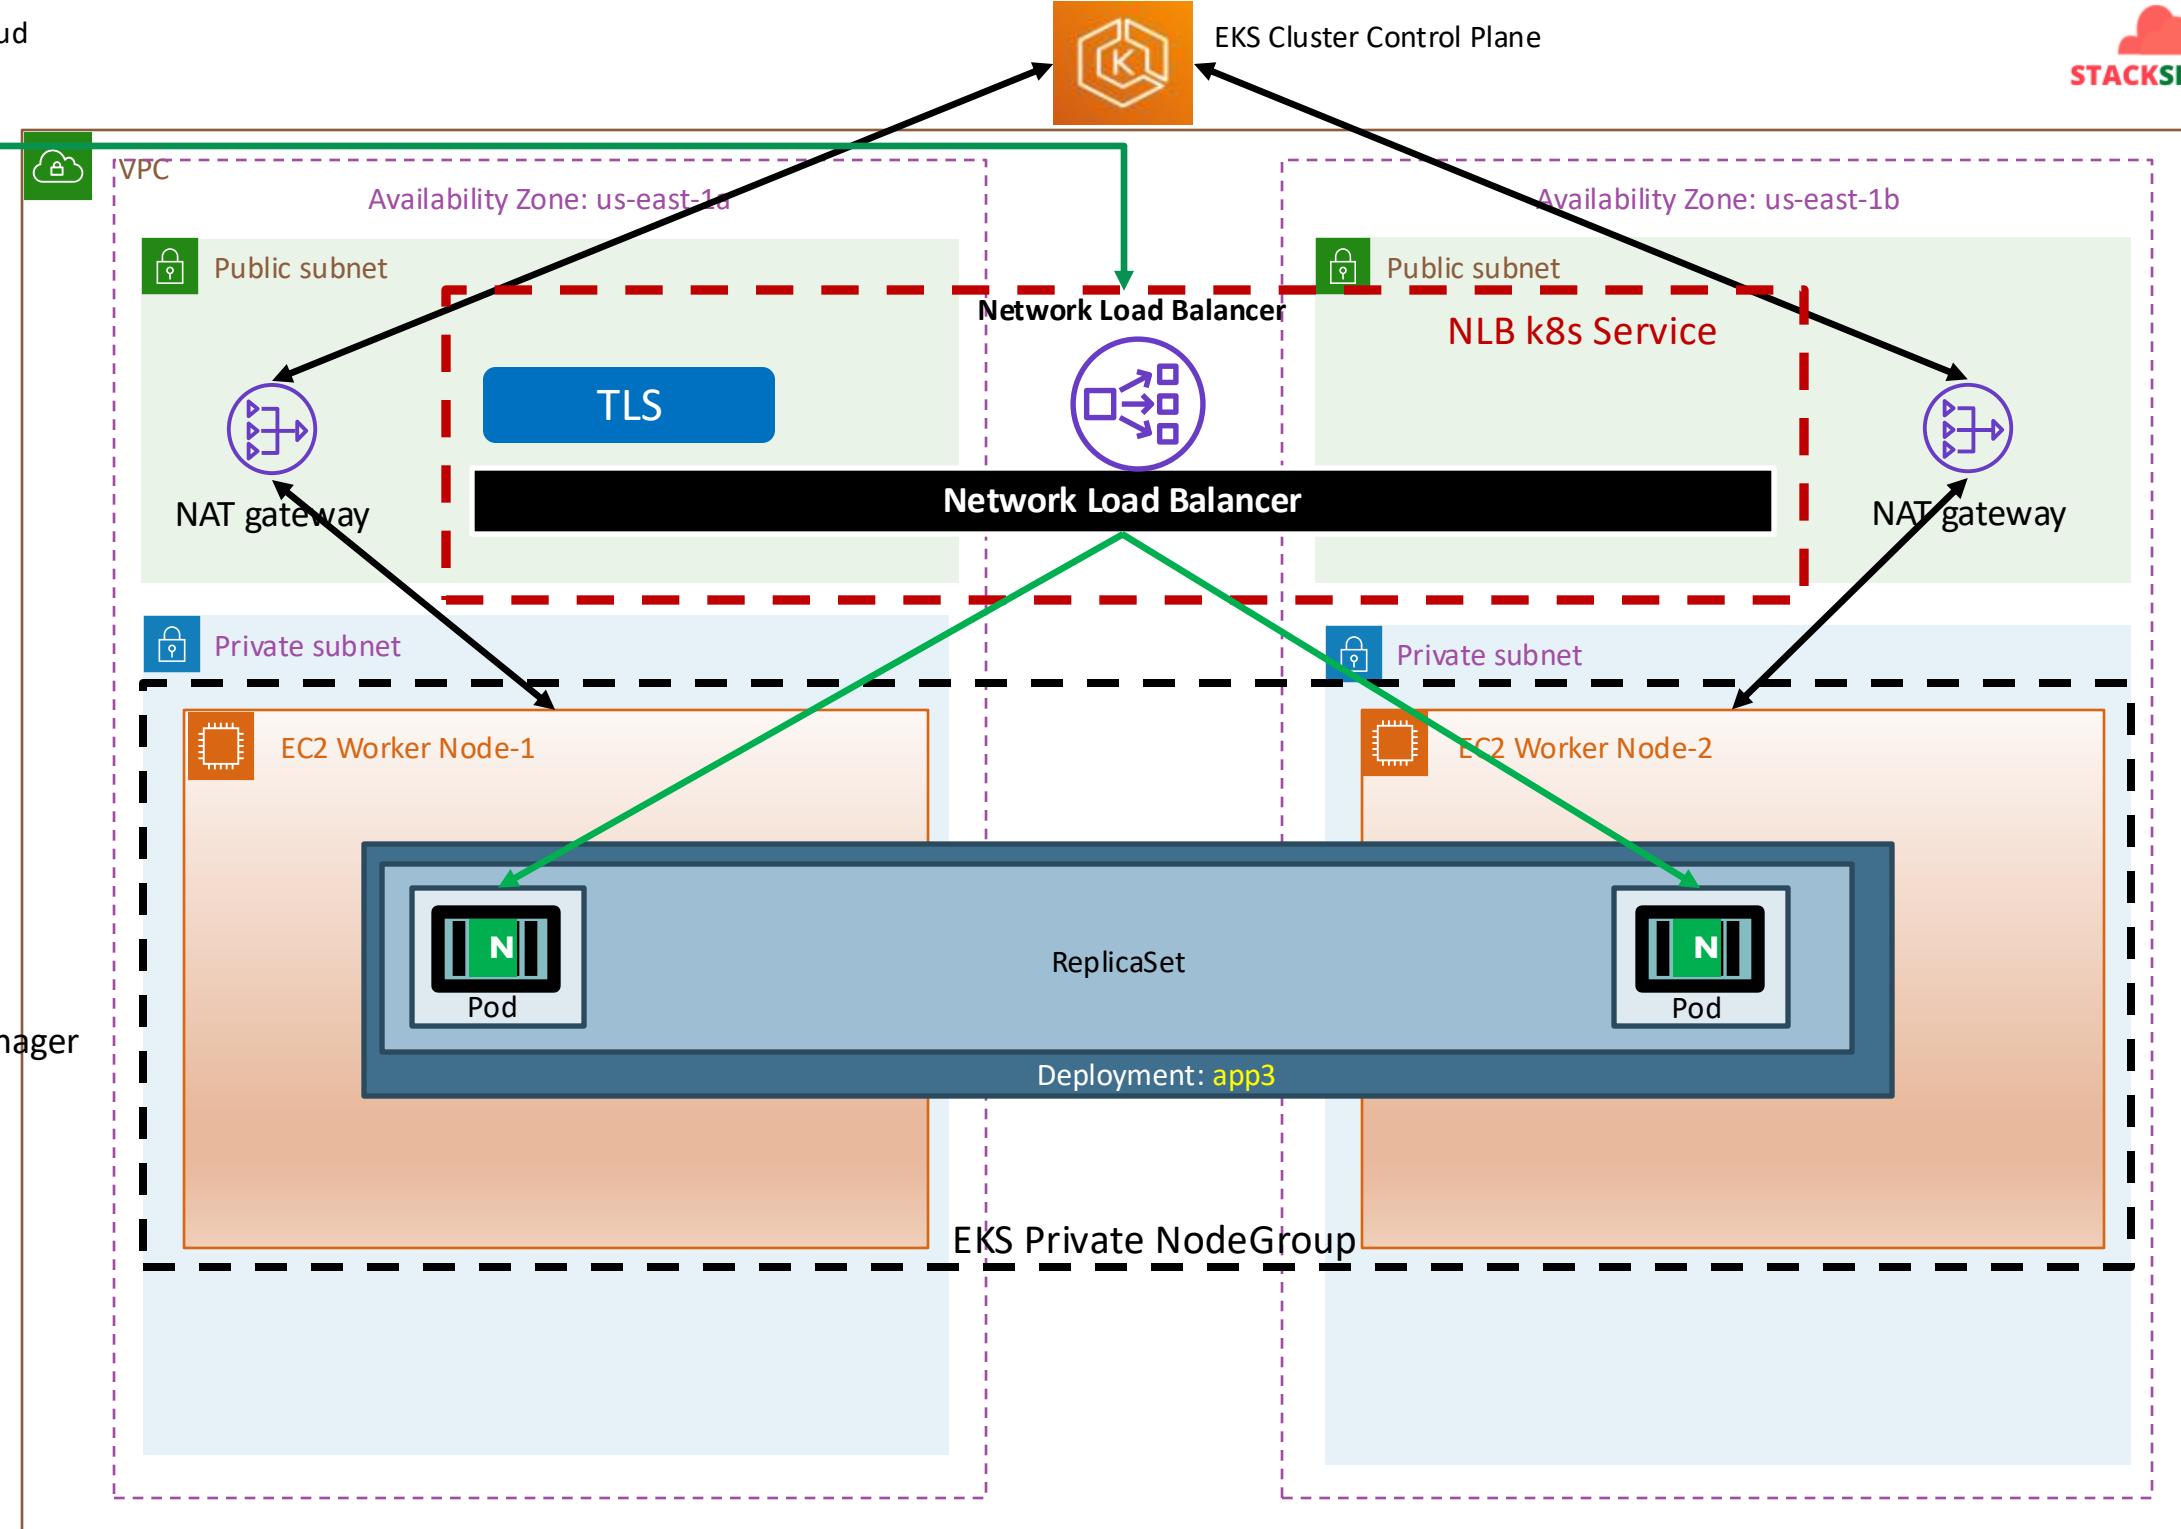


AWS EKS NLB -Annotations

```
# TLS
service.beta.kubernetes.io/aws-load-balancer-ssl-cert: arn:aws:acm:us-east-1:180789647333:certificate/d8
service.beta.kubernetes.io/aws-load-balancer-ssl-ports: 443, # Specify this annotation if you need both
service.beta.kubernetes.io/aws-load-balancer-ssl-negotiation-policy: ELBSecurityPolicy-TLS13-1-2-2021-06
service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp # specifies whether to use TLS or TCP
spec:
  type: LoadBalancer
  selector:
    app: app3-nginx
  ports:
    - name: http
      port: 80
      targetPort: 80
    - name: https
      port: 443
      targetPort: 80
```

AWS EKS NLB -Annotations

```
# TLS
service.beta.kubernetes.io/aws-load-balancer-ssl-cert: arn:aws:acm:us-east-1:123456789012:certificate/12345678-1234-1234-1234-123456789012
service.beta.kubernetes.io/aws-load-balancer-ssl-ports: 443, # Specify this port if your application uses https
service.beta.kubernetes.io/aws-load-balancer-ssl-negotiation-policy: ELBSecurityPolicy-TLS-1-2-2017-1
service.beta.kubernetes.io/aws-load-balancer-backend-protocol: tcp # specify this if your application uses https
spec:
  type: LoadBalancer
  selector:
    app: app3-nginx
  ports:
    - name: http
      port: 80          # Creates NLB Port 80 Listener
      targetPort: 80   # Creates NLB Port 80 Target Group-1
    - name: https
      port: 443         # Creates NLB Port 443 Listener
      targetPort: 80   # Creates NLB Port 80 Target Group-2
    - name: http81
      port: 81          # Creates NLB Port 81 Listener
      targetPort: 80   # Creates NLB Port 80 Target Group-3
    - name: http82
      port: 82          # Creates NLB Port 82 Listener
      targetPort: 80   # Creates NLB Port 80 Target Group-4
```

AWS EKS NLB –Load Balancer

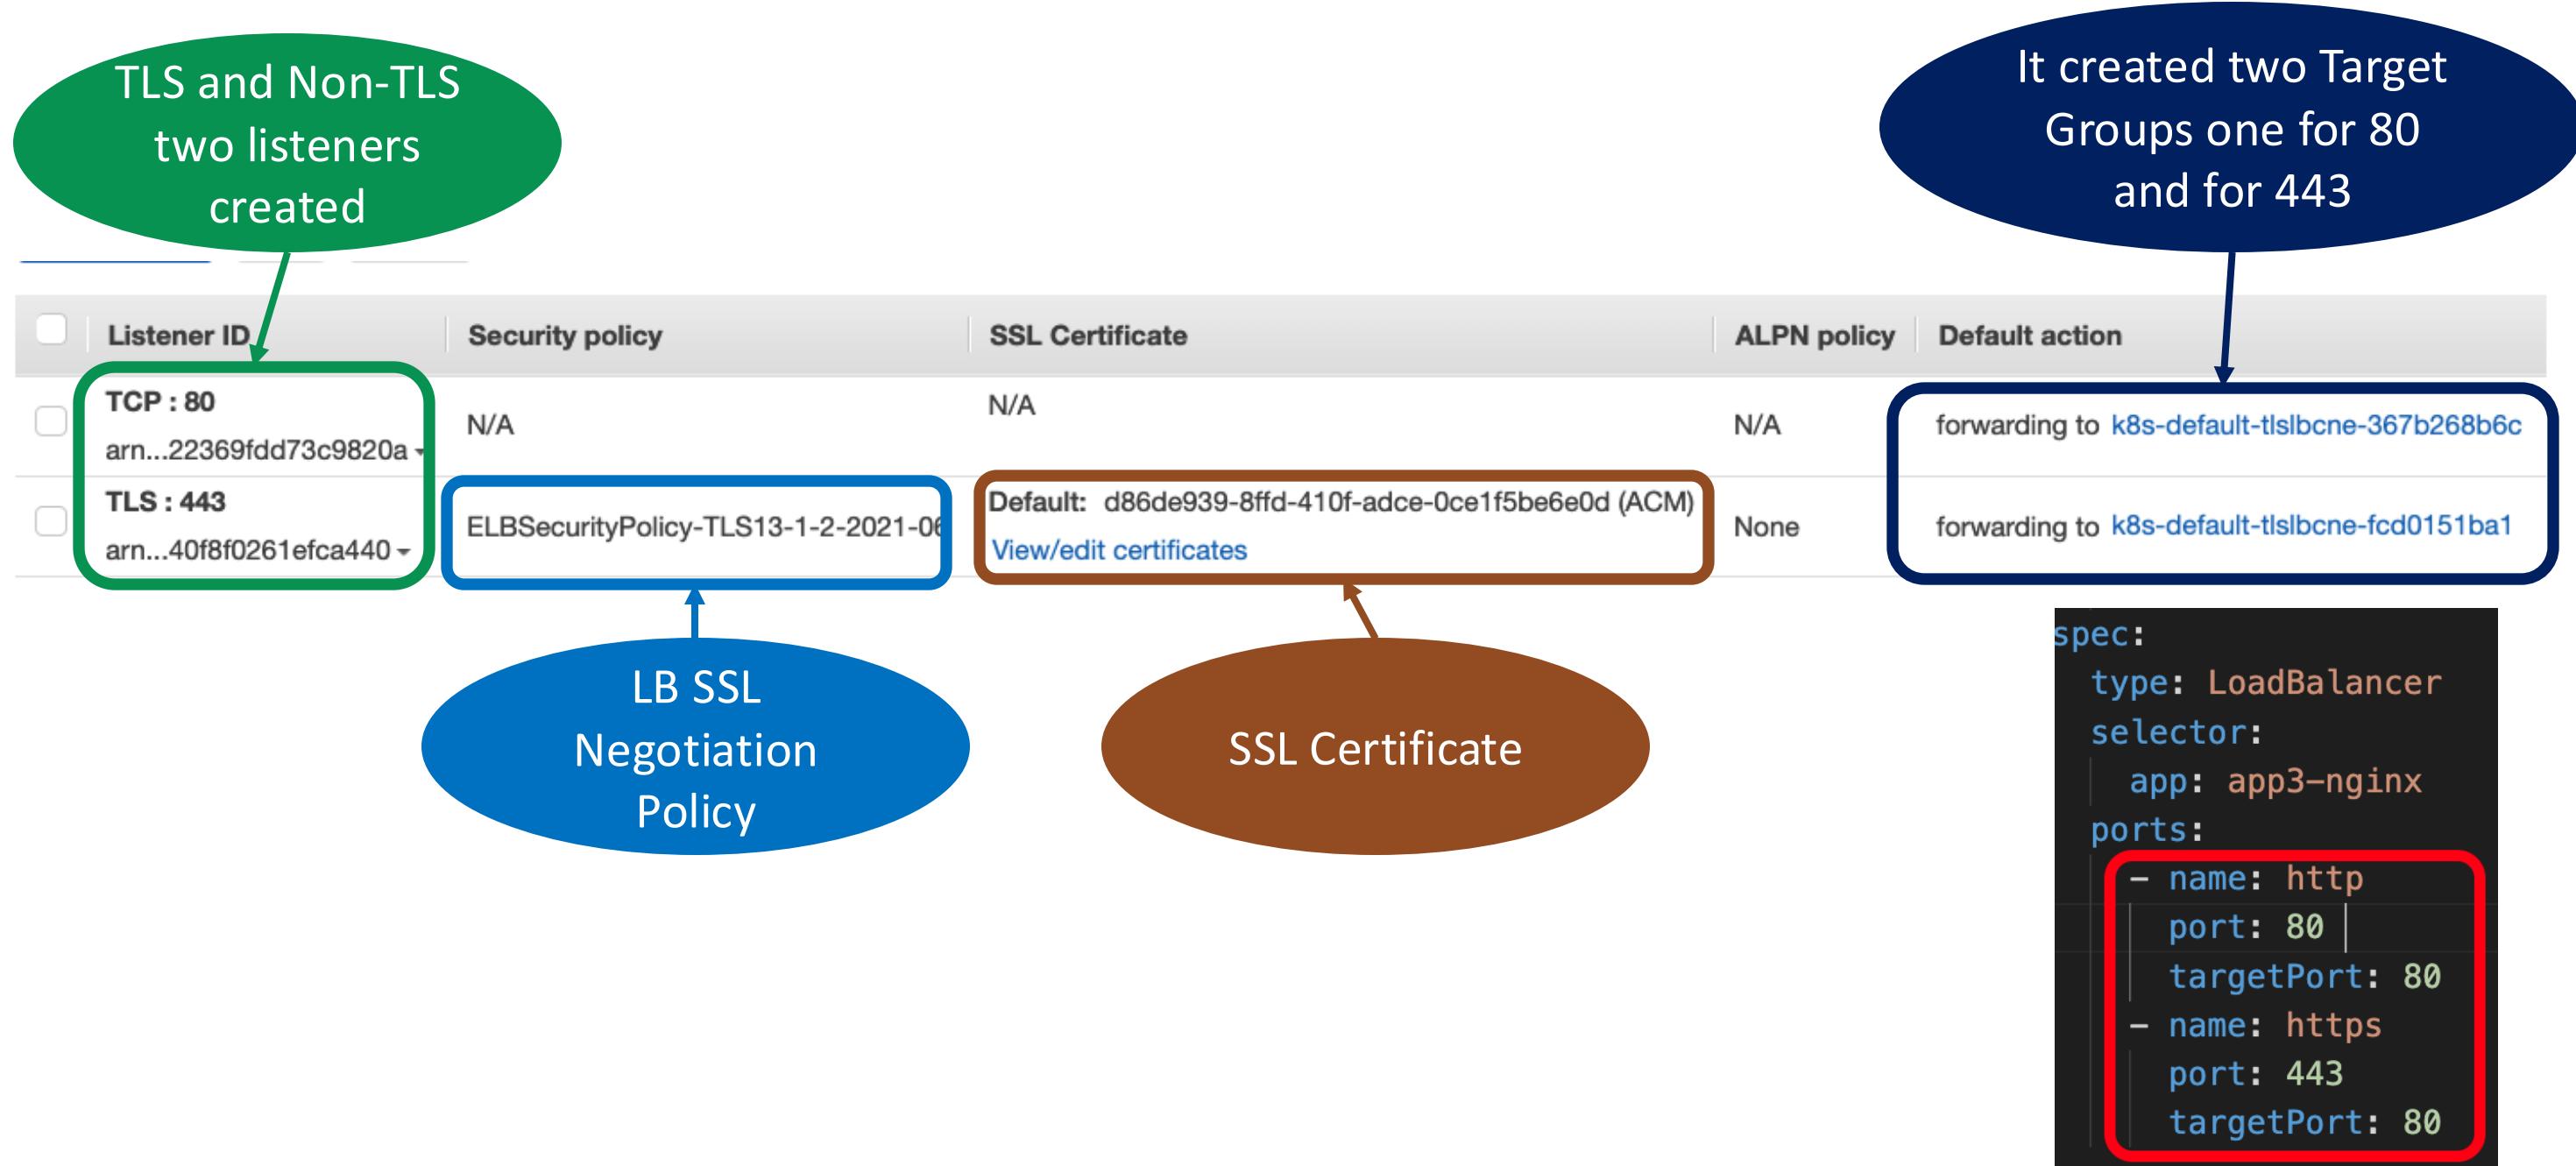

AWS EKS NLB -Target Groups

EC2 > Target groups

Target groups (2) [Info](#)

Actions [Create target group](#)

Search or filter target groups

< 1 >

Name	ARN	Port	Protocol	Target type	Load balancer
<input type="checkbox"/> k8s-default-tlslbcne-367b268b6c	<input type="checkbox"/> arn:aws:elasticloadbalancin...	30810	TCP	Instance	tls-lbc-network-lb
<input type="checkbox"/> k8s-default-tlslbcne-fcd0151ba1	<input type="checkbox"/> arn:aws:elasticloadbalancin...	32162	TCP	Instance	tls-lbc-network-lb

AWS EKS NLB -Target Groups

arn:aws:elasticloadbalancing:us-east-1:180789647333:targetgroup/k8s-default-tlsLbcne-367b268b6c/e564572efca1f1aa

Details					
Target type Instance	Protocol : Port TCP: 30810	VPC vpc-0165a396e41e292a3	IP address type IPv4		
Load balancer tls-lbc-network-lb					
Total targets 2	Healthy <input checked="" type="checkbox"/> 2	Unhealthy <input type="checkbox"/> 0	Unused <input type="checkbox"/> 0	Initial <input type="checkbox"/> 0	Draining <input type="checkbox"/> 0


Targets [Monitoring](#) [Health checks](#) [Attributes](#) [Tags](#)

Registered targets (2)					
<input type="text"/> Filter resources by property or value				<input type="button"/>	Deregister
<input type="checkbox"/>	Instance ID	Name	Port	Zone	Health status
<input type="checkbox"/>	i-0e06f6d06e5dfa0df	eksdemo1-eksdemo1-nginx-private1-Node	30810	us-east-1a	<input checked="" type="checkbox"/> healthy
<input type="checkbox"/>	i-016128c9dd4835826	eksdemo1-eksdemo1-nginx-private1-Node	30810	us-east-1b	<input checked="" type="checkbox"/> healthy


AWS EKS NLB -Target Groups

arn:aws:elasticloadbalancing:us-east-1:180789647333:targetgroup/k8s-default-tlsLbcne-367b268b6c/e564572efca1f1aa

Details													
Target type Instance	Protocol : Port TCP: 30810	VPC vpc-0165a396e41e292a3	IP address type IPv4										
Load balancer tls-lbc-network-lb													
Total targets 2	Healthy ✓ 2	Unhealthy ✗ 0	Unused ○ 0	Initial ⌚ 0	Draining ⊖ 0								
Targets	Monitoring	Health checks	Attributes	Tags									
Health check settings <div style="float: right;">Edit</div> <table border="1"> <tr> <td>Protocol HTTP</td> <td>Path /index.html</td> <td>Port Traffic port</td> <td>Healthy threshold 3 consecutive health check successes</td> </tr> <tr> <td>Unhealthy threshold 3 consecutive health check failures</td> <td>Timeout 6 seconds</td> <td>Interval 10 seconds</td> <td>Success codes 200-399</td> </tr> </table>						Protocol HTTP	Path /index.html	Port Traffic port	Healthy threshold 3 consecutive health check successes	Unhealthy threshold 3 consecutive health check failures	Timeout 6 seconds	Interval 10 seconds	Success codes 200-399
Protocol HTTP	Path /index.html	Port Traffic port	Healthy threshold 3 consecutive health check successes										
Unhealthy threshold 3 consecutive health check failures	Timeout 6 seconds	Interval 10 seconds	Success codes 200-399										

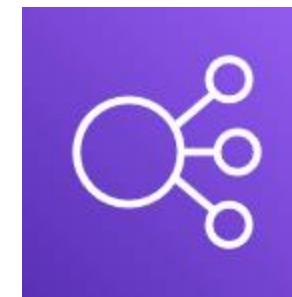

Elastic Load
Balancing

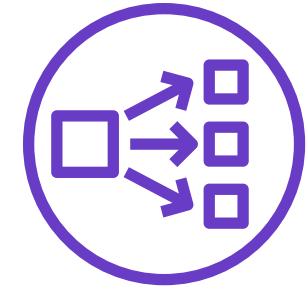

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS


Load Balancer Controller


Kubernetes Service

Network Load Balancer
External DNS




AWS EKS NLB – External DNS

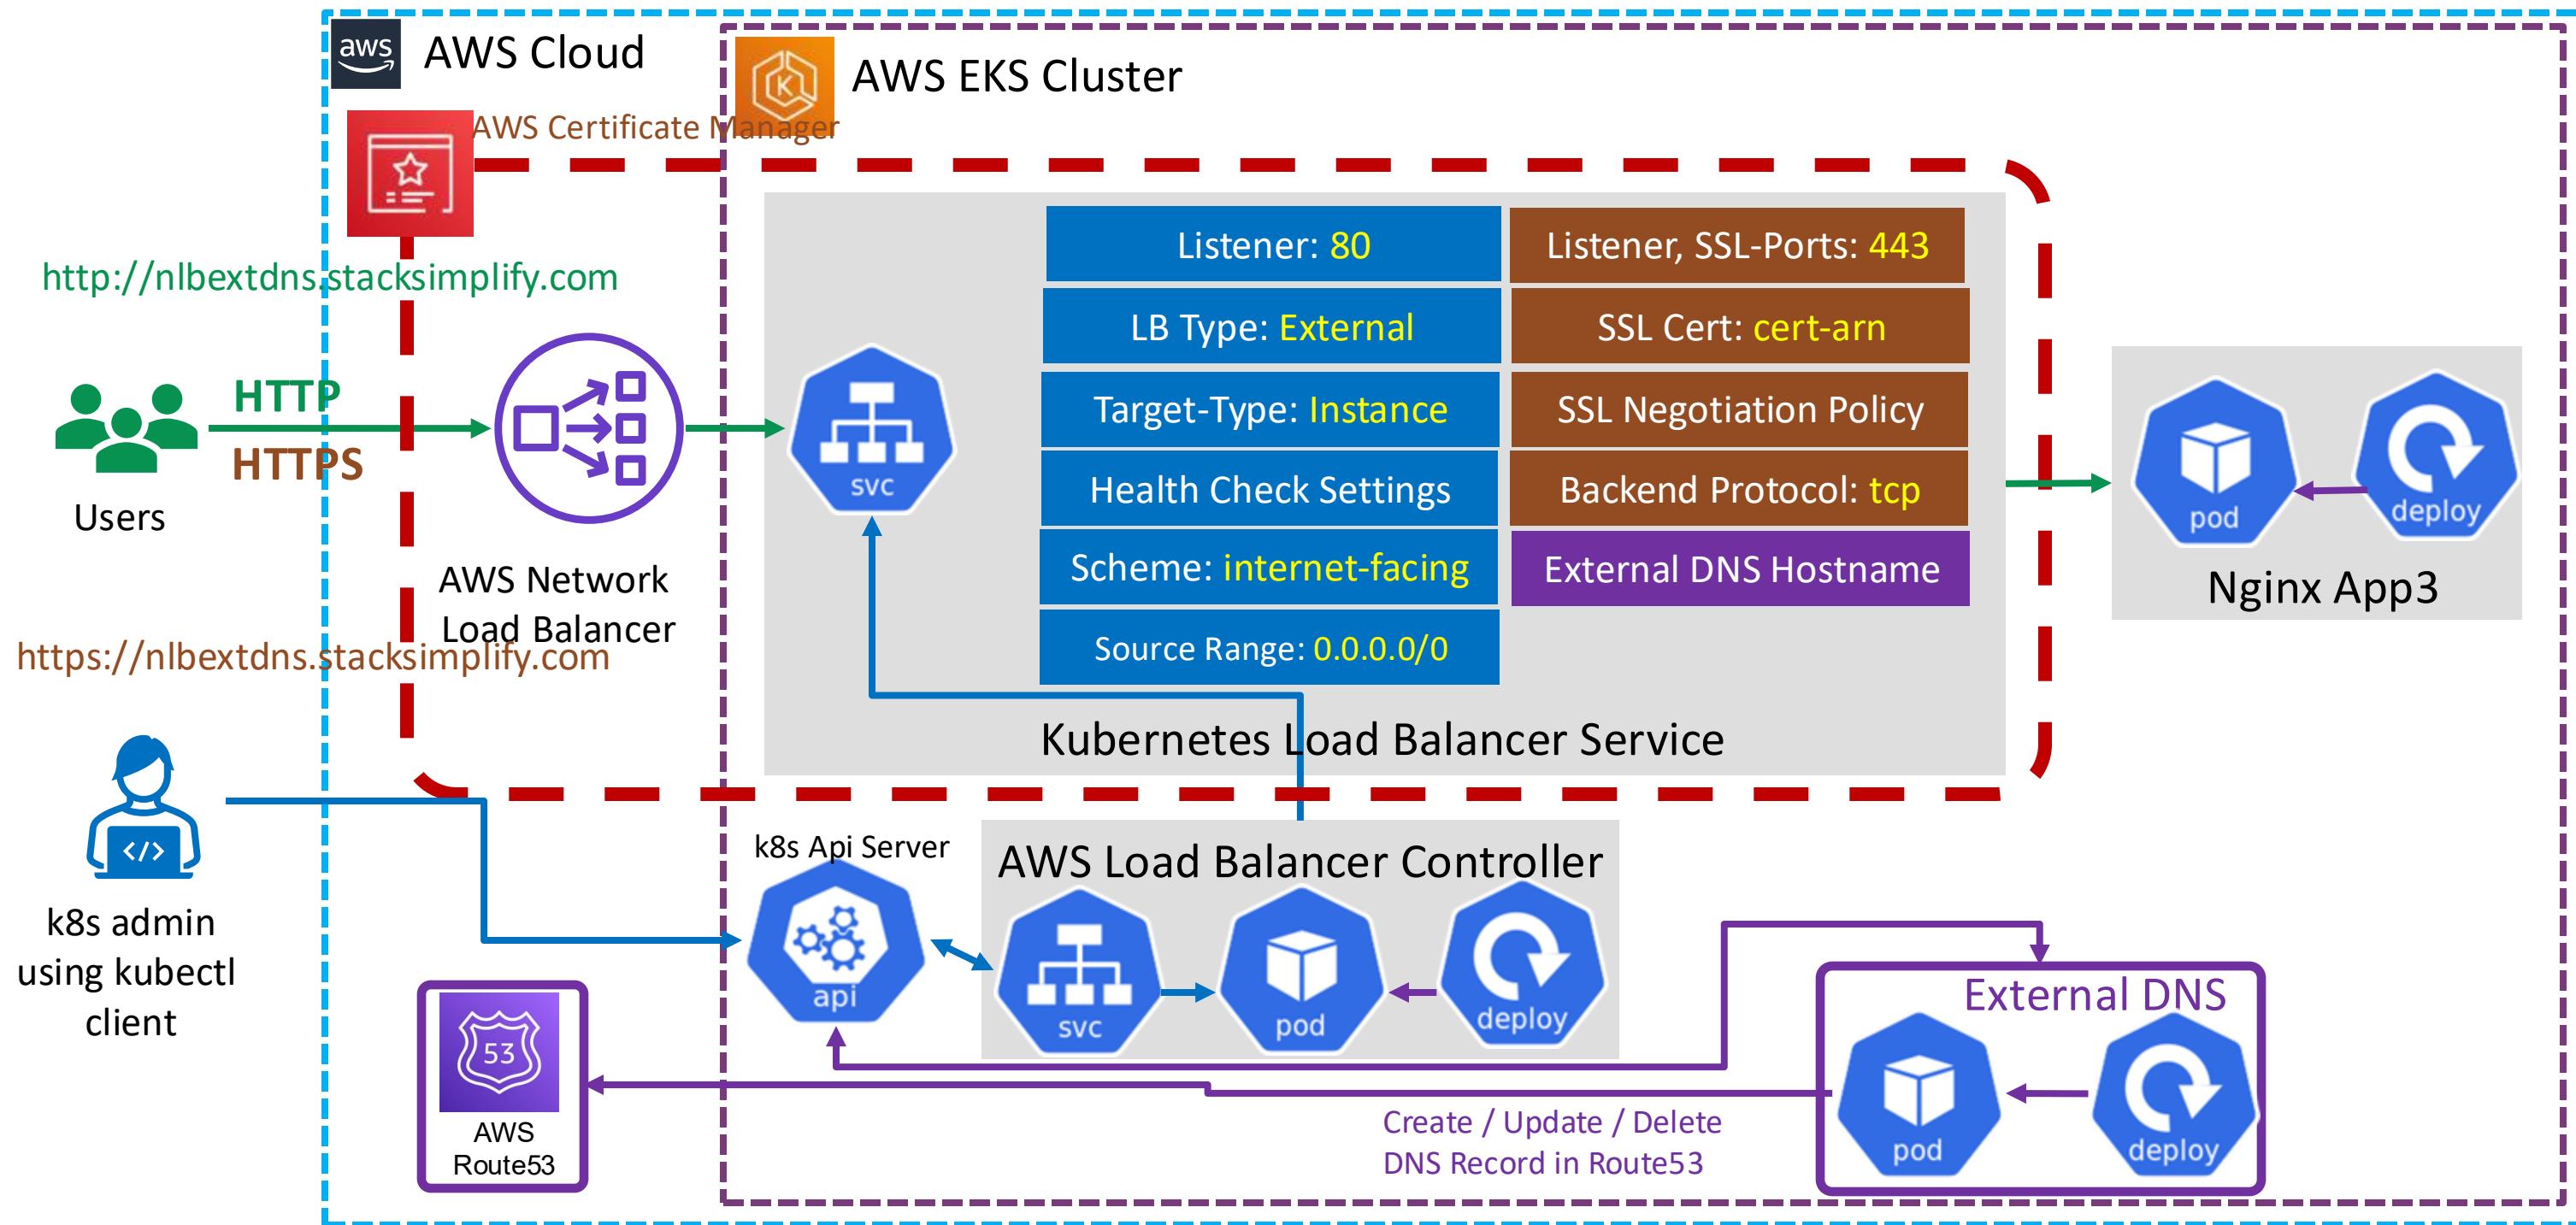

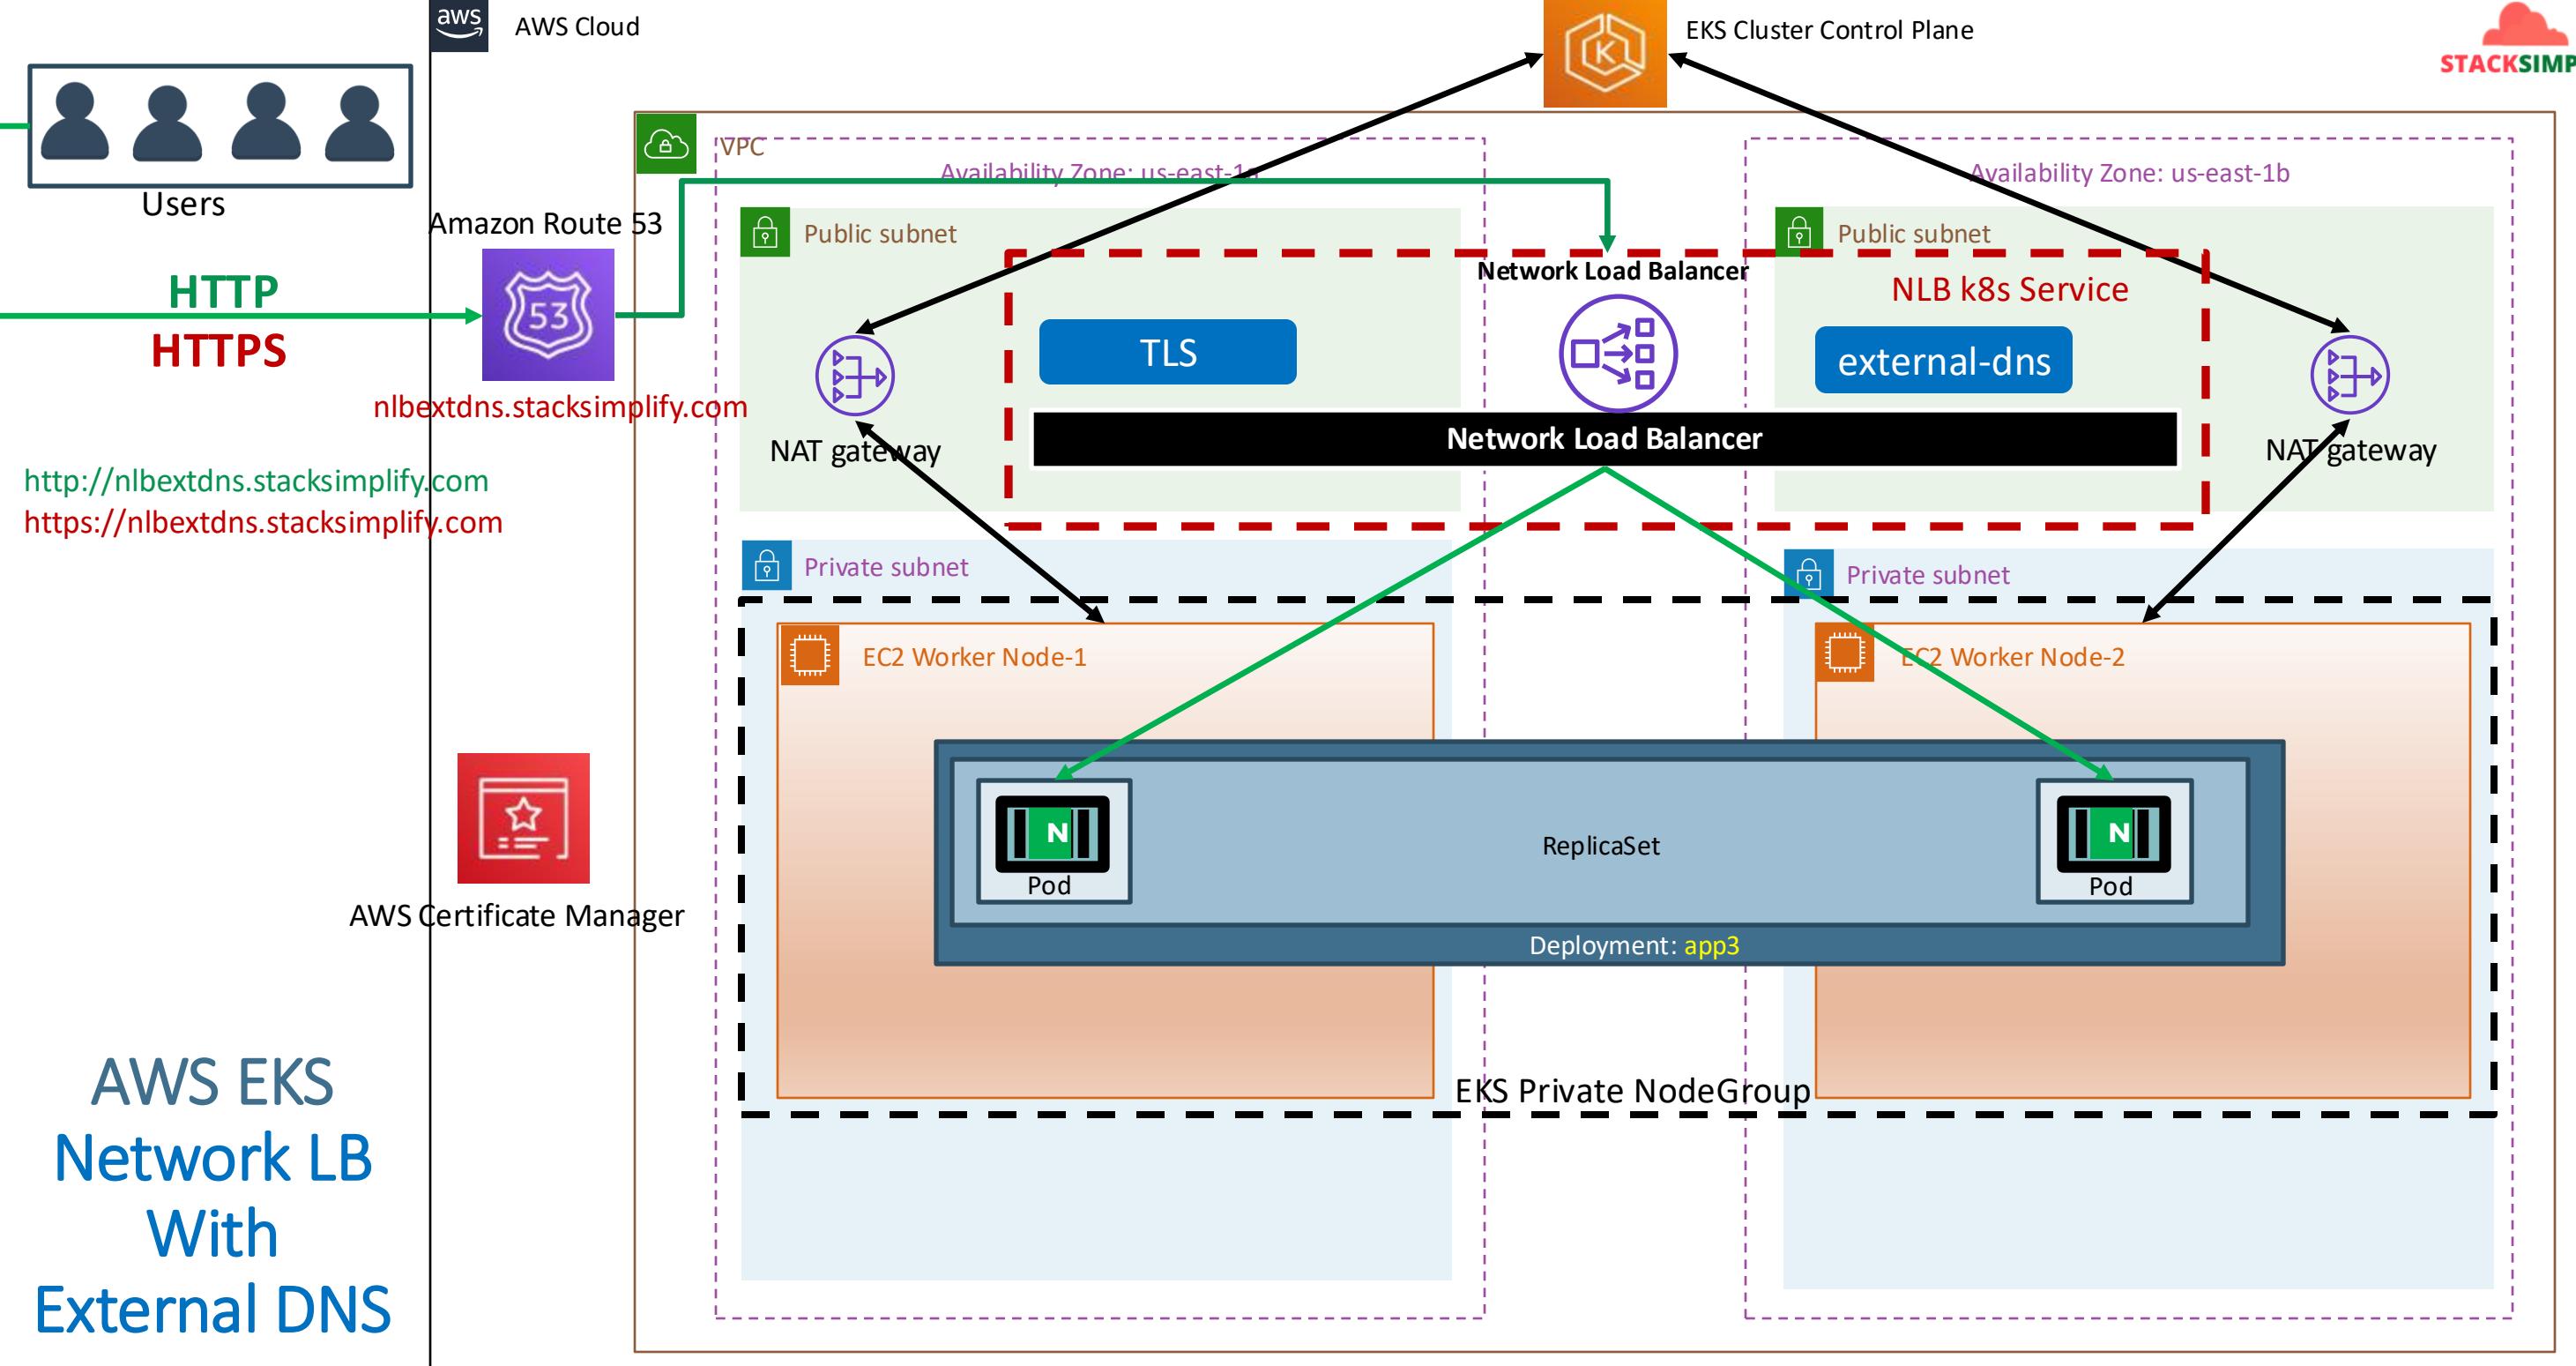


AWS EKS NLB - External DNS Annotation

```
# External DNS – For creating a Record Set in Route53  
external-dns.alpha.kubernetes.io/hostname: nlbdns101.stacksimplify.com
```

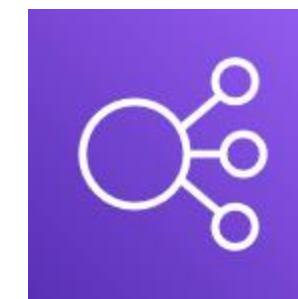

Elastic Load
Balancing

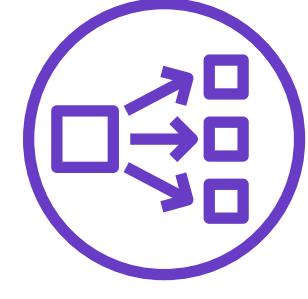

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS

Load Balancer Controller


Kubernetes Service


Network Load Balancer

Elastic IP



AWS EKS NLB – External DNS

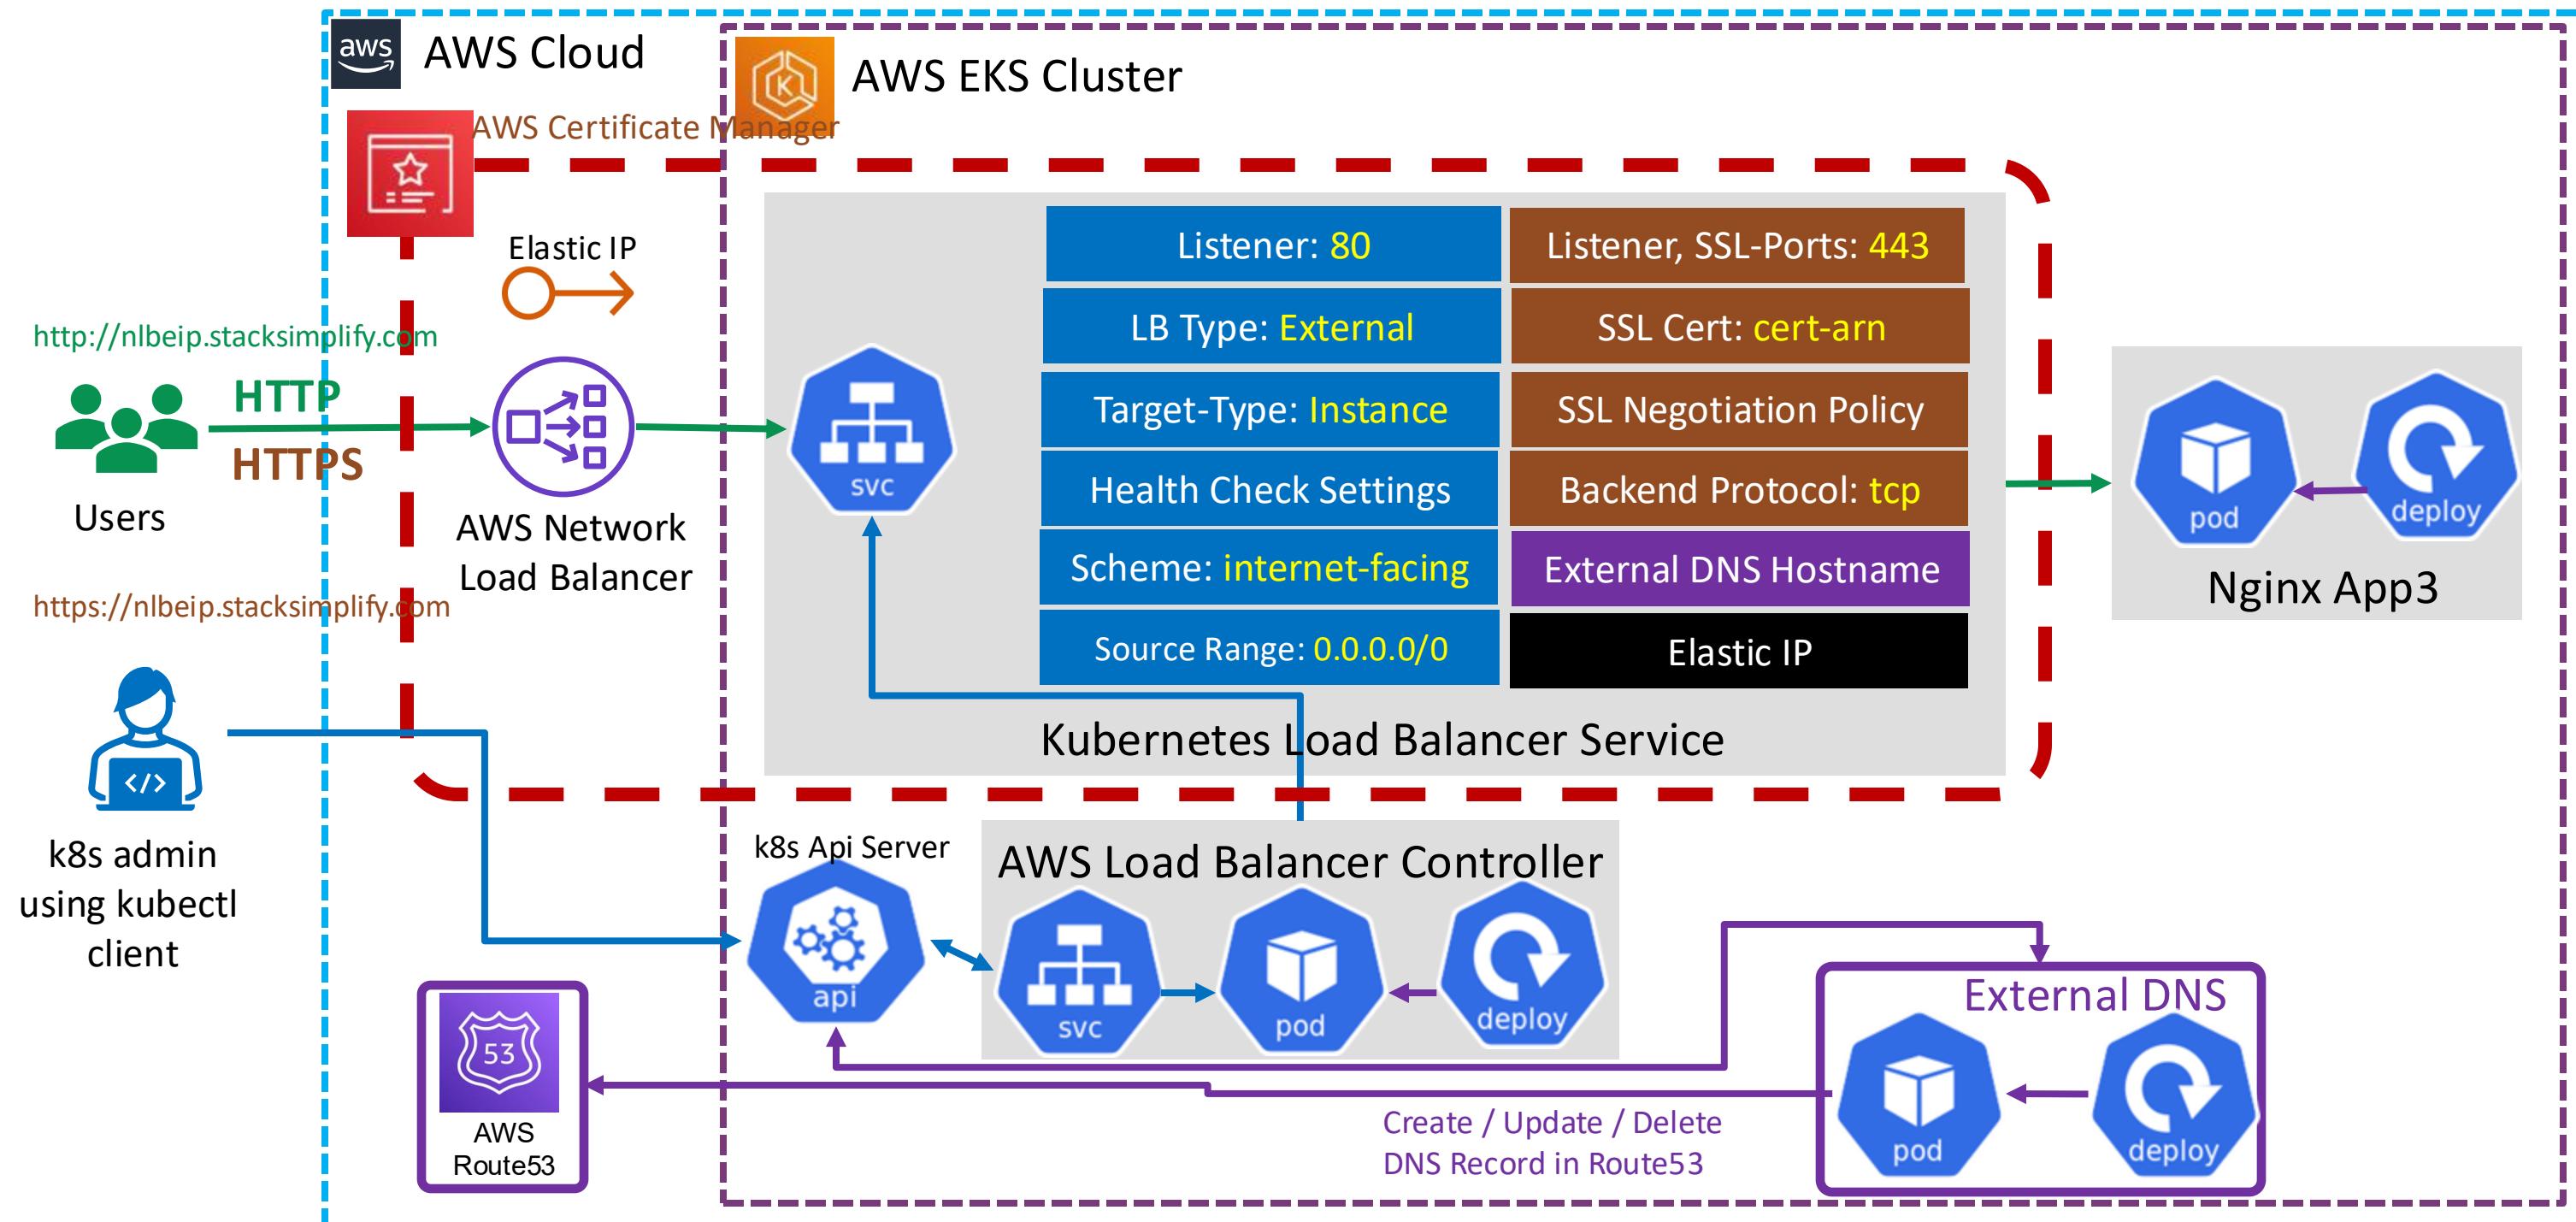

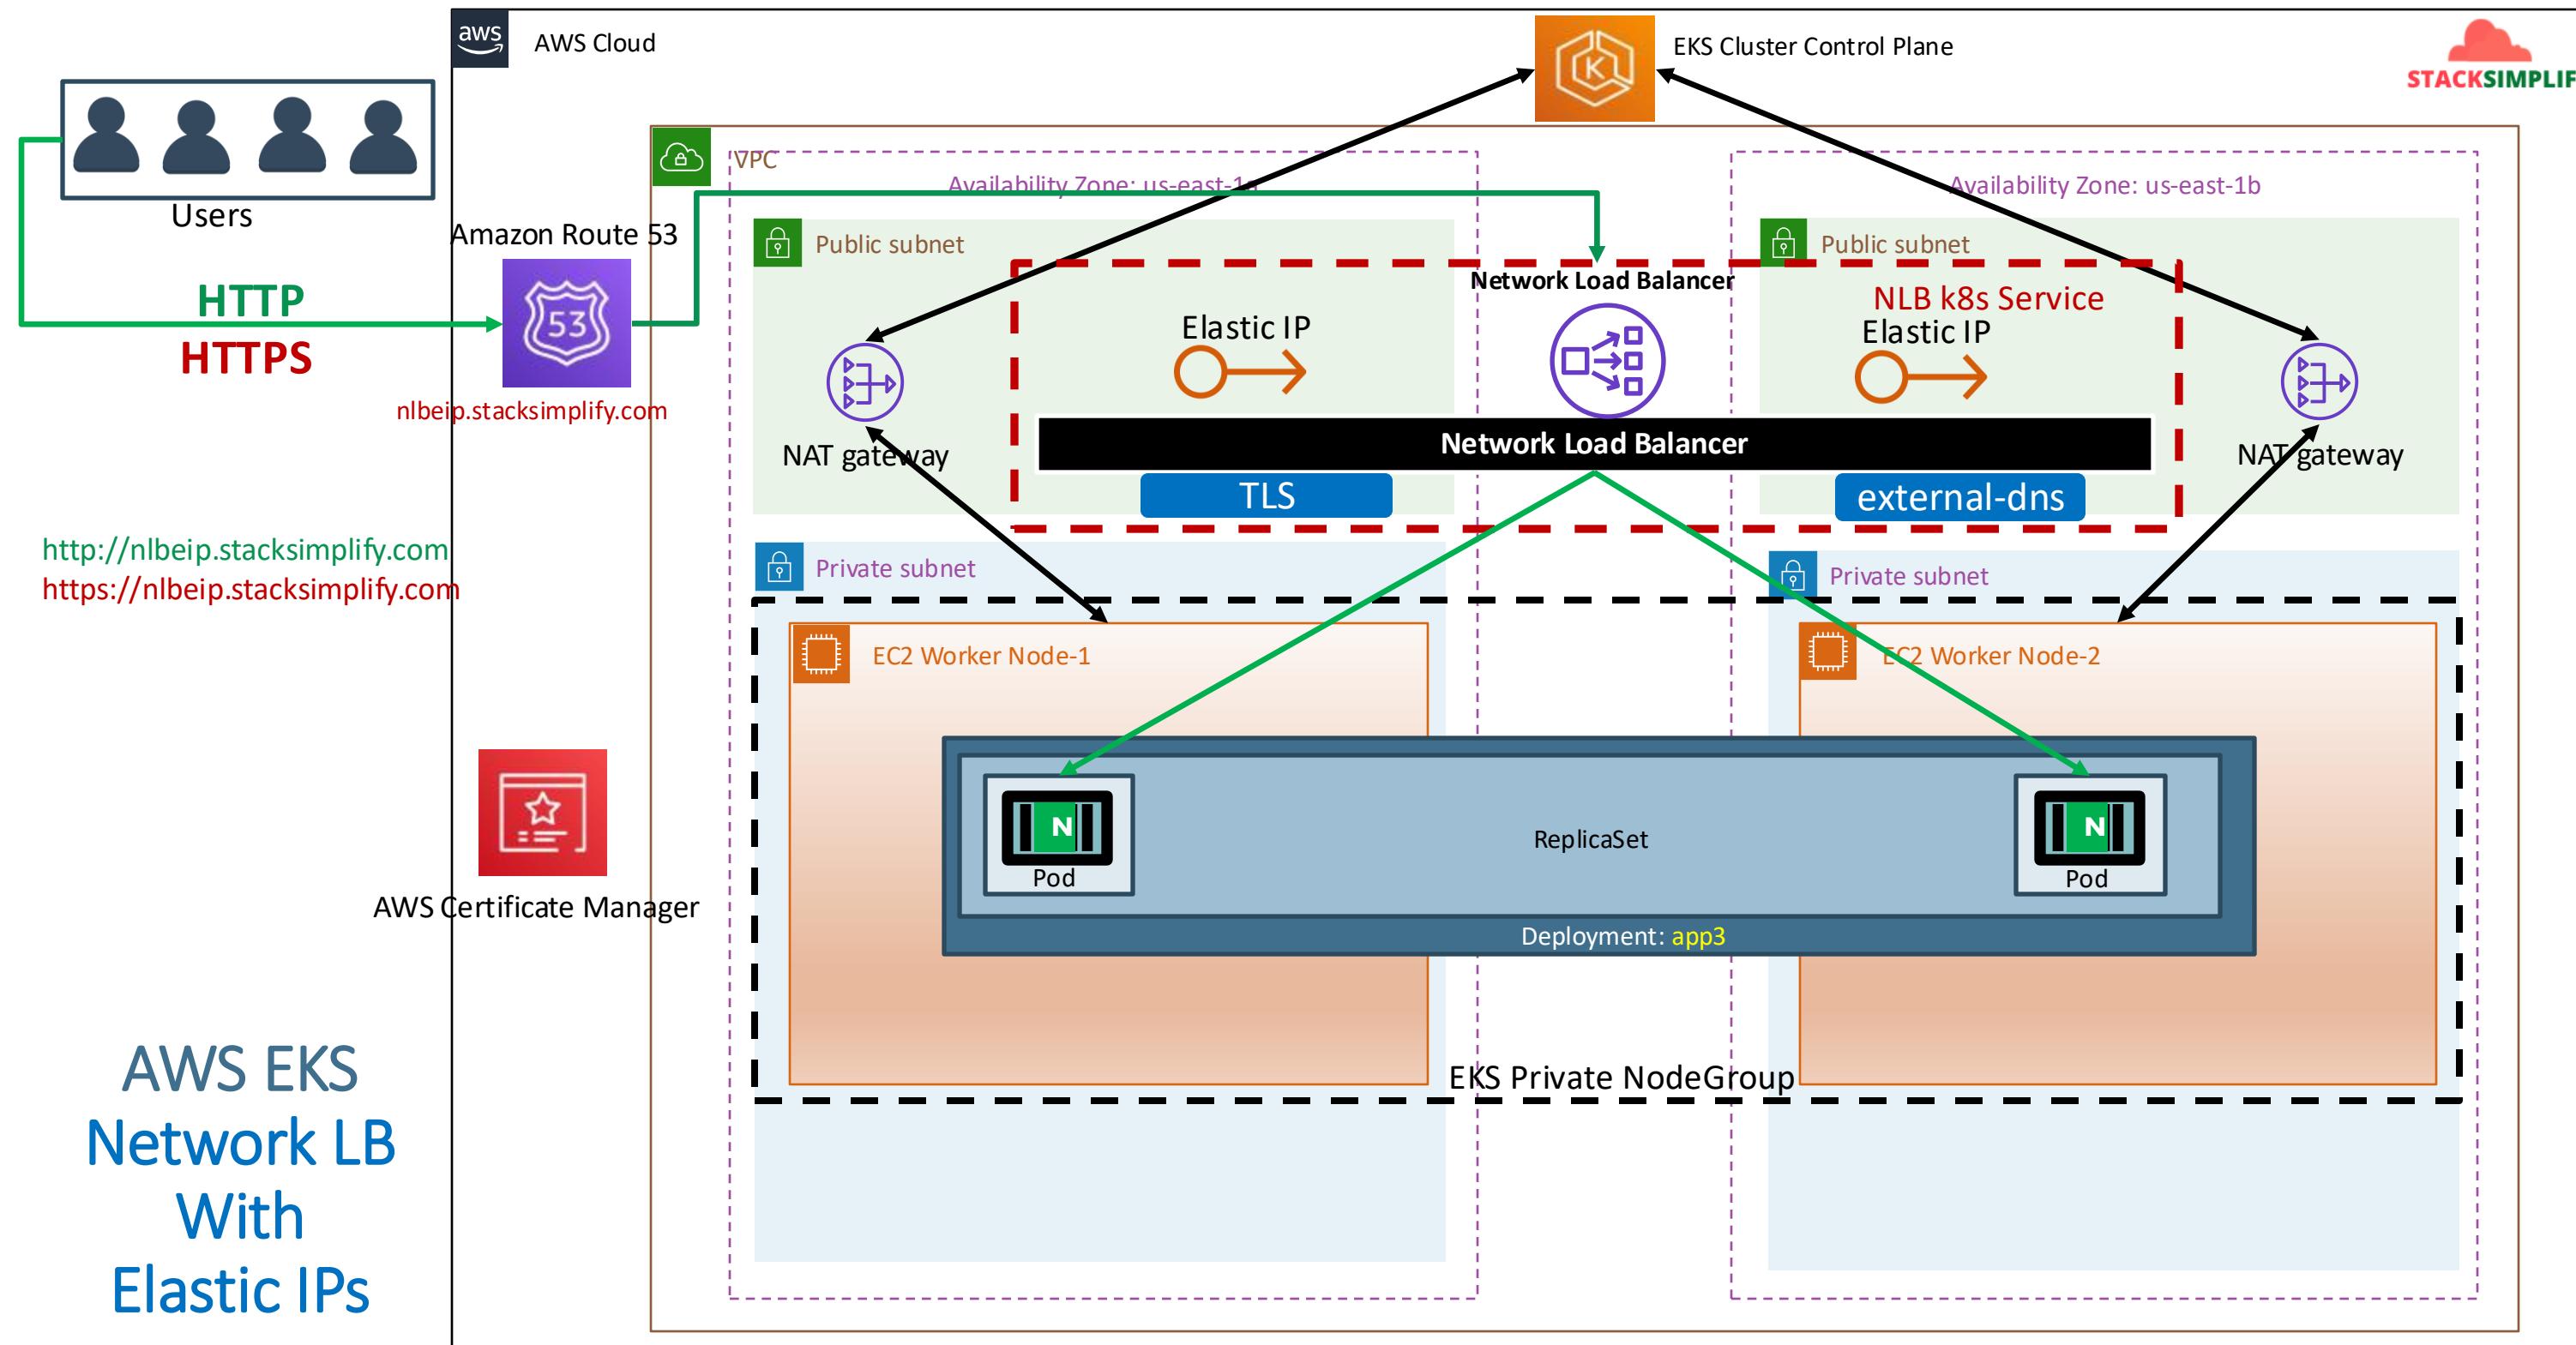


AWS EKS NLB - Elastic IP Annotation


```
# Elastic IPs  
service.beta.kubernetes.io/aws-load-balancer-eip-allocations: eipalloc-07daf60991cf21f0,
```

Important Note-1:
You must specify the same number of **eip allocations** as load balancer subnets annotation

Important Note-2:
NLB must be **internet-facing**

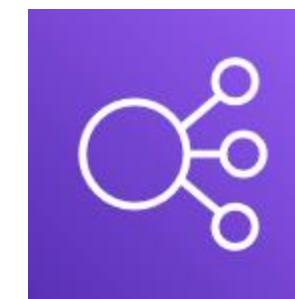

Elastic Load
Balancing

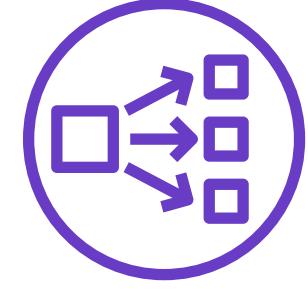

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS

Load Balancer Controller

Kubernetes Service


Network Load Balancer

Internal LB




AWS EKS NLB – Internal LB

k8s admin using
kubectl client

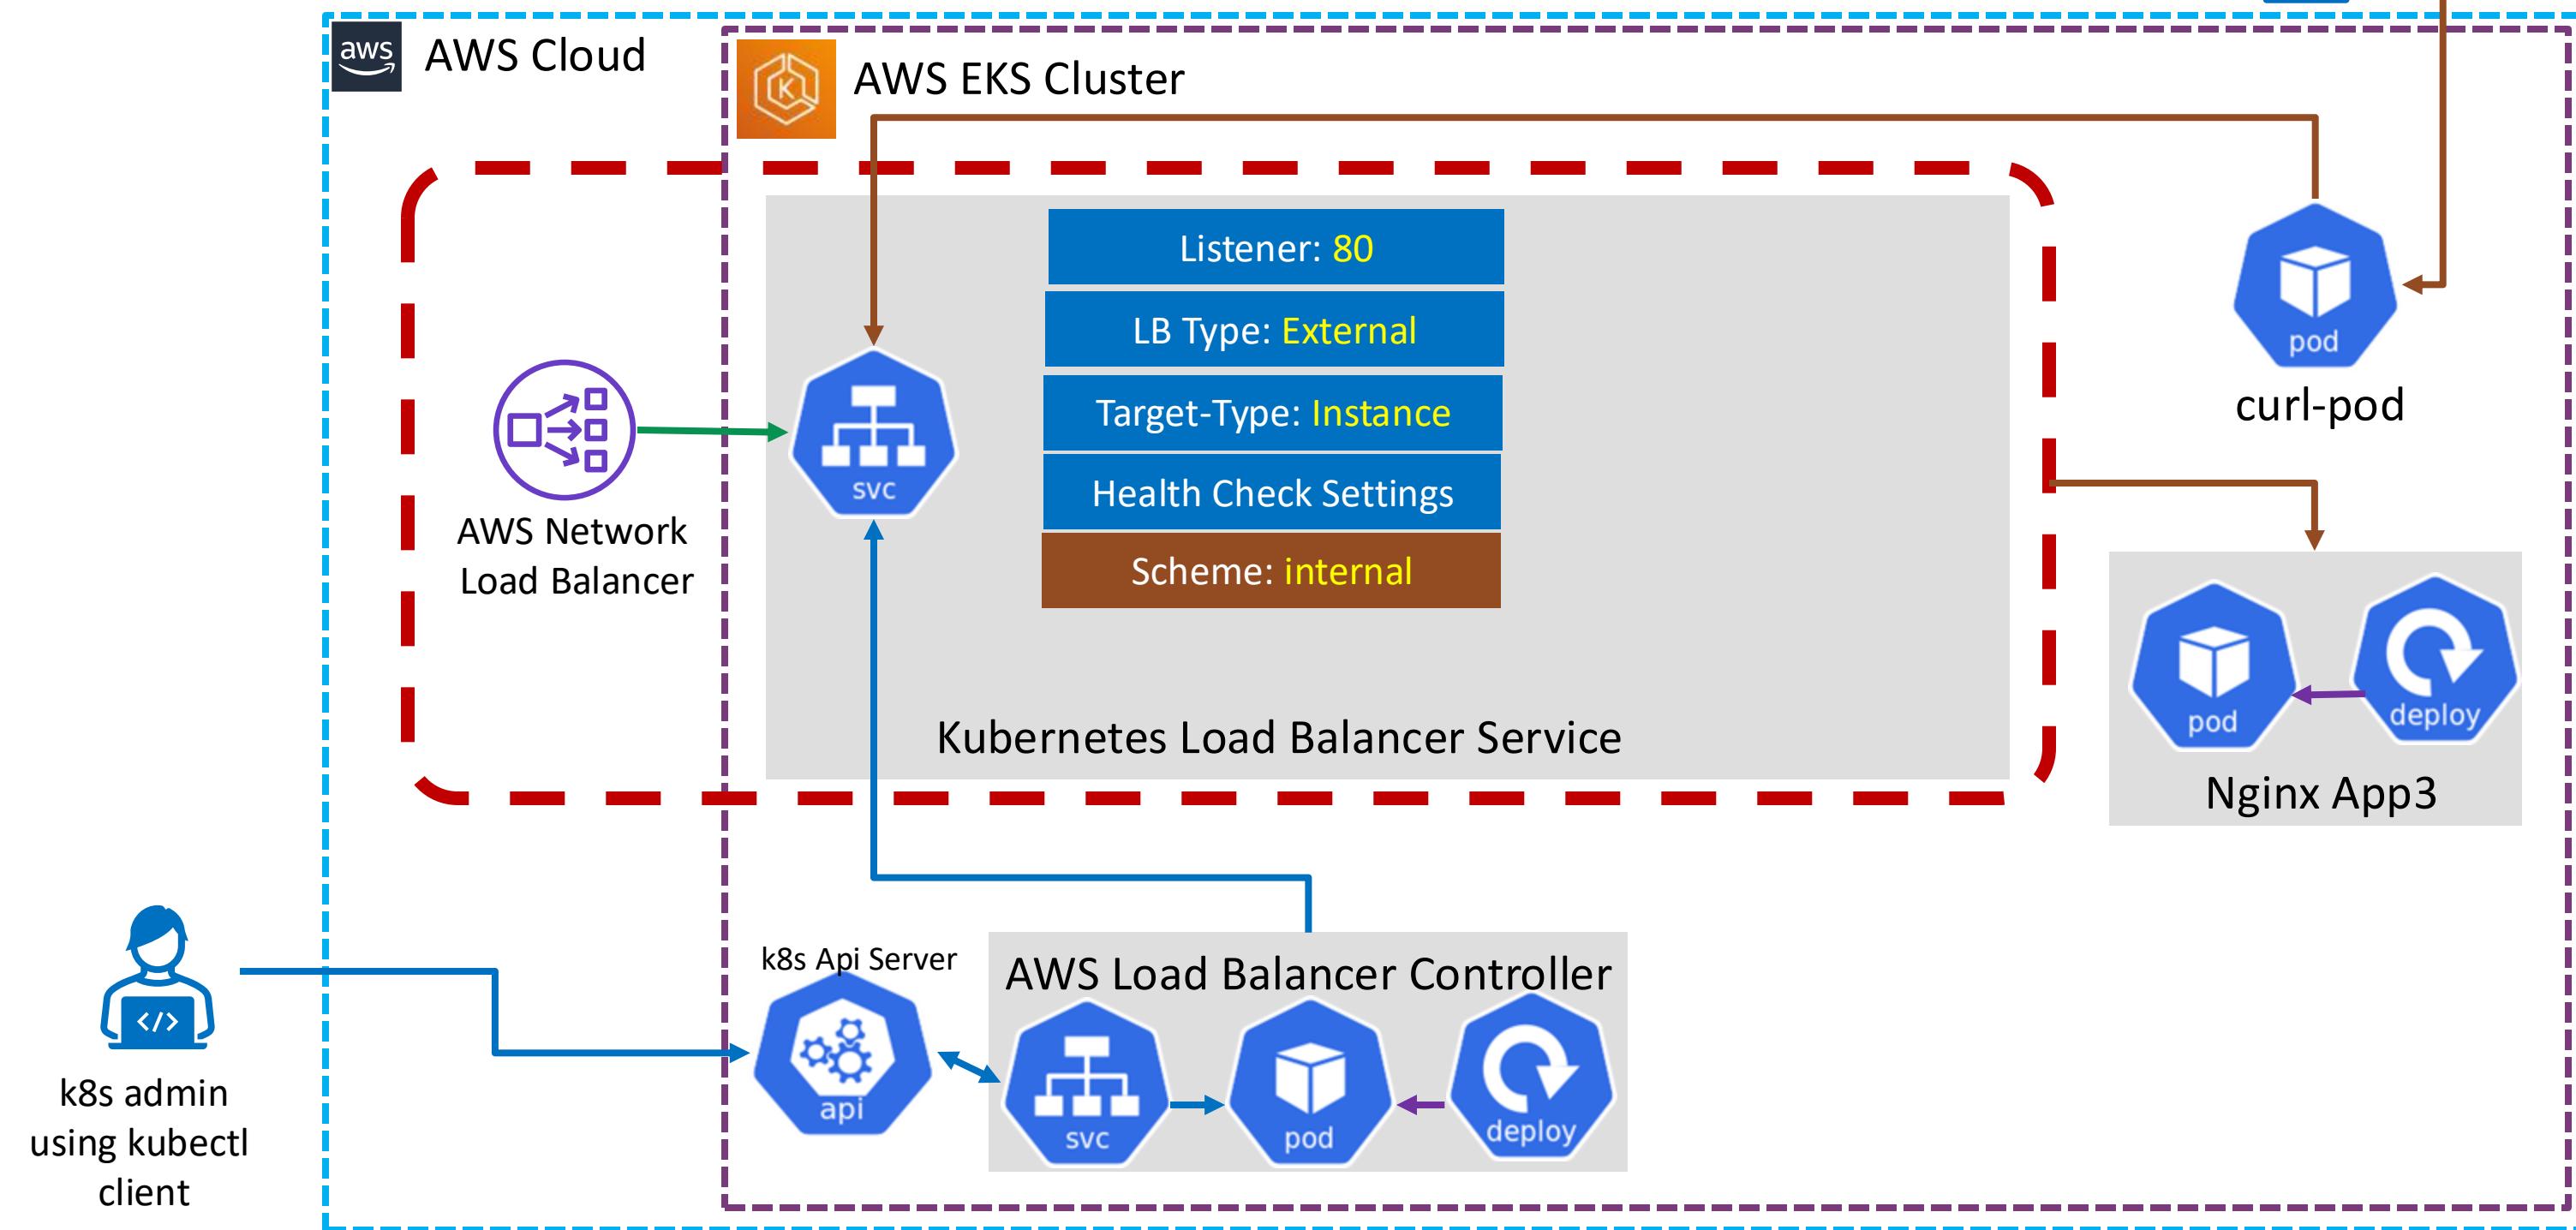

AWS EKS Network Design With Network Load Balancer Internal

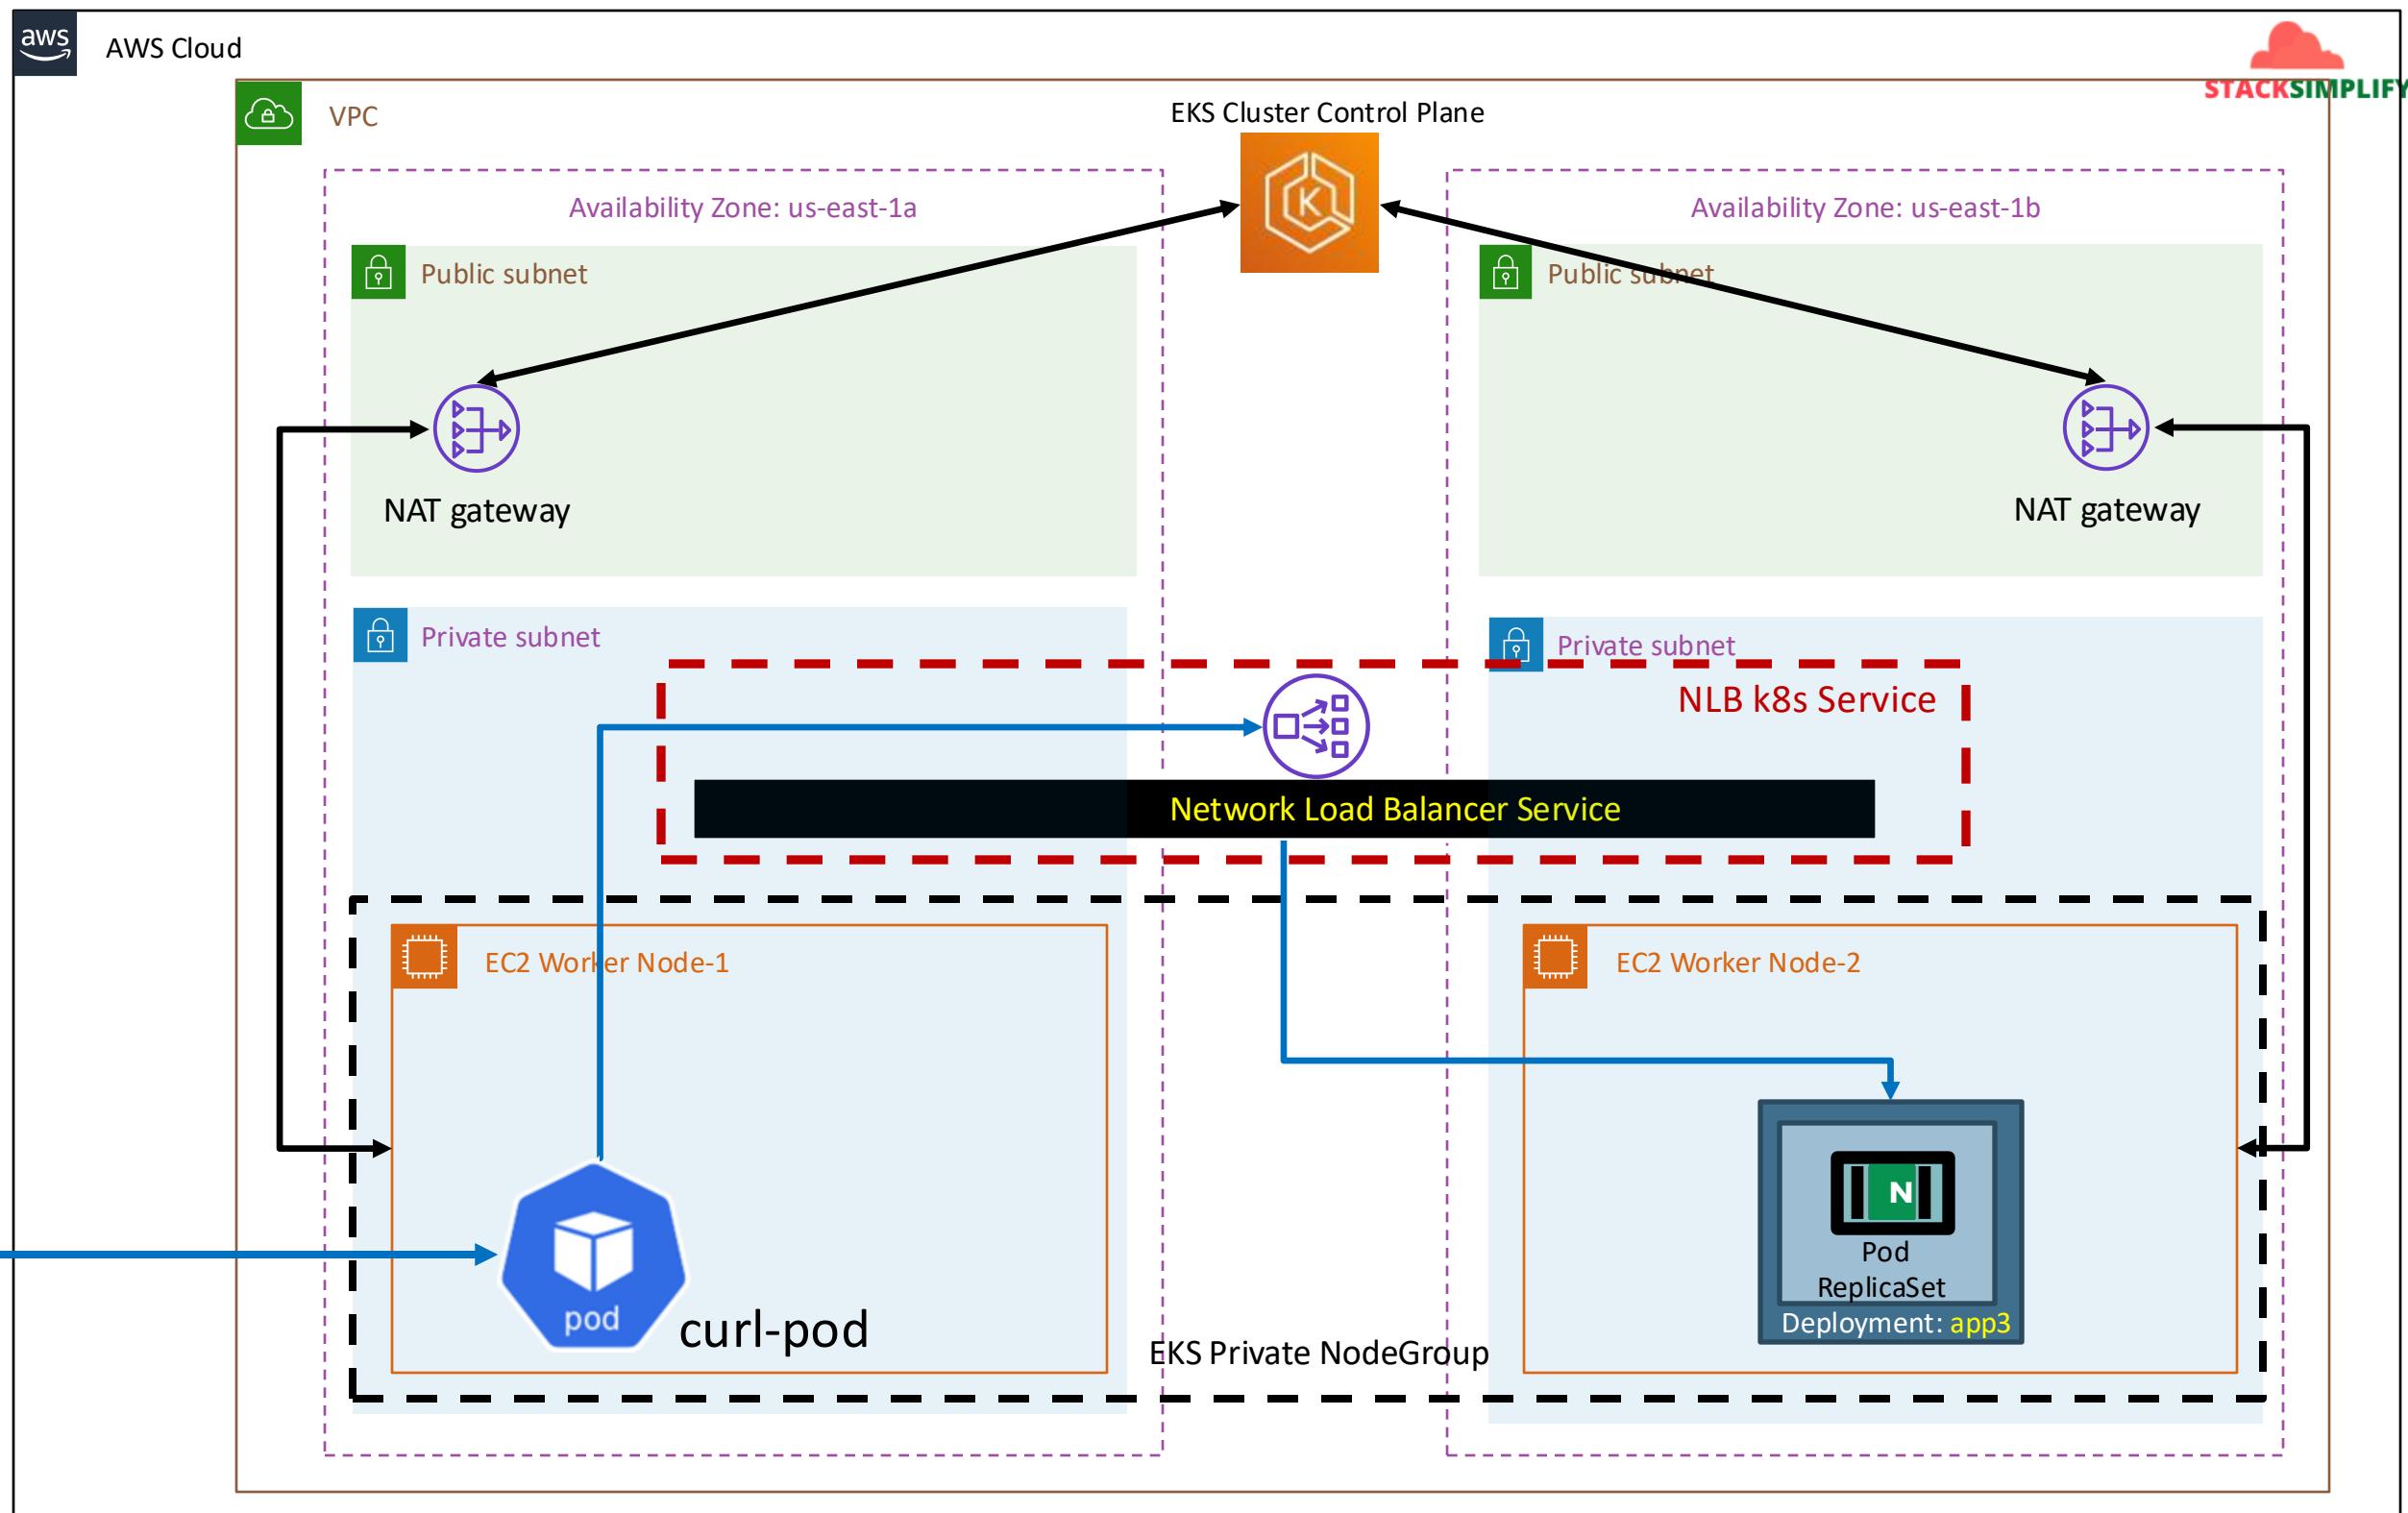

AWS EKS NLB - Internal

```
# Access Control  
service.beta.kubernetes.io/aws-load-balancer-scheme: "internal"
```

Curl Pod

```
apiVersion: v1
kind: Pod
metadata:
  name: curl-pod
spec:
  containers:
  - name: curl
    image: curlimages/curl
    command: [ "sleep", "600" ]
```

We **cannot** connect to Internal LB directly from internet to test it.

We will deploy a **curl pod** in EKS Cluster so we can connect to curl pod in EKS Cluster and test the **Internal LB Endpoint** using **curl** command.


Command to Test AWS Internal NLB using curl pod

```
# Deploy curl-pod
kubectl apply -f kube-manifests-curl


# Will open up a terminal session into the container
kubectl exec -it curl-pod -- sh

# We can now curl external addresses or internal services:
curl http://google.com/
curl <INTERNAL-NETWORK-LB-DNS>

# Internal Network LB Curl Test
curl lbc-network-lb-internal-demo-7031ade4ca457080.elb.us-east-1.amazonaws.com
```

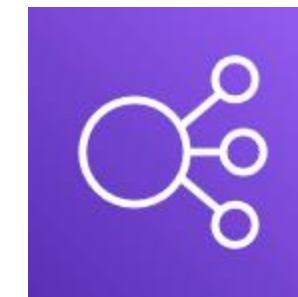

Elastic Load
Balancing

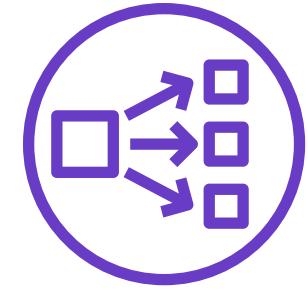

Network
Load Balancer



Kubernetes
Service



External
DNS



AWS EKS

Load Balancer Controller


Kubernetes Service


Network Load Balancer

with Workload running on Fargate



AWS EKS NLB – Fargate Workloads

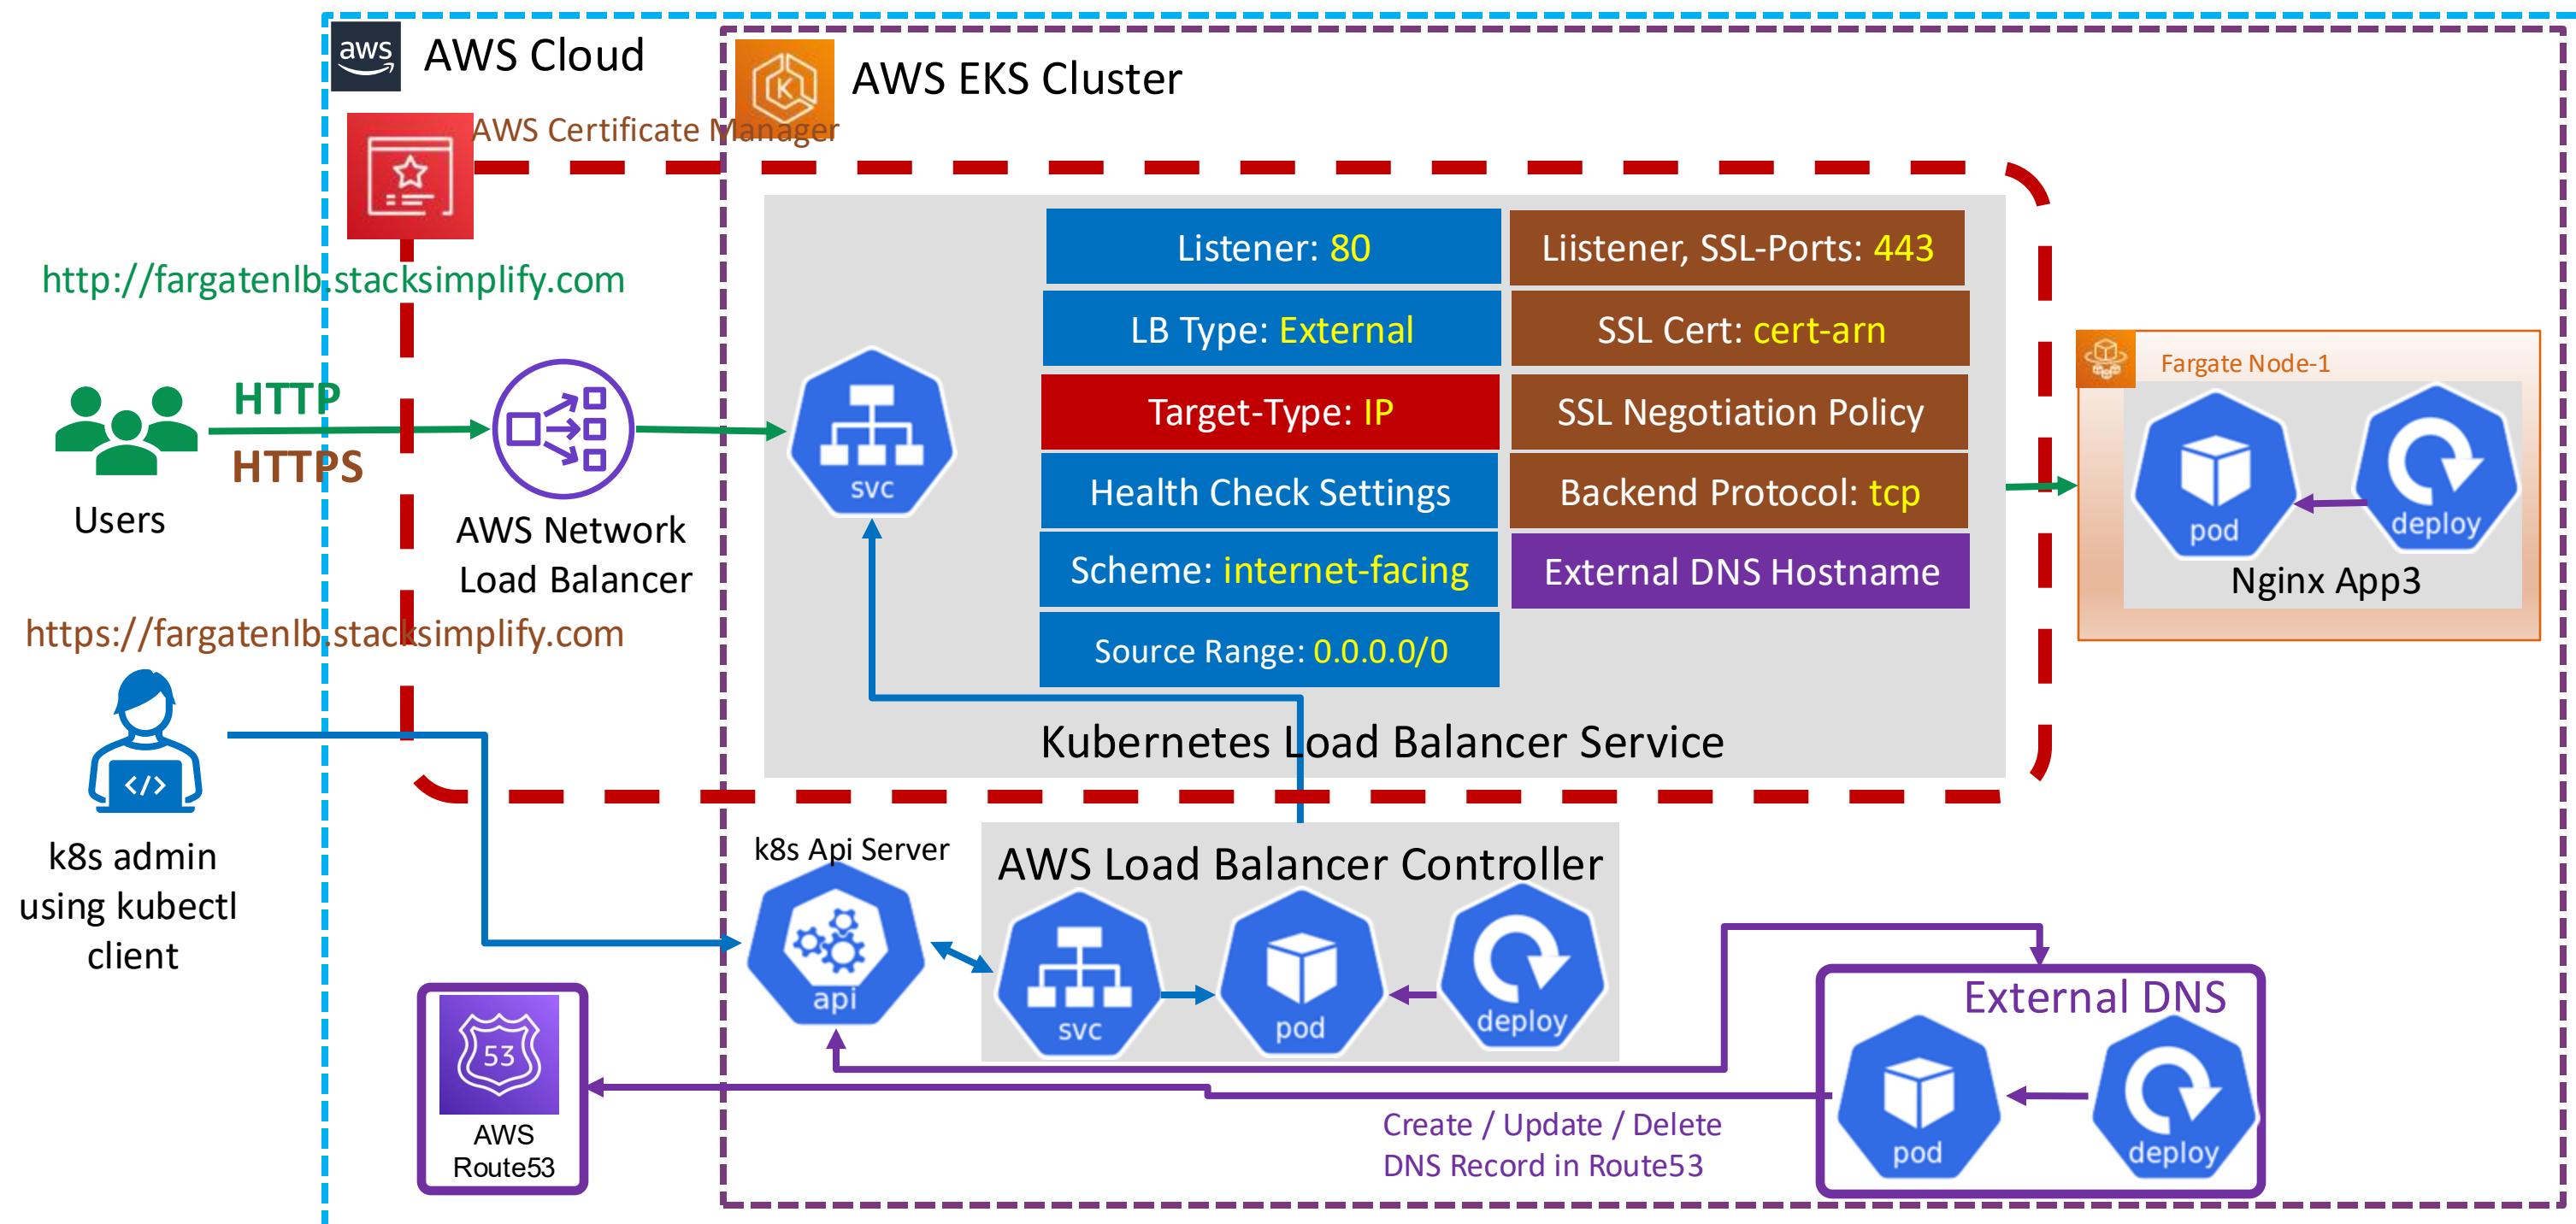



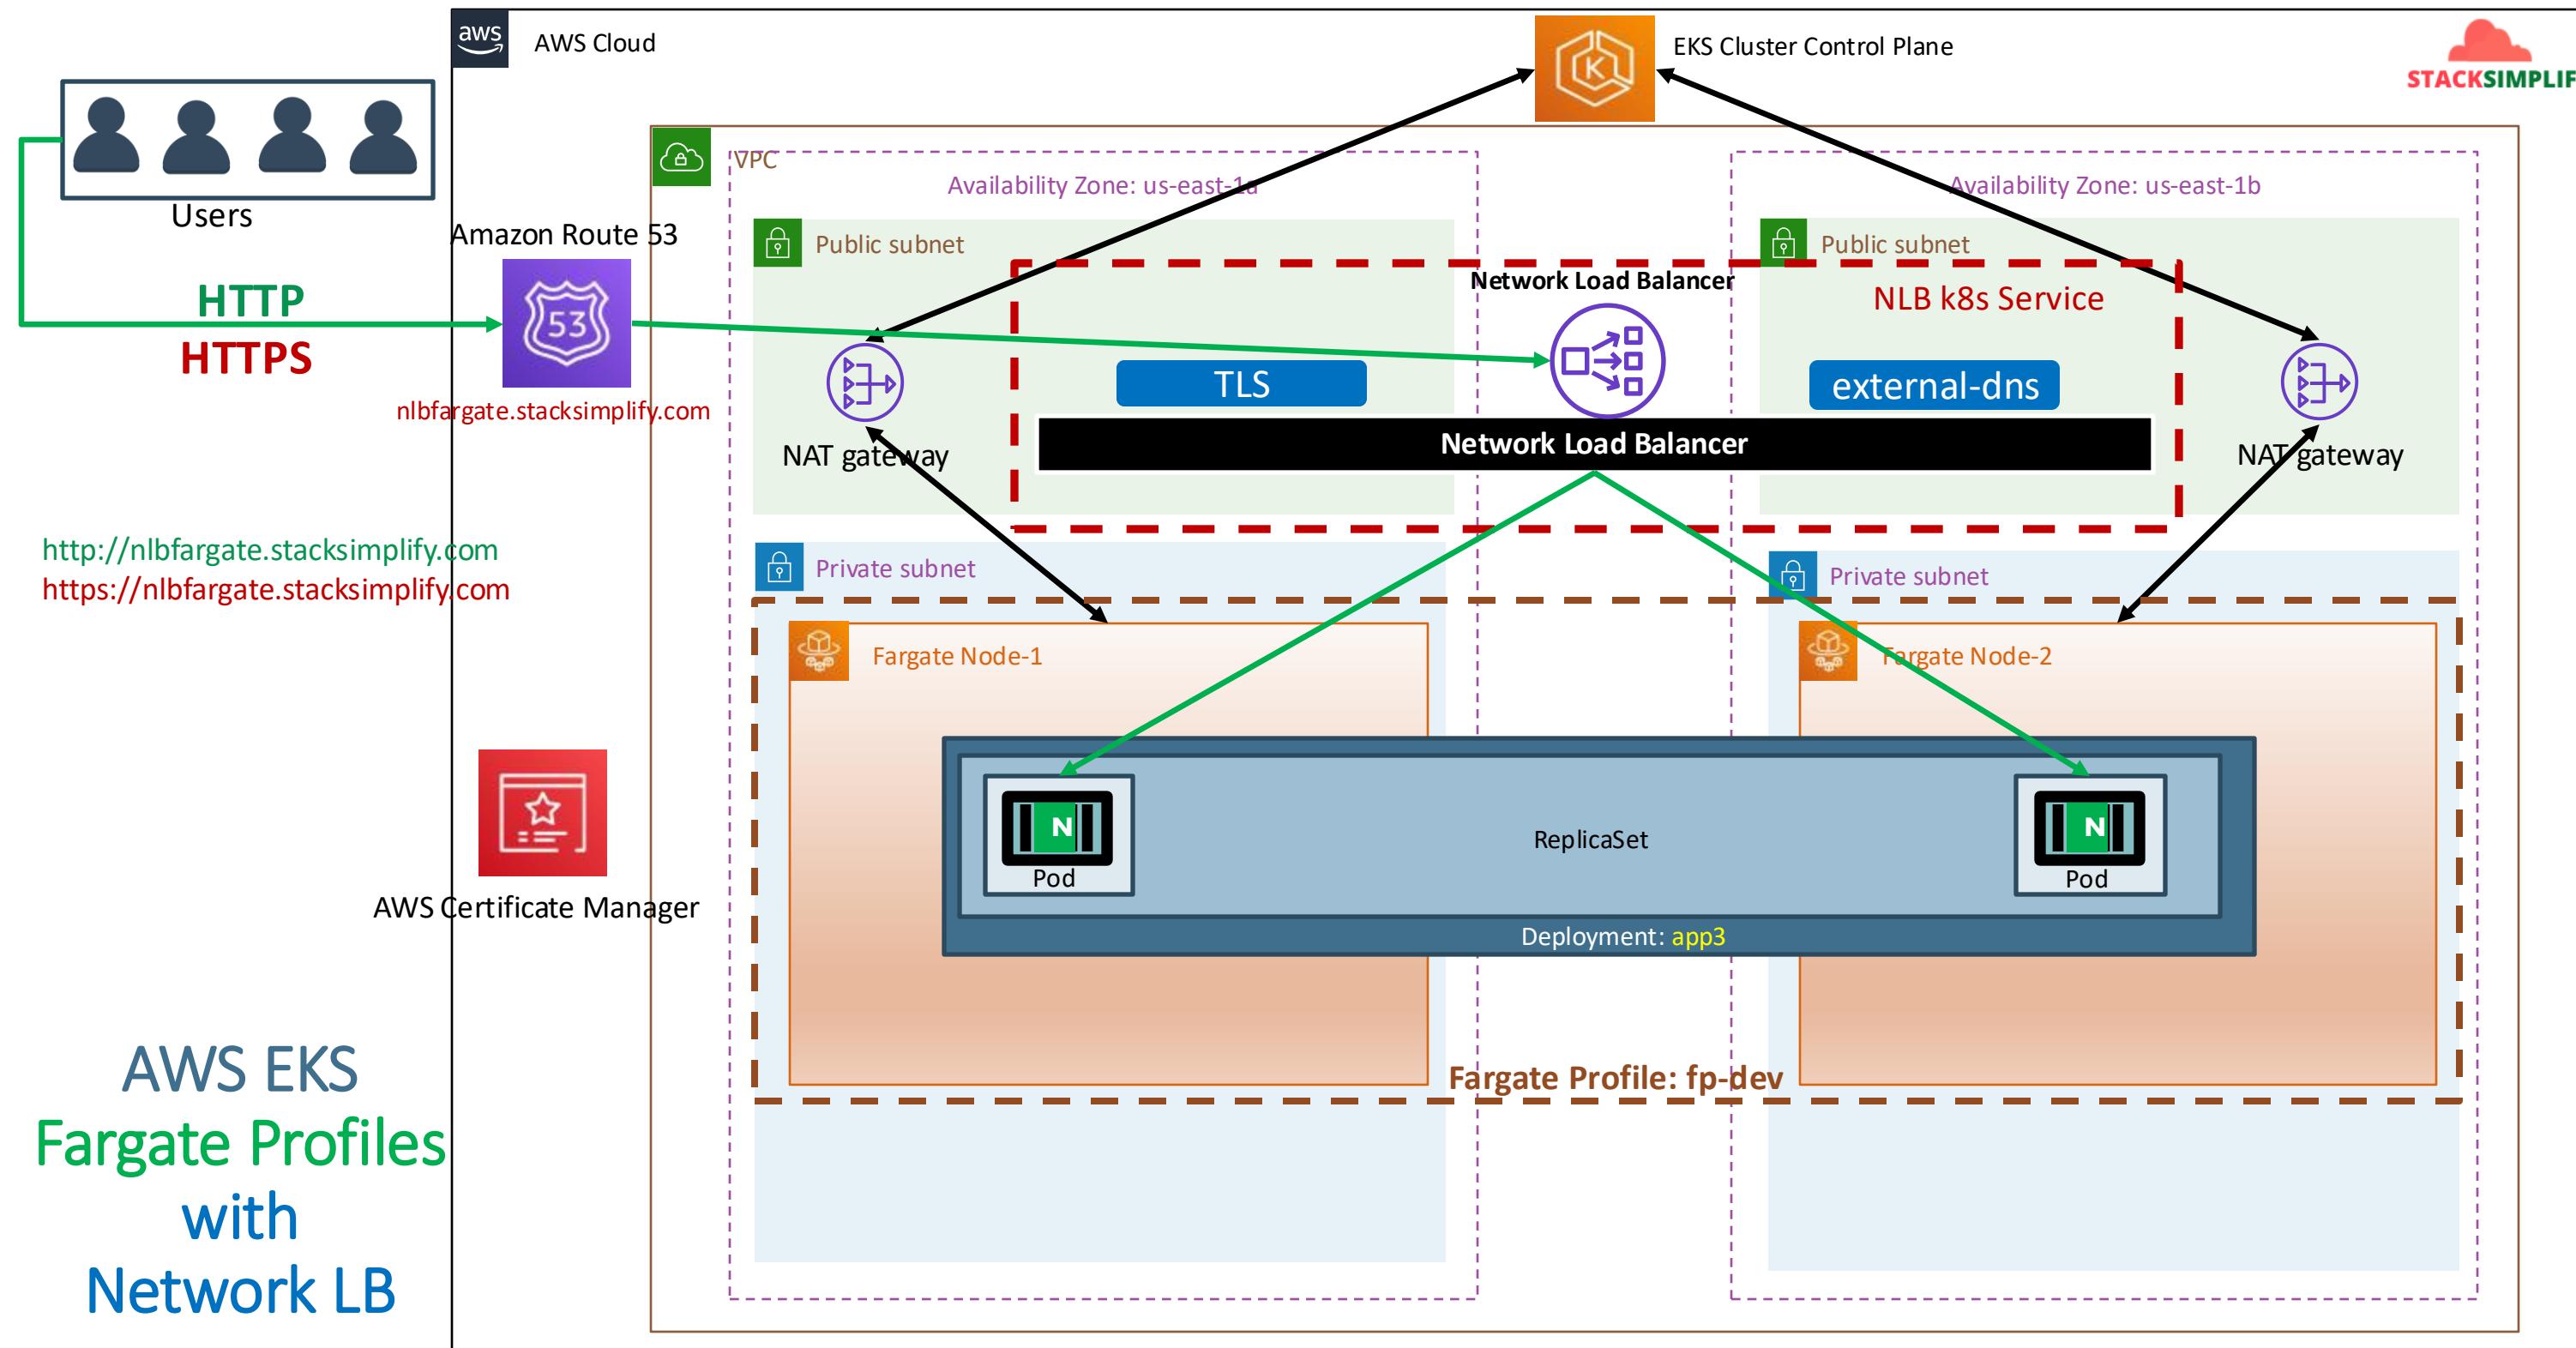


AWS EKS NLB – Fargate Workloads

```
service.beta.kubernetes.io/aws-load-balancer-nlb-target-type: ip
```

Pod IP Address will be directly registered as targets in NLB Load Balancer Target Groups when we use Target Type as **IP Mode**

AWS Load Balancer Controller & AWS Network Load Balancer – NEW TOPIC ADDITION - END

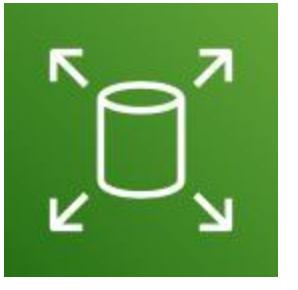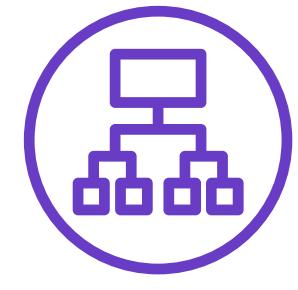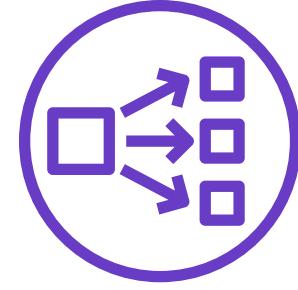

Elastic Load
Balancing

Classic
Load Balancer

Network
Load Balancer

Application
Load Balancer

Certificate
Manager

Route53

Elastic Block
Store

Amazon RDS



AWS EKS

ECR



Elastic Container Registry



Fargate Elastic Container
Profiles Registry


Elastic Container Registry - ECR

- Elastic Container Registry (ECR) is a **fully-managed** Docker container registry that makes it easy for developers to store, manage, and deploy Docker container images.
- ECR is integrated with **Elastic Kubernetes Service (EKS)**, simplifying our development to production workflow.
- ECR **eliminates** the need to operate our own container repositories or worry about scaling the underlying infrastructure.
- ECR hosts our images in a **highly available** and scalable architecture, allowing us to reliably deploy containers for our applications.
- Integration with **AWS Identity and Access Management (IAM)** provides resource-level control of each repository.
- With Amazon ECR, there are **no upfront fees** or commitments. We pay only for the amount of data you store in your repositories and data transferred to the Internet.

Elastic Container Registry - ECR


- Benefits
 - Full managed
 - Secure
 - Highly Available
 - Simplified Workflow

How ECR Works?

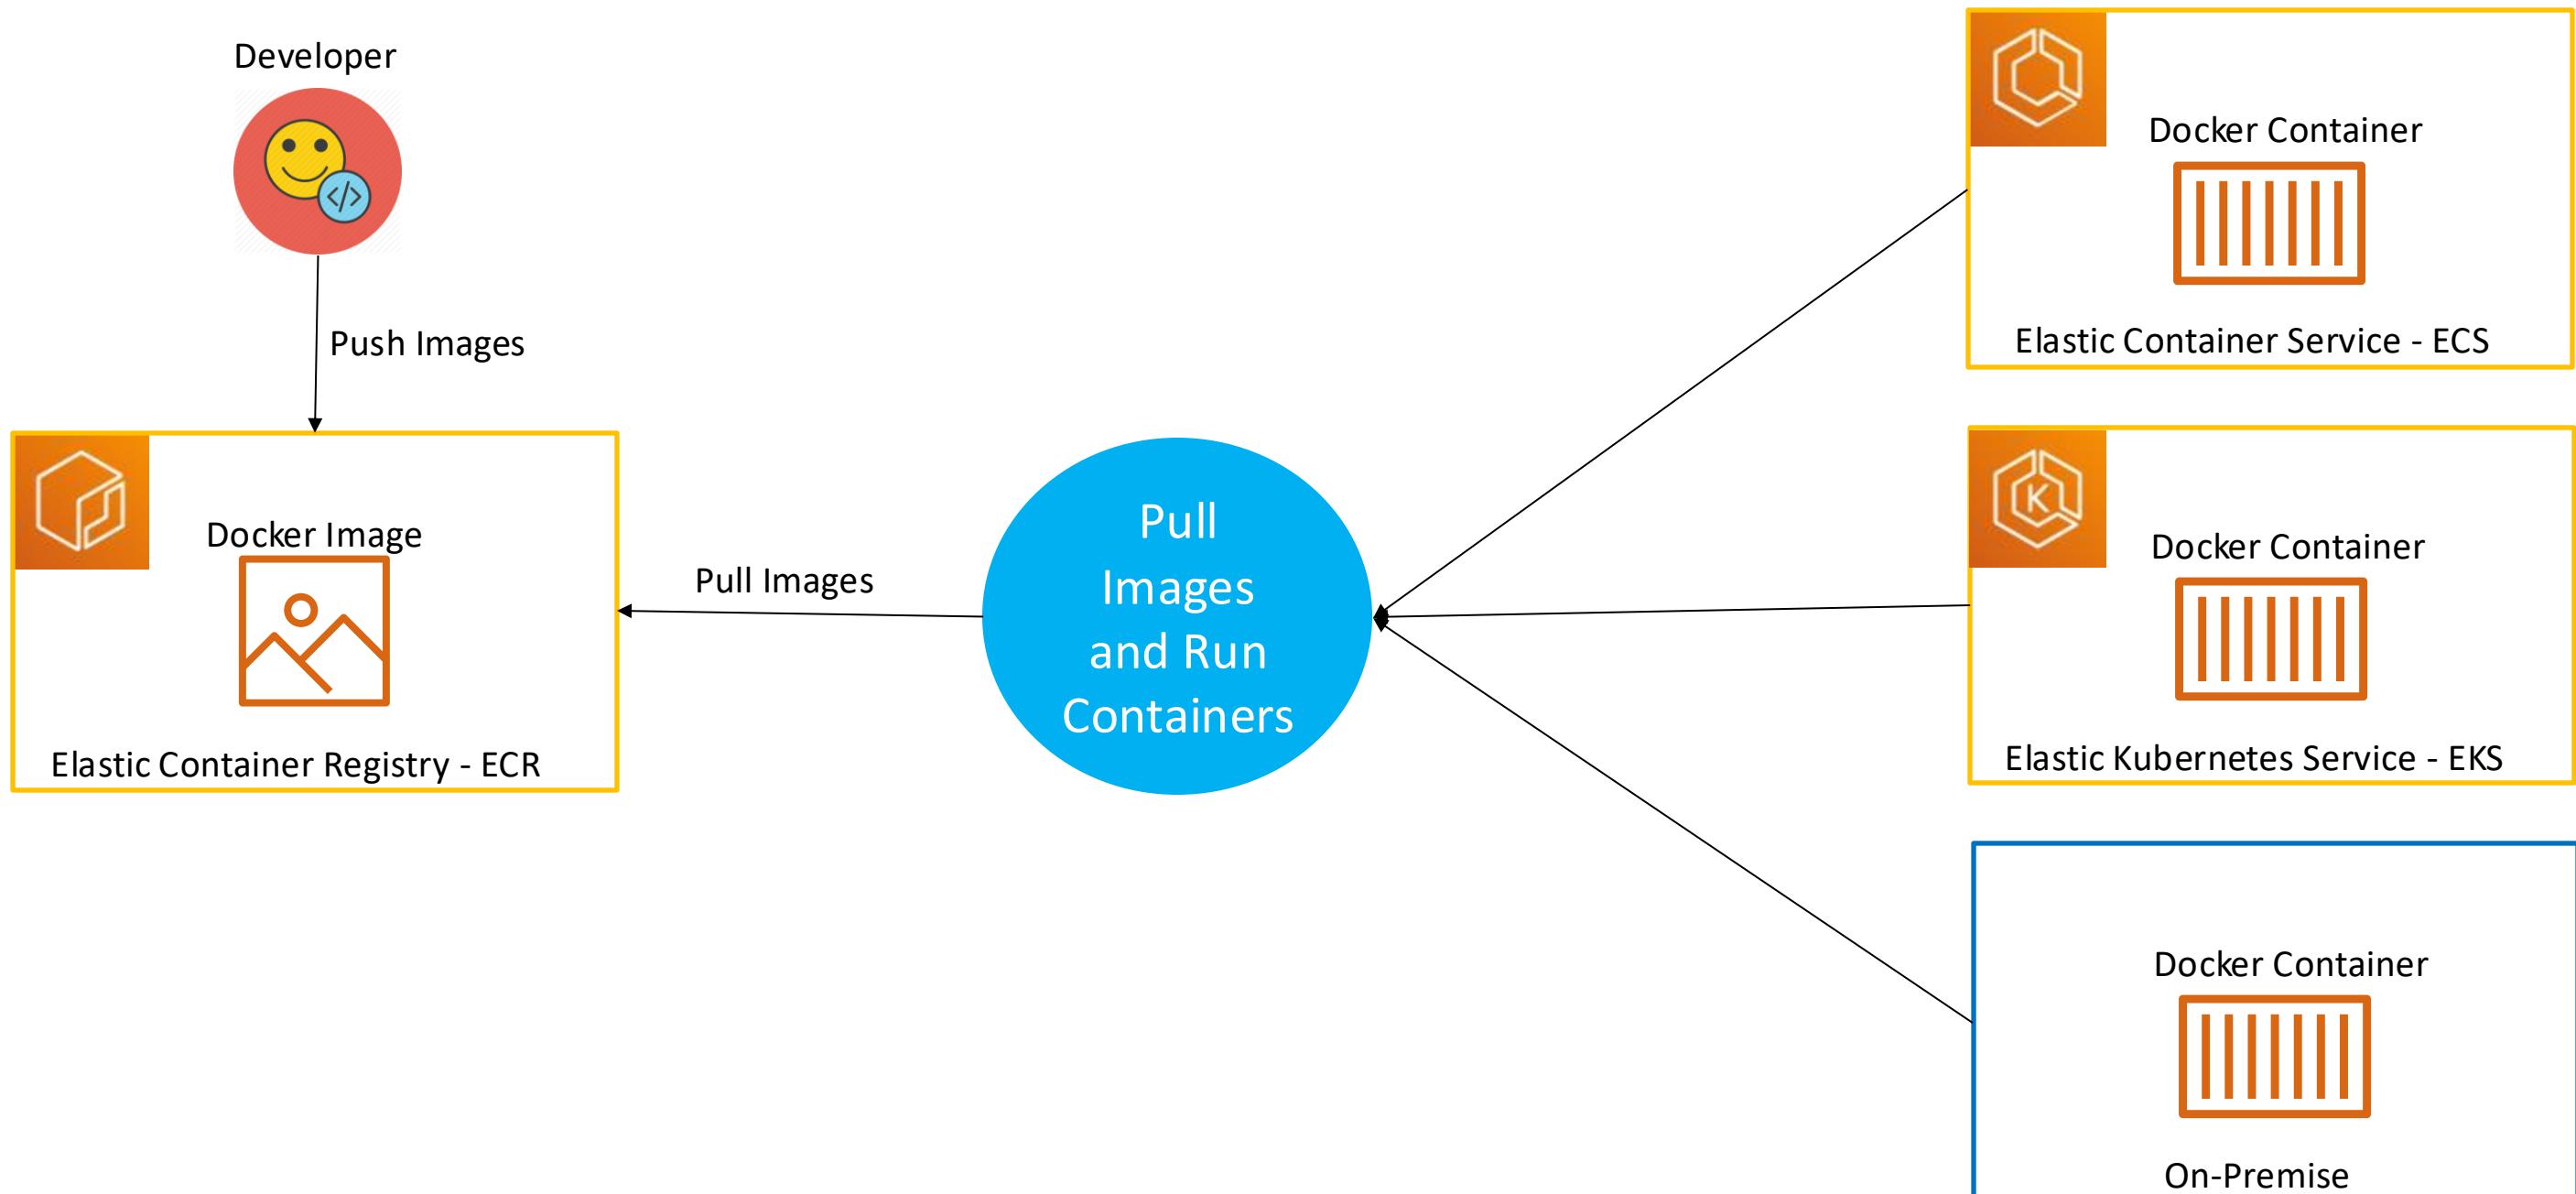


EKS & ECR

Developer

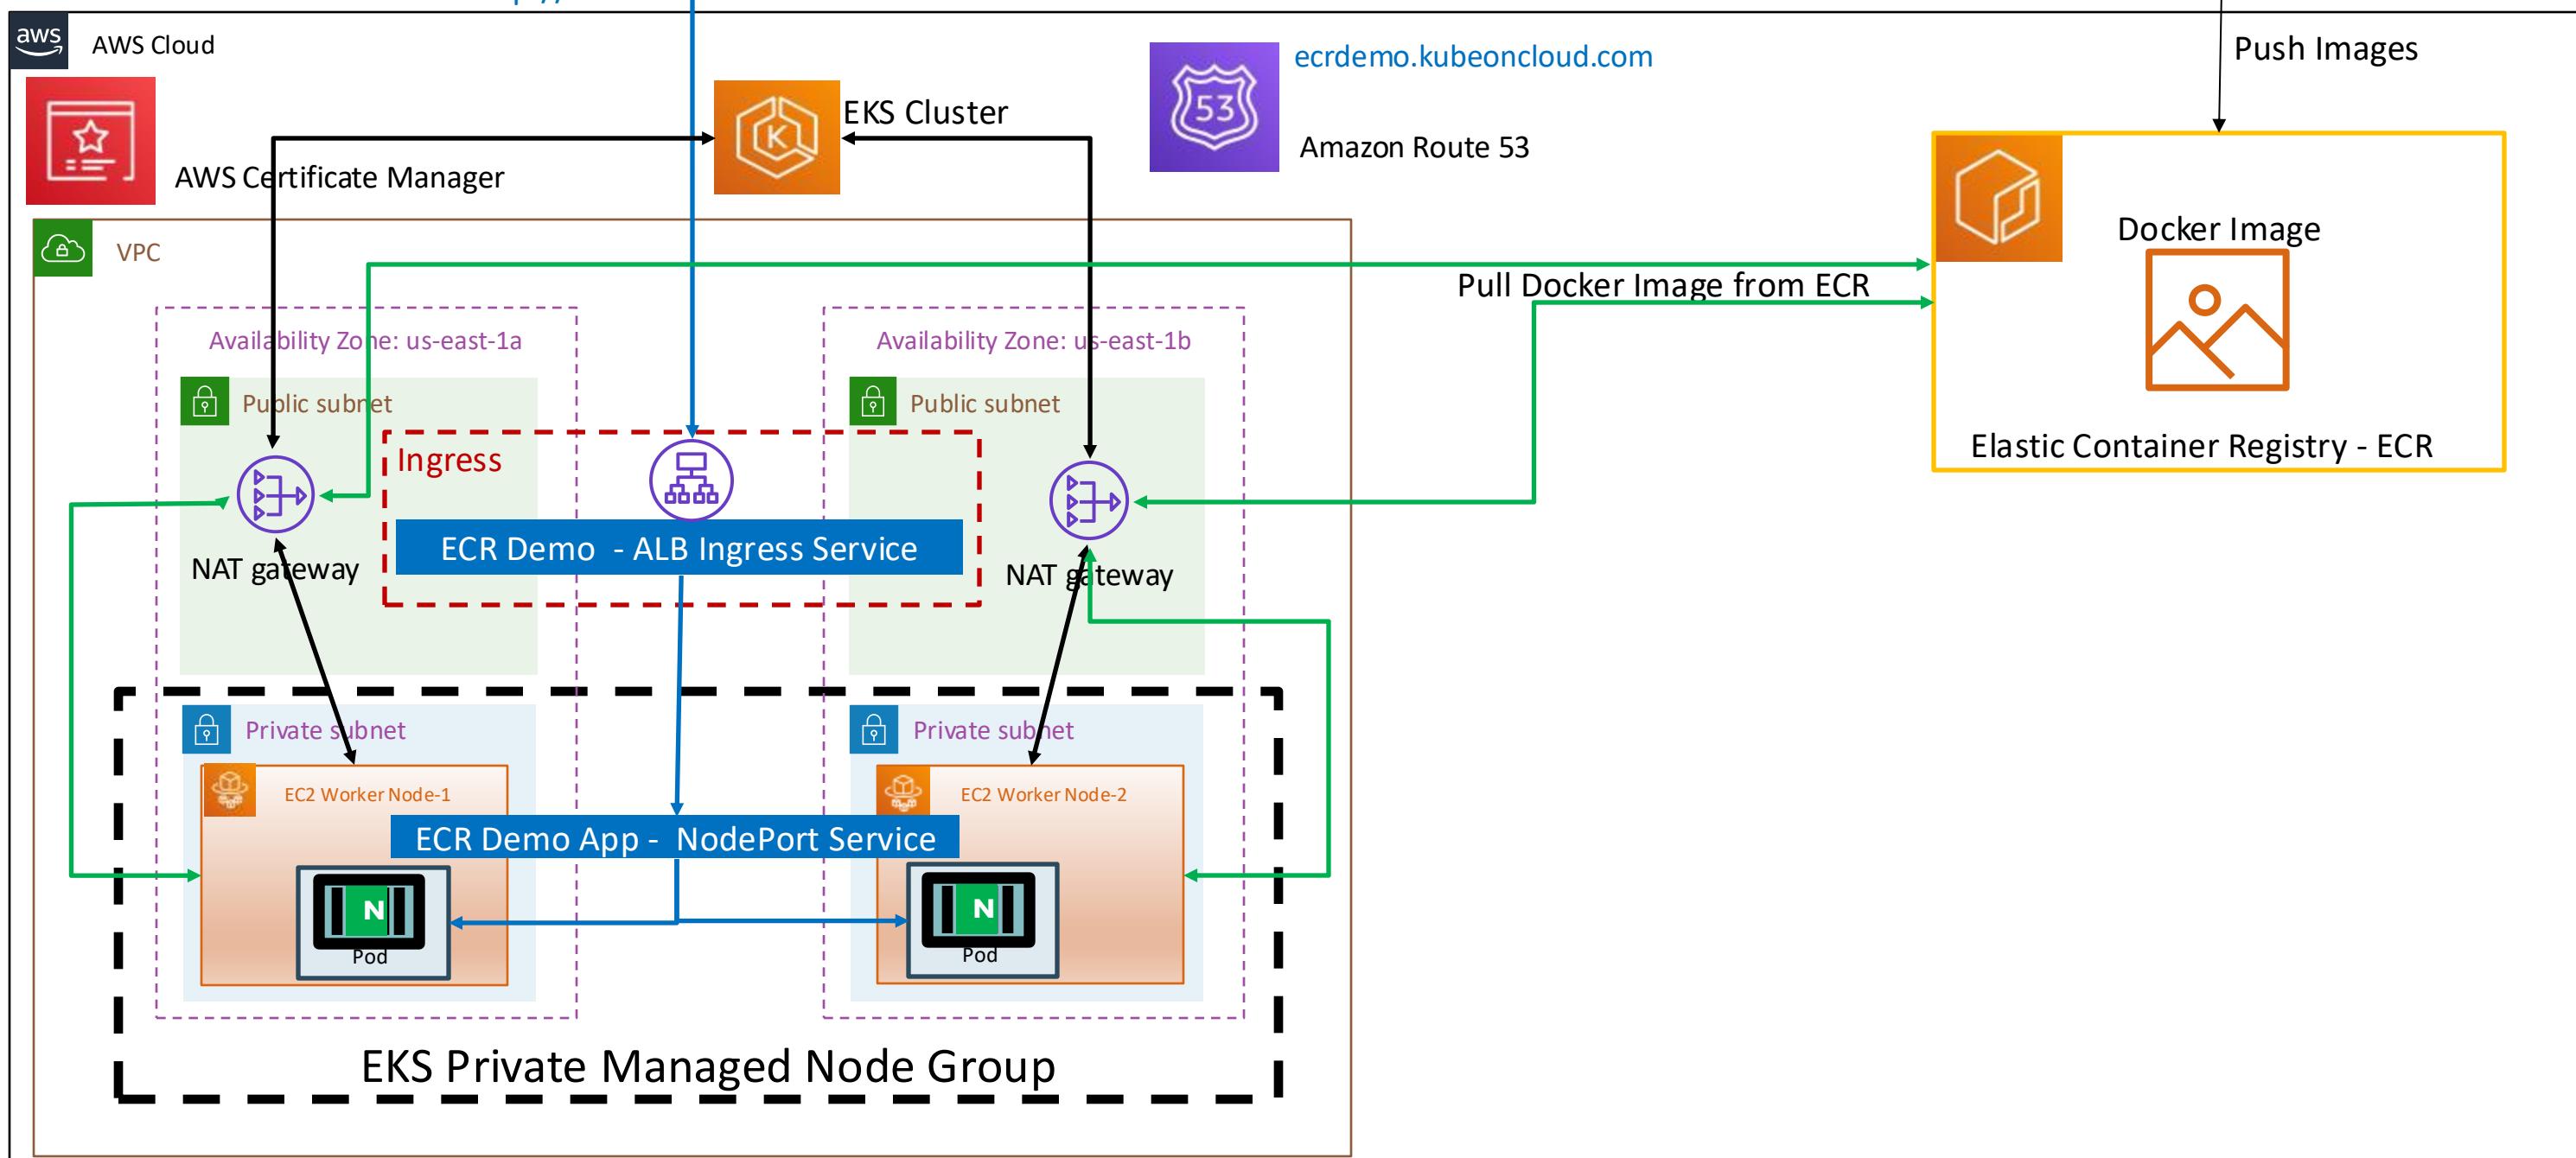





Elastic Load
Balancing

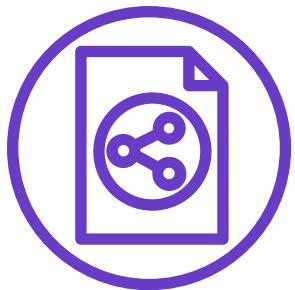

Classic
Load Balancer

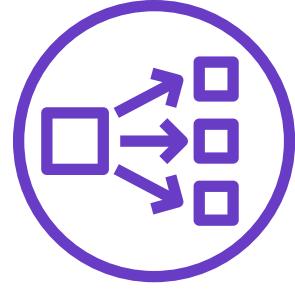

Network
Load Balancer

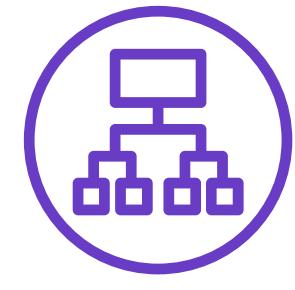

Application
Load Balancer



Certificate
Manager



Route53



Elastic Block
Store



Amazon RDS

AWS EKS

&

AWS Developer Tools




Fargate
Profiles



Elastic Container
Registry



Code
Commit

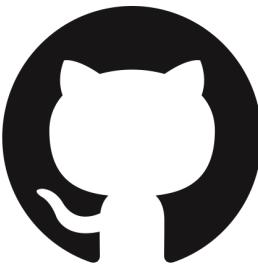

GitHub



Code
Build




Code
Pipeline

Stages in Release Process



- | | | | |
|--|---|--|---|
| <ul style="list-style-type: none">• Check-in source code• Peer review new code• Pull Request process | <ul style="list-style-type: none">• Compile Code & build artifacts (war ,jar, container images, Kubernetes manifest files)• Unit Tests | <ul style="list-style-type: none">• Integration tests with other systems.• Load Testing• UI Tests• Security Tests• Test Environments (Dev, QA and Staging) | <ul style="list-style-type: none">• Deployment to production environments• Monitor code in production to quickly detect errors |
|--|---|--|---|

Stages in Release Process

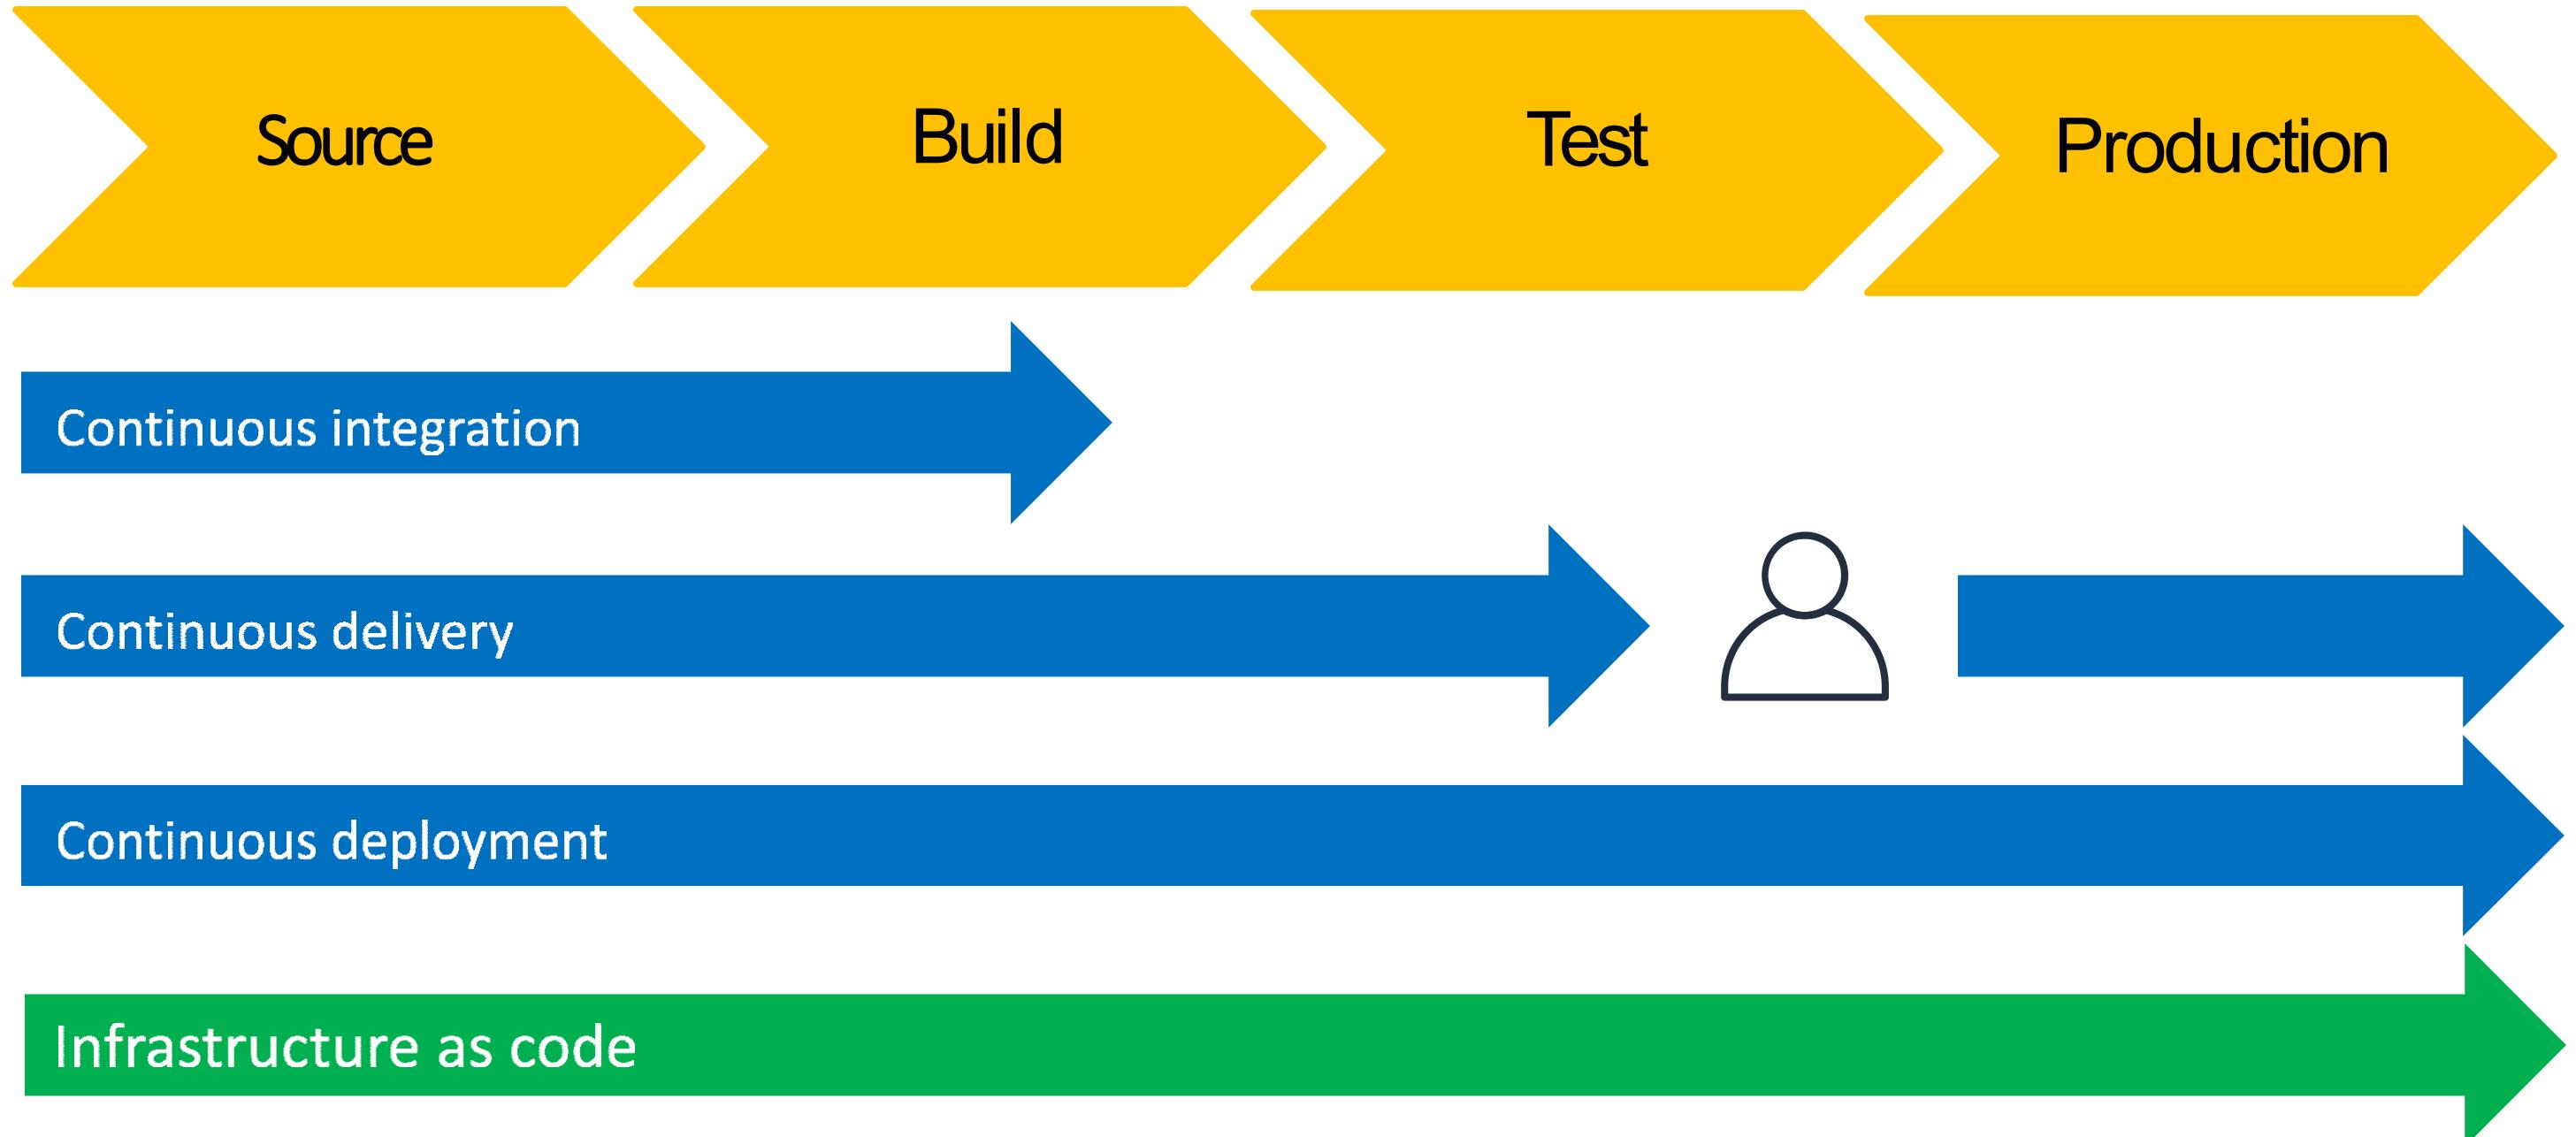

Continuous Integration




- Automatically kick off a new release when new code is checked-in
- Build and test code in a consistent, repeatable environment
- Continually have an artifact ready for deployment

Continuous Delivery




- Automatically deploy new changes to staging environments for testing
- Deploy to production safely without affecting customers
- Deliver to customers faster
- Increase deployment frequency, and reduce change lead time and change failure rate

AWS Developer Tools or Code Services

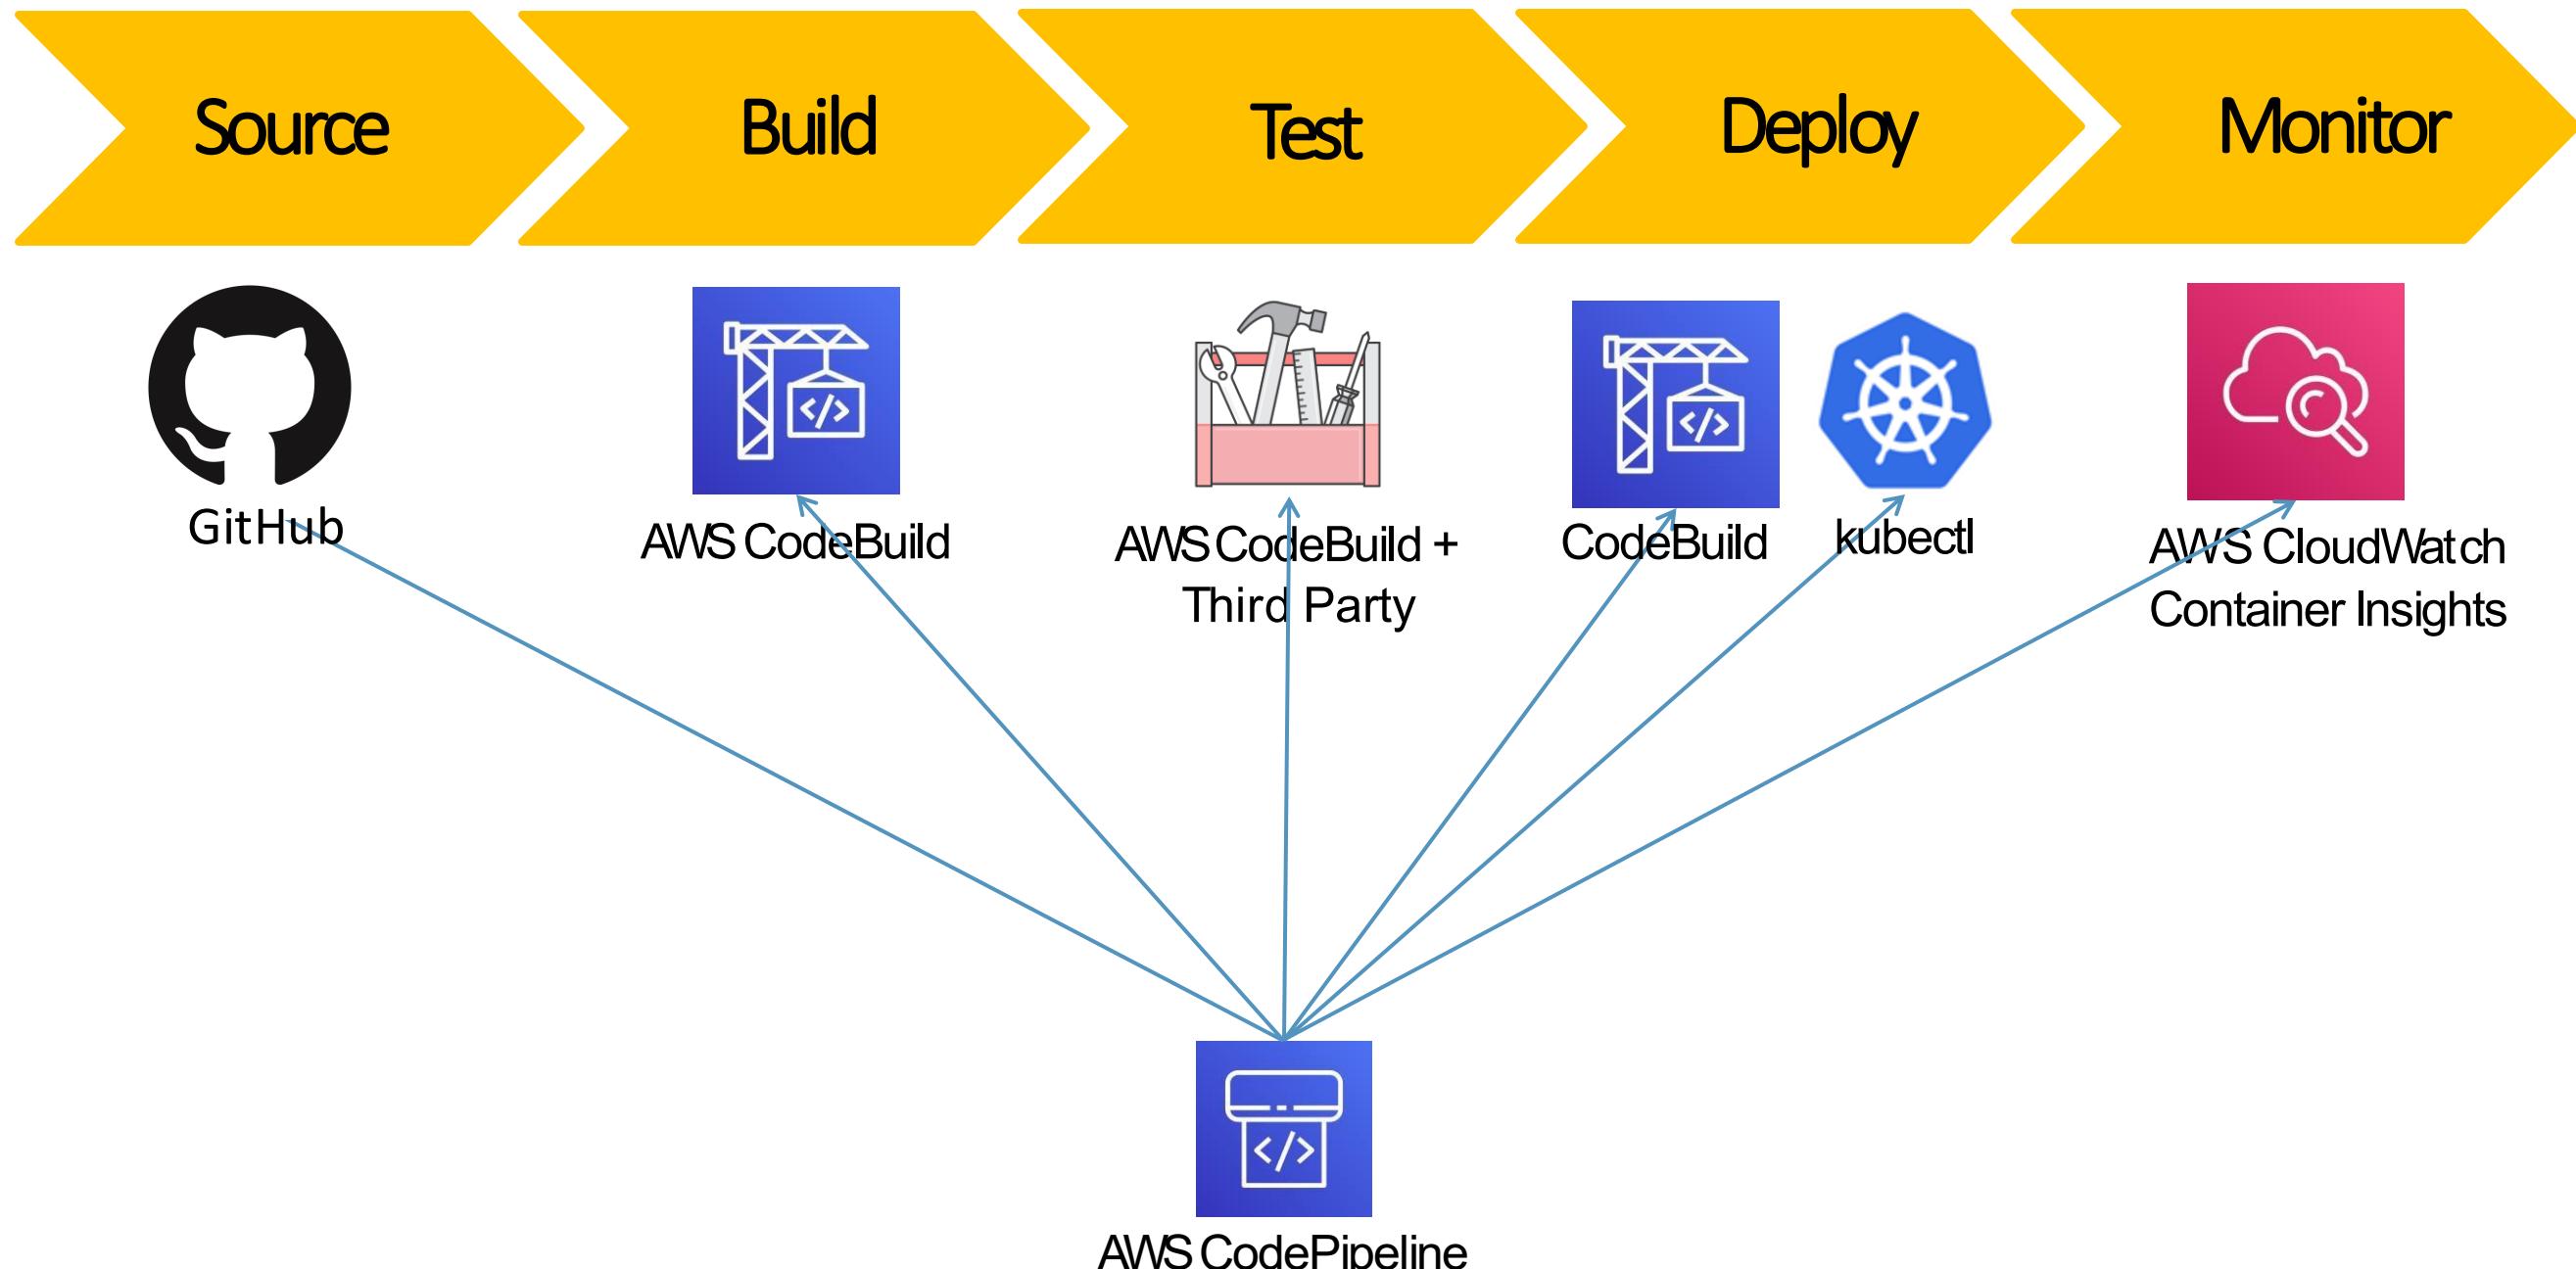

AWS Developer Tools or Code Services

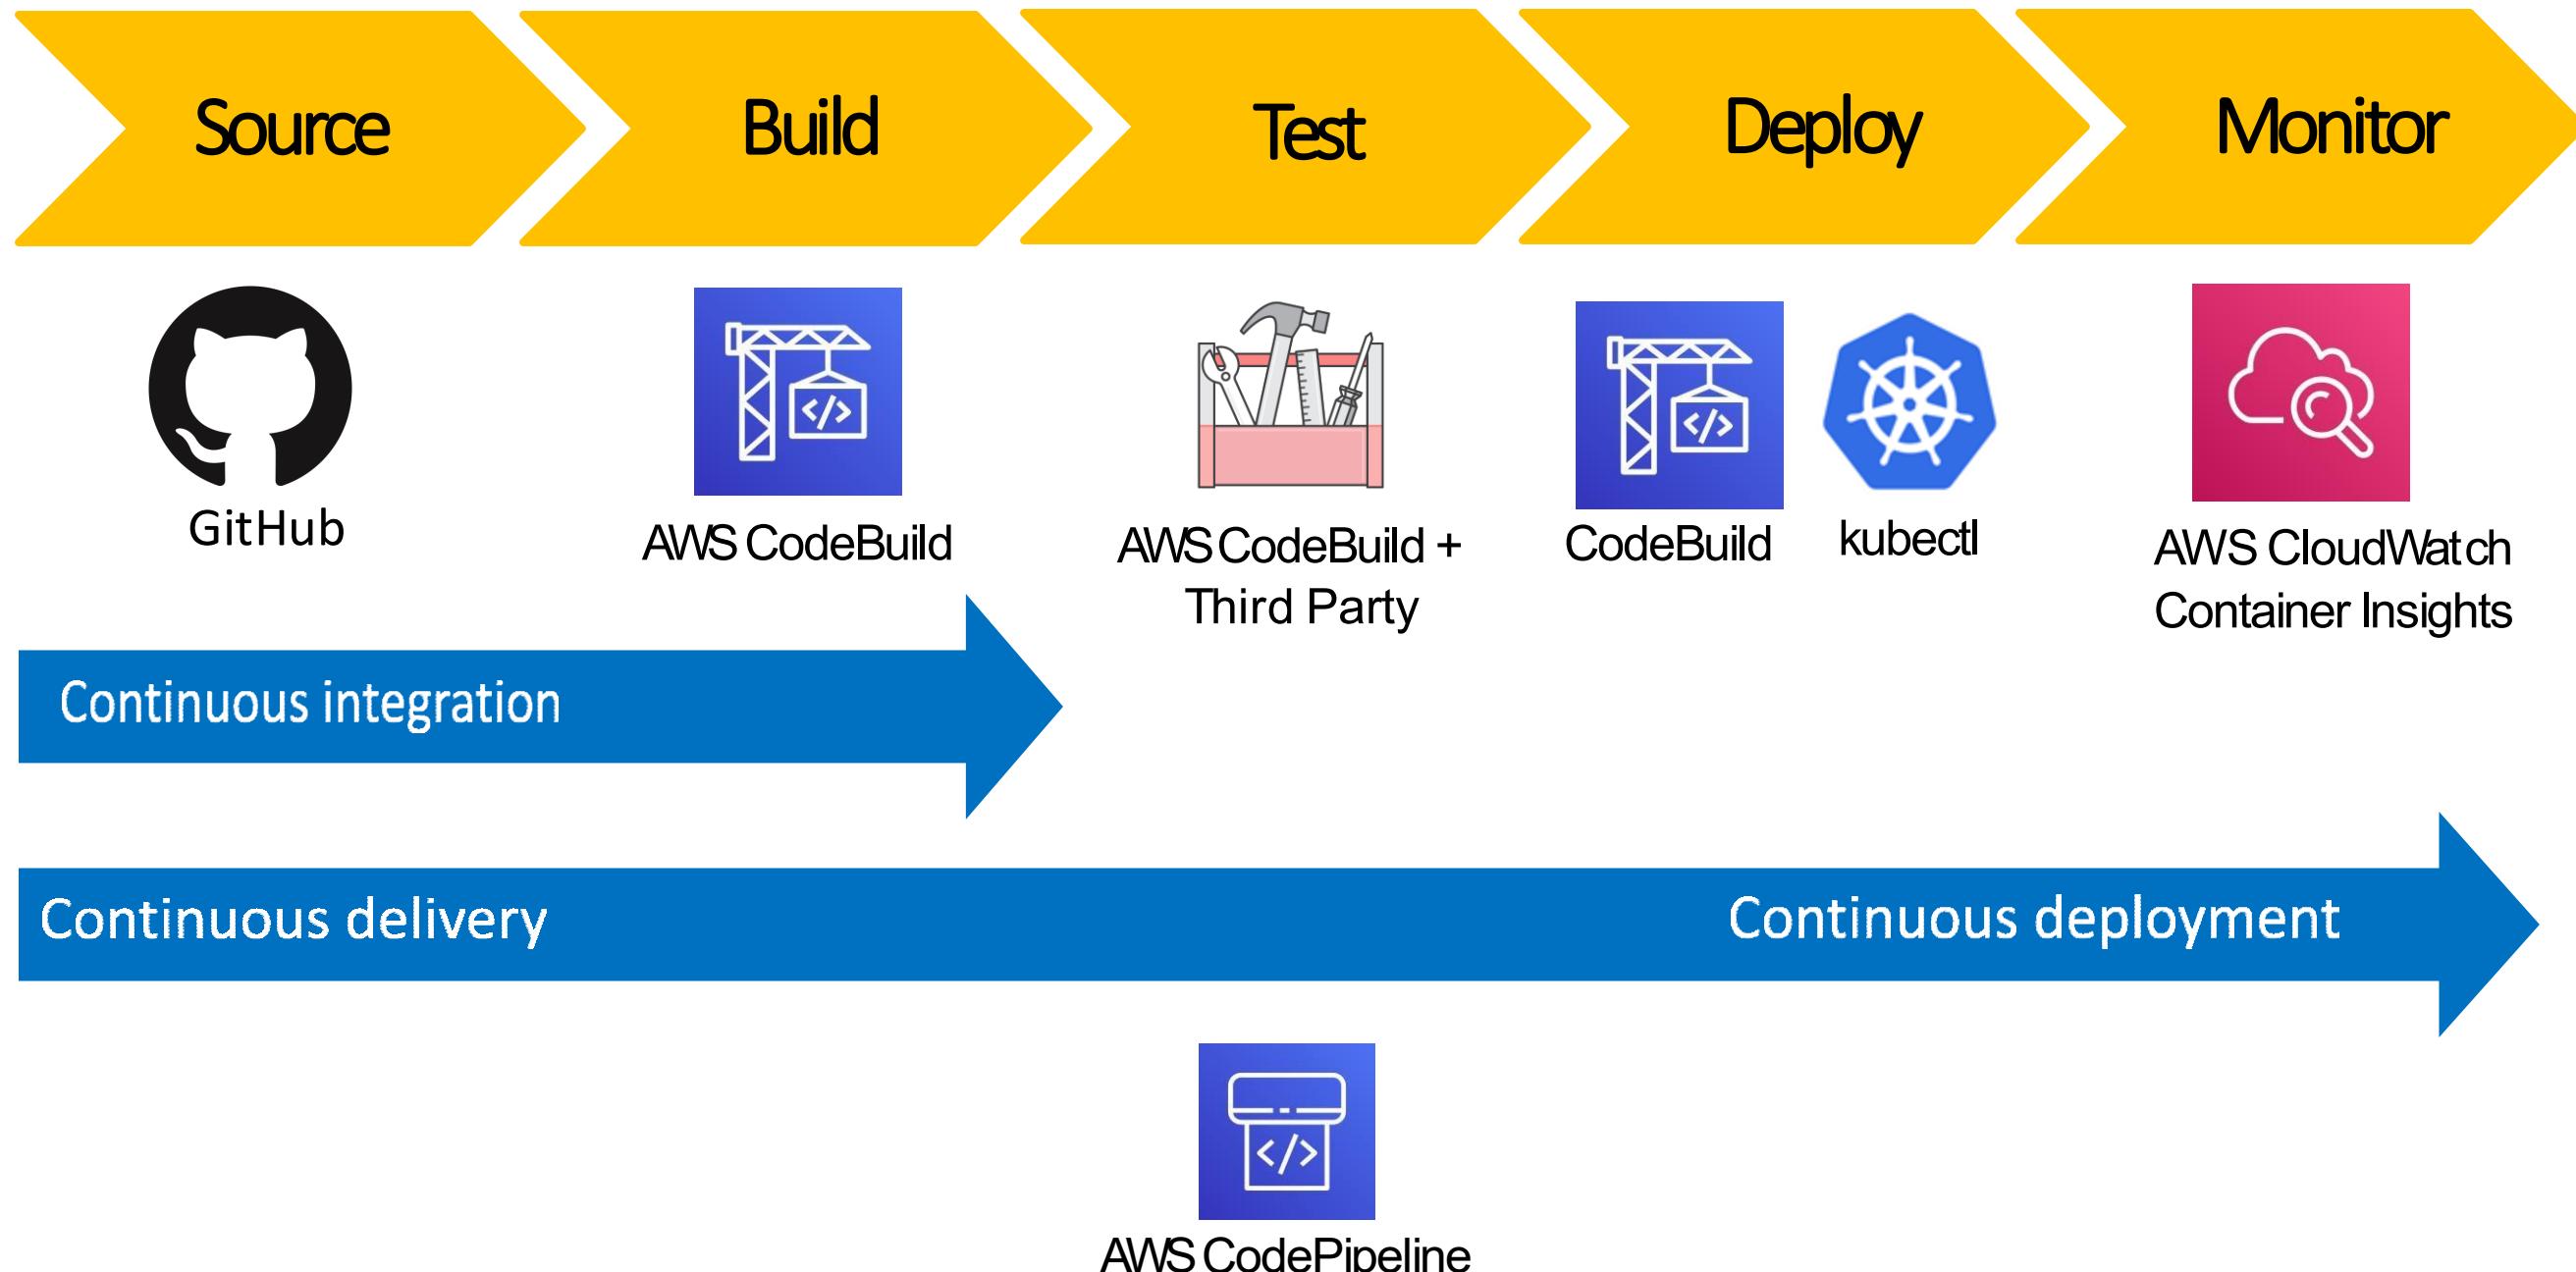


What are we going to Build?

Source

Build

Test

Production

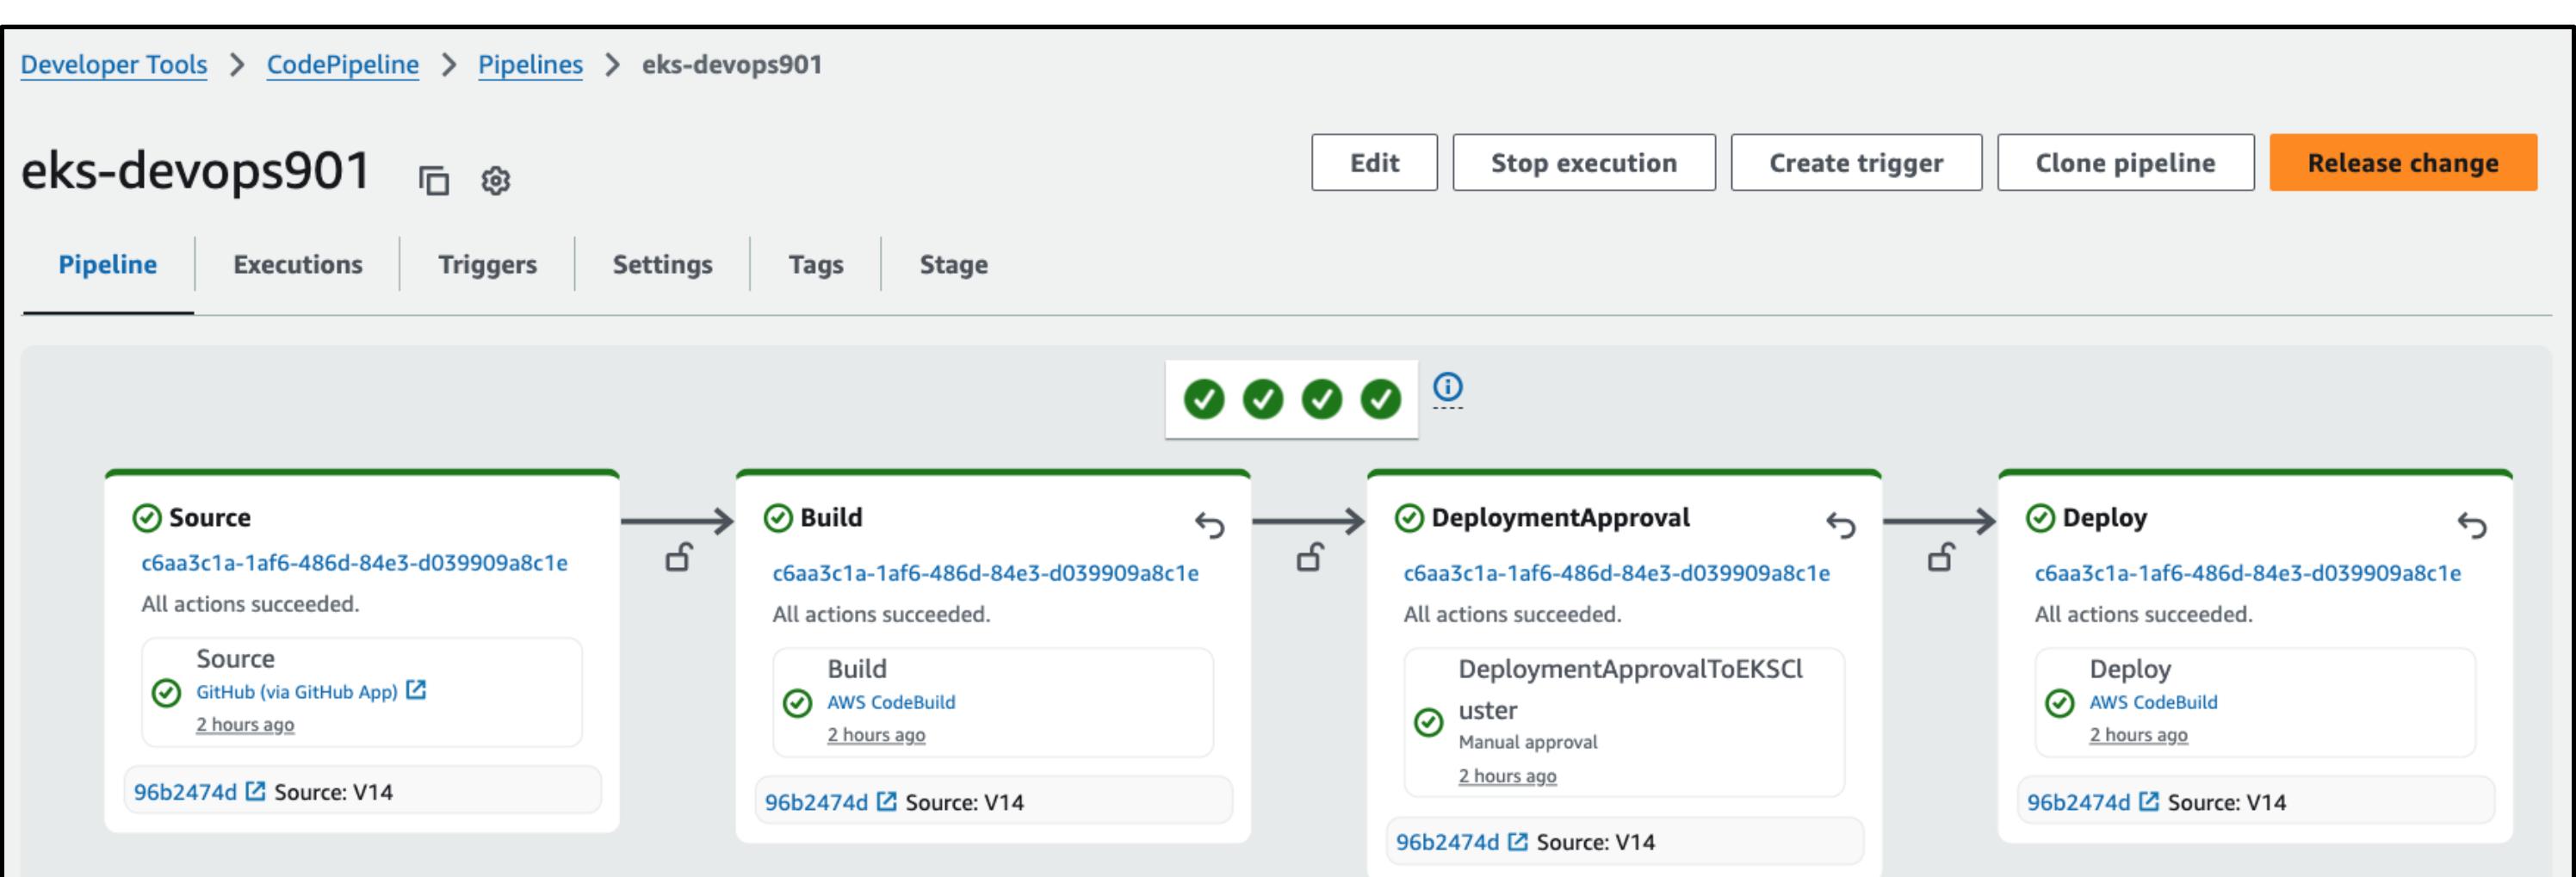


GitHub




GitHub - Introduction

- GitHub - **Version Control Service (Hosted by Microsoft)**
- **Global Platform** to host, manage, and collaborate on source code using Git.
- **Public and private** repositories for version-controlled content: code, documents, binaries.
- **Highly secure & scalable**, trusted by open-source communities and enterprises.
- **Fully supports Git** and its ecosystem (GitHub supports Git versions 2.x+).
- Authentication via:
 - **SSH Keys**
 - **Personal Access Tokens (PATs)**
 - **OAuth / SSO / SAML** (for organizations)

GitHub - Steps

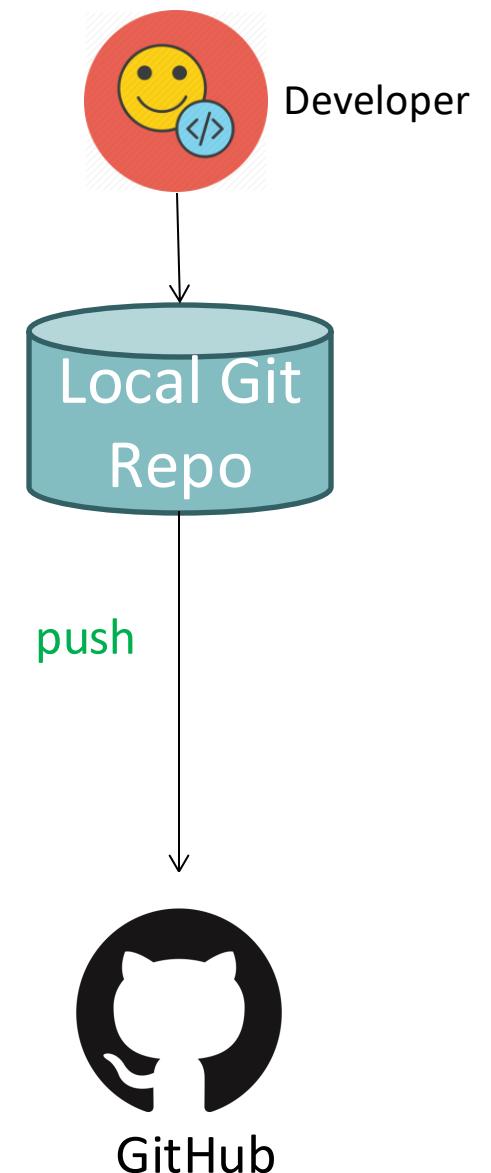


AWS CodeBuild

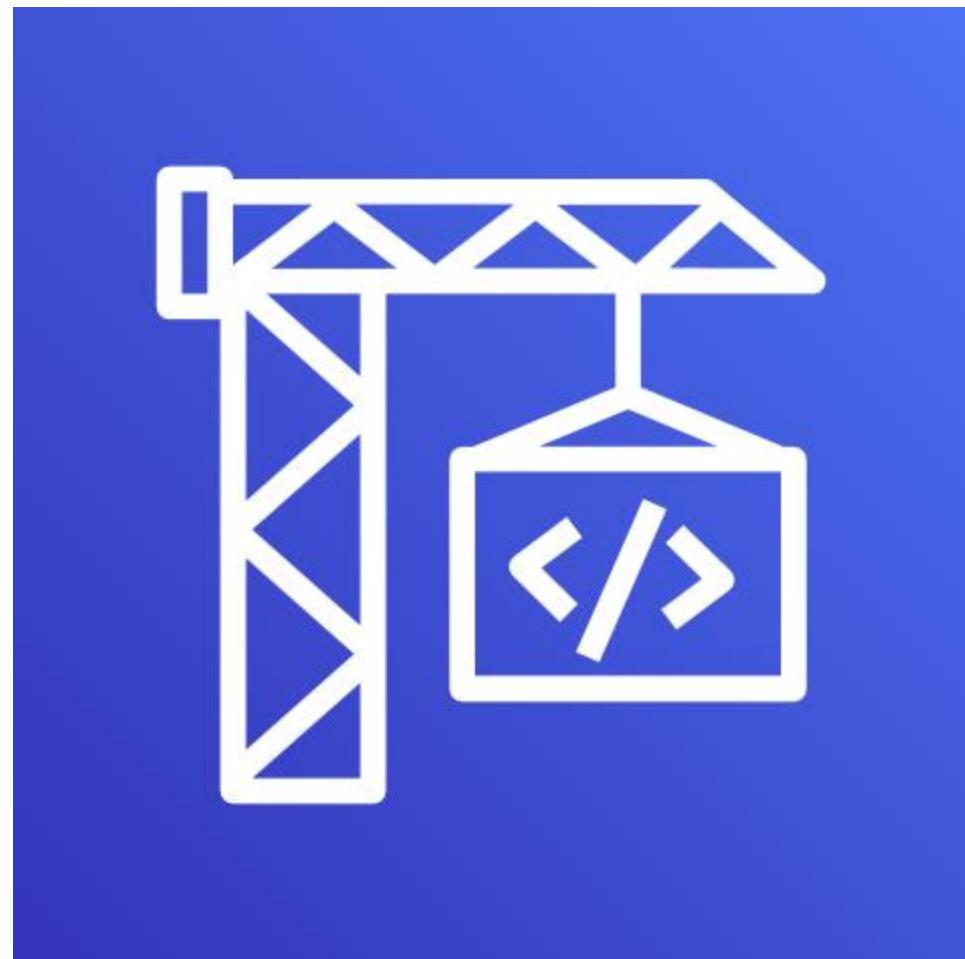


CodeBuild - Introduction

- CodeBuild is a **fully managed** build service in the cloud.
- Compiles our **source code**, runs **unit tests**, and produces **artifacts** that are ready to deploy.
- Eliminates the need to provision, manage, and scale **our own build servers**.
- It provides **prepackaged build environments** for the most popular programming languages and build tools such as Apache Maven, Gradle, and many more.
- We can also customize build environments in CodeBuild to use **our own build tools**.
- **Scales automatically** to meet peak build requests.

How to run CodeBuild?

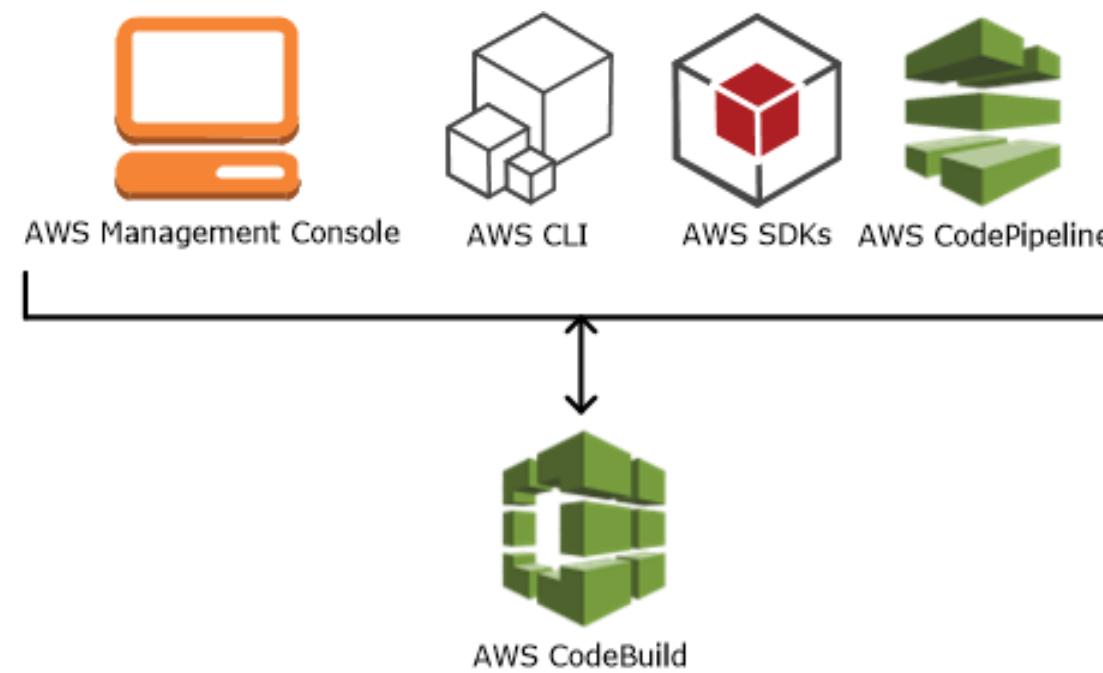


How CodeBuild works?

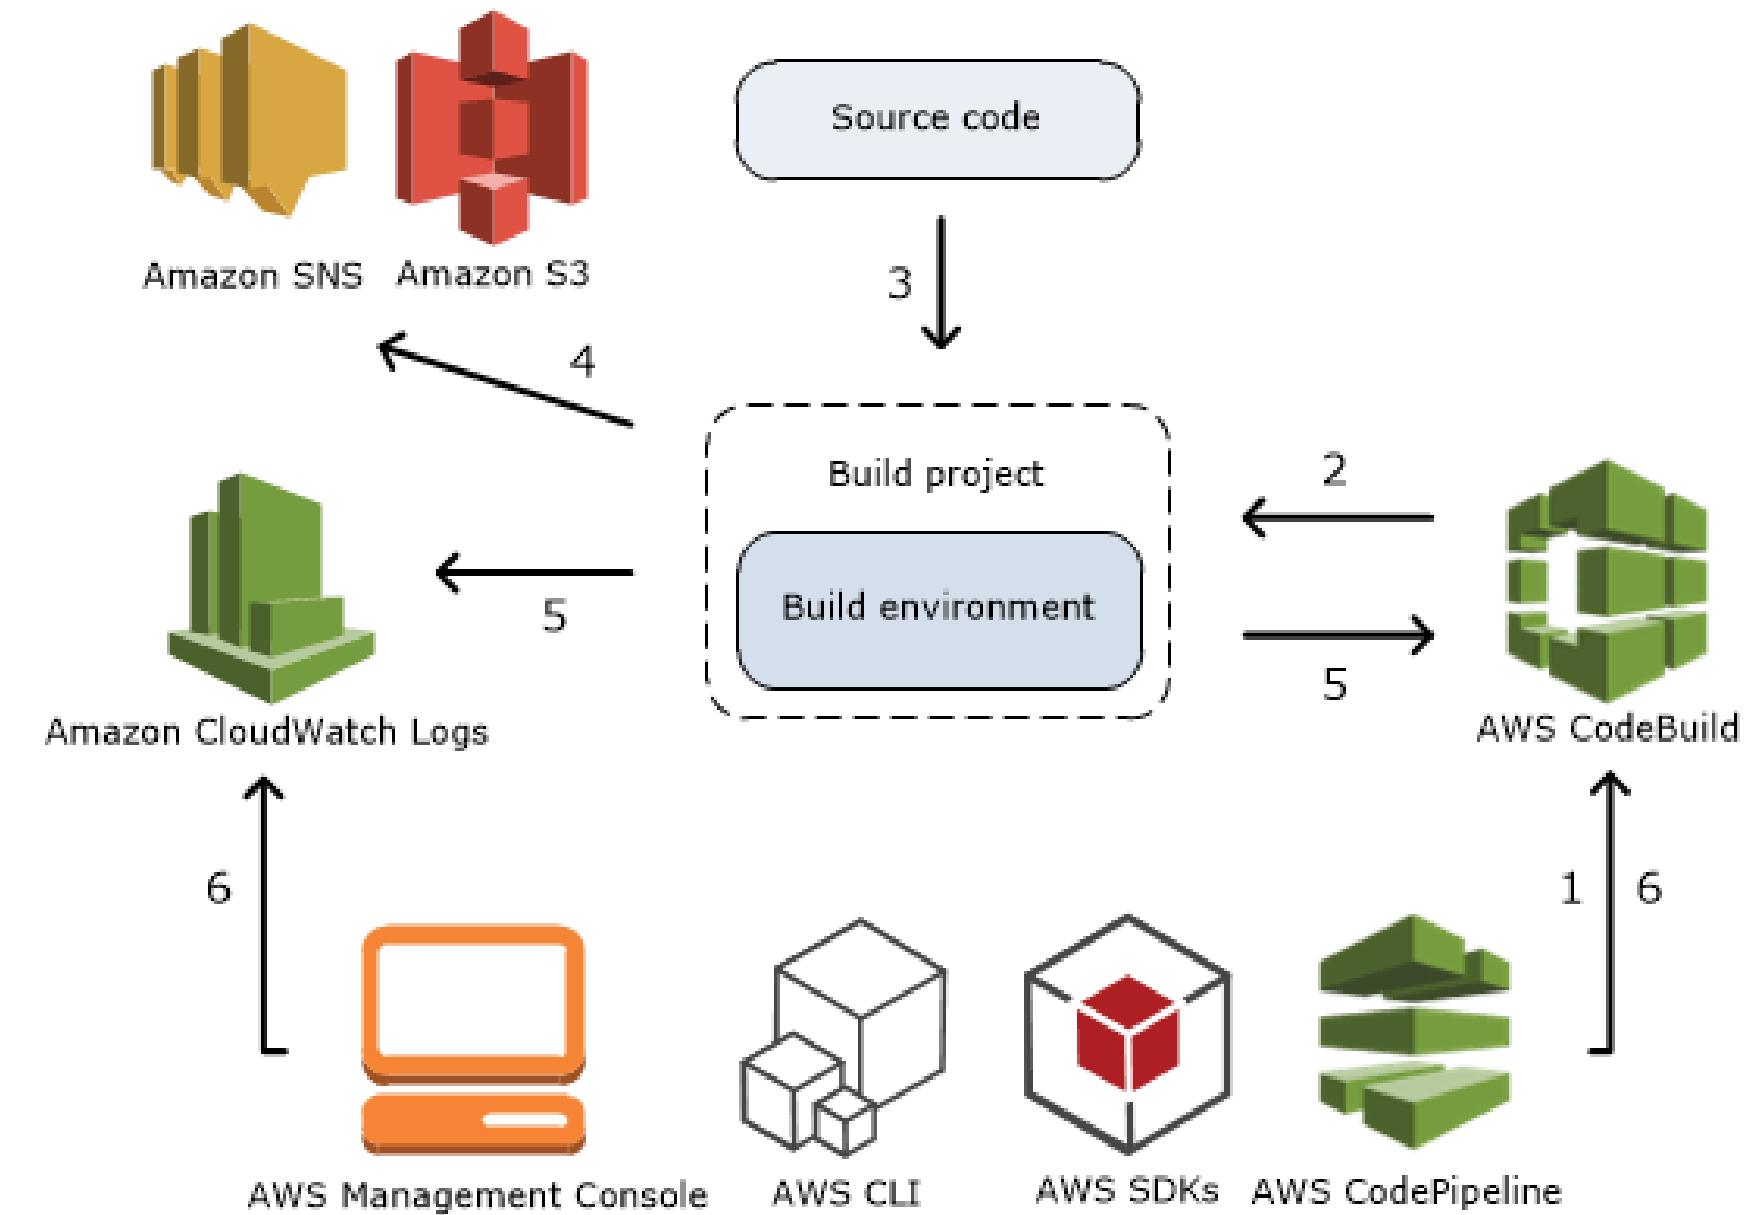

Source

AWS CodeCommit



Amazon Simple Storage Service (S3)



GitHub



GitHub Enterprise



Bitbucket



AWS Managed Image




Amazon EC2 Container Registry



External Container Registry (Docker Hub)

Build Environment




AWS CodeBuild



Build Artifacts



Amazon CloudWatch

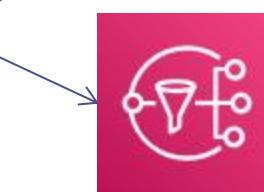


Amazon Simple Notification Service


Build Notifications

AWS CodeBuild Architecture

CodeBuild - Steps

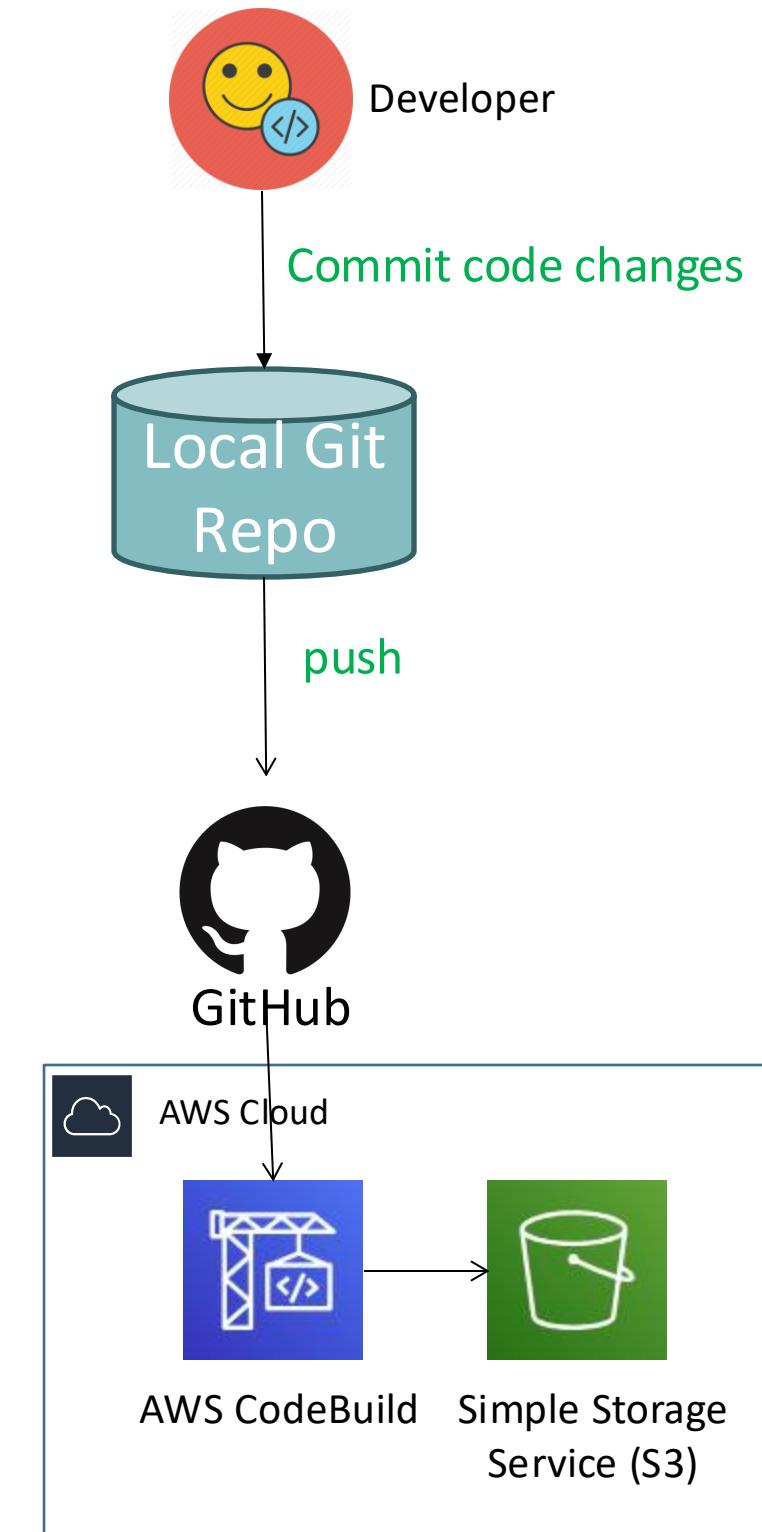


AWS CodePipeline

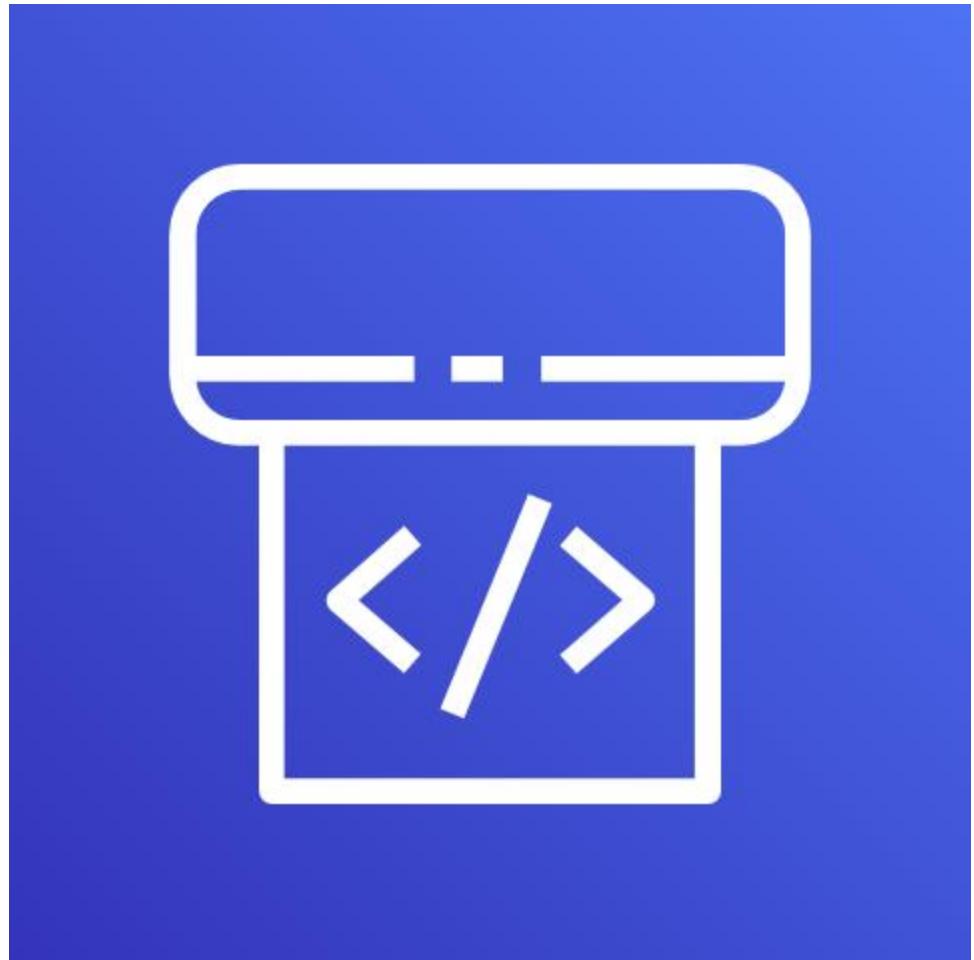

CodePipeline - Introduction

- AWS CodePipeline is a **continuous delivery service to model, visualize, and automate** the steps required to release your software.
- Benefits
 - We can **automate** our release processes.
 - We can establish a **consistent** release process.
 - We can **speed** up delivery while improving quality.
 - Supports **external tools** integration for source, build and deploy.
 - View **progress** at a glance
 - View pipeline **history details**.

AWS CodePipeline Architecture

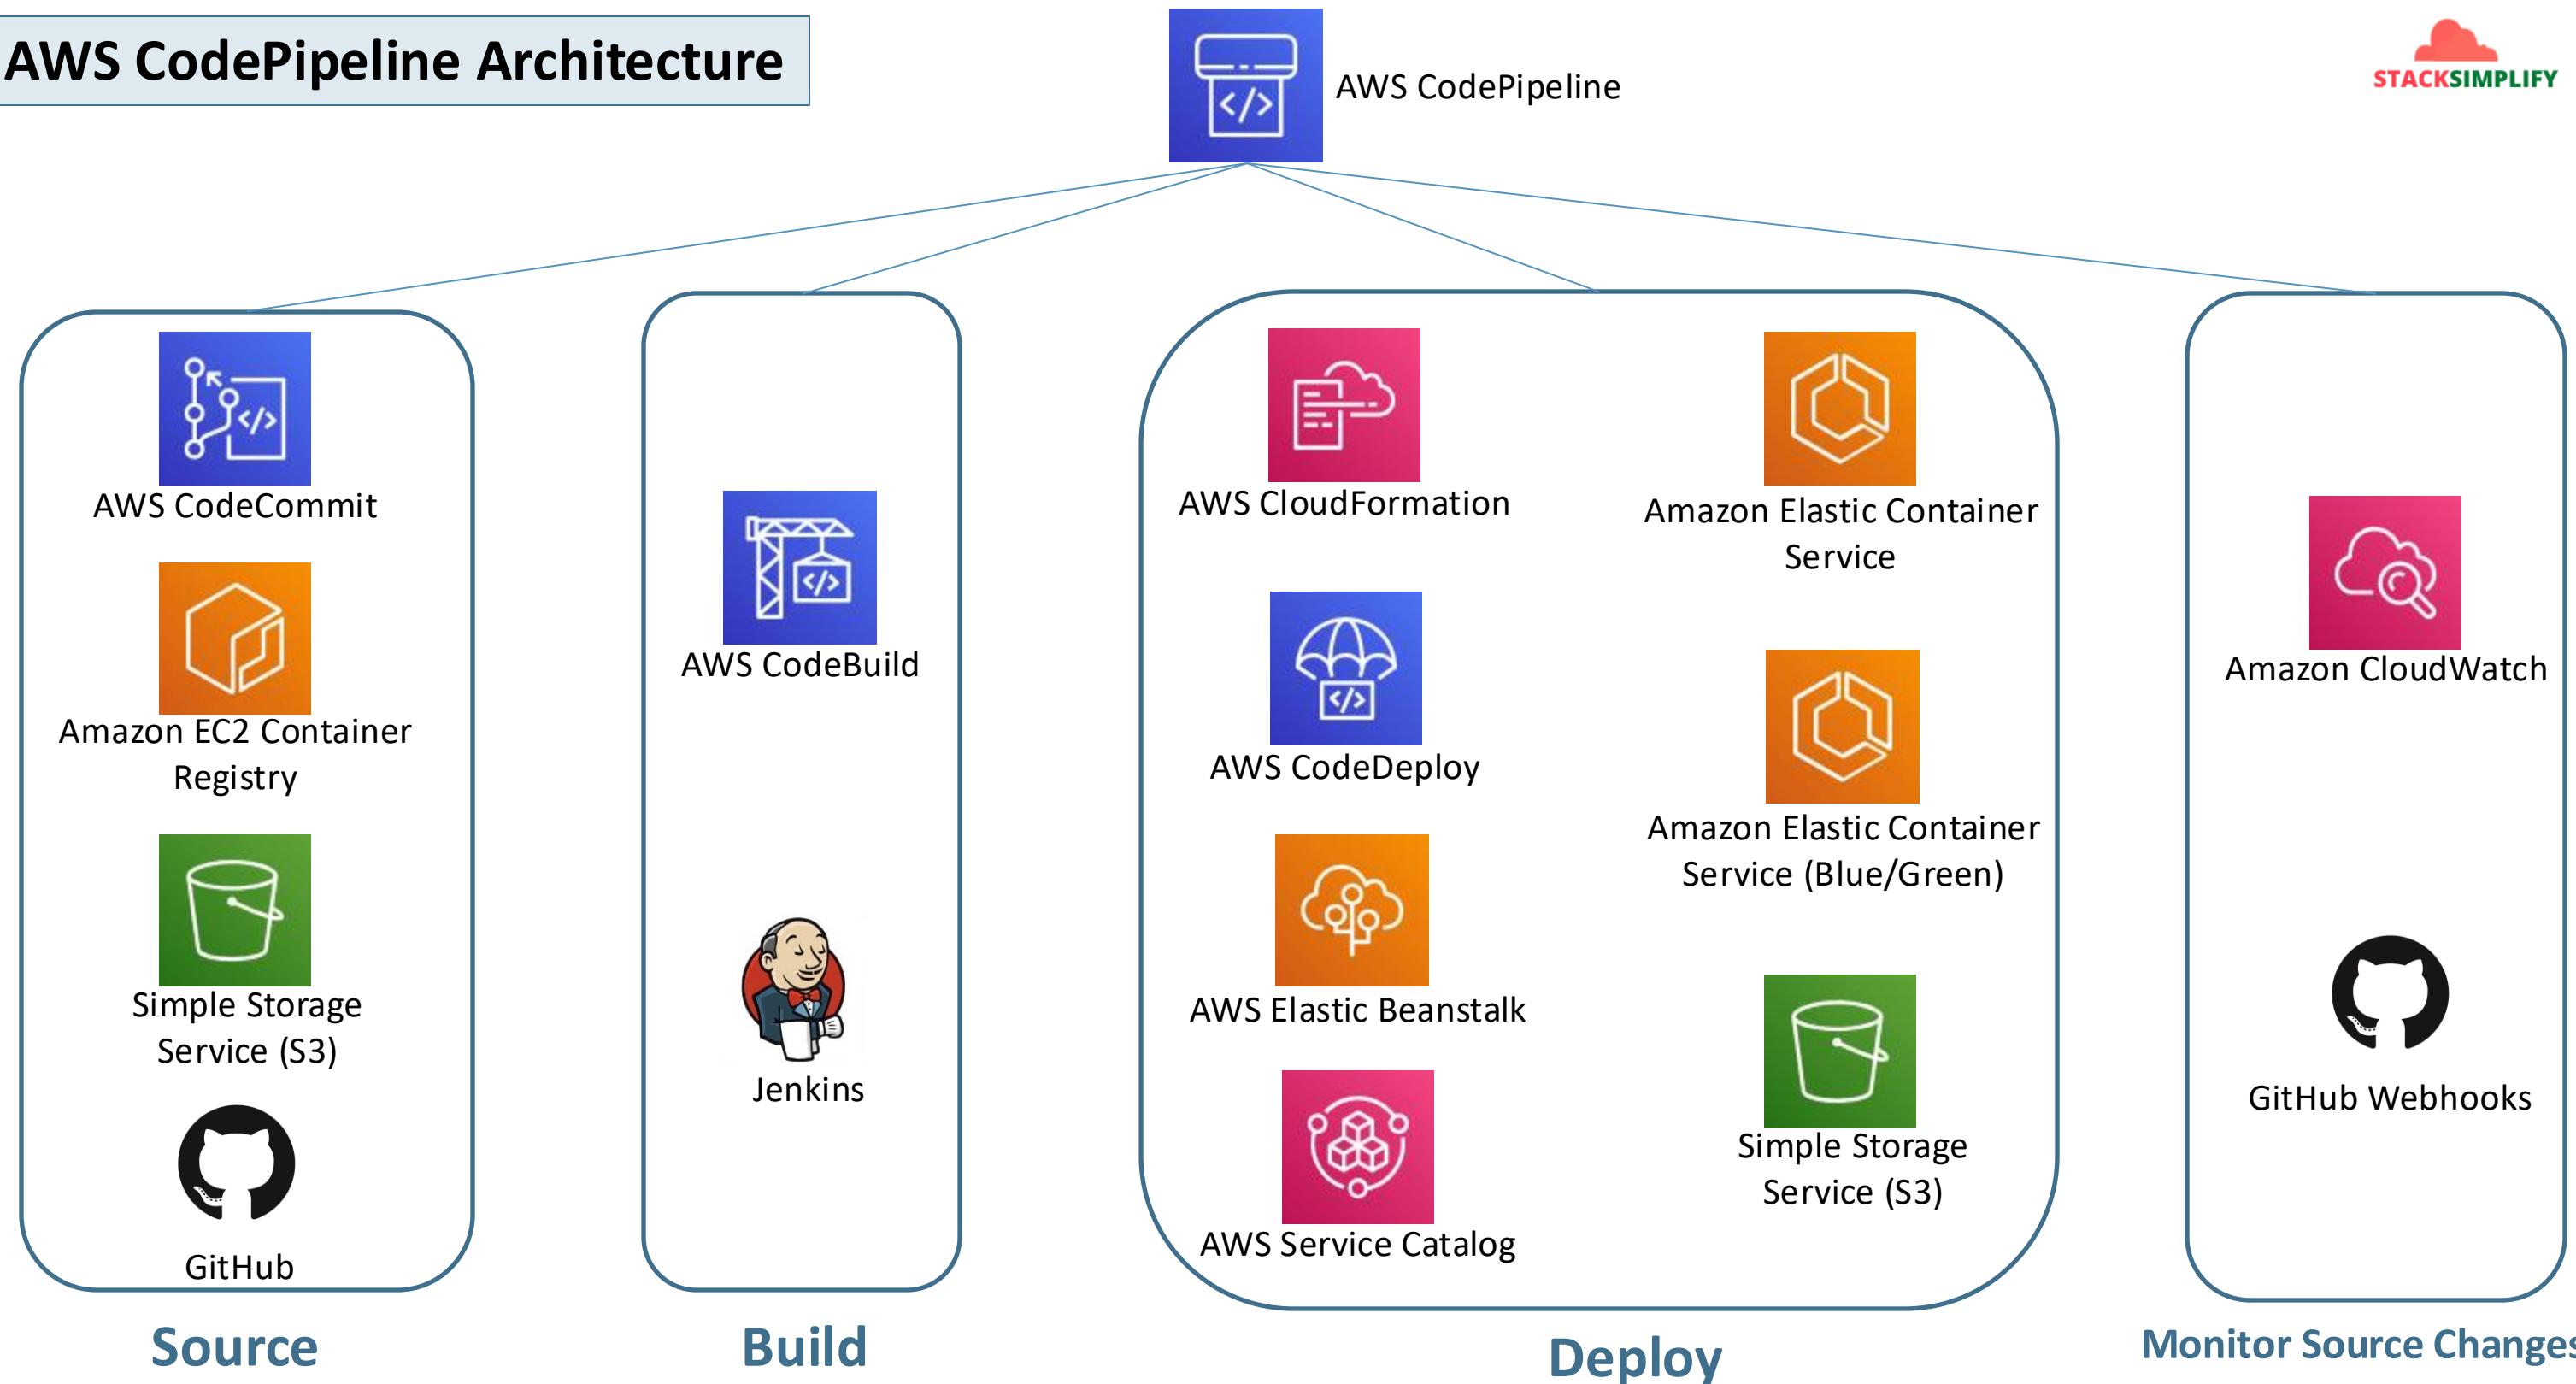


Source


Build

Deploy

Monitor Source Changes

Continuous Delivery

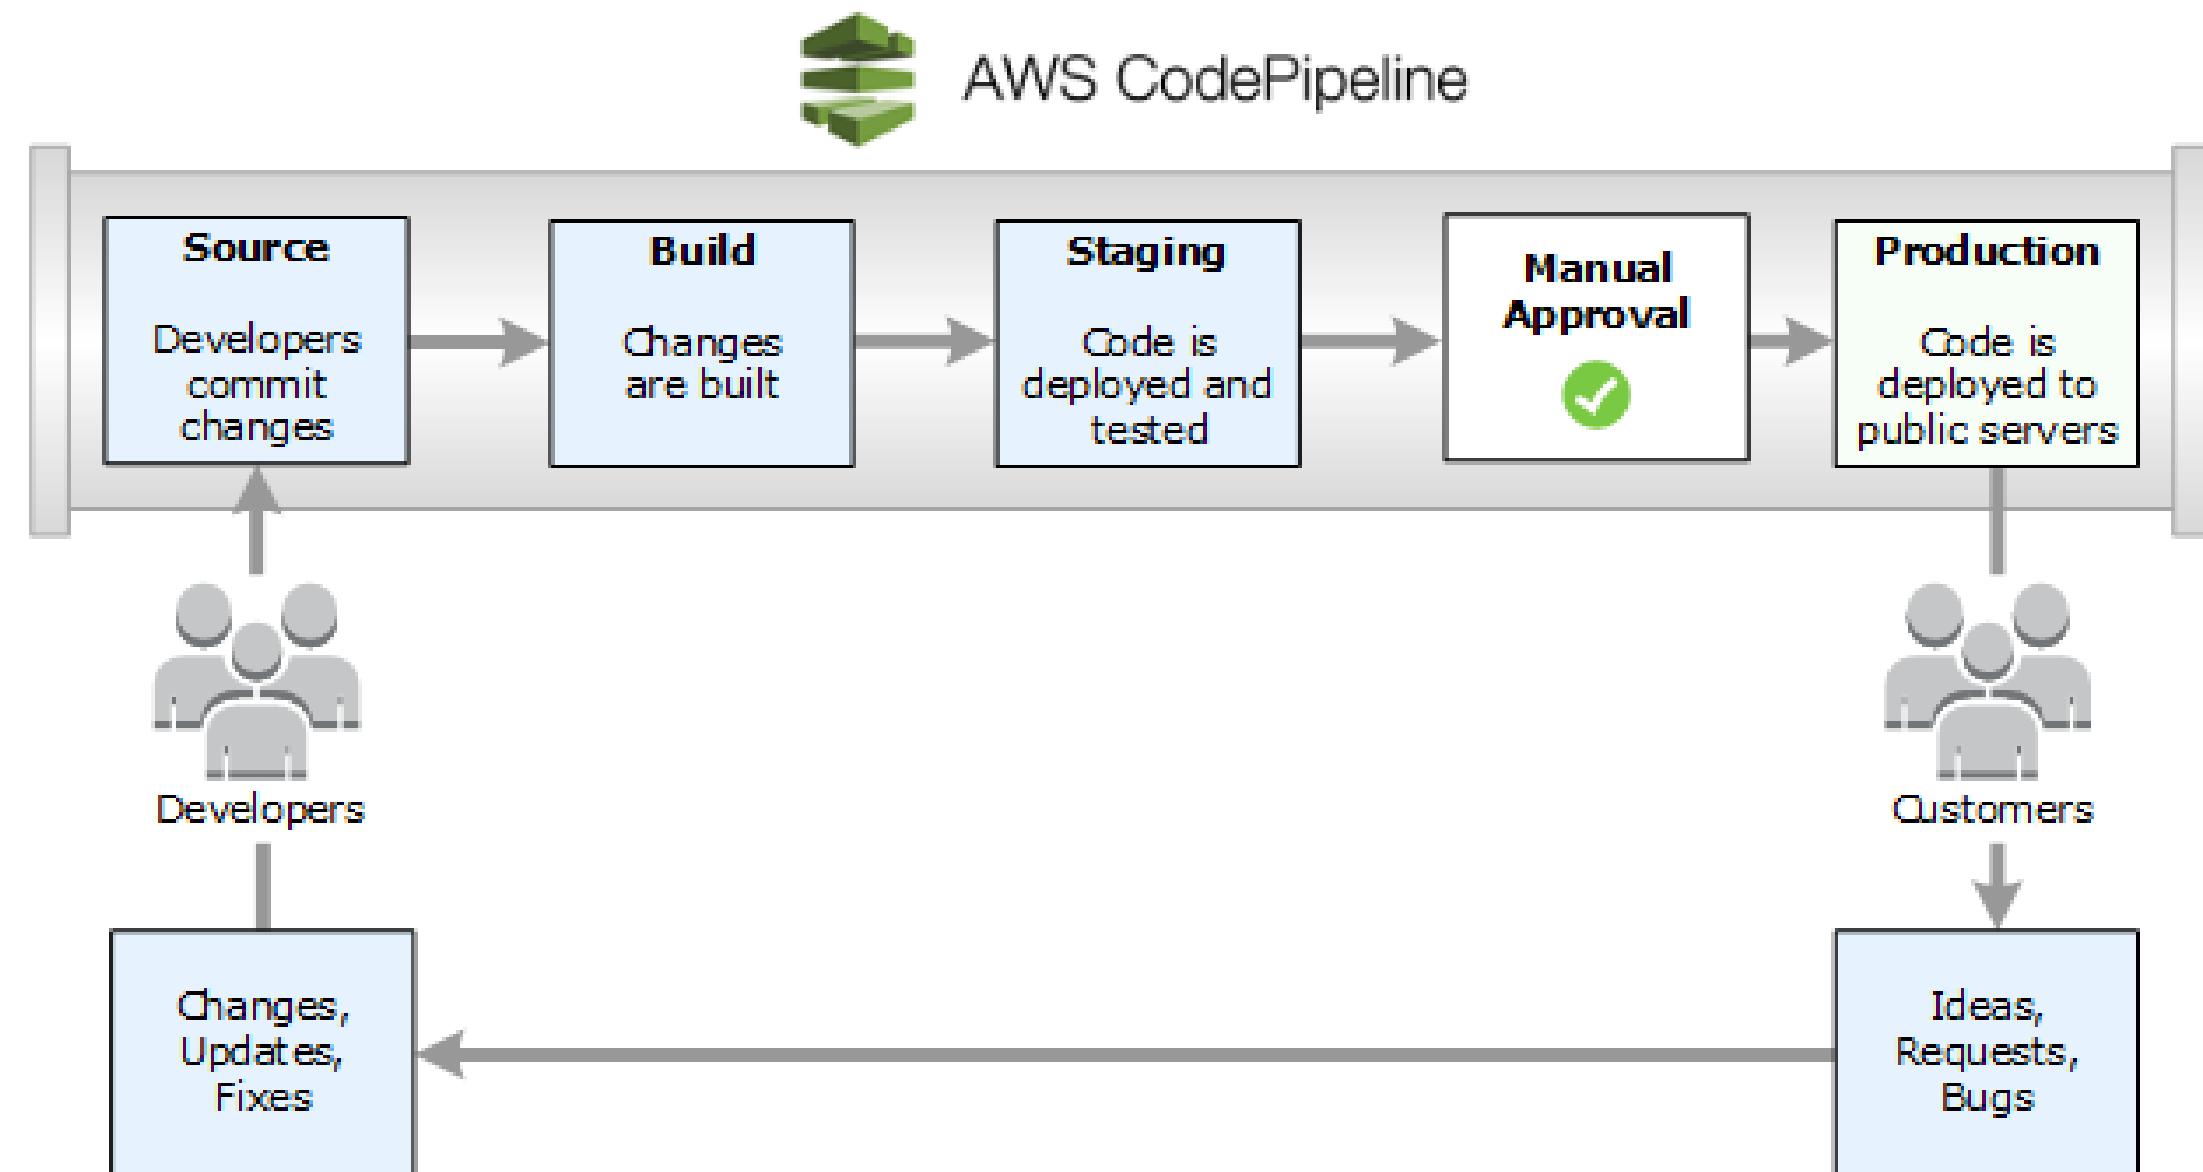

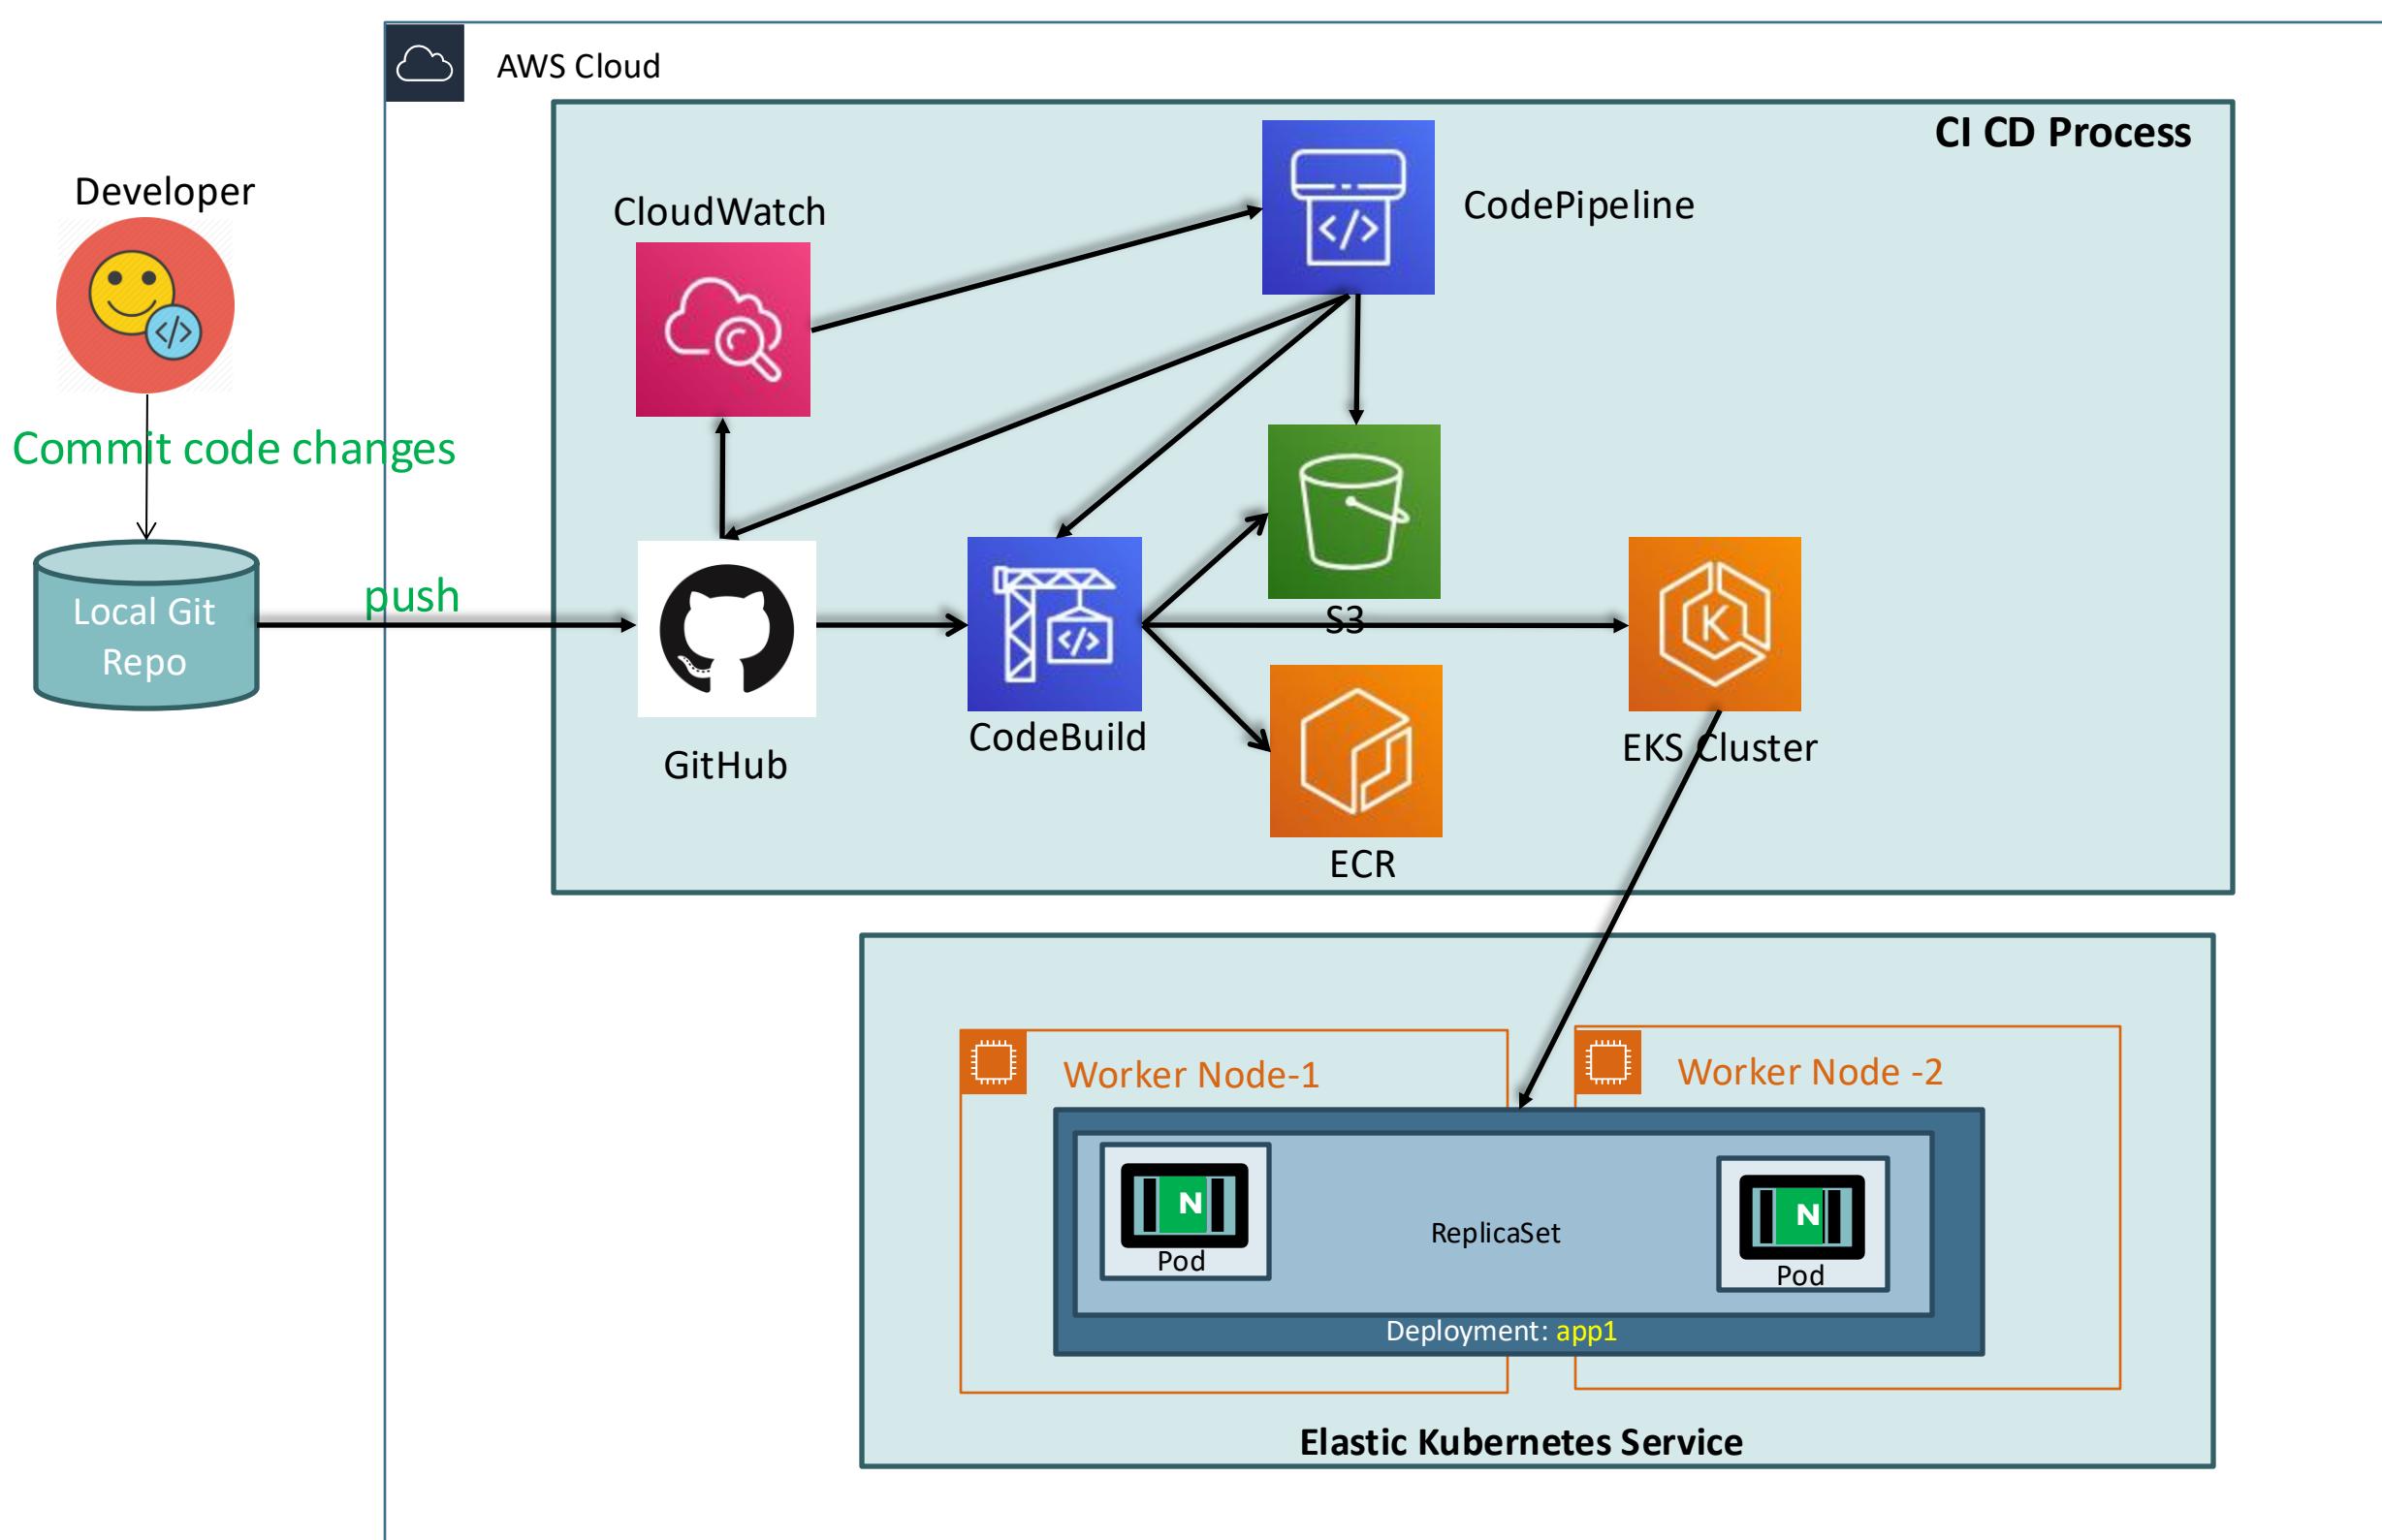





Elastic Load
Balancing



Classic
Load Balancer

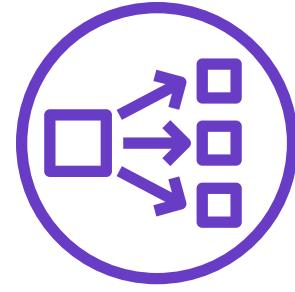

Network
Load Balancer

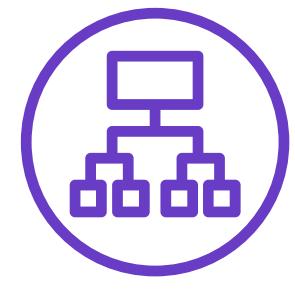


Application
Load Balancer



Certificate
Manager



Route53

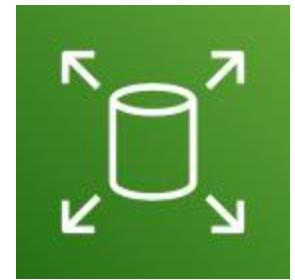

Elastic Block
Store



Amazon RDS



AWS EKS


What are Microservices?



Fargate



Elastic Container
Registry

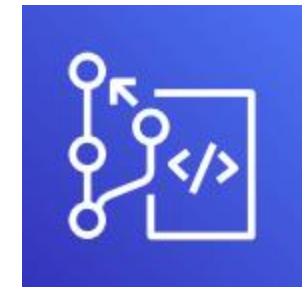

Code
Commit



Code
Build



Code
Pipeline



Simple Email
Service

What are Microservices?


- **Microservices** - also known as the **microservice architecture** - is an architectural style that structures an application as a **collection of services** that are
 - Highly maintainable and testable
 - Loosely coupled
 - Independently deployable
 - Organized around business capabilities
 - Owned by a small team

Microservices - Benefits


- **Developer independence:** Small teams work in parallel and can iterate faster than large teams.
- **Isolation and resilience:** If a component dies, you spin up another while the rest of the application continues to function.
- **Scalability:** Smaller components take up fewer resources and can be scaled to meet increasing demand of that component only.
- **Lifecycle automation:** Individual components are easier to fit into continuous delivery pipelines and complex deployment scenarios not possible with monoliths.
- **Relationship to the business:** Microservice architectures are split along business domain boundaries, increasing independence and understanding across the organization.




Elastic Load
Balancing

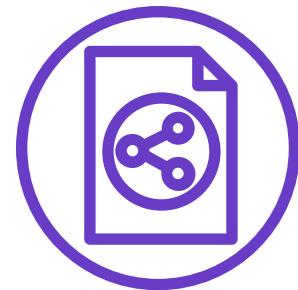


Classic
Load Balancer

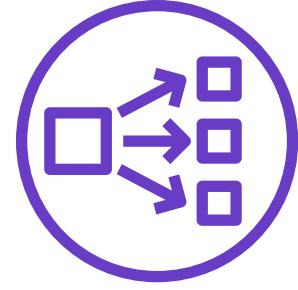

Network
Load Balancer

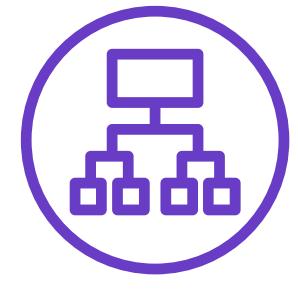

Application
Load Balancer

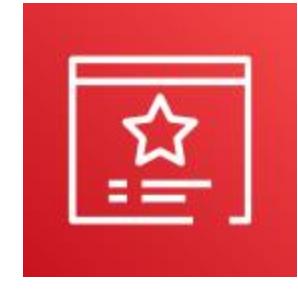

Certificate
Manager



Route53



Elastic Block
Store



Amazon RDS



AWS EKS


Microservices Deployment



Fargate
Profiles



Elastic Container
Registry

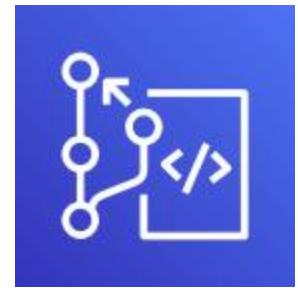

Code
Commit



Code
Build




Code
Pipeline






Simple Email
Service

Microservices

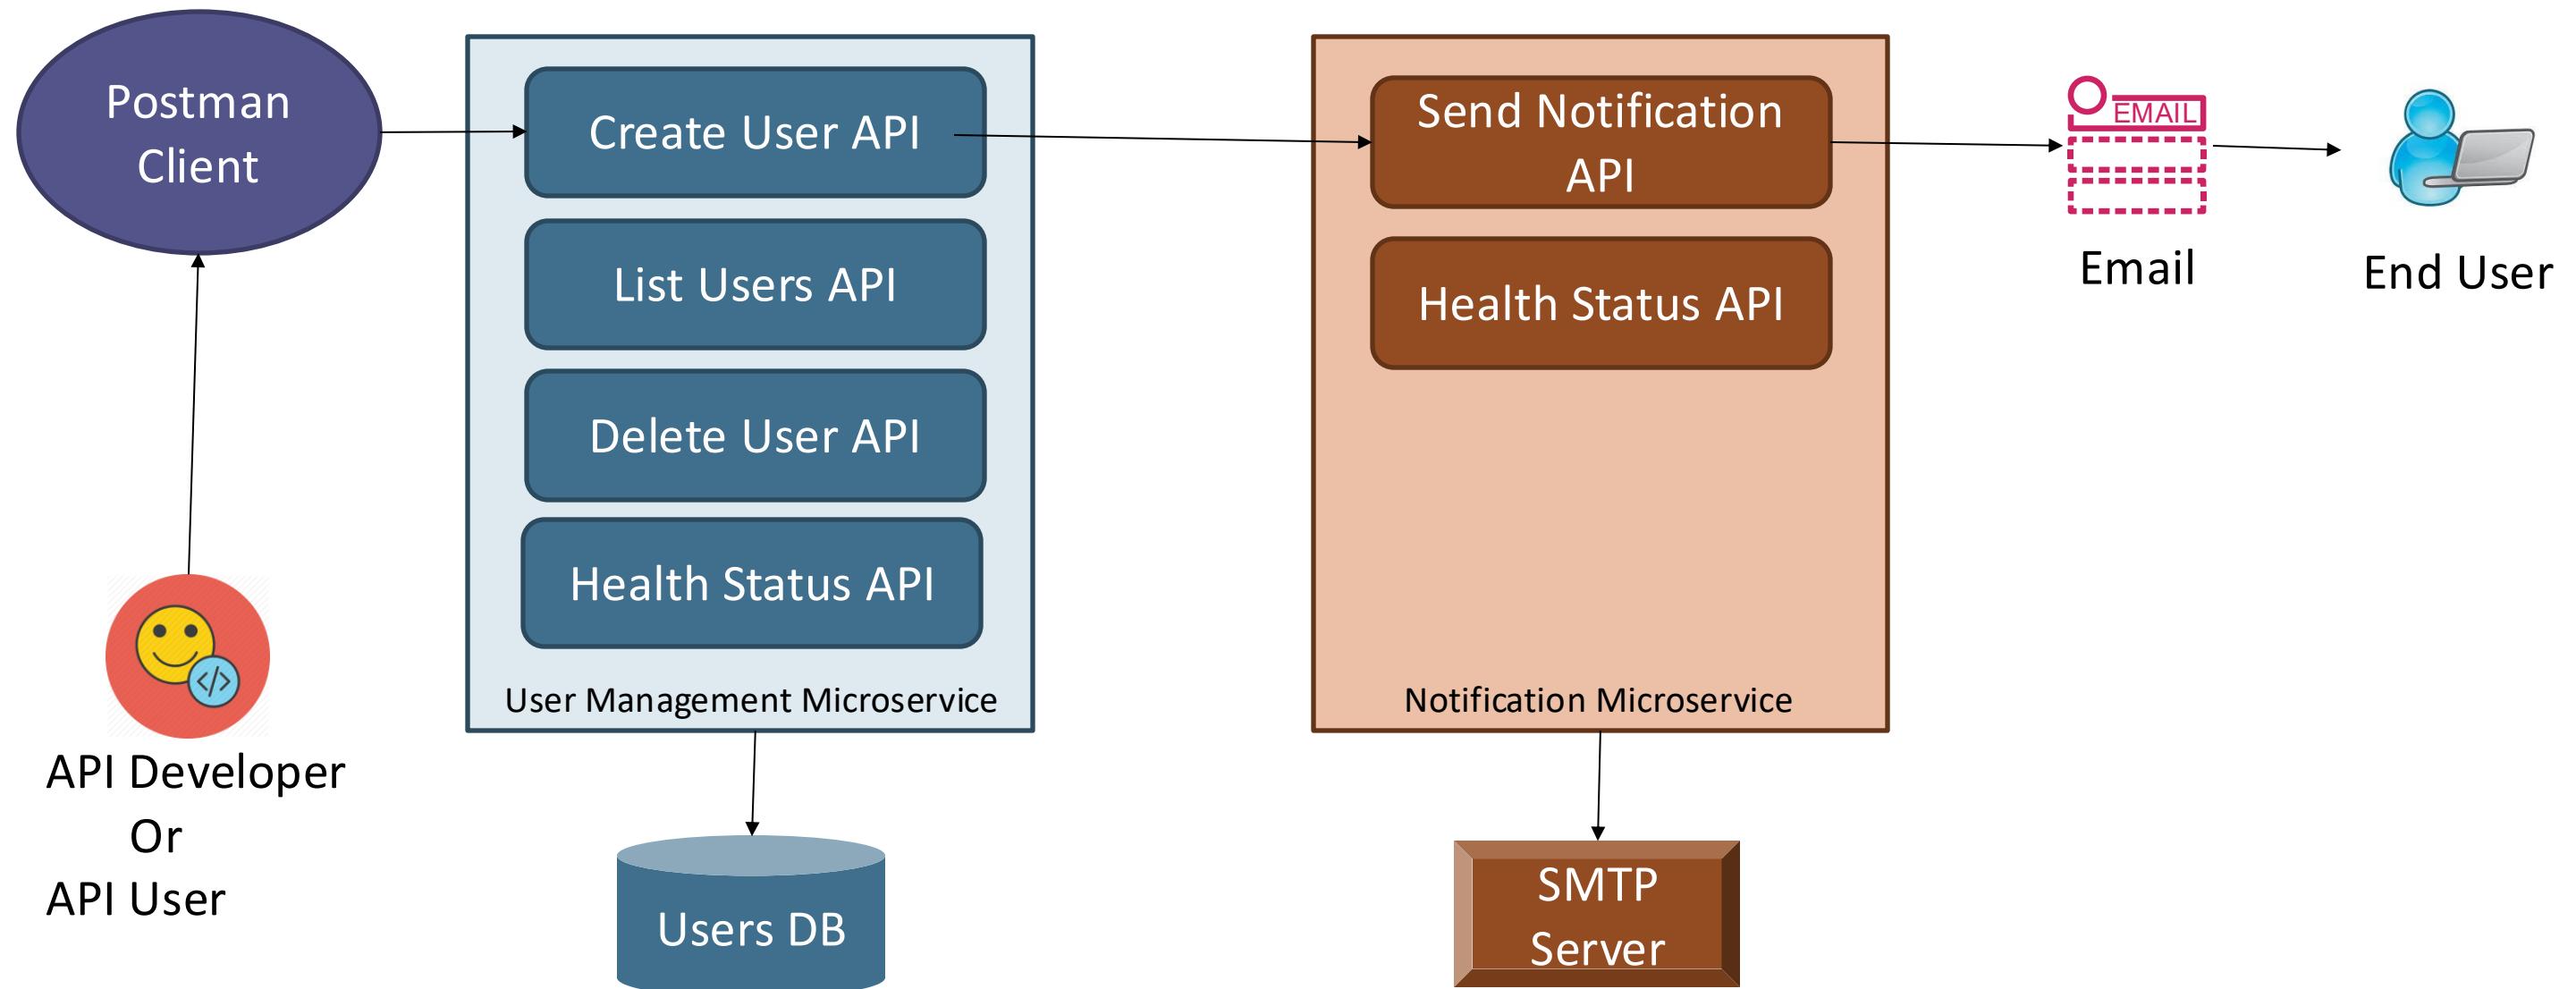

Microservices Deployment on AWS EKS

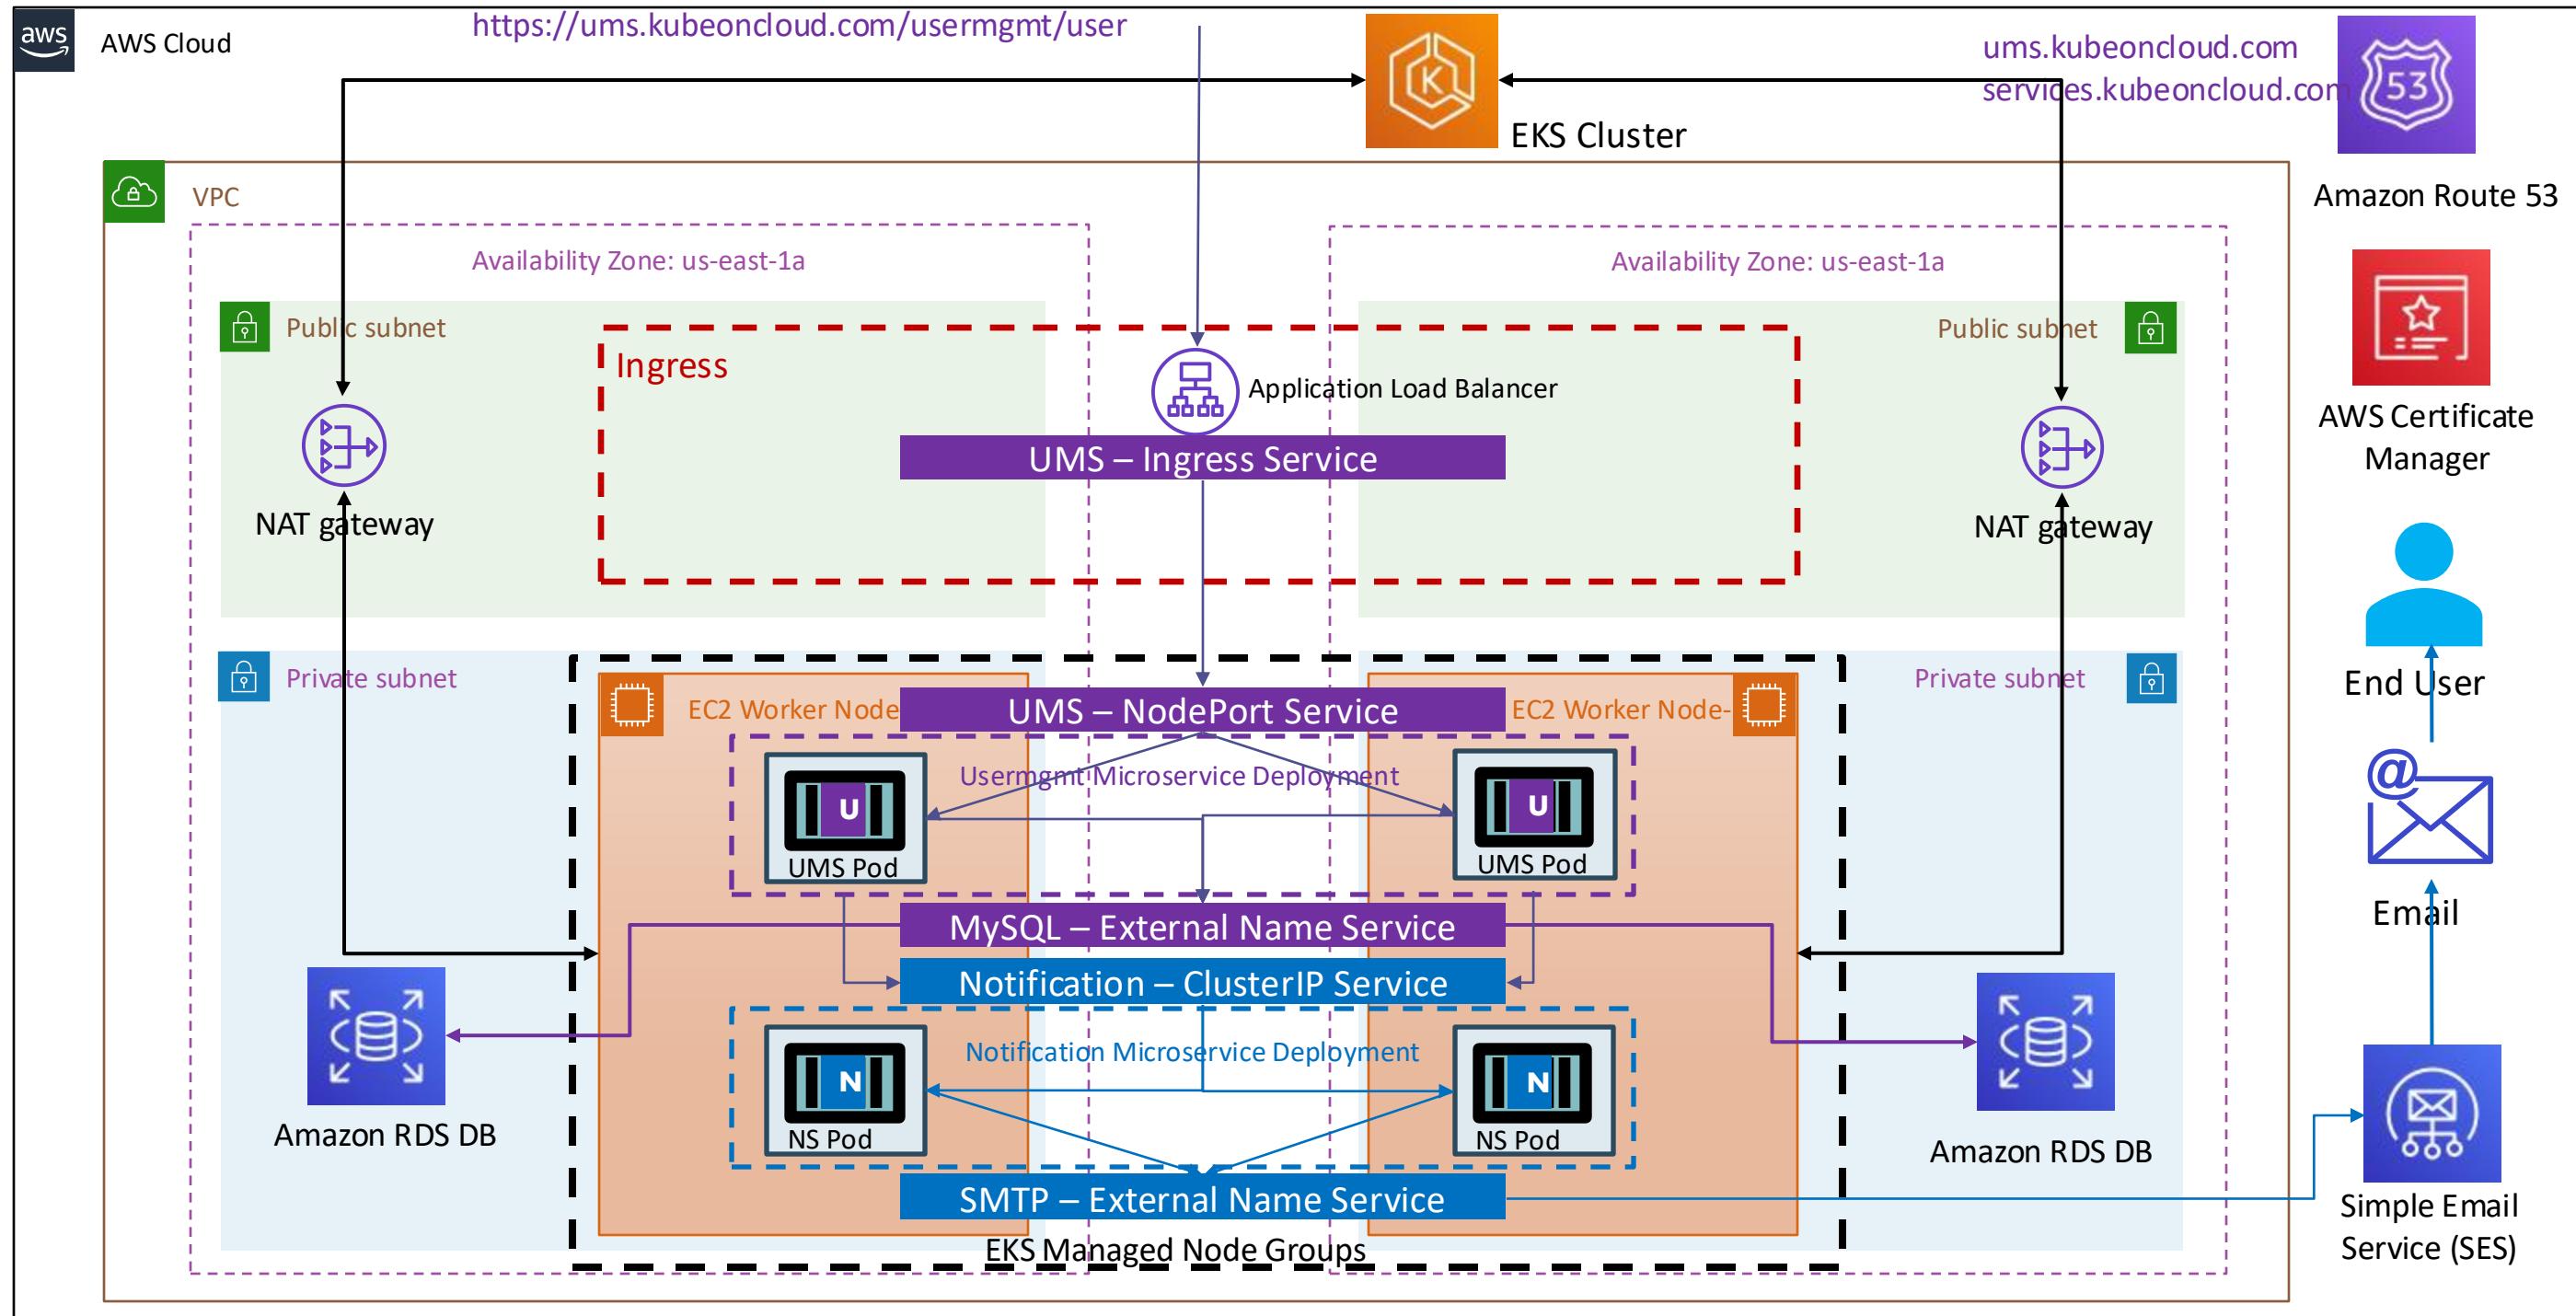

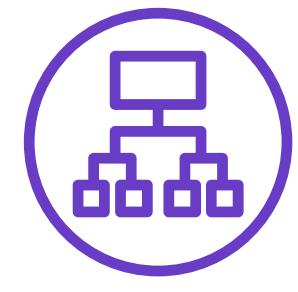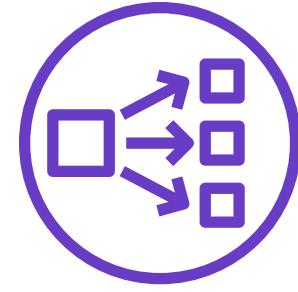

Elastic Load
Balancing

Classic
Load Balancer

Network
Load Balancer

Application
Load Balancer

Certificate
Manager

Route53


Elastic Block
Store

Amazon RDS



AWS EKS

Microservices Distributed Tracing

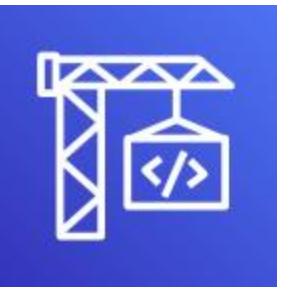

Fargate
Profiles

Elastic Container
Registry

Code
Commit

Code
Build

Code
Pipeline

Simple Email
Service

X-Ray

AWS X-Ray Introduction


- AWS X-Ray helps analyse and debug distributed applications built using microservices architecture.
- With X-Ray, we can understand how our application and its underlying services are performing to identify and troubleshoot the root cause of performance issues and errors.
- X-Ray provides an end-to-end view of requests as they travel through our application and shows a map of our application's underlying components.
- We can also use X-Ray to analyse applications in development and in production, from simple three-tier applications to complex microservices applications consisting of thousands of services.

AWS X-Ray - Benefits

- Review request behavior
- Discover application issues
- Improve application performance
- Ready to use with AWS
- Designed for a variety of applications

AWS X-Ray – How it works?


How it works

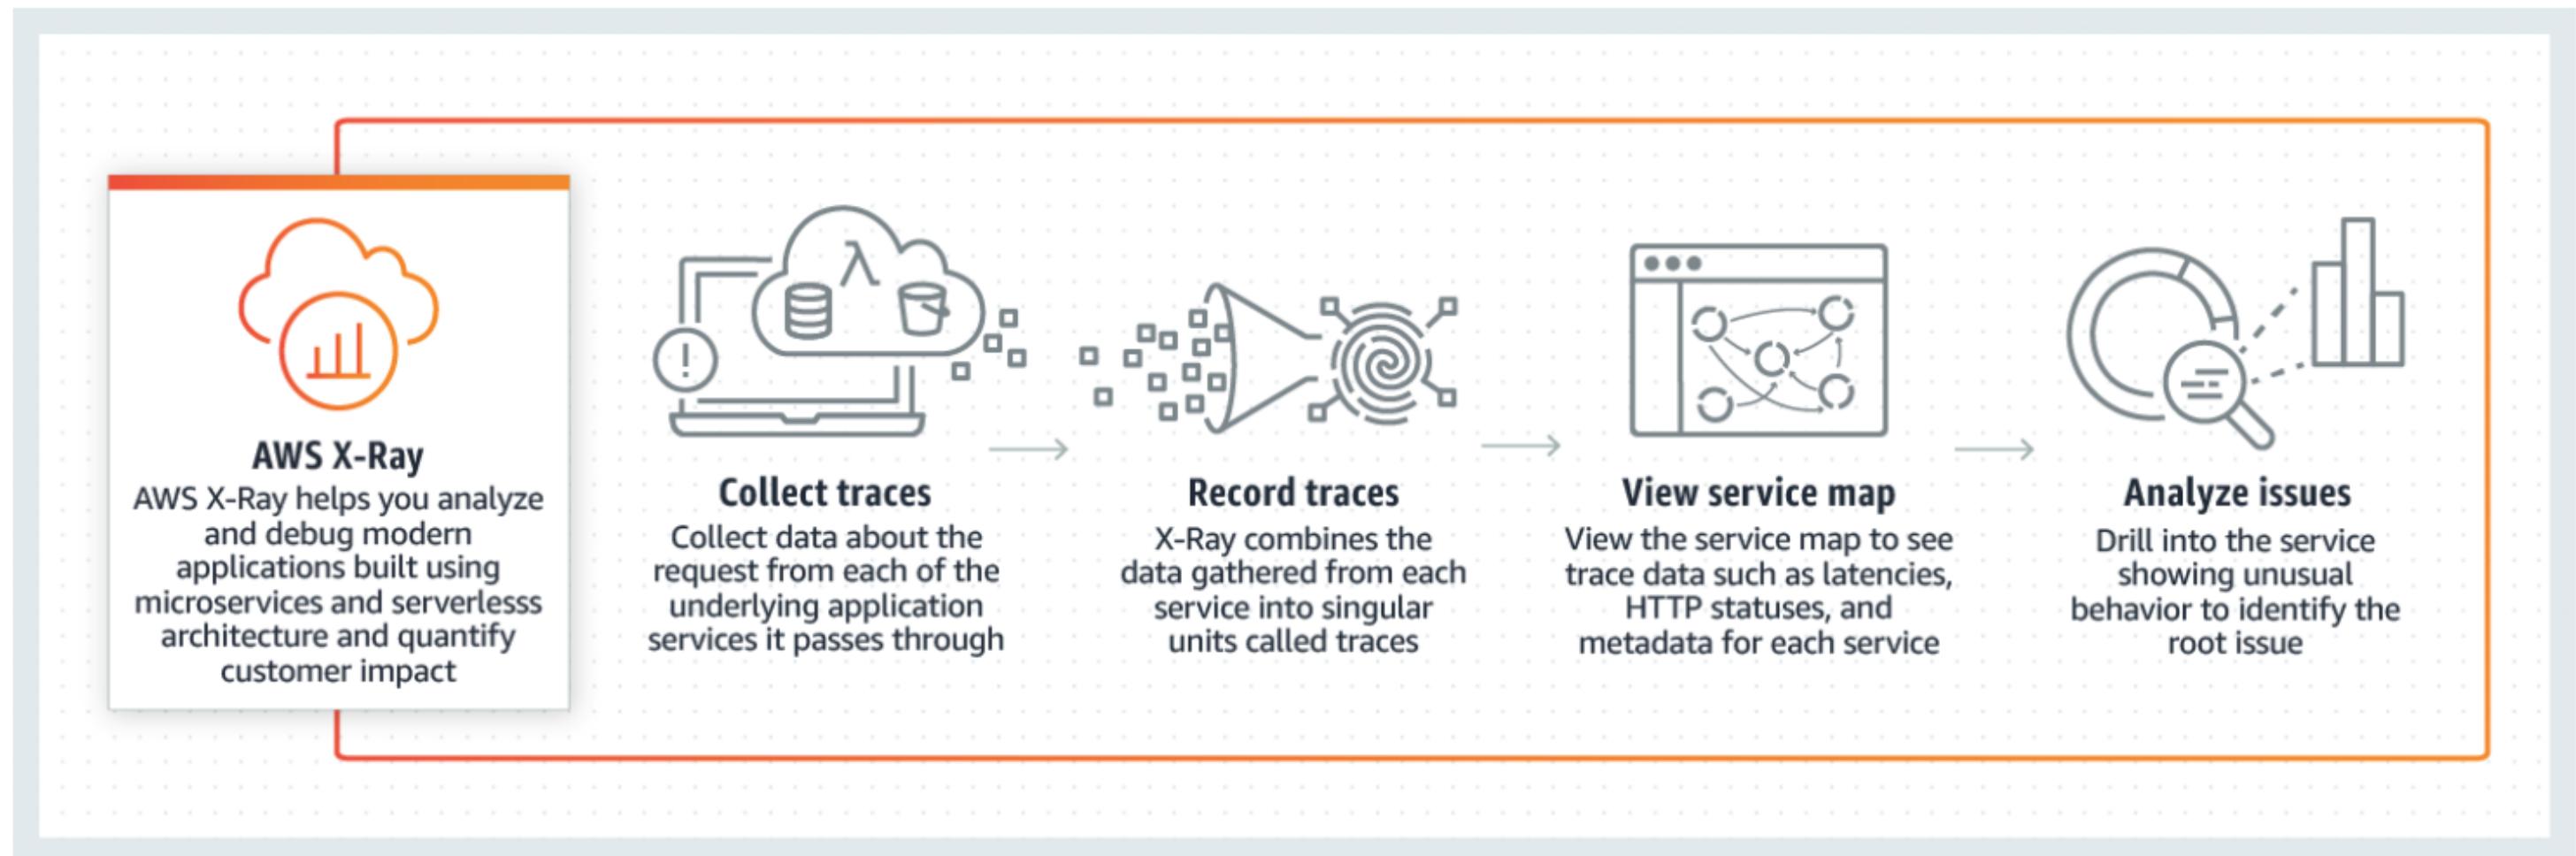

Kubernetes DaemonSets - Introduction

- A *DaemonSet* ensures that all (or some) Nodes run a copy of a Pod.
 - As nodes are **added** to the cluster, Pods are added to them.
 - As nodes are **removed** from the cluster, those Pods are garbage collected.
 - **Deleting** a DaemonSet will clean up the Pods it created.
- Some typical uses of a DaemonSet are:
 - running a **logs collection daemon** on every node (Example: **fluentd**)
 - running a **node monitoring daemon** on every node (Example: **cloudwatchagent**)
 - running an **application trace collection daemon** on every node (Example: **AWS X-Ray**)
- In a **simple case**, one DaemonSet, covering all nodes, would be used for each type of daemon.
- A **more complex setup** might use **multiple DaemonSets for a single type of daemon**, but with different flags and/or different memory and cpu requests for different hardware types


Kubernetes – DaemonSets

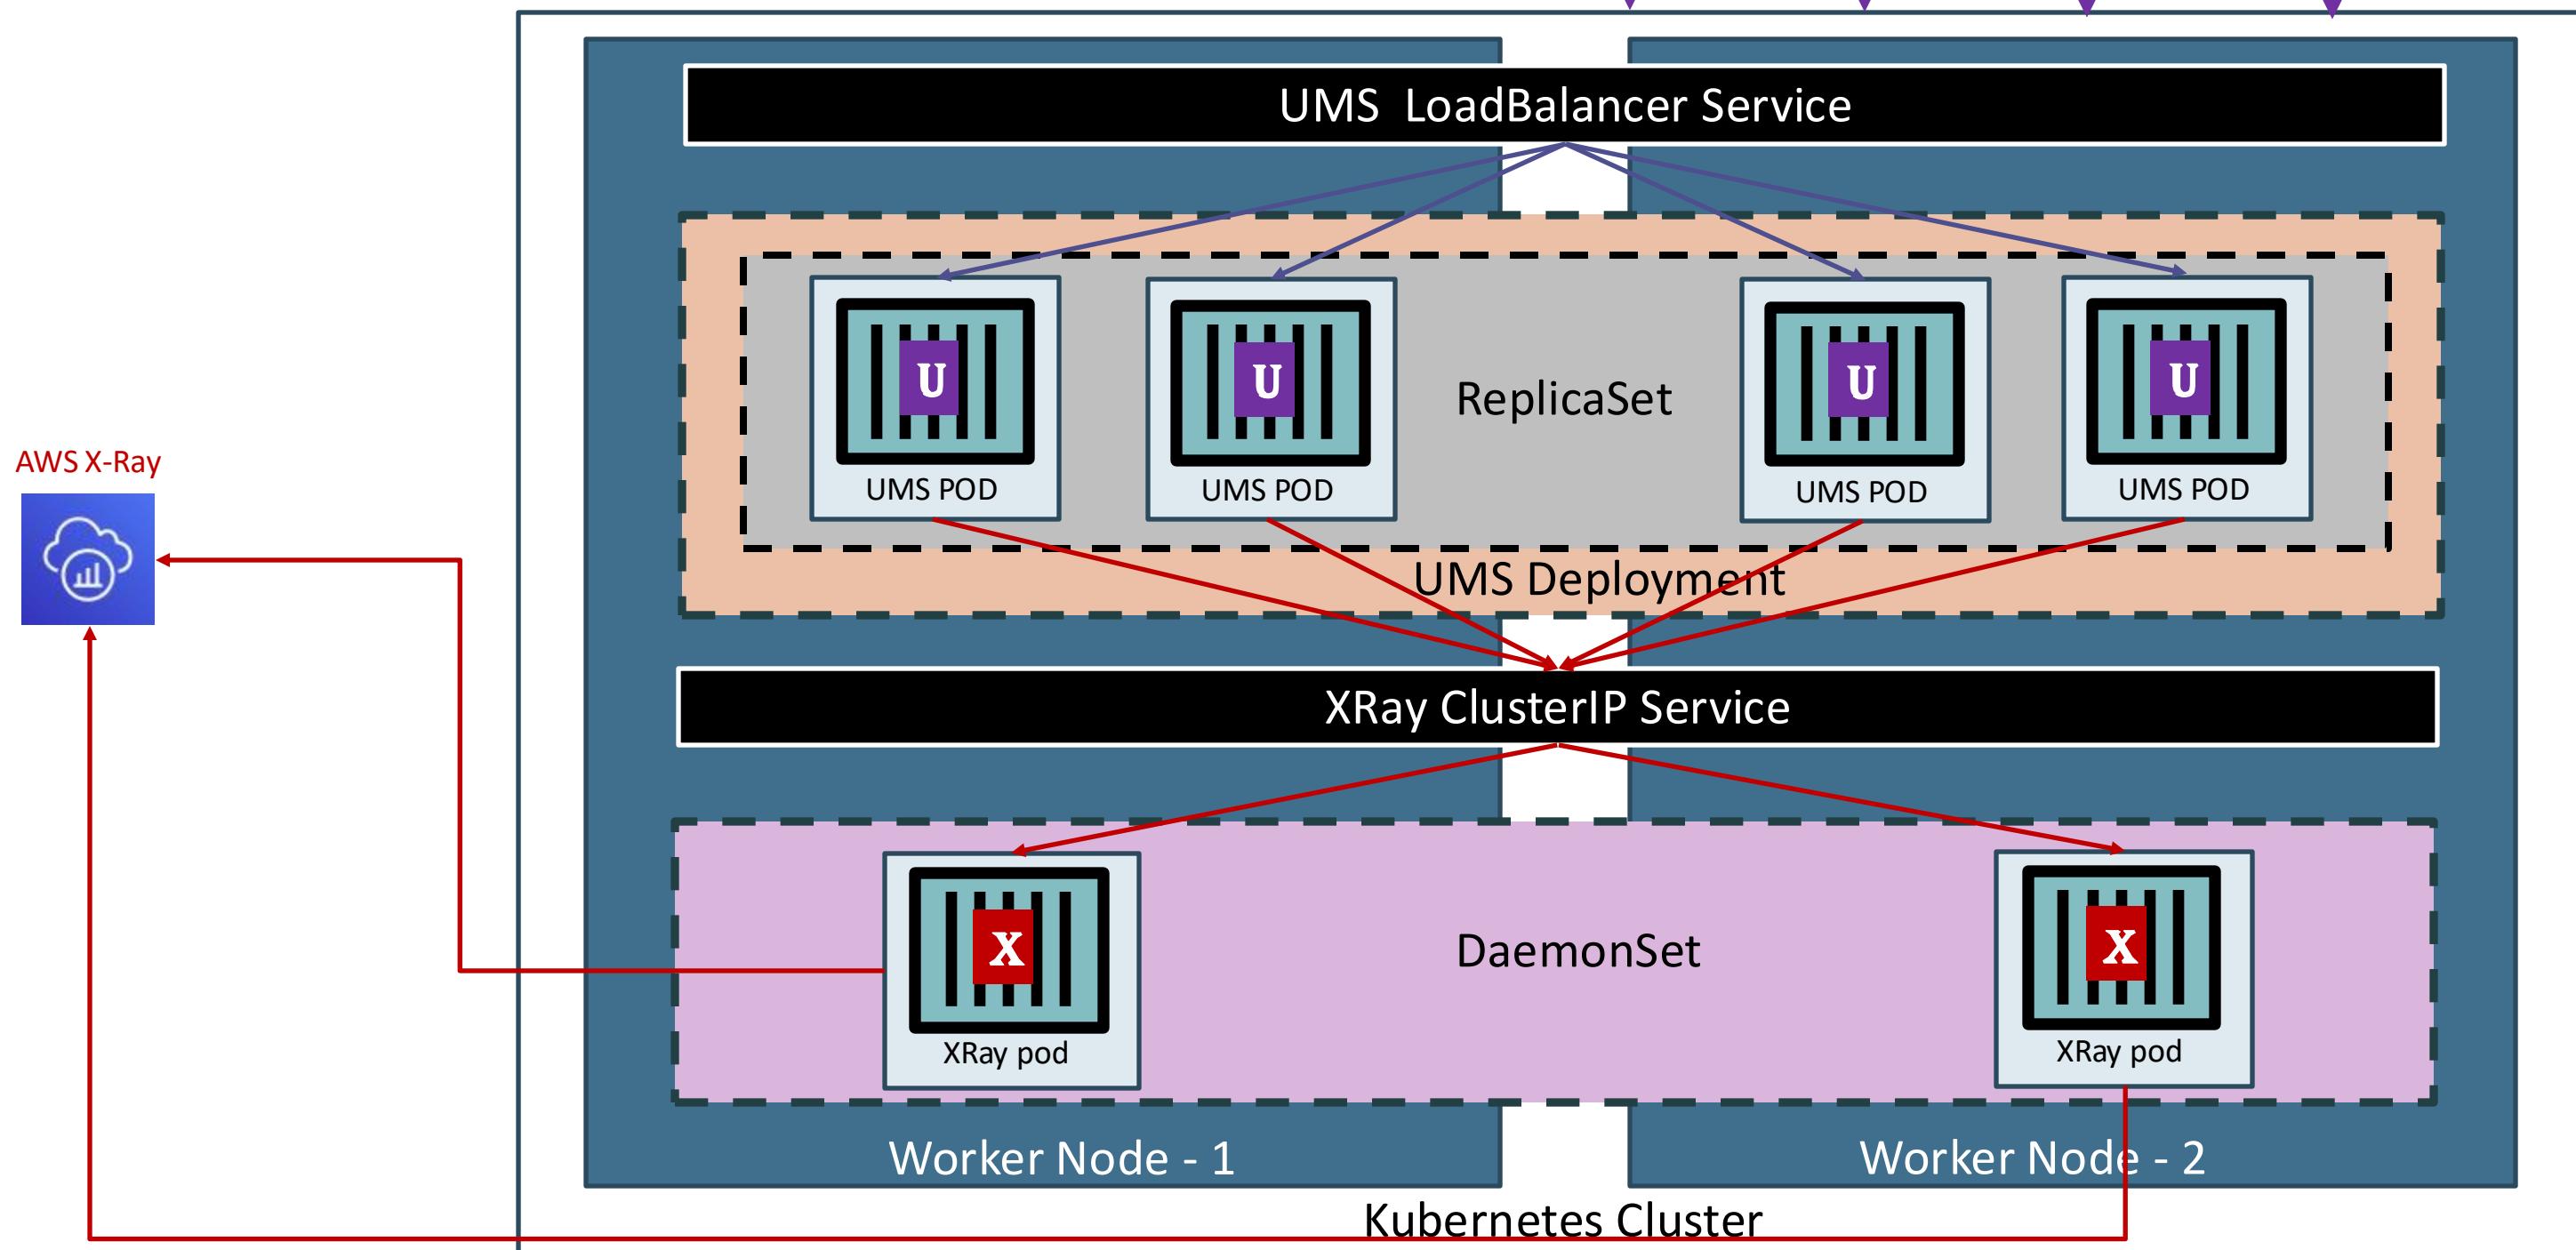




Microservices Distributed Tracing with AWS X-Ray


STACKSIMPLIFY

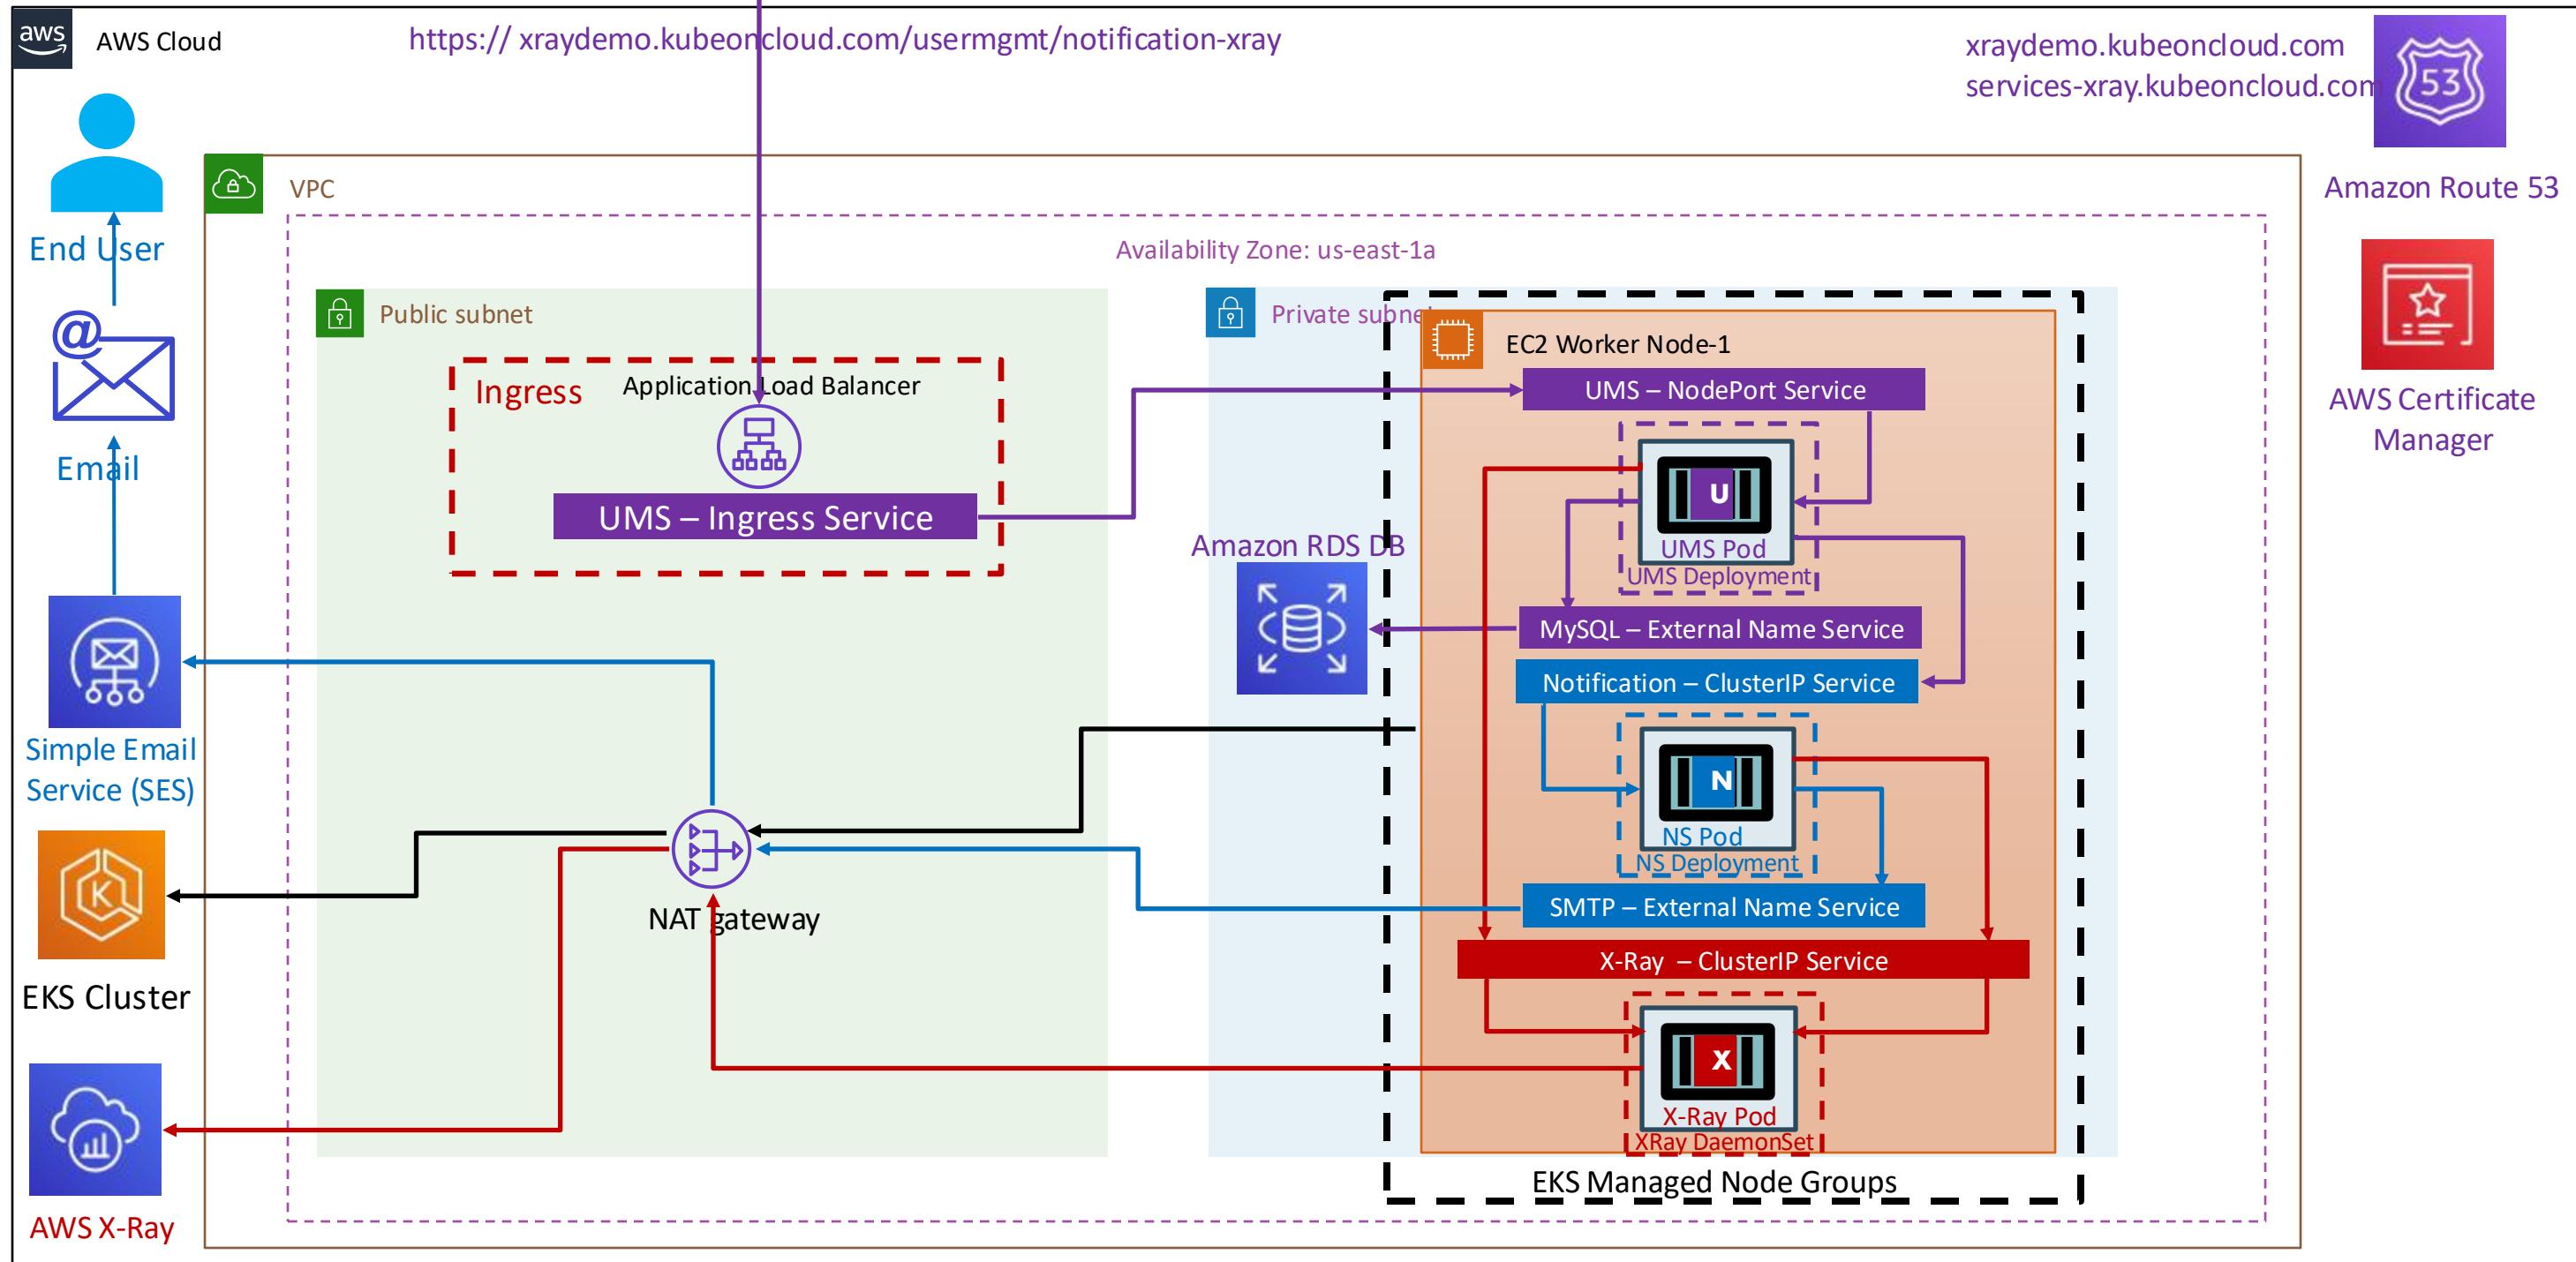

AWS X-Ray – Service Map

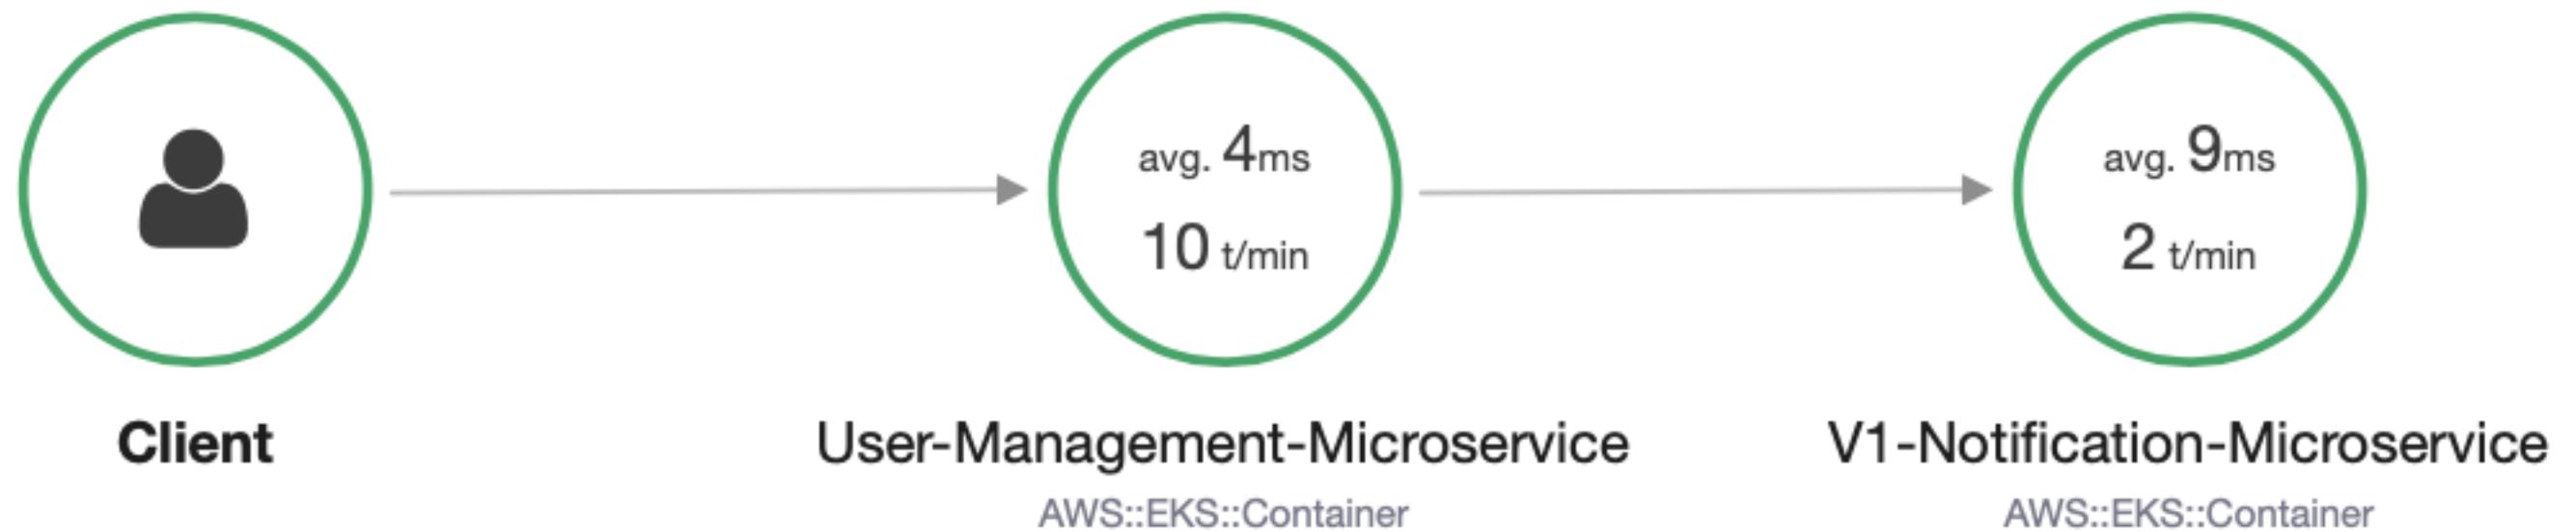

AWS X-Ray - Traces

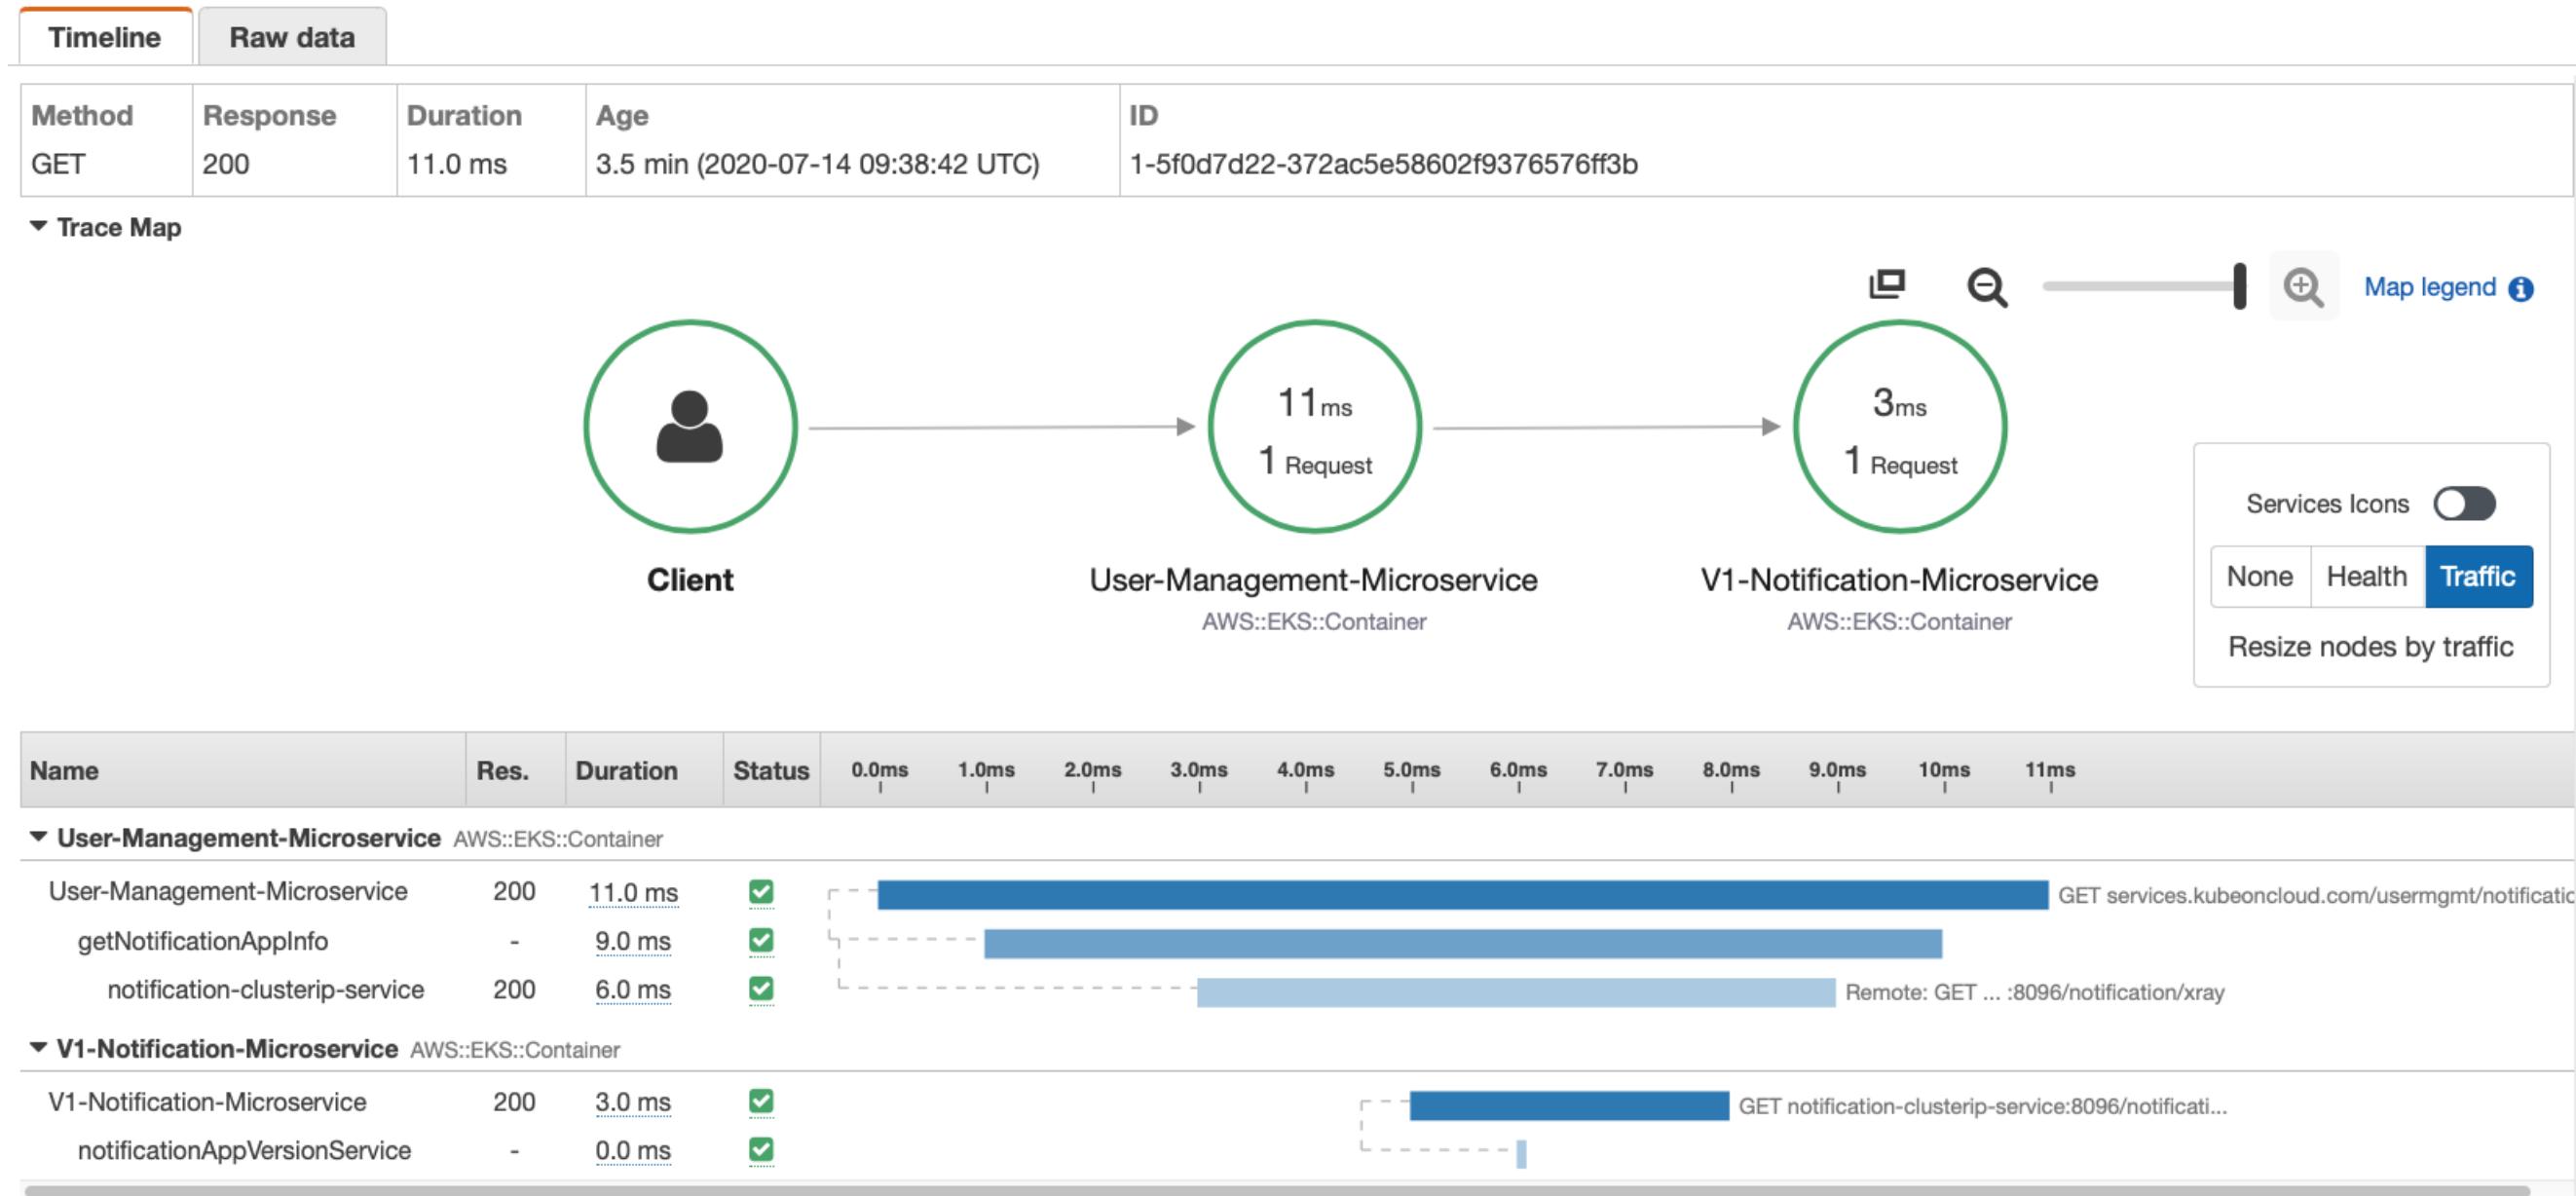

AWS X-Ray - Traces

Segment - User-Management-Microservice

[Overview](#)
[Resources](#)
[Annotations](#)
[Metadata](#)
[Exceptions](#)

Segment ID

722d02f36eb066c4

Parent ID

Name

User-Management-Microservice

Origin

AWS::EKS::Container

Time

Start time

2020-07-14 09:38:42.647 (UTC)

End time

2020-07-14 09:38:42.658 (UTC)

Duration

11.0 ms

In progress

false

Errors & Faults

Error

false

Fault

false

Request & Response

Request url

http://services.kubeoncloud.com/usermgmt/notification-xray

Request method

GET

Request user_agent

PostmanRuntime/7.25.0

Request client_ip

49.206.222.64

Request x_forwarded_for

true

Segment - User-Management-Microservice

[Overview](#)
[Resources](#)
[Annotations](#)
[Metadata](#)
[Exceptions](#)

CloudWatch Logs

```
[  
  {  
    "log_group": "/aws/containerinsights//application"  
  }  
]
```

EC2

Availability zone

us-east-1b

Instance ID

i-0247e0ae1264716b3

Instance size

t3.medium

Ami ID

ami-01b33458af4b31b8f

X-Ray

SDK version

2.6.1

SDK

X-Ray for Java



Eks

Pod

usermgmt-microservice-7598cb7fcf-txwck

Containerid

1aeabf8732ab8303eb24a138b31f963566d5d113dd571ea965f5b7ad2dd9e34a

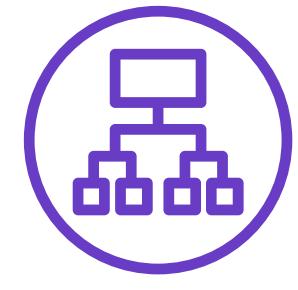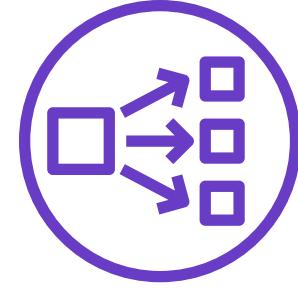

Elastic Load
Balancing

Classic
Load Balancer

Network
Load Balancer

Application
Load Balancer

Certificate
Manager

Route53

Elastic Block
Store




Amazon RDS



AWS EKS

Microservices

Canary Deployments

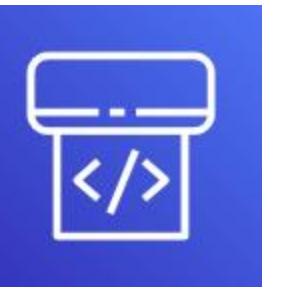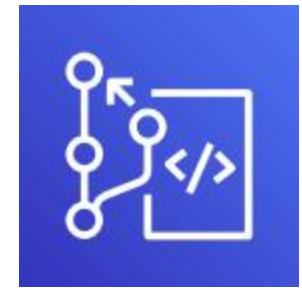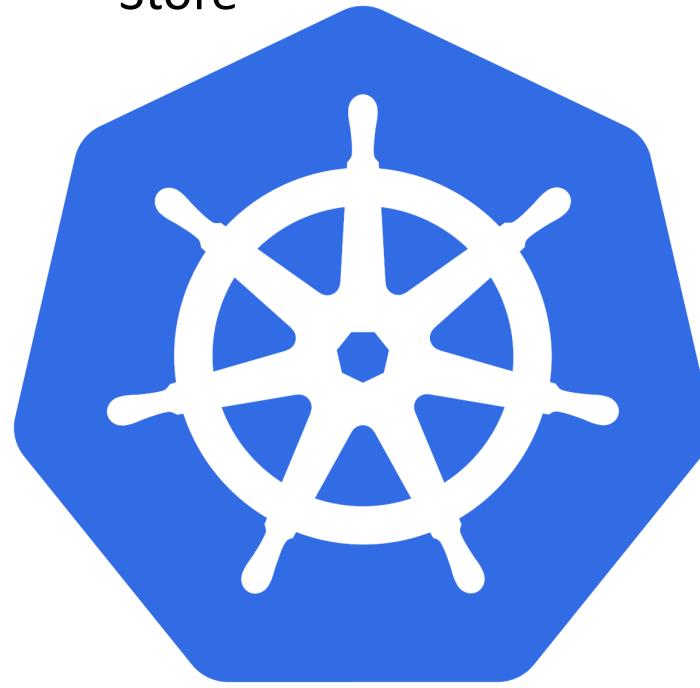

Fargate
Profiles

Elastic Container
Registry

Code
Commit

Code
Build


Code
Pipeline

Simple Email
Service


X-Ray

What are Canary Deployments?


- Canaries means **incremental** rollouts
- With canaries, the **new version** of the application is slowly deployed to the Kubernetes cluster while getting a very small amount of **live traffic**
- In short, **a subset of live users** are connecting to the **new version** while the rest are still using the **previous version**
- Using canaries, we can detect **deployment issues very early** while they effect only a small subset of users
- If we **encounter any issues with a canary**, the production version is still present, and **all traffic can simply be reverted to it.**

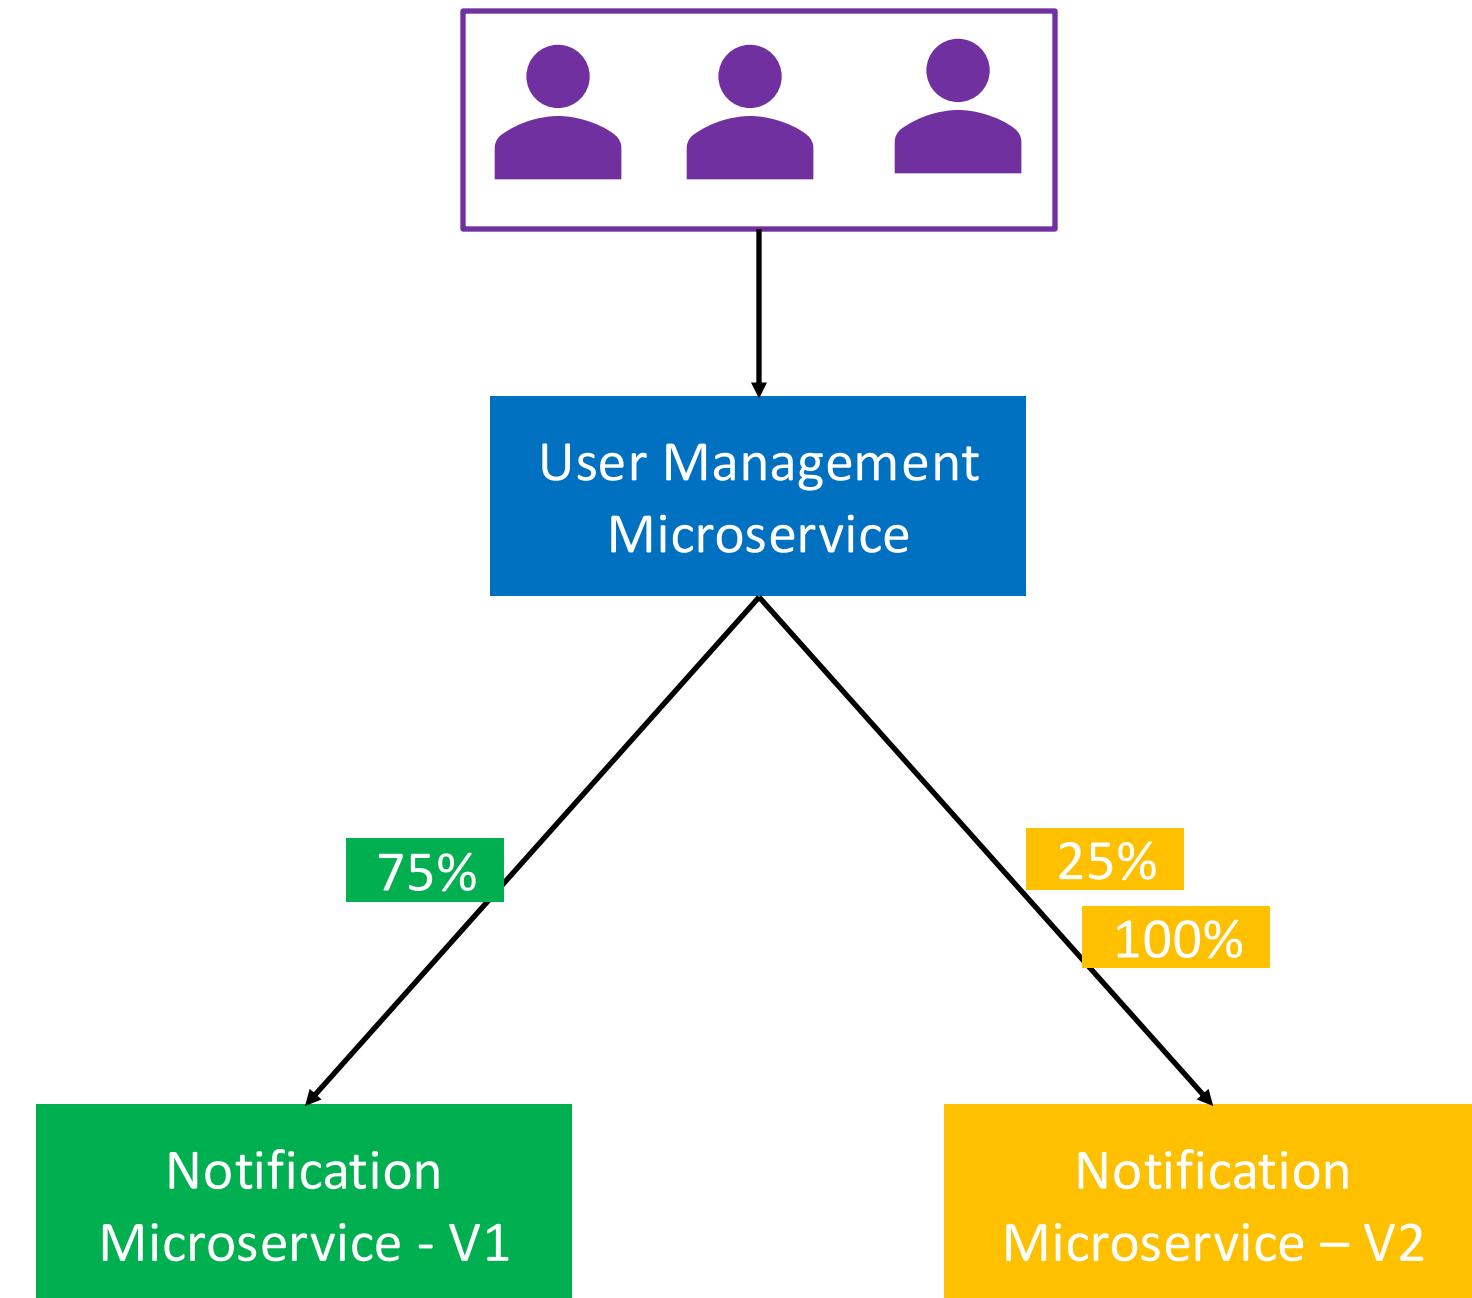


Microservices – Canary Deployments

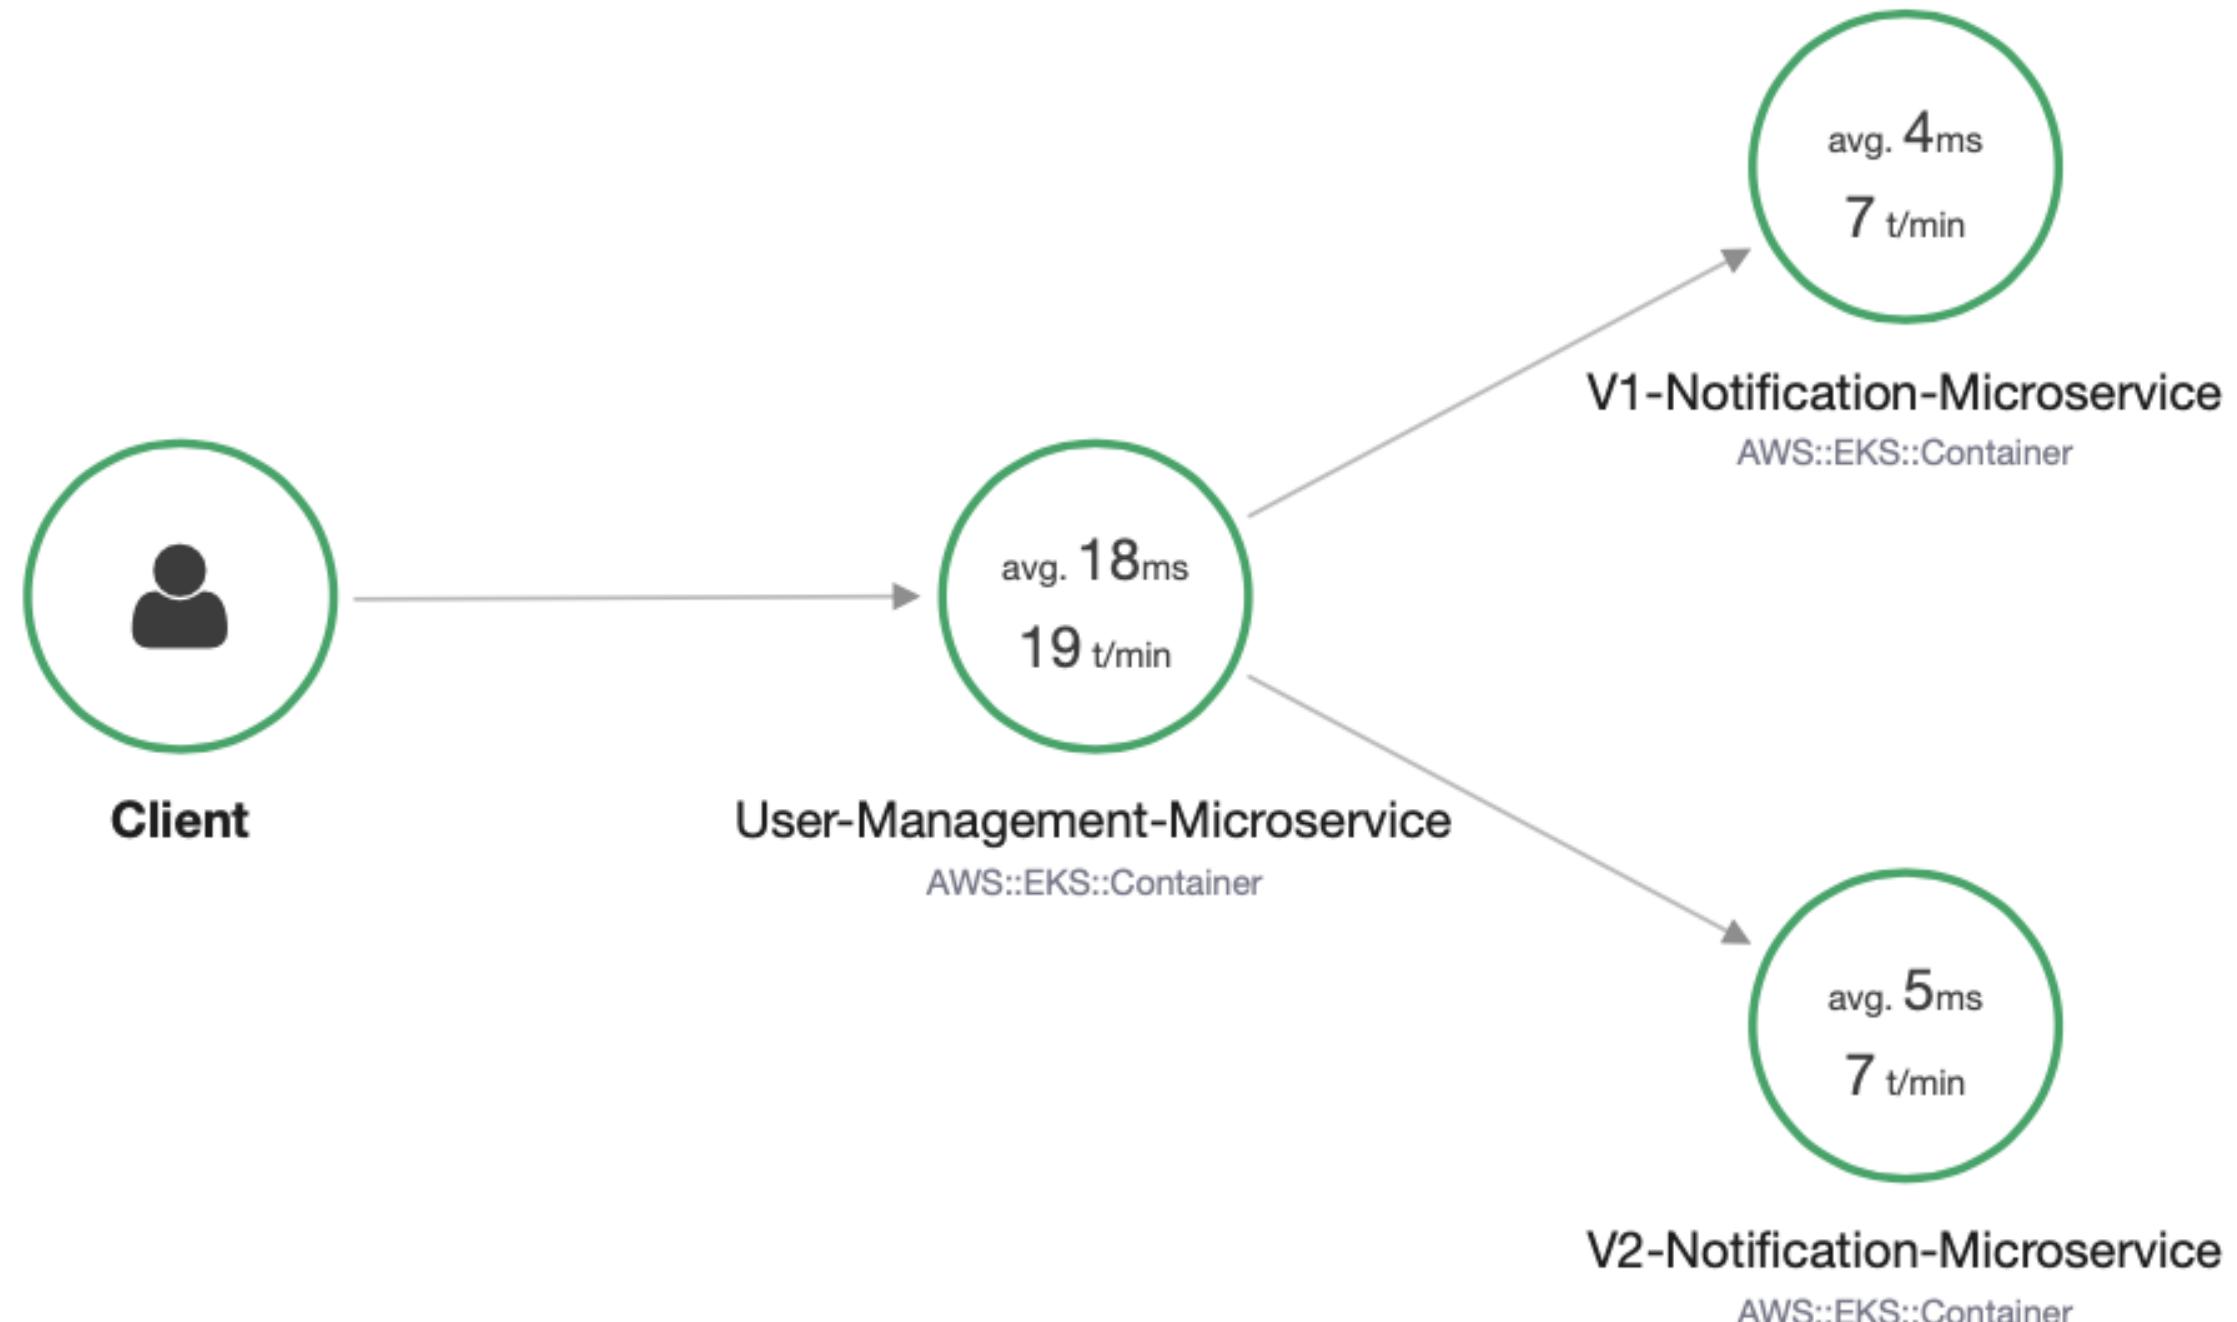

Canary Deployments out of box on Kubernetes

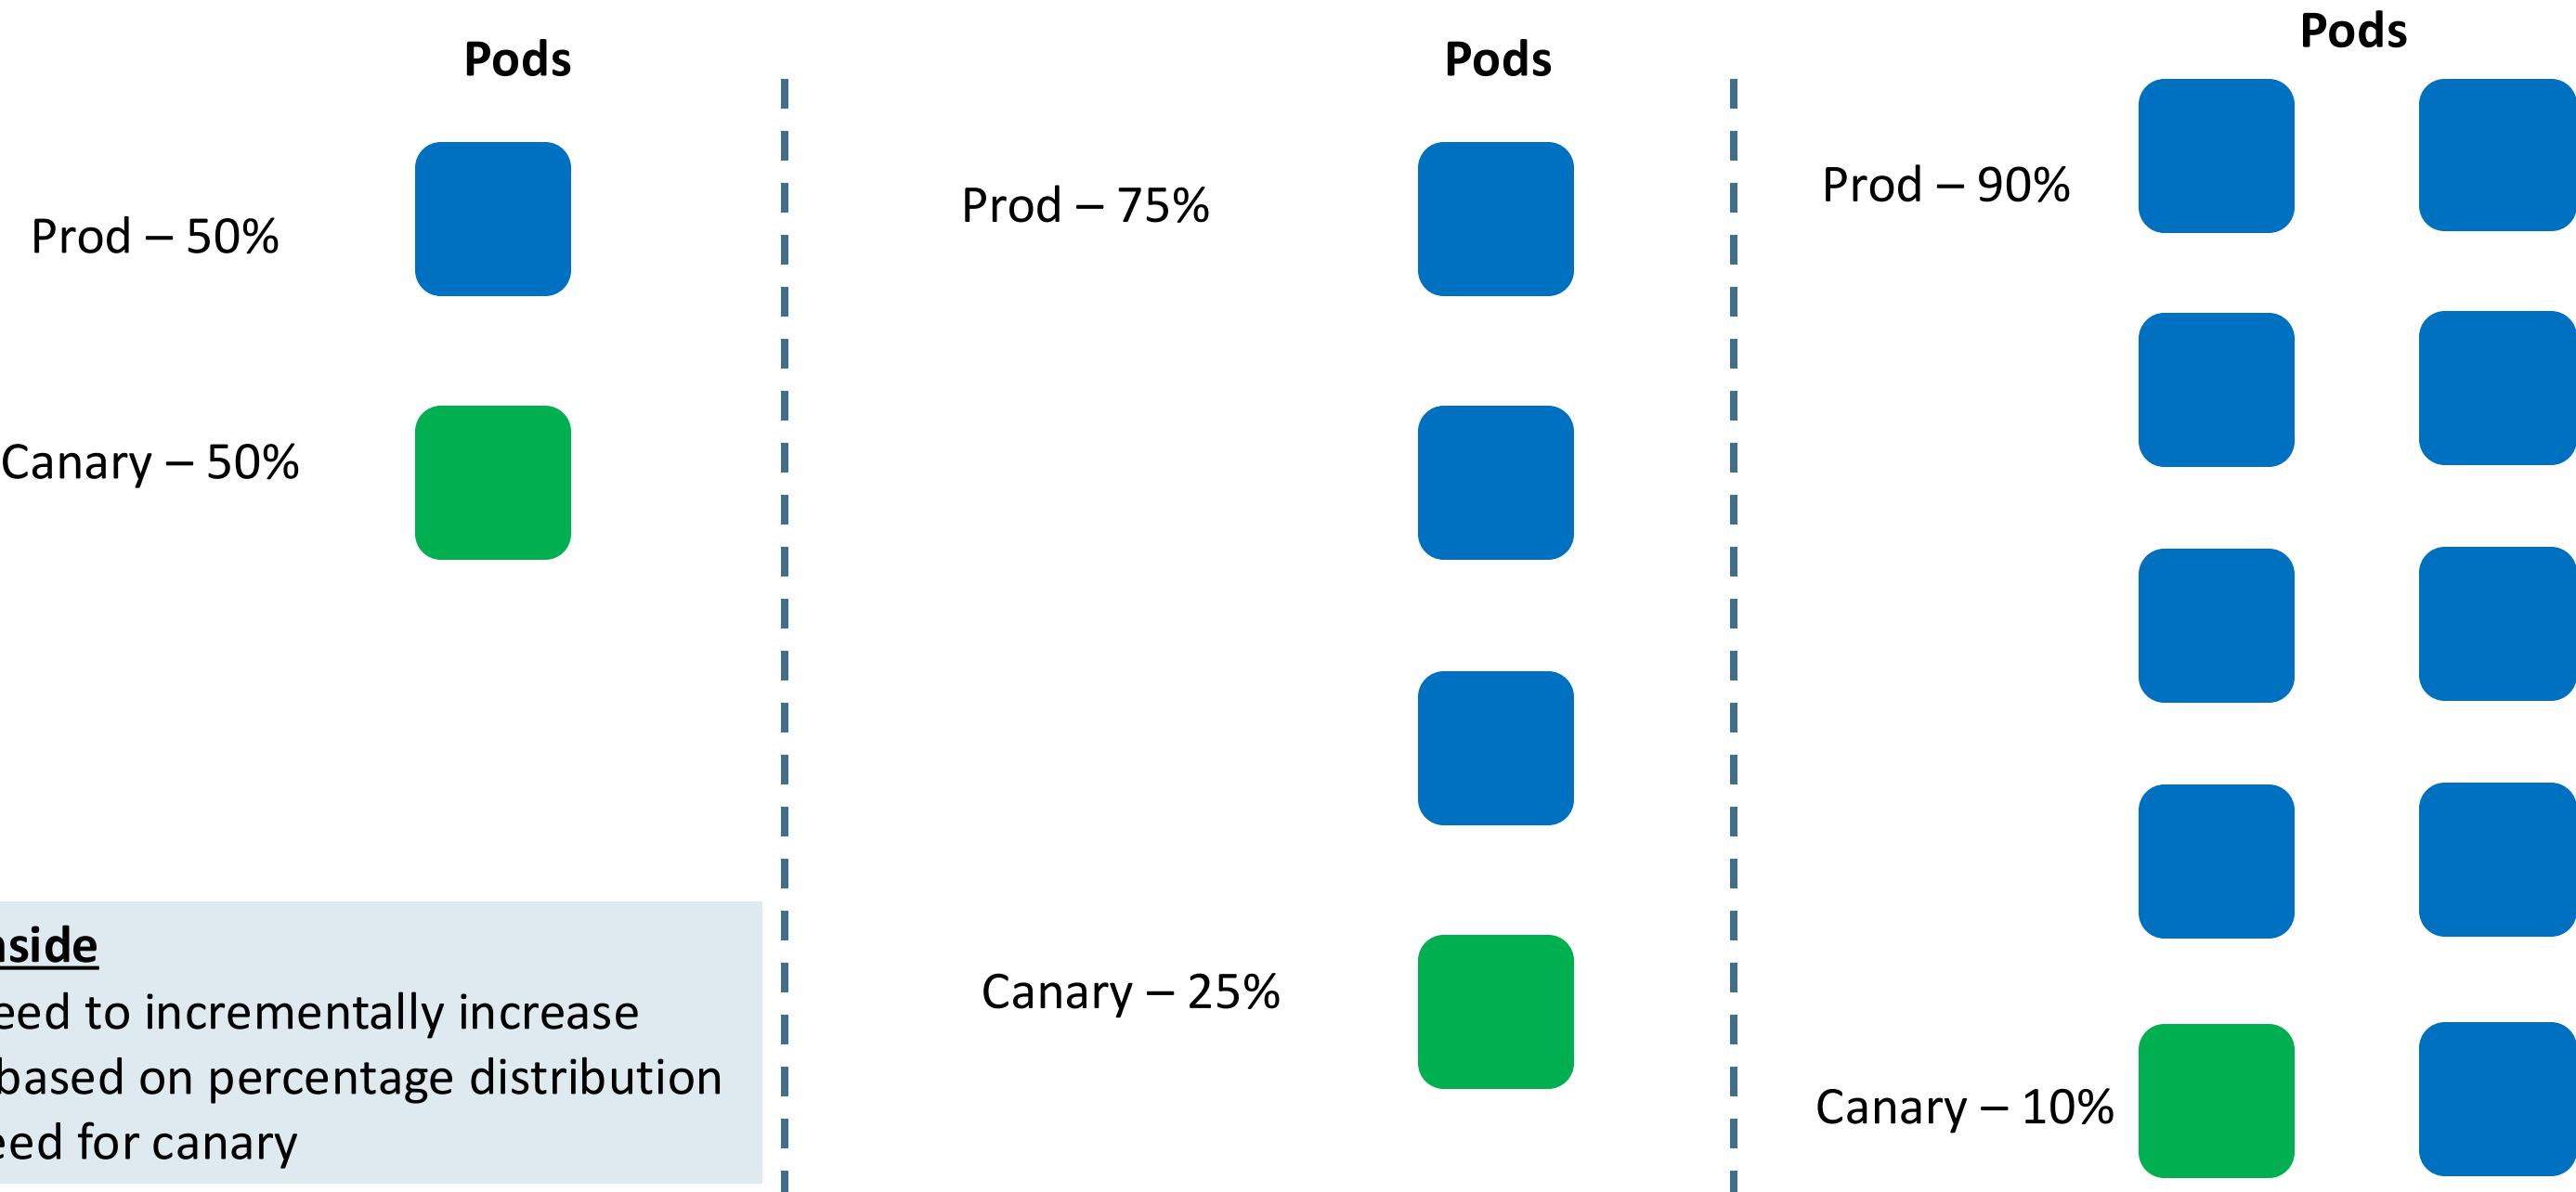

Canary Deployments on Kubernetes with AWS App Mesh

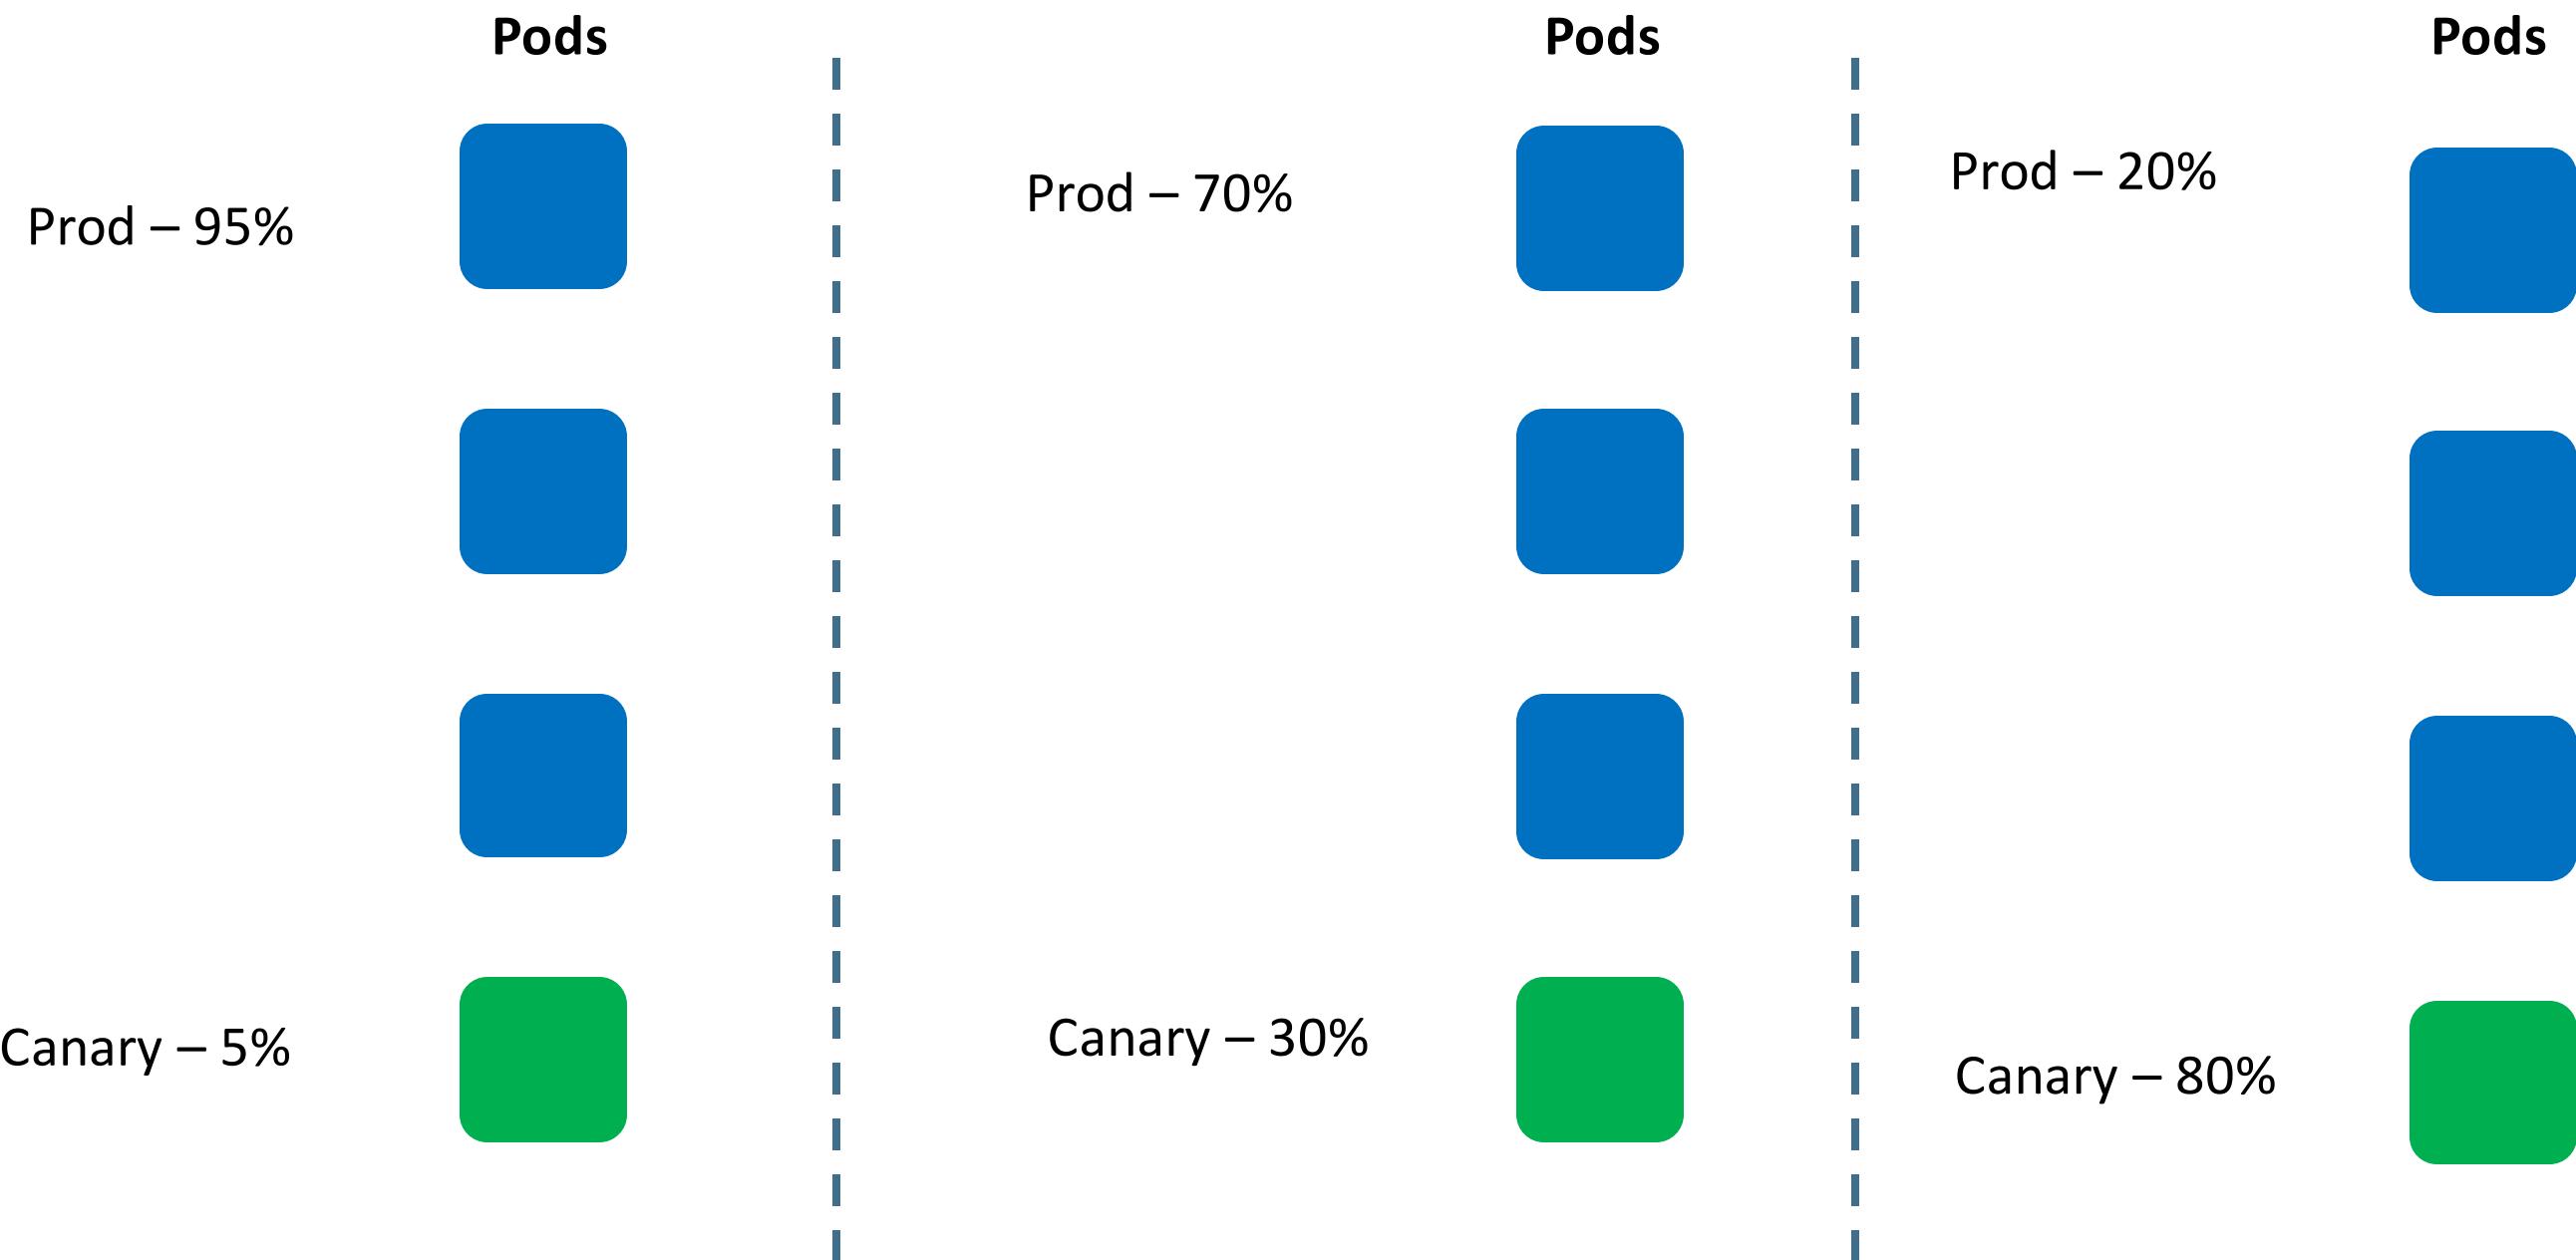




AWS EKS Autoscaling Horizontal Pod Autoscaler




Horizontal Pod Autoscaler – HPA - Introduction

- In a very simple note Horizontal Scaling means **increasing and decreasing** the number of **Replicas (Pods)**
- HPA **automatically scales** the number of pods in a deployment, replication controller, or replica set, stateful set based on that resource's **CPU utilization**.
- This can help our applications **scale out to meet increased demand** or **scale in when resources are not needed**, thus freeing up your worker nodes for other applications.
- When we set a **target CPU utilization percentage**, the HPA scales our application in or out to try to meet that **target**.
- HPA needs **Kubernetes metrics server** to verify CPU metrics of a pod.
- We **do not need** to **deploy or install the HPA** on our cluster to begin scaling our applications, its out of the box available as a **default** Kubernetes API resource.

How HPA works?

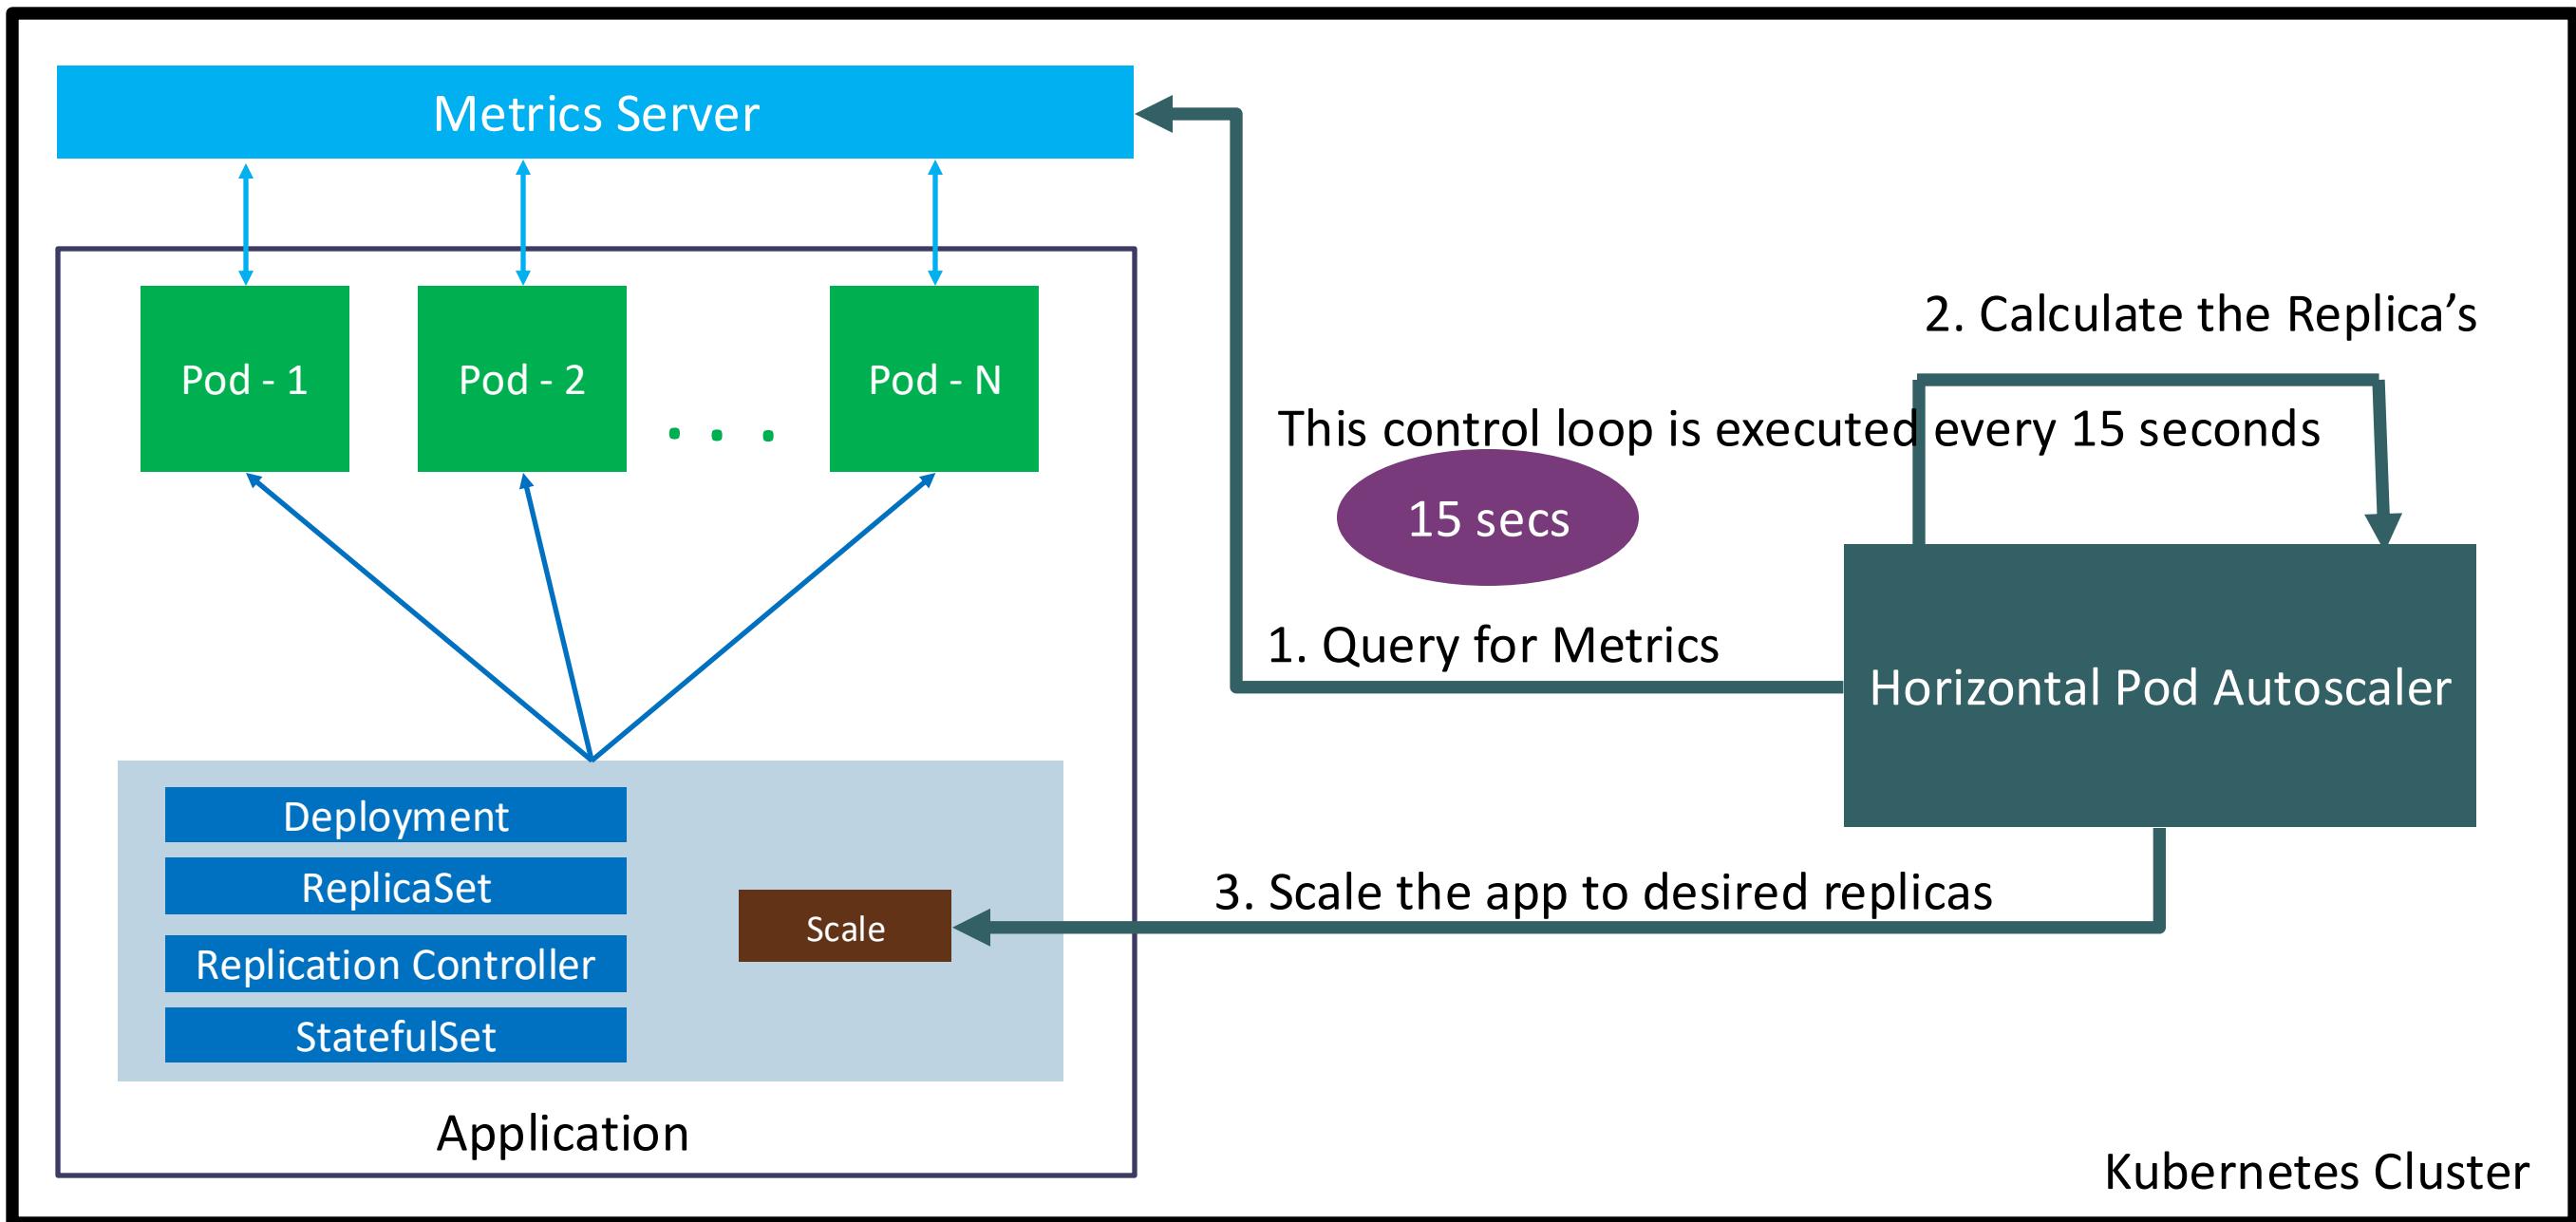

How is HPA configured?

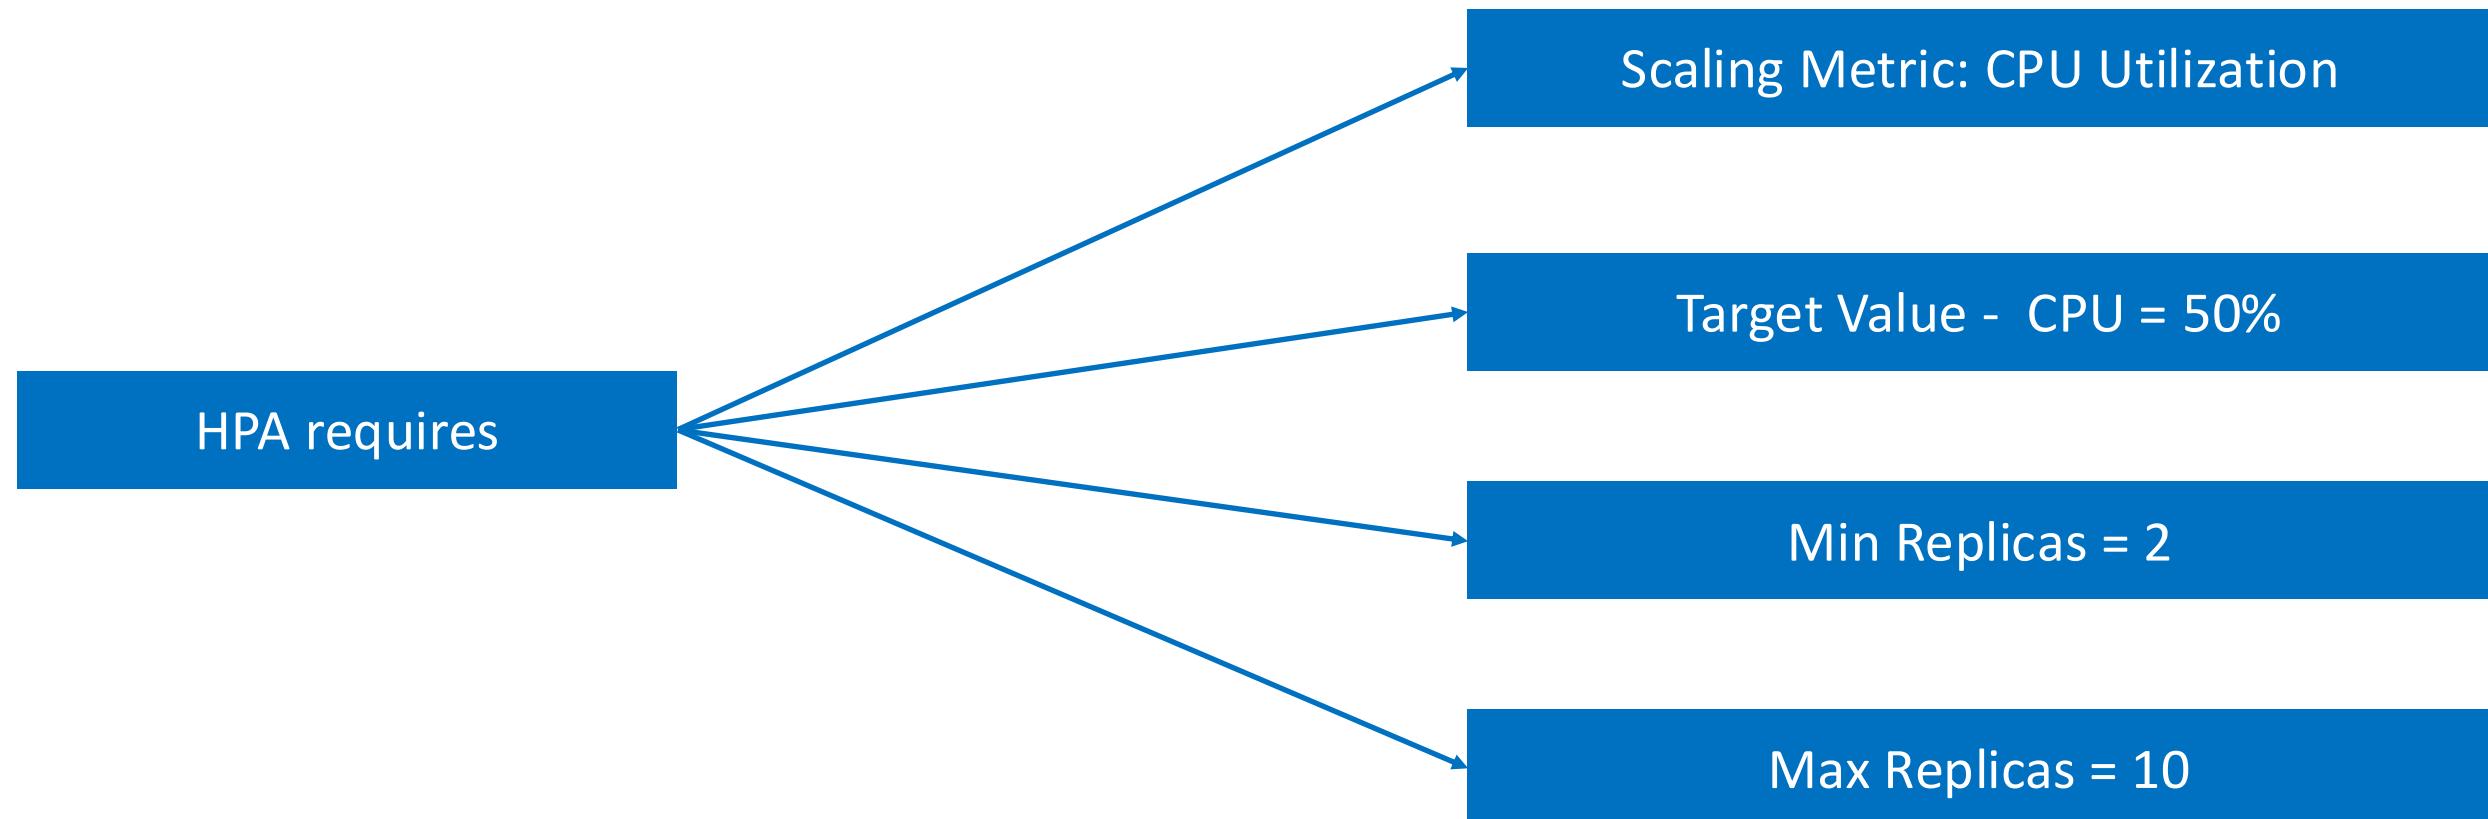

```
kubectl autoscale deployment demo-deployment --cpu-percent=50 --min=1 --max=10
```



AWS EKS Autoscaling Vertical Pod Autoscaler



Vertical Pod Autoscaler – VPA - Introduction

- VPA automatically adjusts the **CPU and memory reservations** for our pods to help "**right size**" our applications.
- This adjustment can **improve cluster resource utilization** and **free up** CPU and memory for other pods.
- Benefits
 - Cluster nodes are used **efficiently**, because Pods use exactly what they need.
 - Pods are **scheduled onto nodes** that have the appropriate resources available.
 - We **don't have** to run **time-consuming benchmarking tasks** to determine the correct values for CPU and memory requests.
 - **Maintenance time is reduced**, because the autoscaler can adjust CPU and memory requests over time without any action on your part.

VPA Components

VPA Admission Hook

Every pod submitted to the k8s cluster goes through this webhook automatically which checks whether a **VerticalPodAutoscaler** object is referencing this pod or one of its parents (a ReplicaSet, a Deployment, etc).

VPA Recommender

Connects to the **metrics-server** in the cluster, fetches historical and current usage data (CPU and memory) for each VPA-enabled pod and generates recommendations for **scaling up or down** the requests and limits of these pods.

VPA Updater

Runs every 1 minute. If a pod is not running in the calculated recommendation range, **it evicts the currently running version of this pod**, so it can restart and go through the **VPA admission webhook** which will change the CPU and memory settings for it, before it can start.



AWS EKS Autoscaling Cluster Autoscaler




Cluster Autoscaler - Introduction


- Cluster Autoscaler is a tool that automatically adjusts the size of a Kubernetes cluster when one of the following conditions is true:
- There are pods that failed to run in the cluster due to insufficient resources.
- There are nodes in the cluster that have been underutilized for an extended period of time and their pods can be placed on other existing nodes.
- The Cluster Autoscaler modifies our worker node groups so that they scale out when we need more resources and scale in when we have underutilized resources.




Elastic Load
Balancing

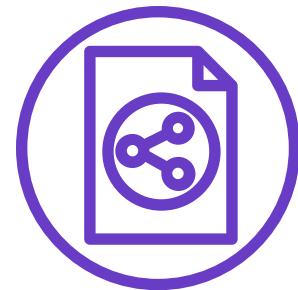


Classic
Load Balancer

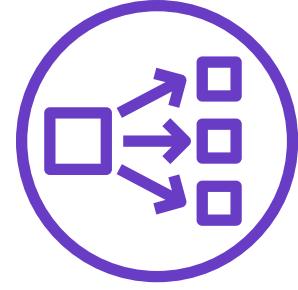

Network
Load Balancer

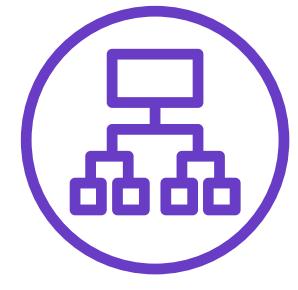


Application
Load Balancer

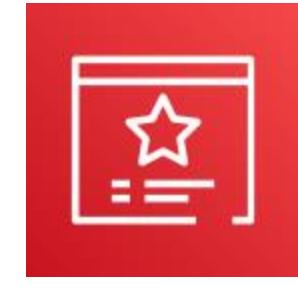

Certificate
Manager



Route53

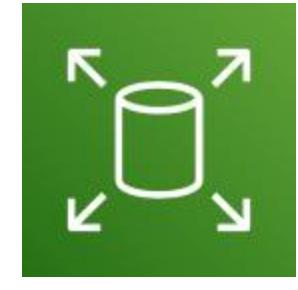

Elastic Block
Store



Amazon RDS



AWS EKS

CloudWatch


Container Insights



Fargate
Profiles



Elastic Container
Registry

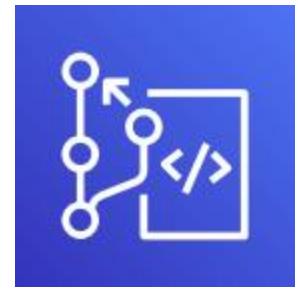

Code
Commit




Code
Build




Code
Pipeline



Simple Email
Service

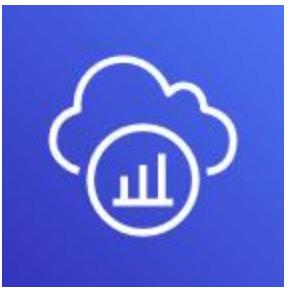

X-Ray

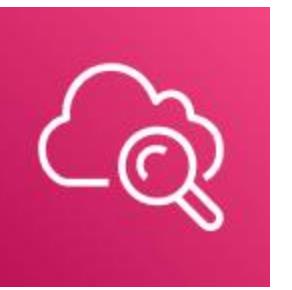

CloudWatch
Metrics



Simple
Notification Service

Container Insights

- A **fully managed observability service** for monitoring, troubleshooting and alarming on our containerized applications.
- Container Insights to **collect, aggregate, and summarize metrics and logs** from our containerized applications and microservices.
- The metrics include **utilization for resources** such as CPU, memory, disk, and network.
- It also provides **diagnostic information**, such as container restart failures, to help us isolate issues and resolve them quickly.
- We can also set **CloudWatch alarms** on metrics that Container Insights collects.
- The metrics that Container Insights collects are available in **CloudWatch automatic dashboards**.
- We can analyze and troubleshoot container performance and logs data with **CloudWatch Logs Insights**.

- Container Map
- Container Resources
- Performance Dashboards
- Log Groups
- Log Insights
- Alarms




Developer or Operations User




CloudWatch


Container Insights

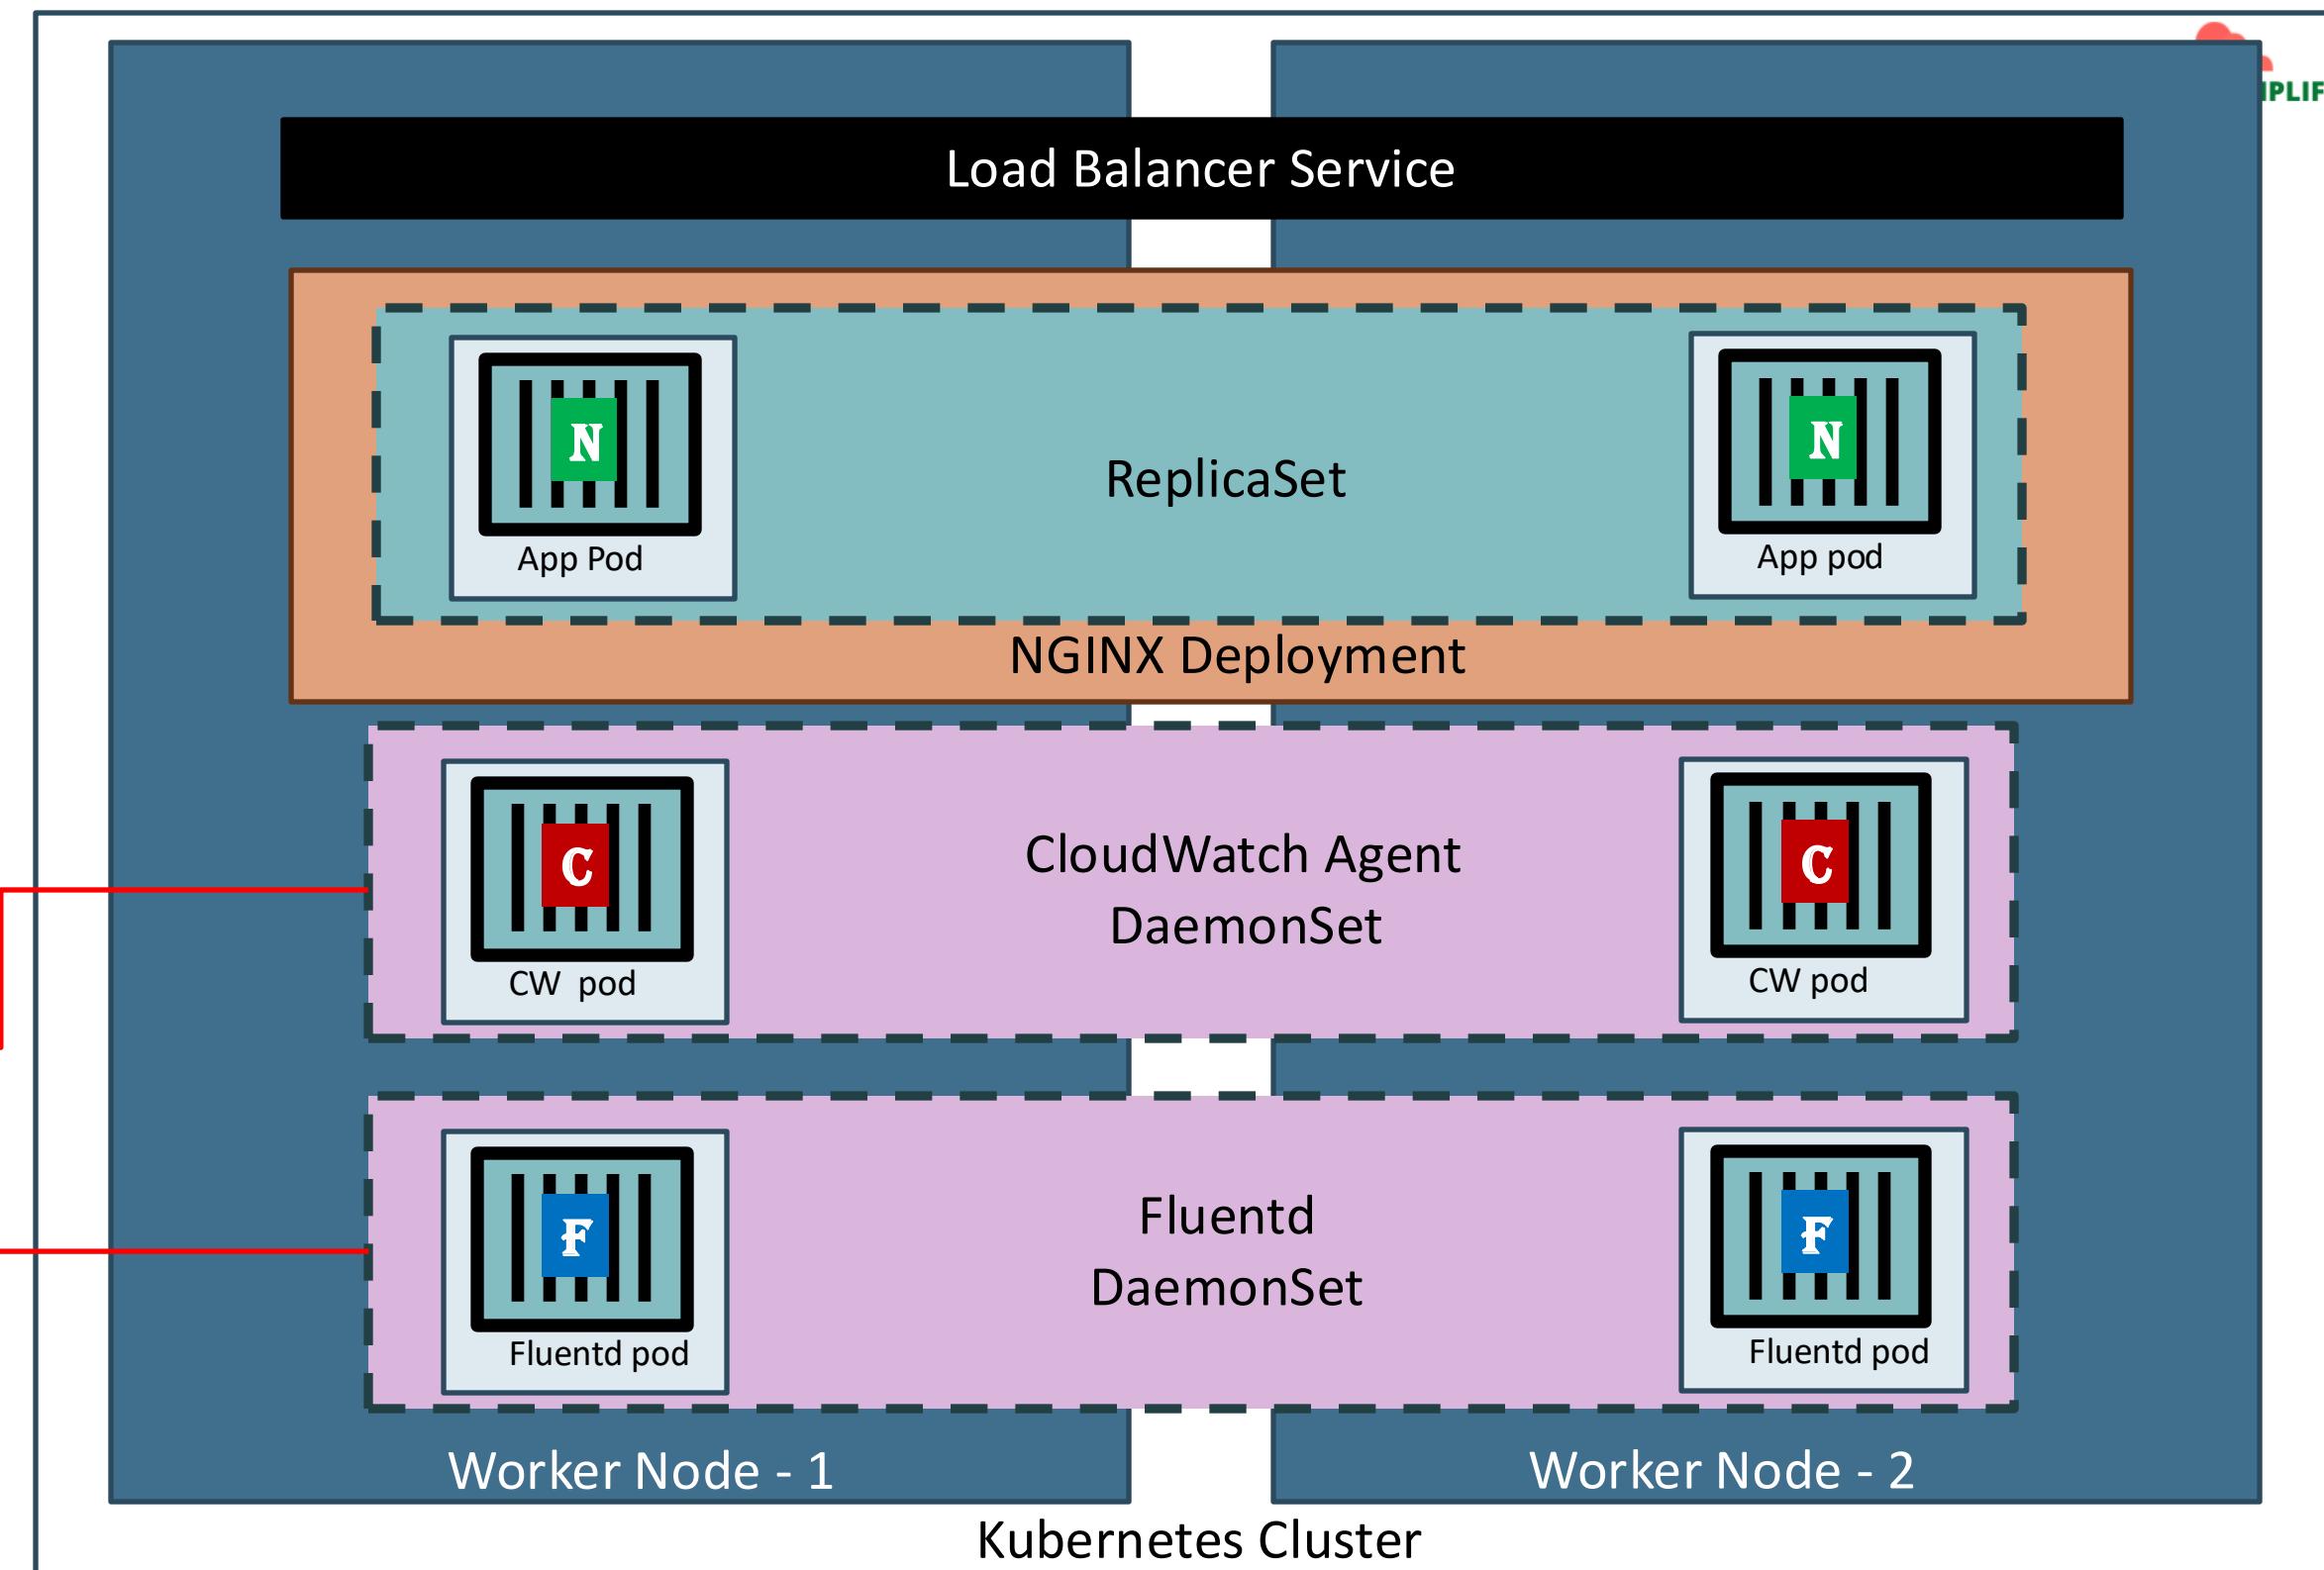

CloudWatch Container Insights Map

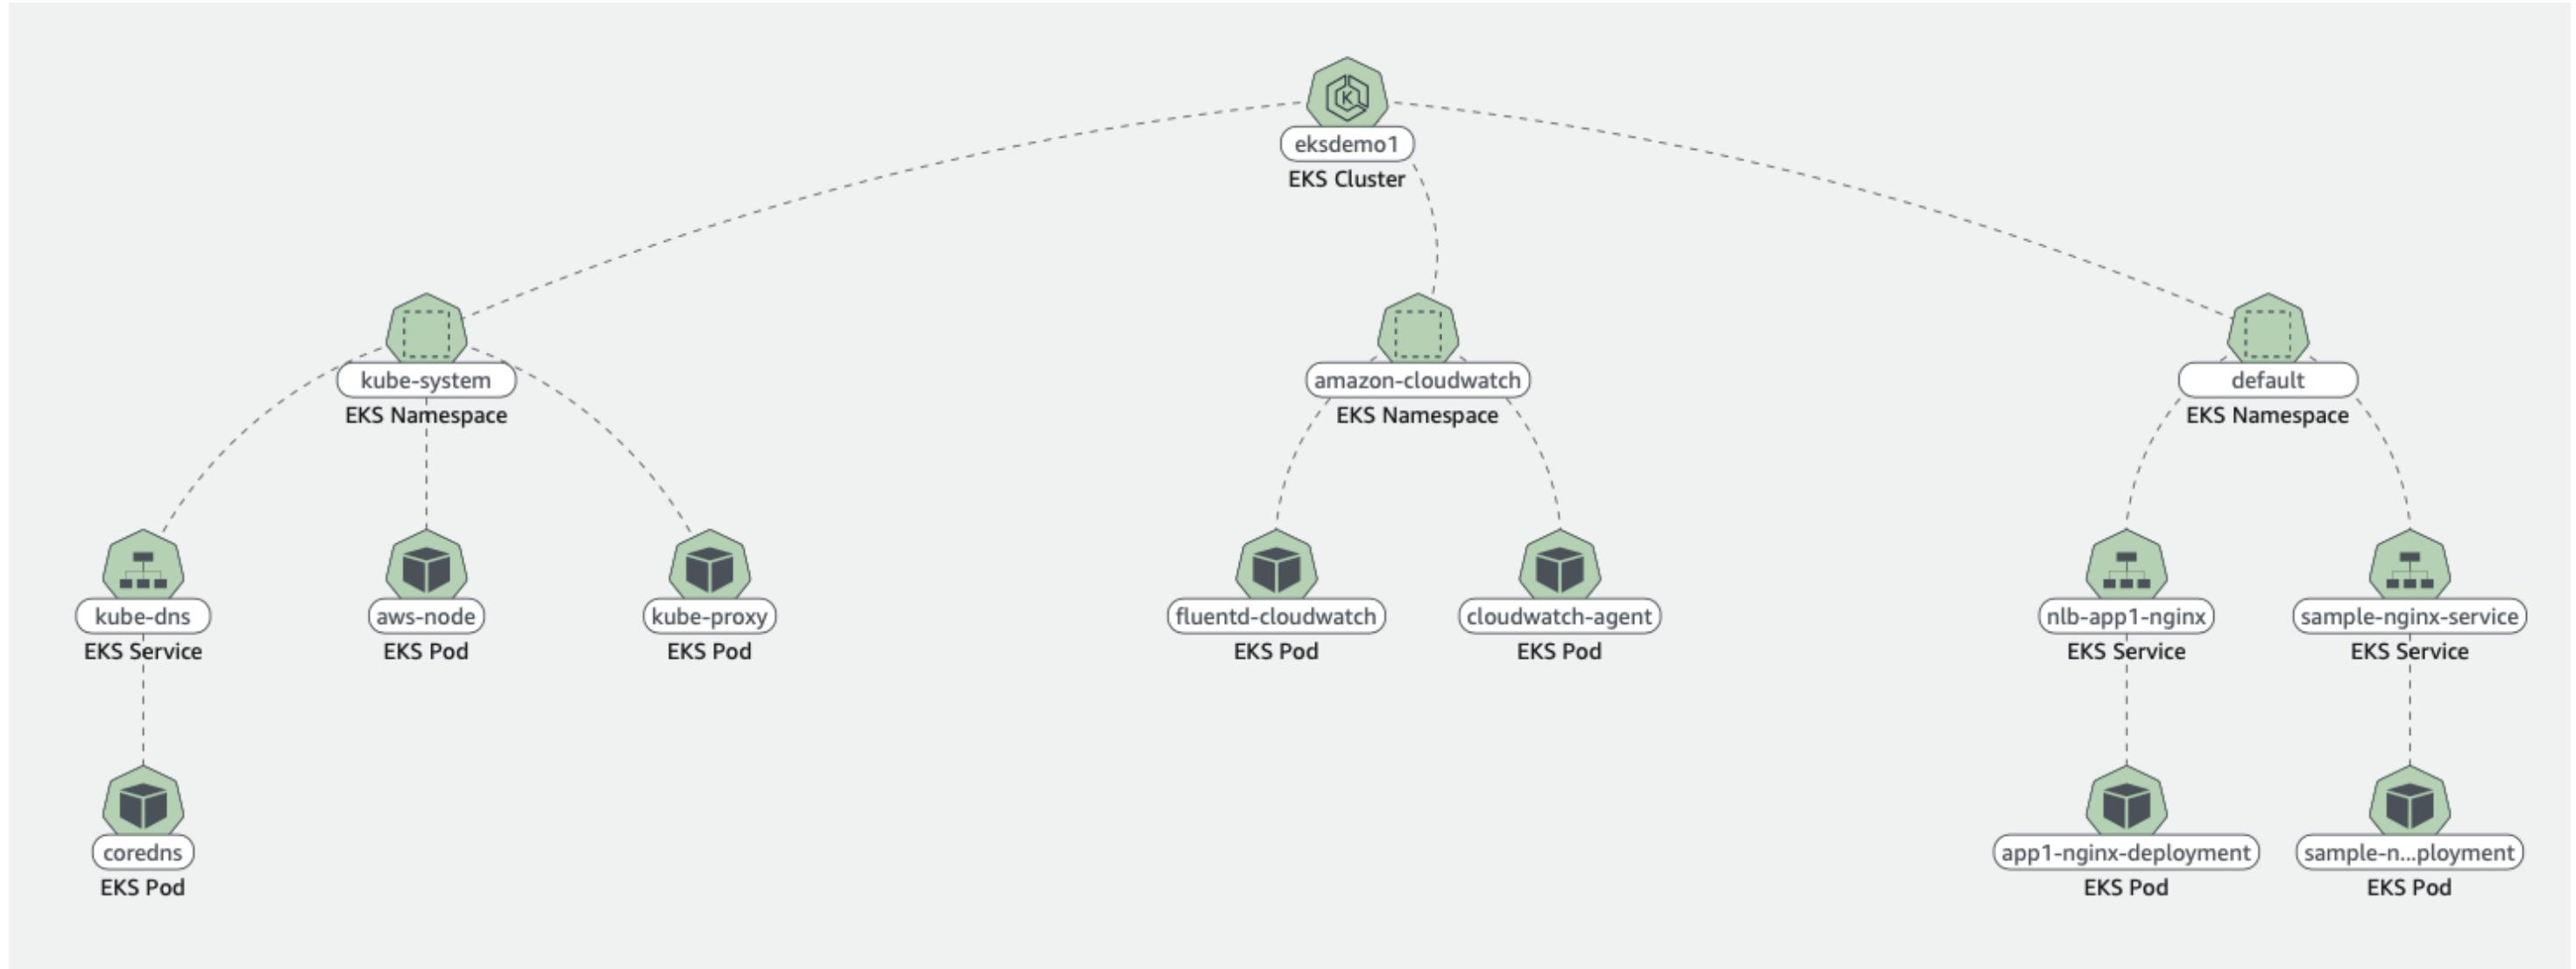


Automatic Performance Dashboard

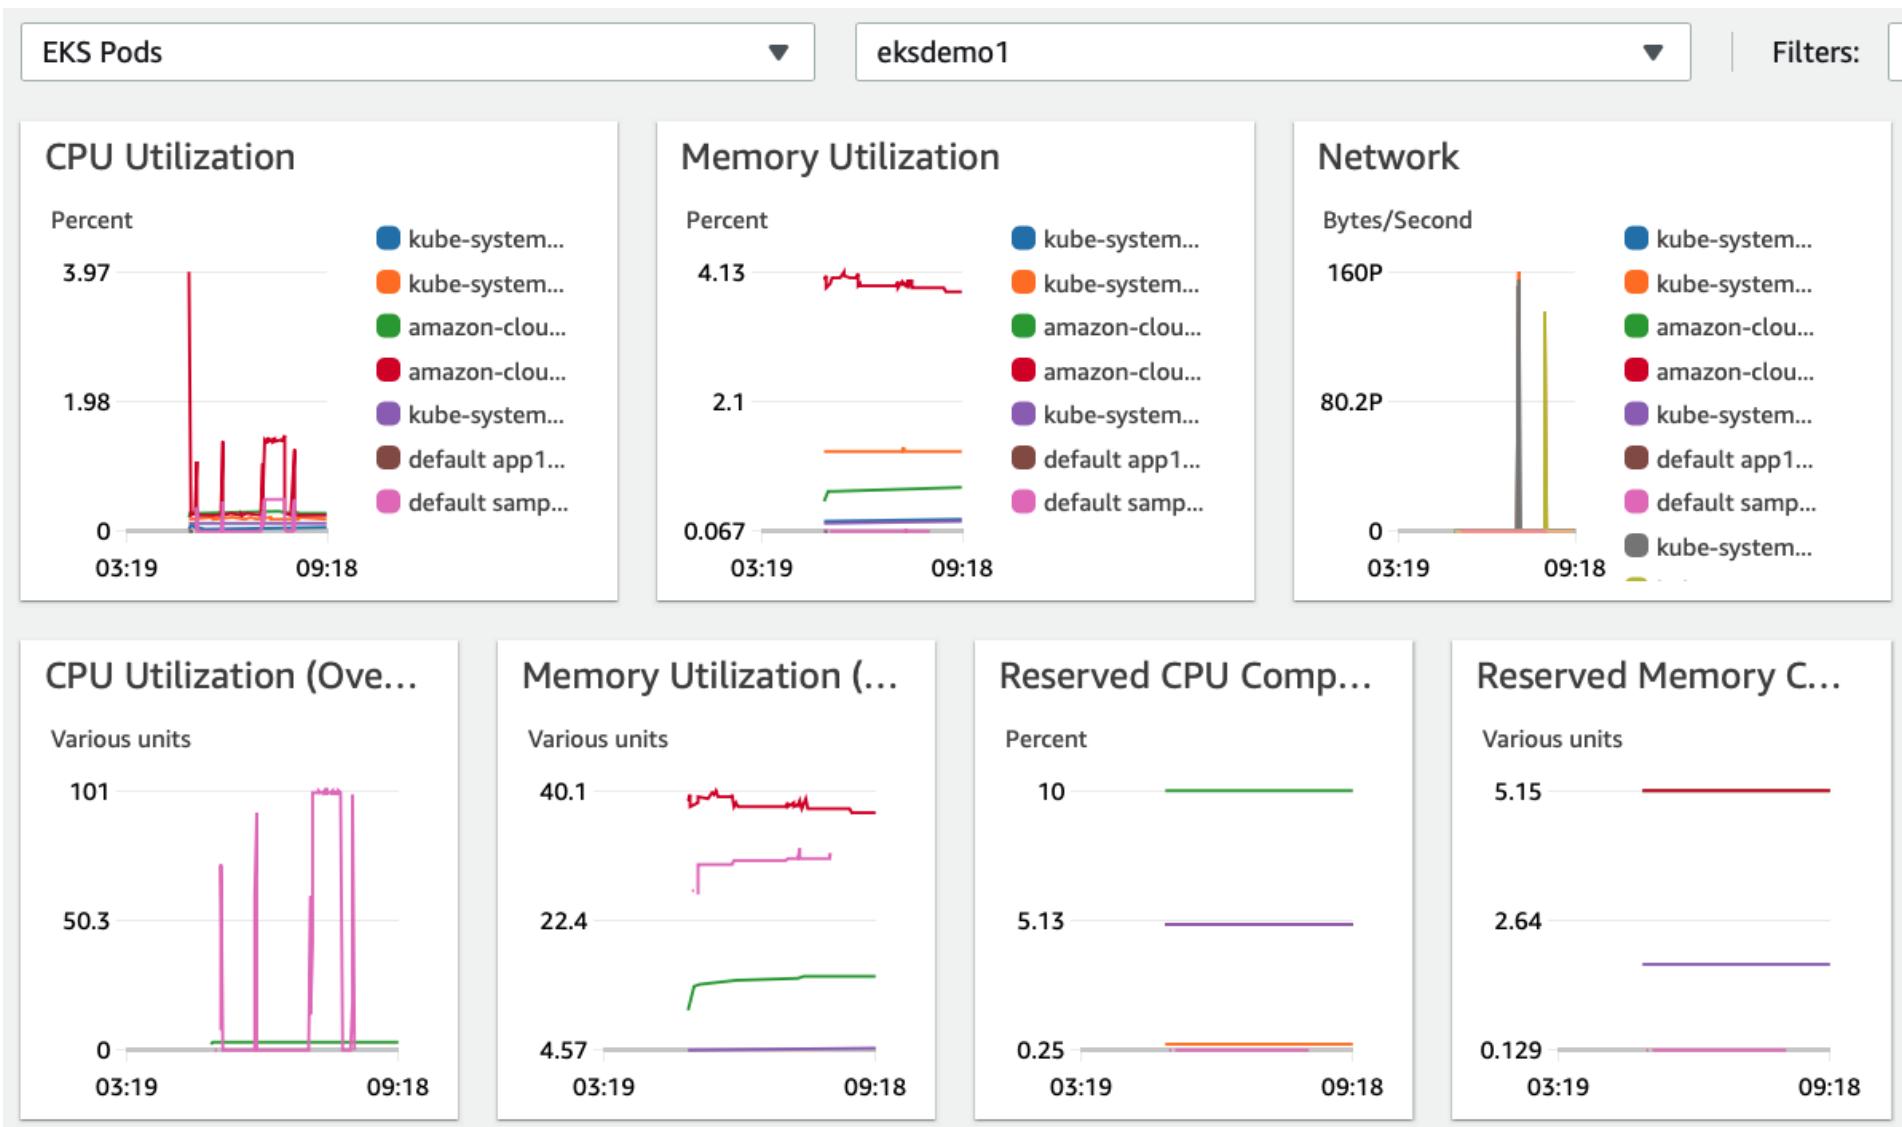

[CloudWatch](#) > [Container Insights](#) > [Performance monitoring](#)

Performance monitoring

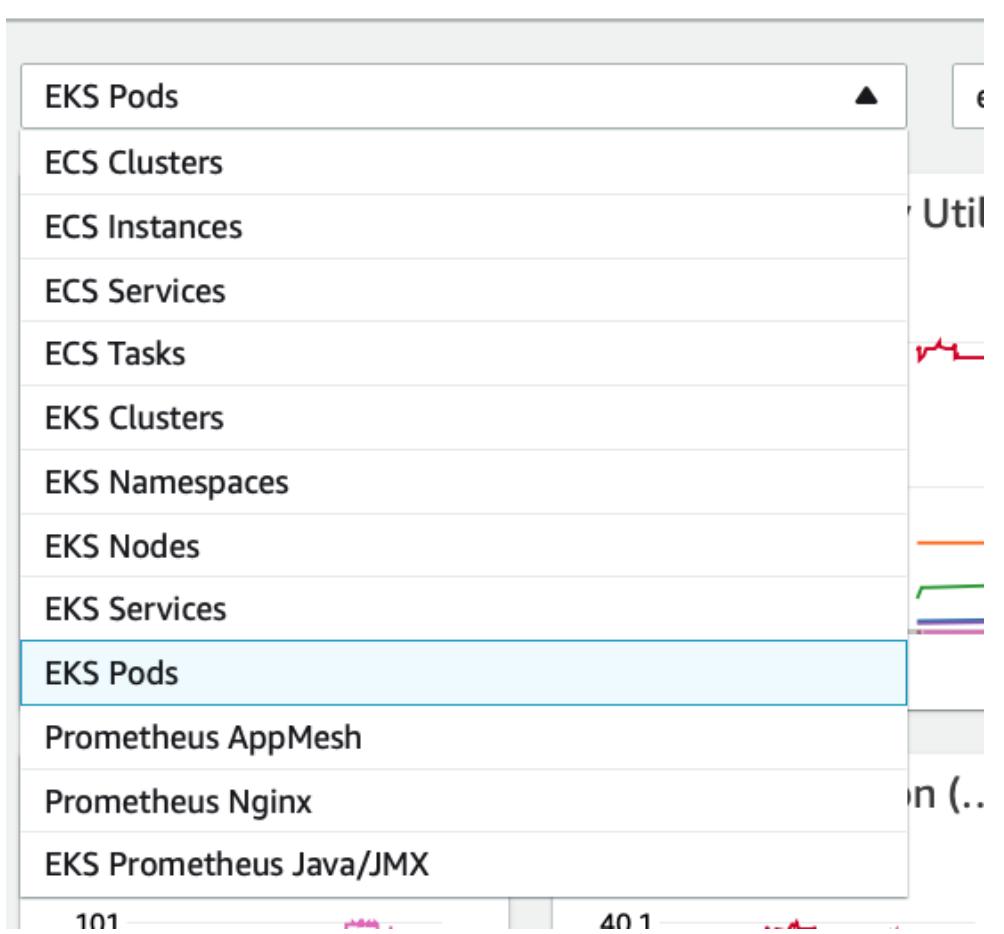


THANK YOU


ALB Ingress Controller v1.x DEPRECATED Slides Continues




Elastic Load
Balancing

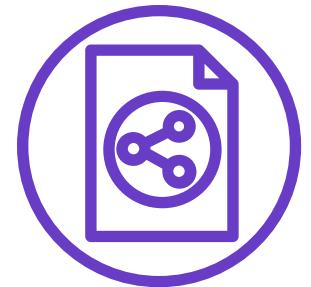

Classic
Load Balancer

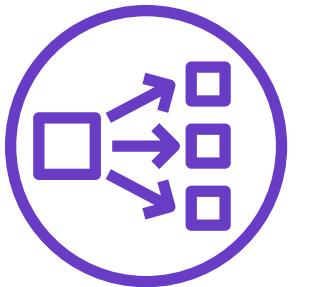

Network
Load Balancer

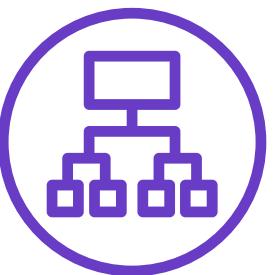

Application
Load Balancer



Amazon RDS




AWS EKS
&
RDS & ELB



Application Load Balancer

How Ingress Works?

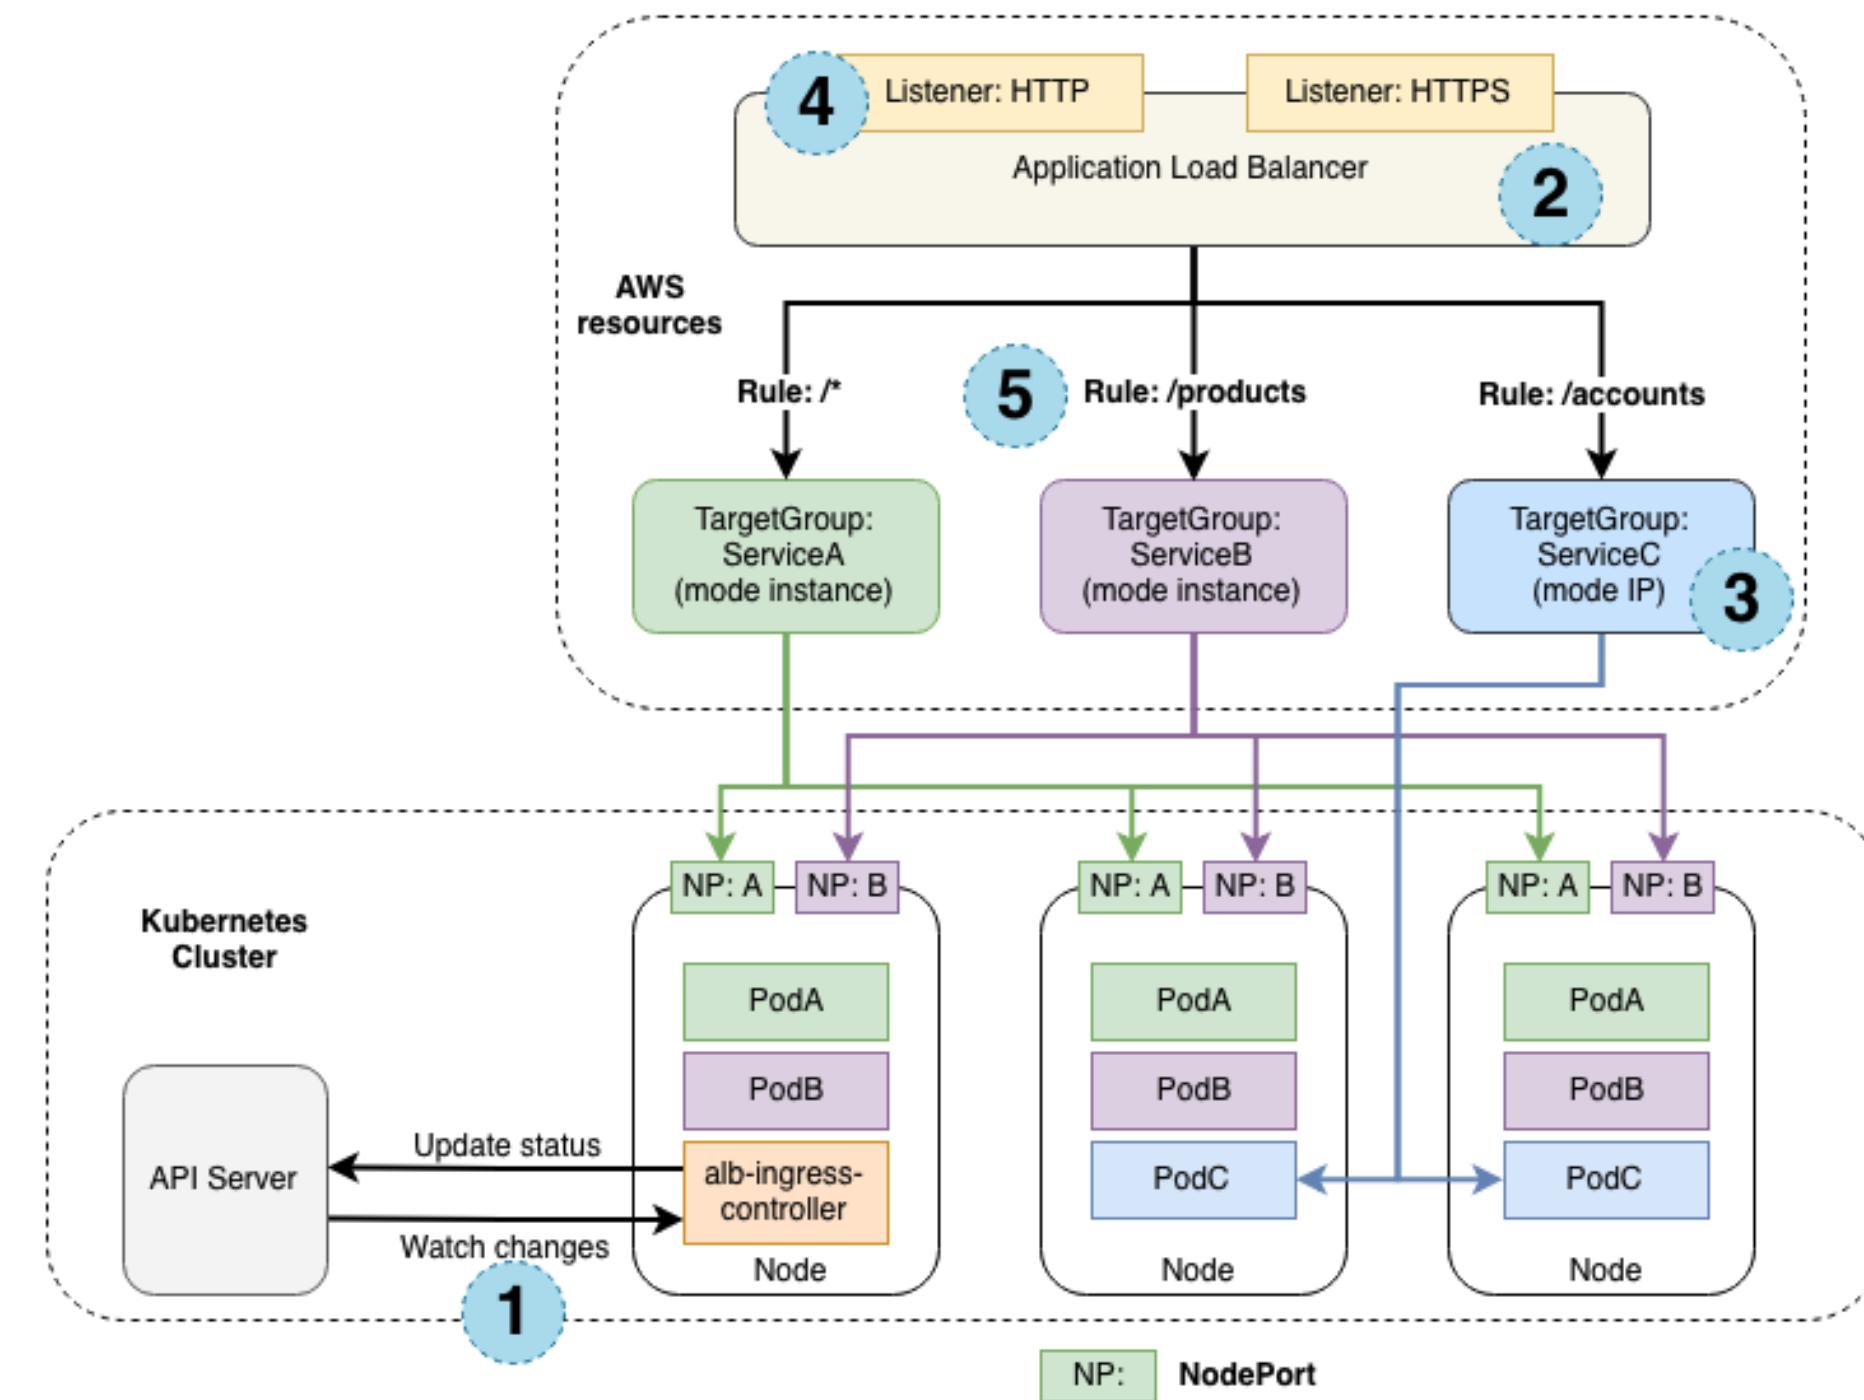

k8s ClusterRole

```

apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  labels:
    app.kubernetes.io/name: alb-ingress-controller
  name: alb-ingress-controller
rules:
- apiGroups:
  - ""
  - extensions
  resources:
  - configmaps
  - endpoints
  - events
  - ingresses
  - ingresses/status
  - services
  - pods/status
  verbs:
  - create
  - get
  - list
  - update
  - watch
  - patch
- apiGroups:
  - ""
  - extensions
  resources:
  - nodes
  - pods
  - secrets
  - services
  - namespaces
  verbs:
  - get
  - list
  - watch

```

k8s ServiceAccount

```

apiVersion: v1
kind: ServiceAccount
metadata:
  labels:
    app.kubernetes.io/name: alb-ingress-controller
  name: alb-ingress-controller
  namespace: kube-system

```

k8s ClusterRoleBinding

```

apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  labels:
    app.kubernetes.io/name: alb-ingress-controller
  name: alb-ingress-controller
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
  name: alb-ingress-controller
subjects:
- kind: ServiceAccount
  name: alb-ingress-controller
  namespace: kube-system


```

AWS IAM Policy

<https://raw.githubusercontent.com/kubernetes-sigs/aws-alb-ingress-controller/master/docs/examples/iam-policy.json>




STACKSIMPLIFY

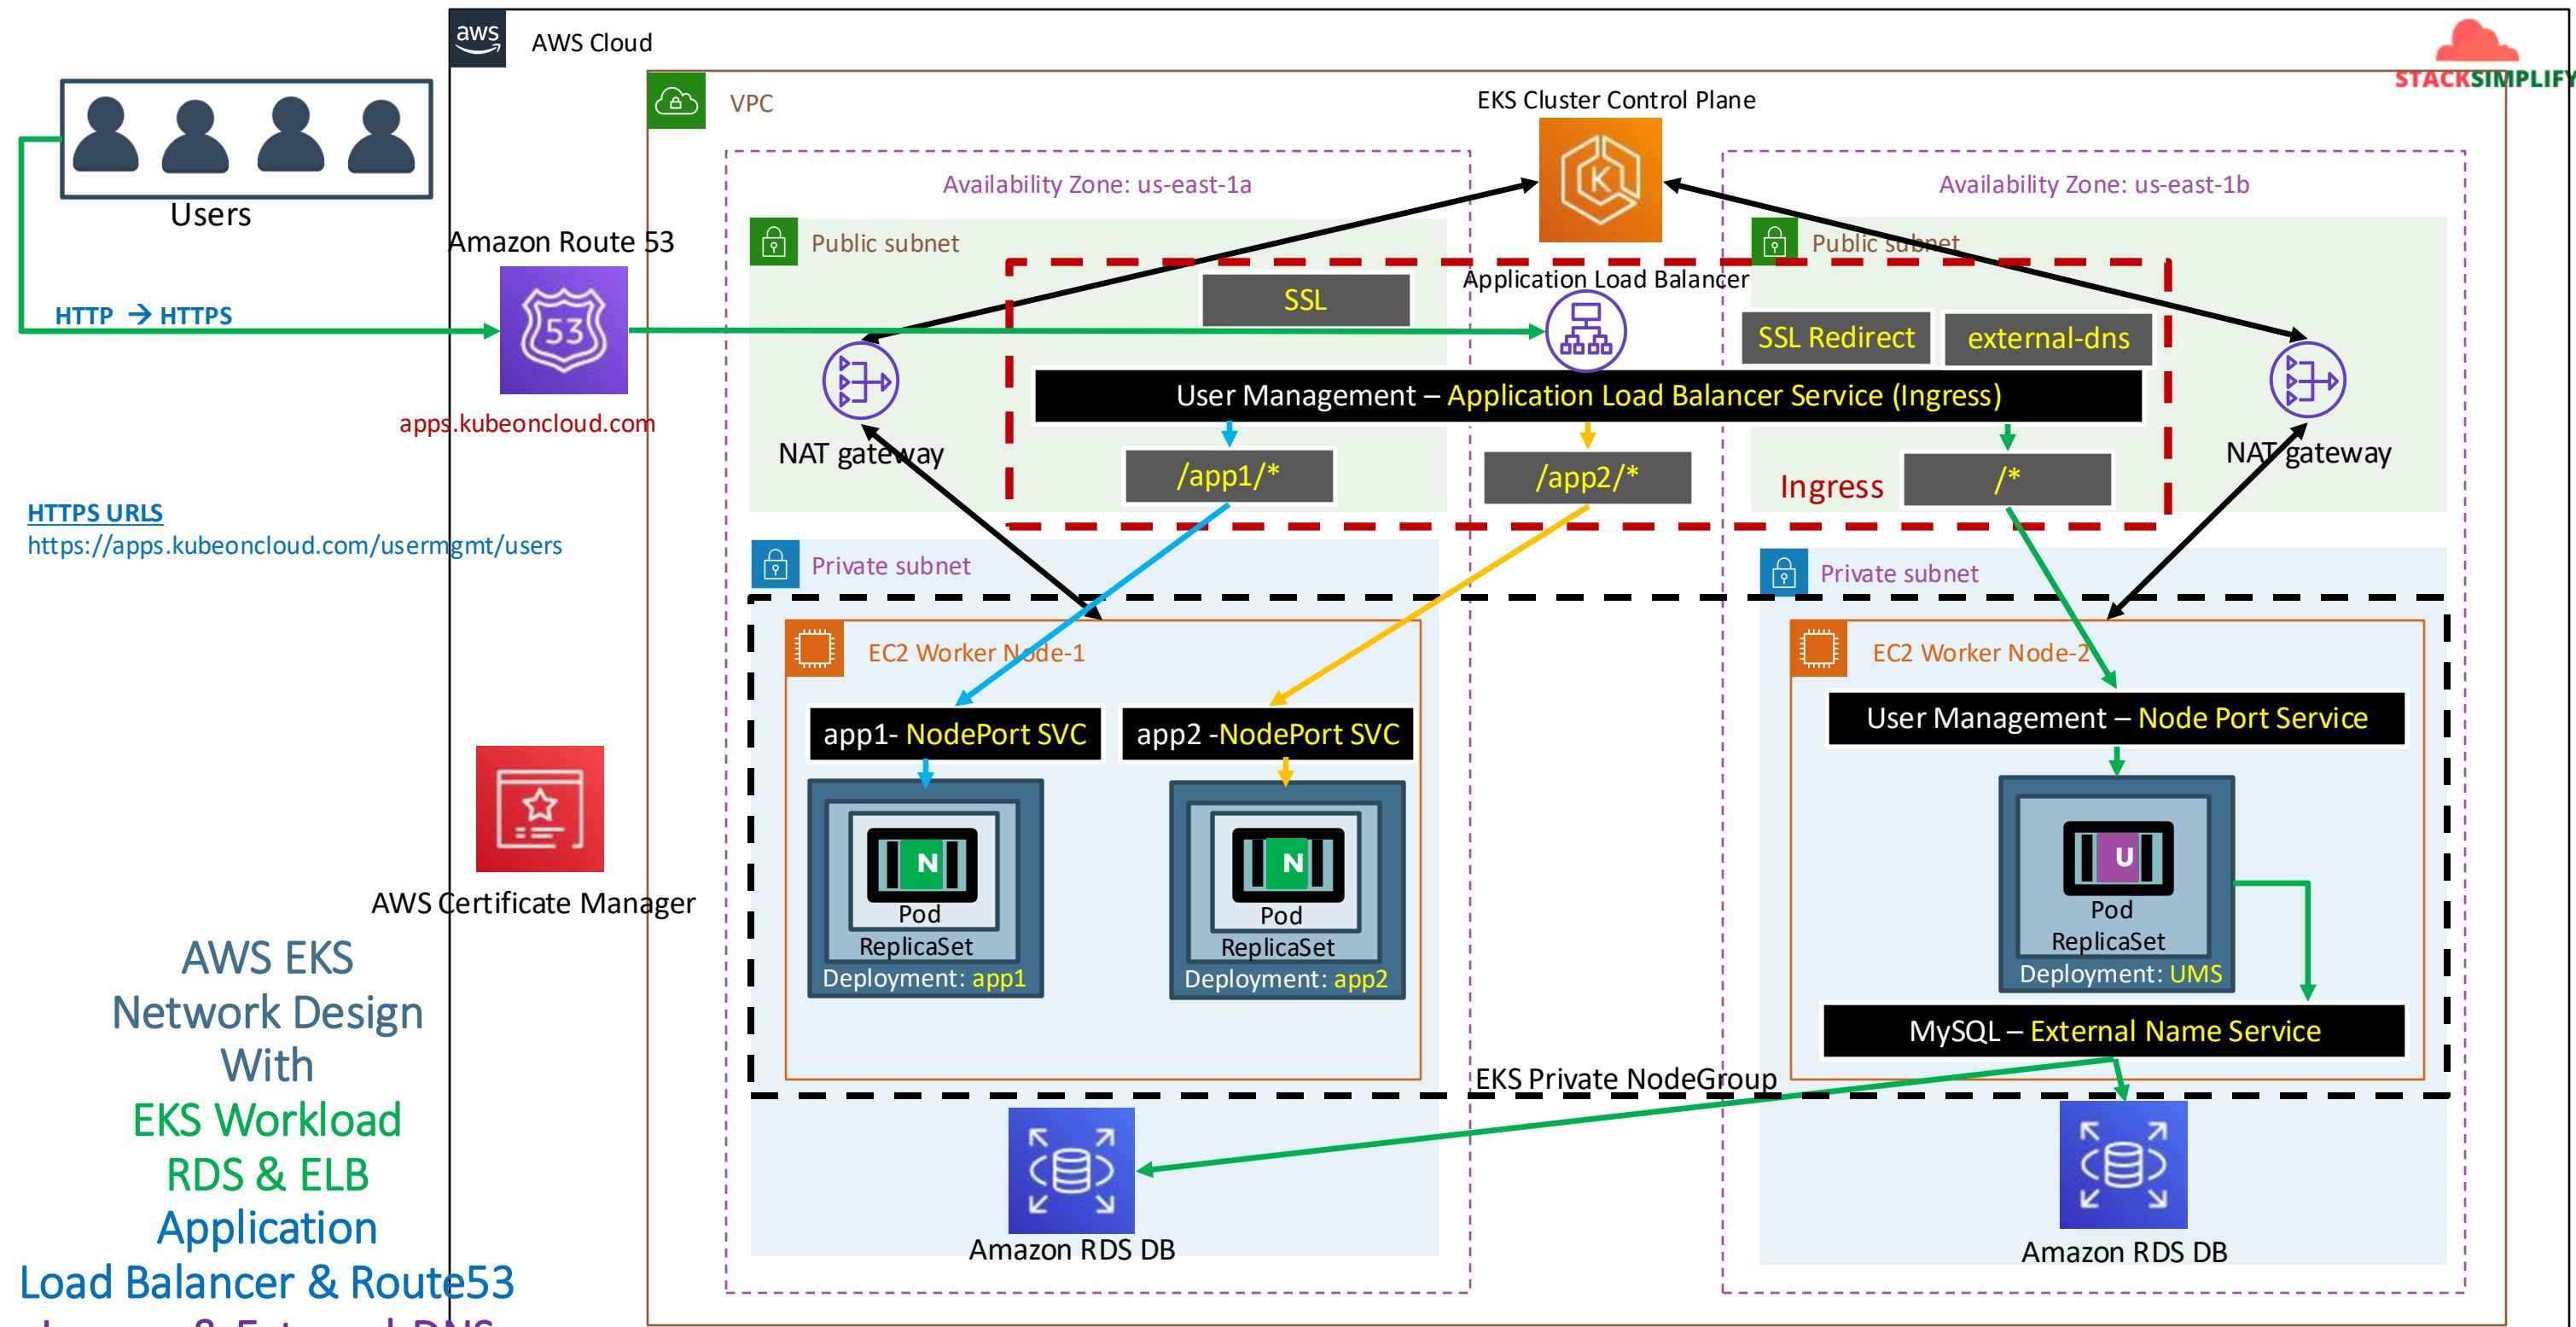





Elastic Load
Balancing

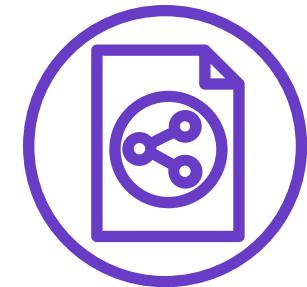

Classic
Load Balancer

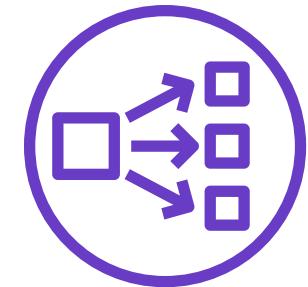

Network
Load Balancer

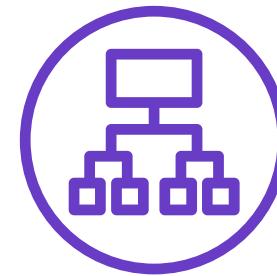

Application
Load Balancer




Amazon RDS



AWS EKS RDS & ELB Application Load Balancer Ingress Controller Basics



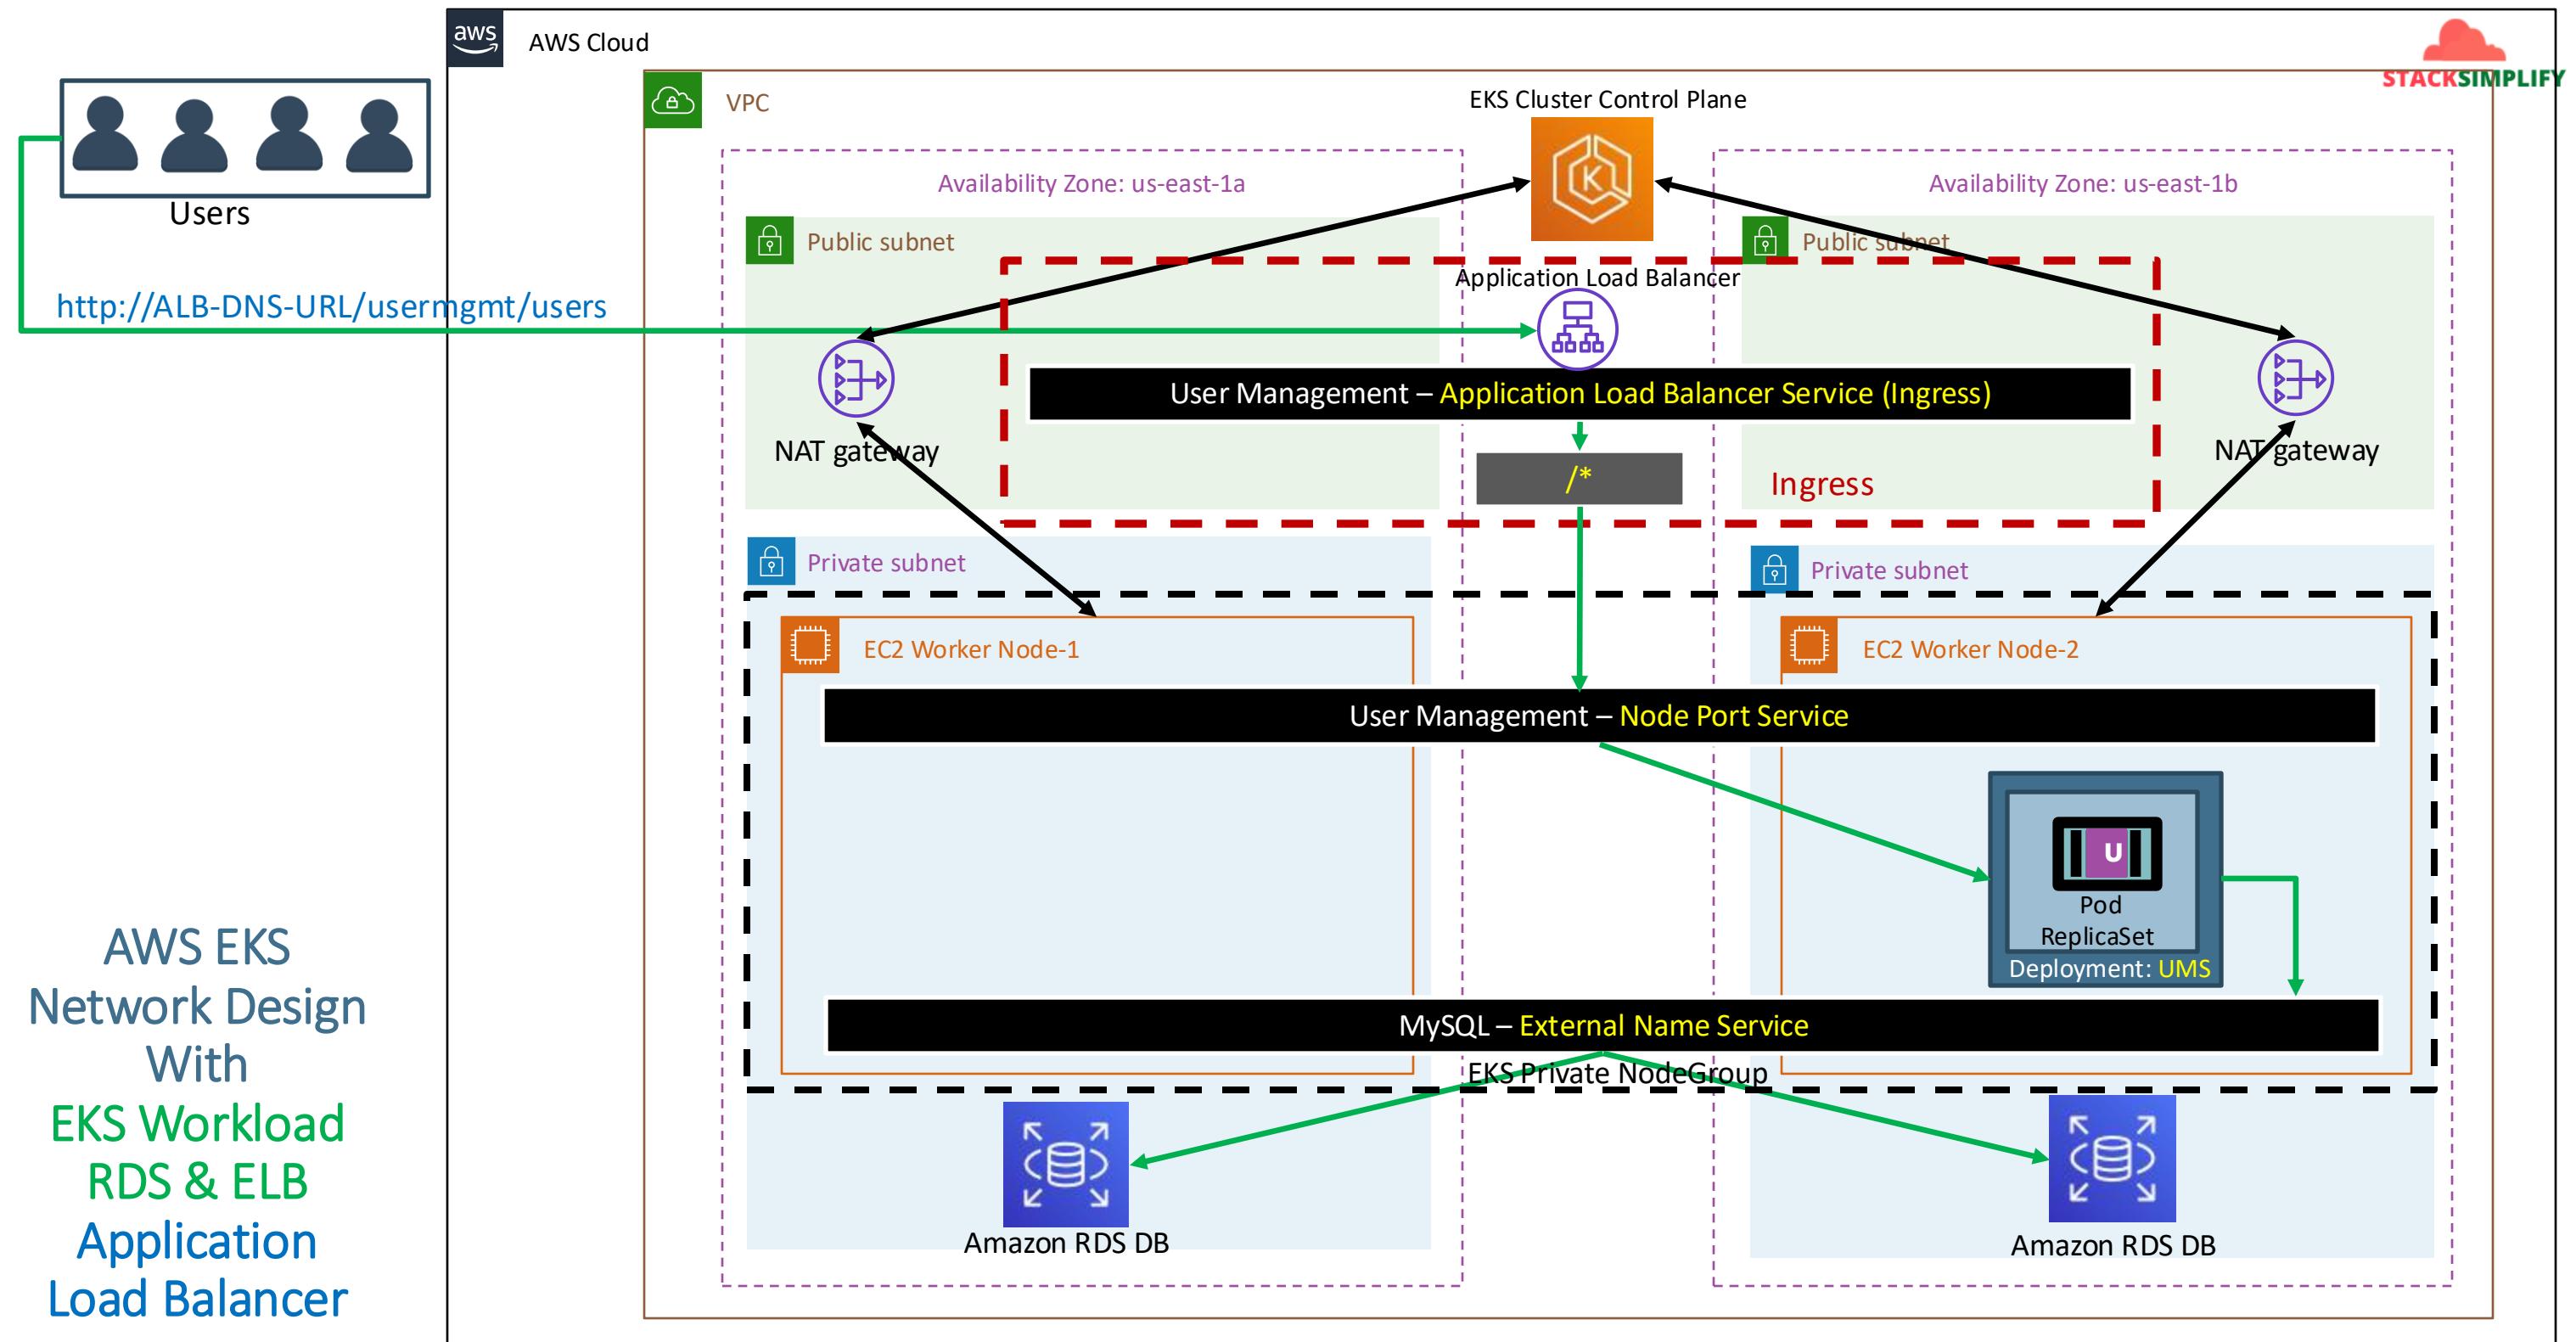





Elastic Load
Balancing



Classic
Load Balancer

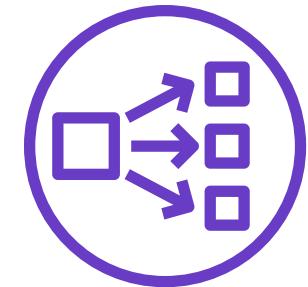

Network
Load Balancer

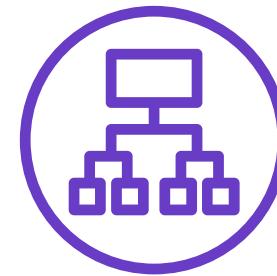

Application
Load Balancer




Amazon RDS




AWS EKS RDS & ELB Application Load Balancer Ingress Context Path based Routing



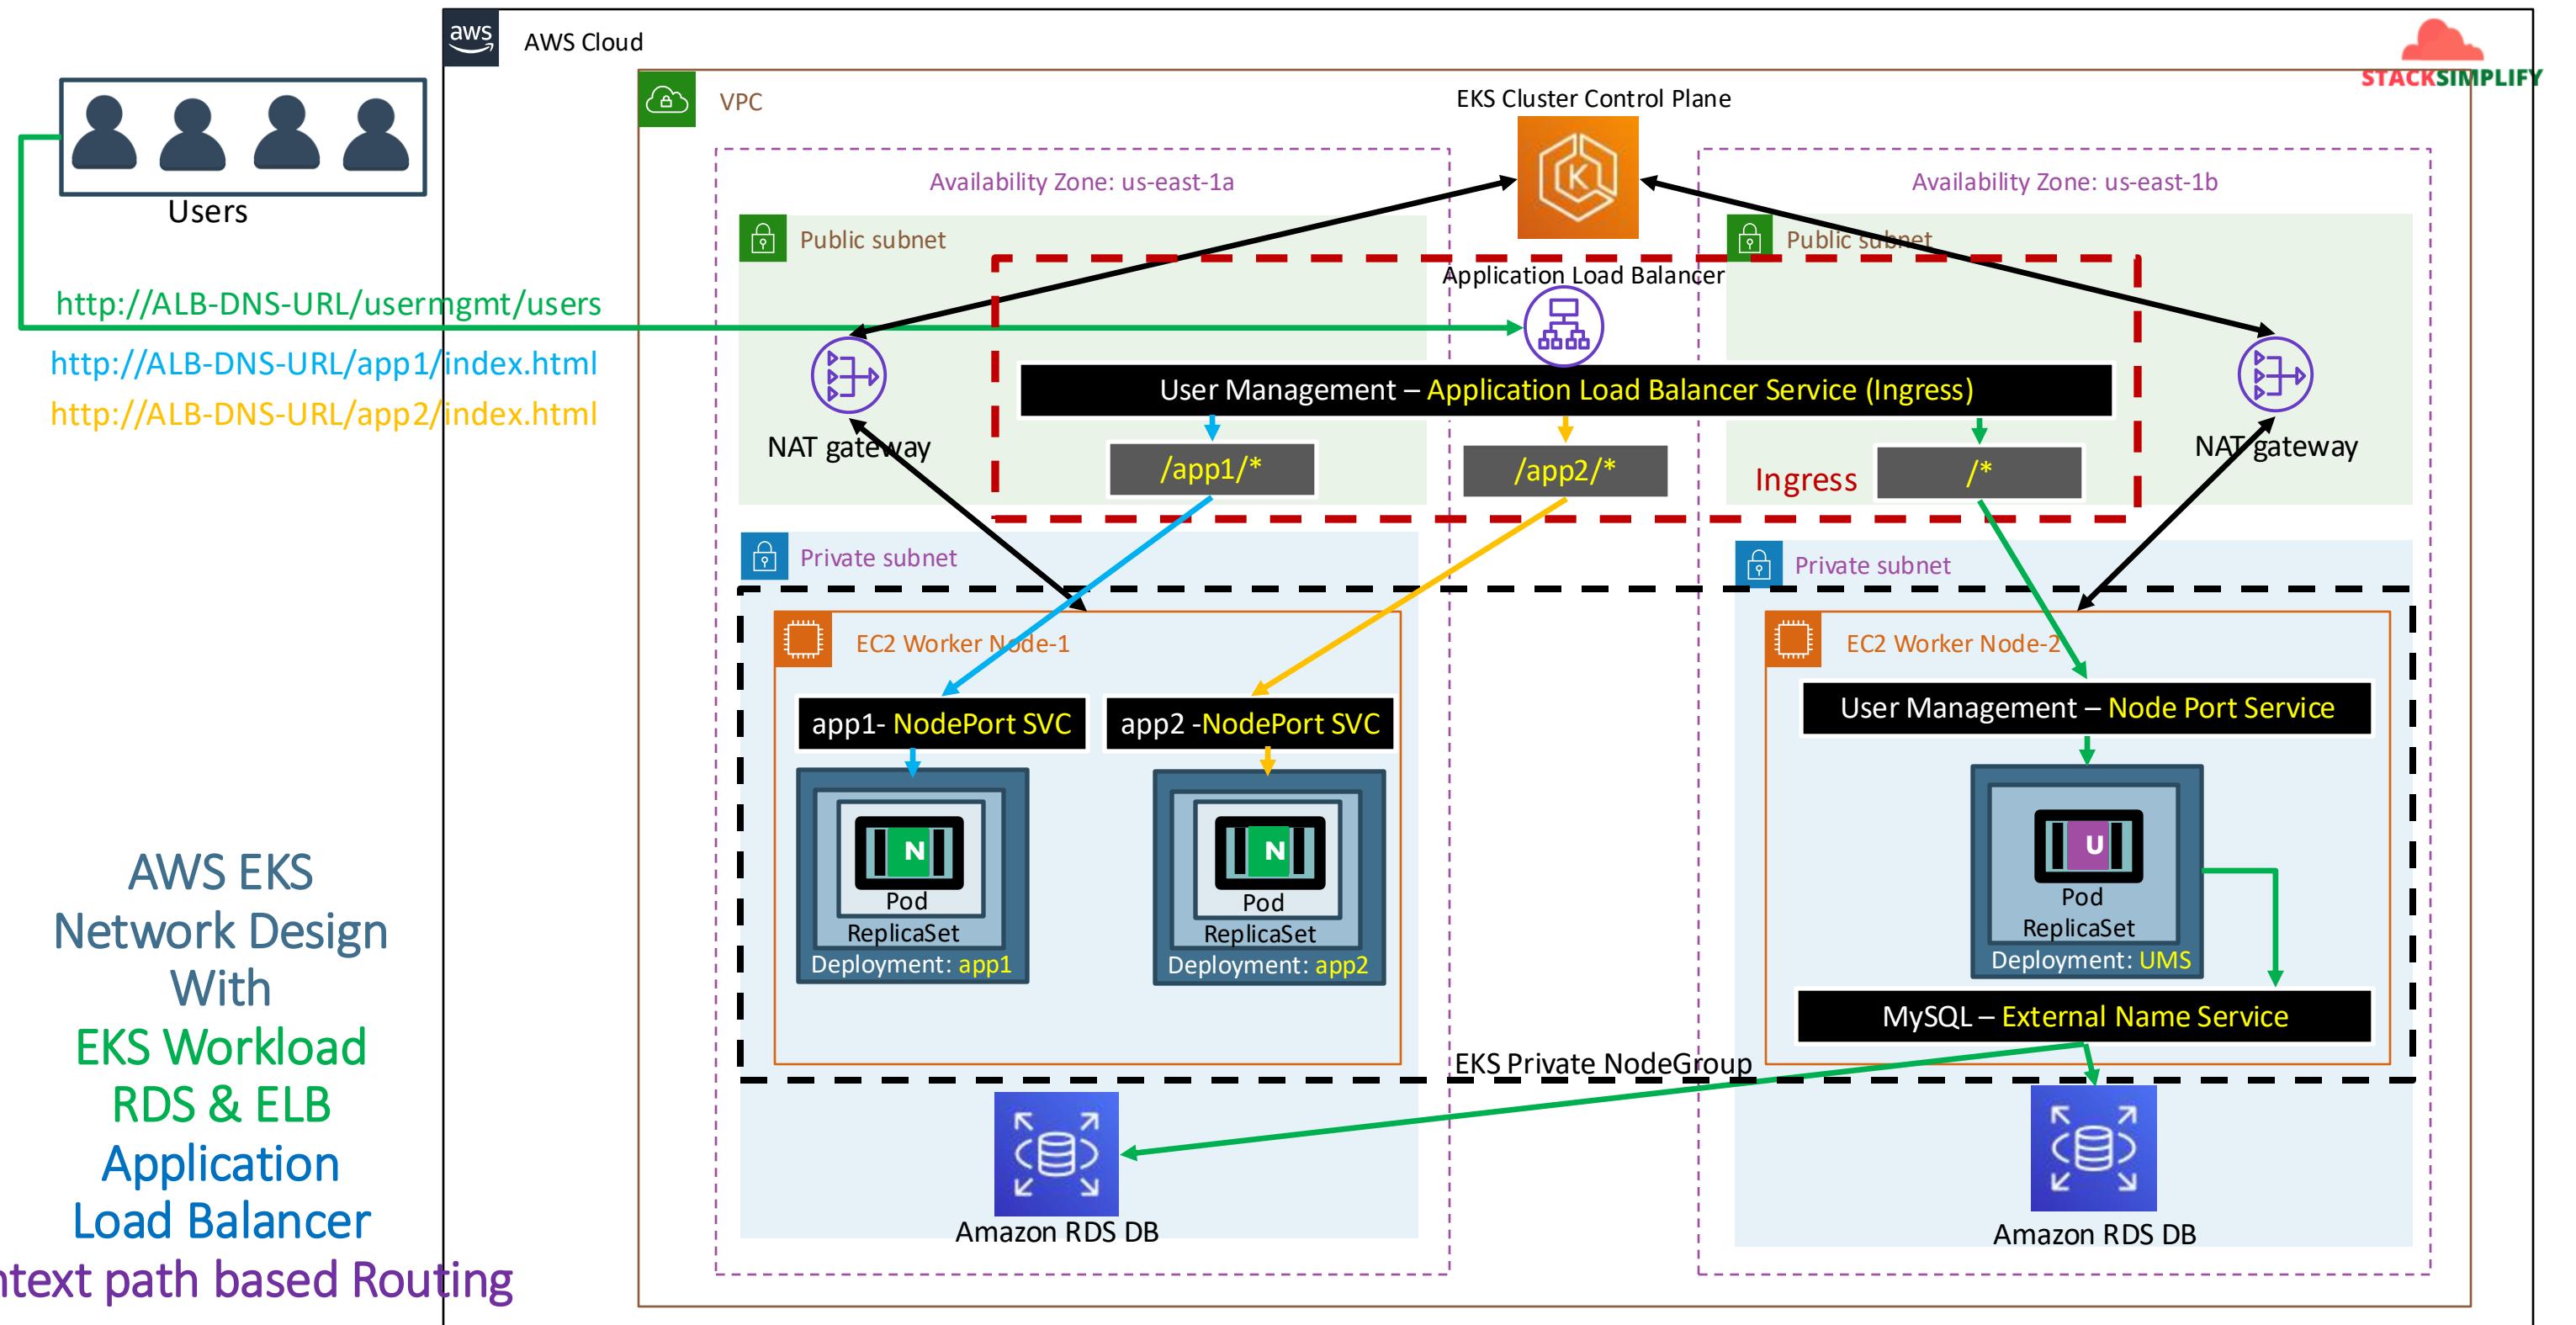





Elastic Load
Balancing

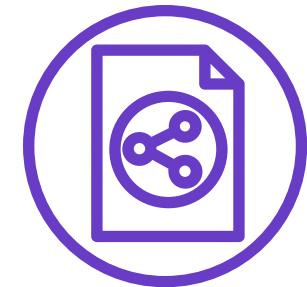

Classic
Load Balancer

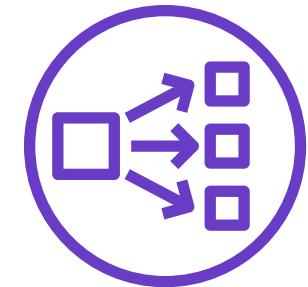

Network
Load Balancer

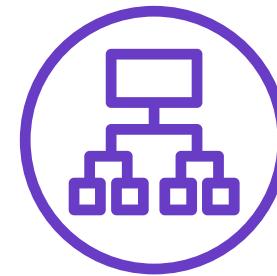

Application
Load Balancer




Amazon RDS




AWS EKS RDS & ELB Application Load Balancer Ingress SSL



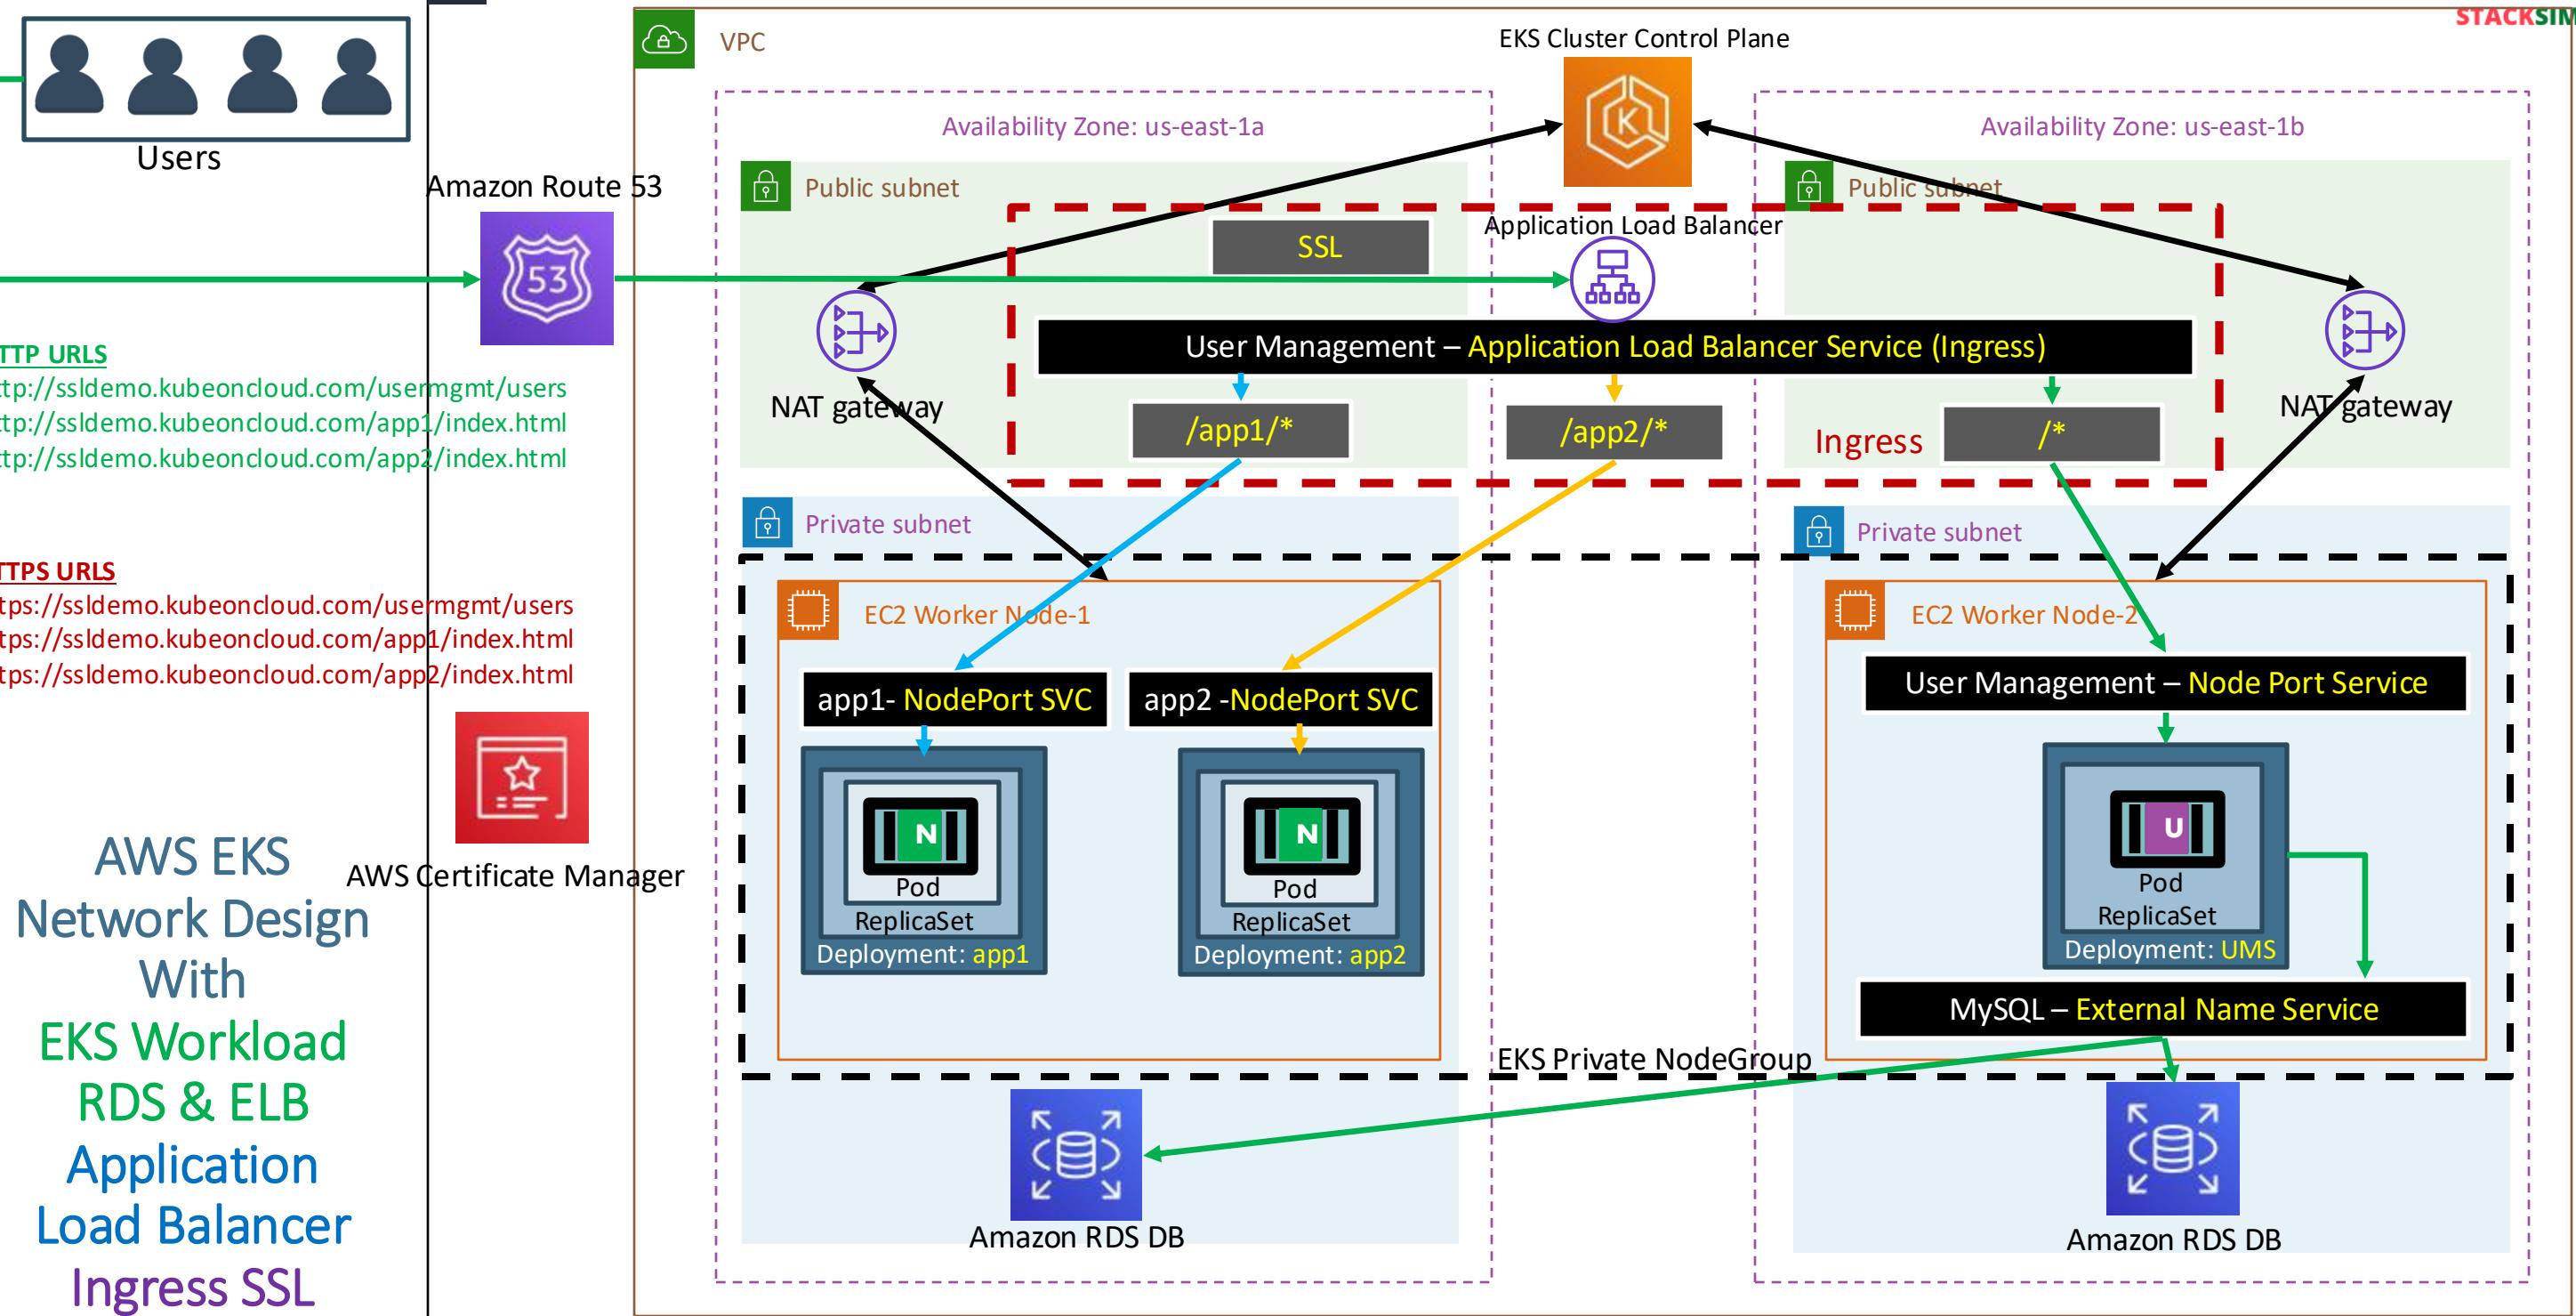





Elastic Load
Balancing

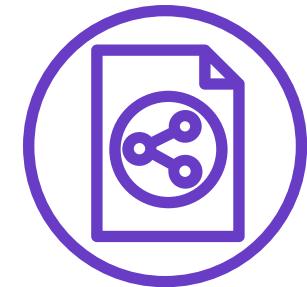

Classic
Load Balancer

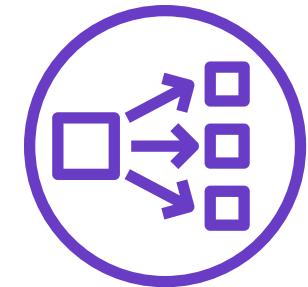

Network
Load Balancer

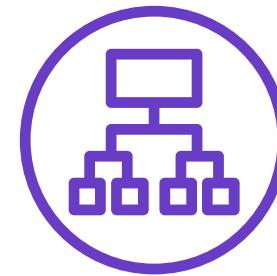

Application
Load Balancer




Amazon RDS



AWS EKS RDS & ELB Application Load Balancer Ingress SSL Redirect



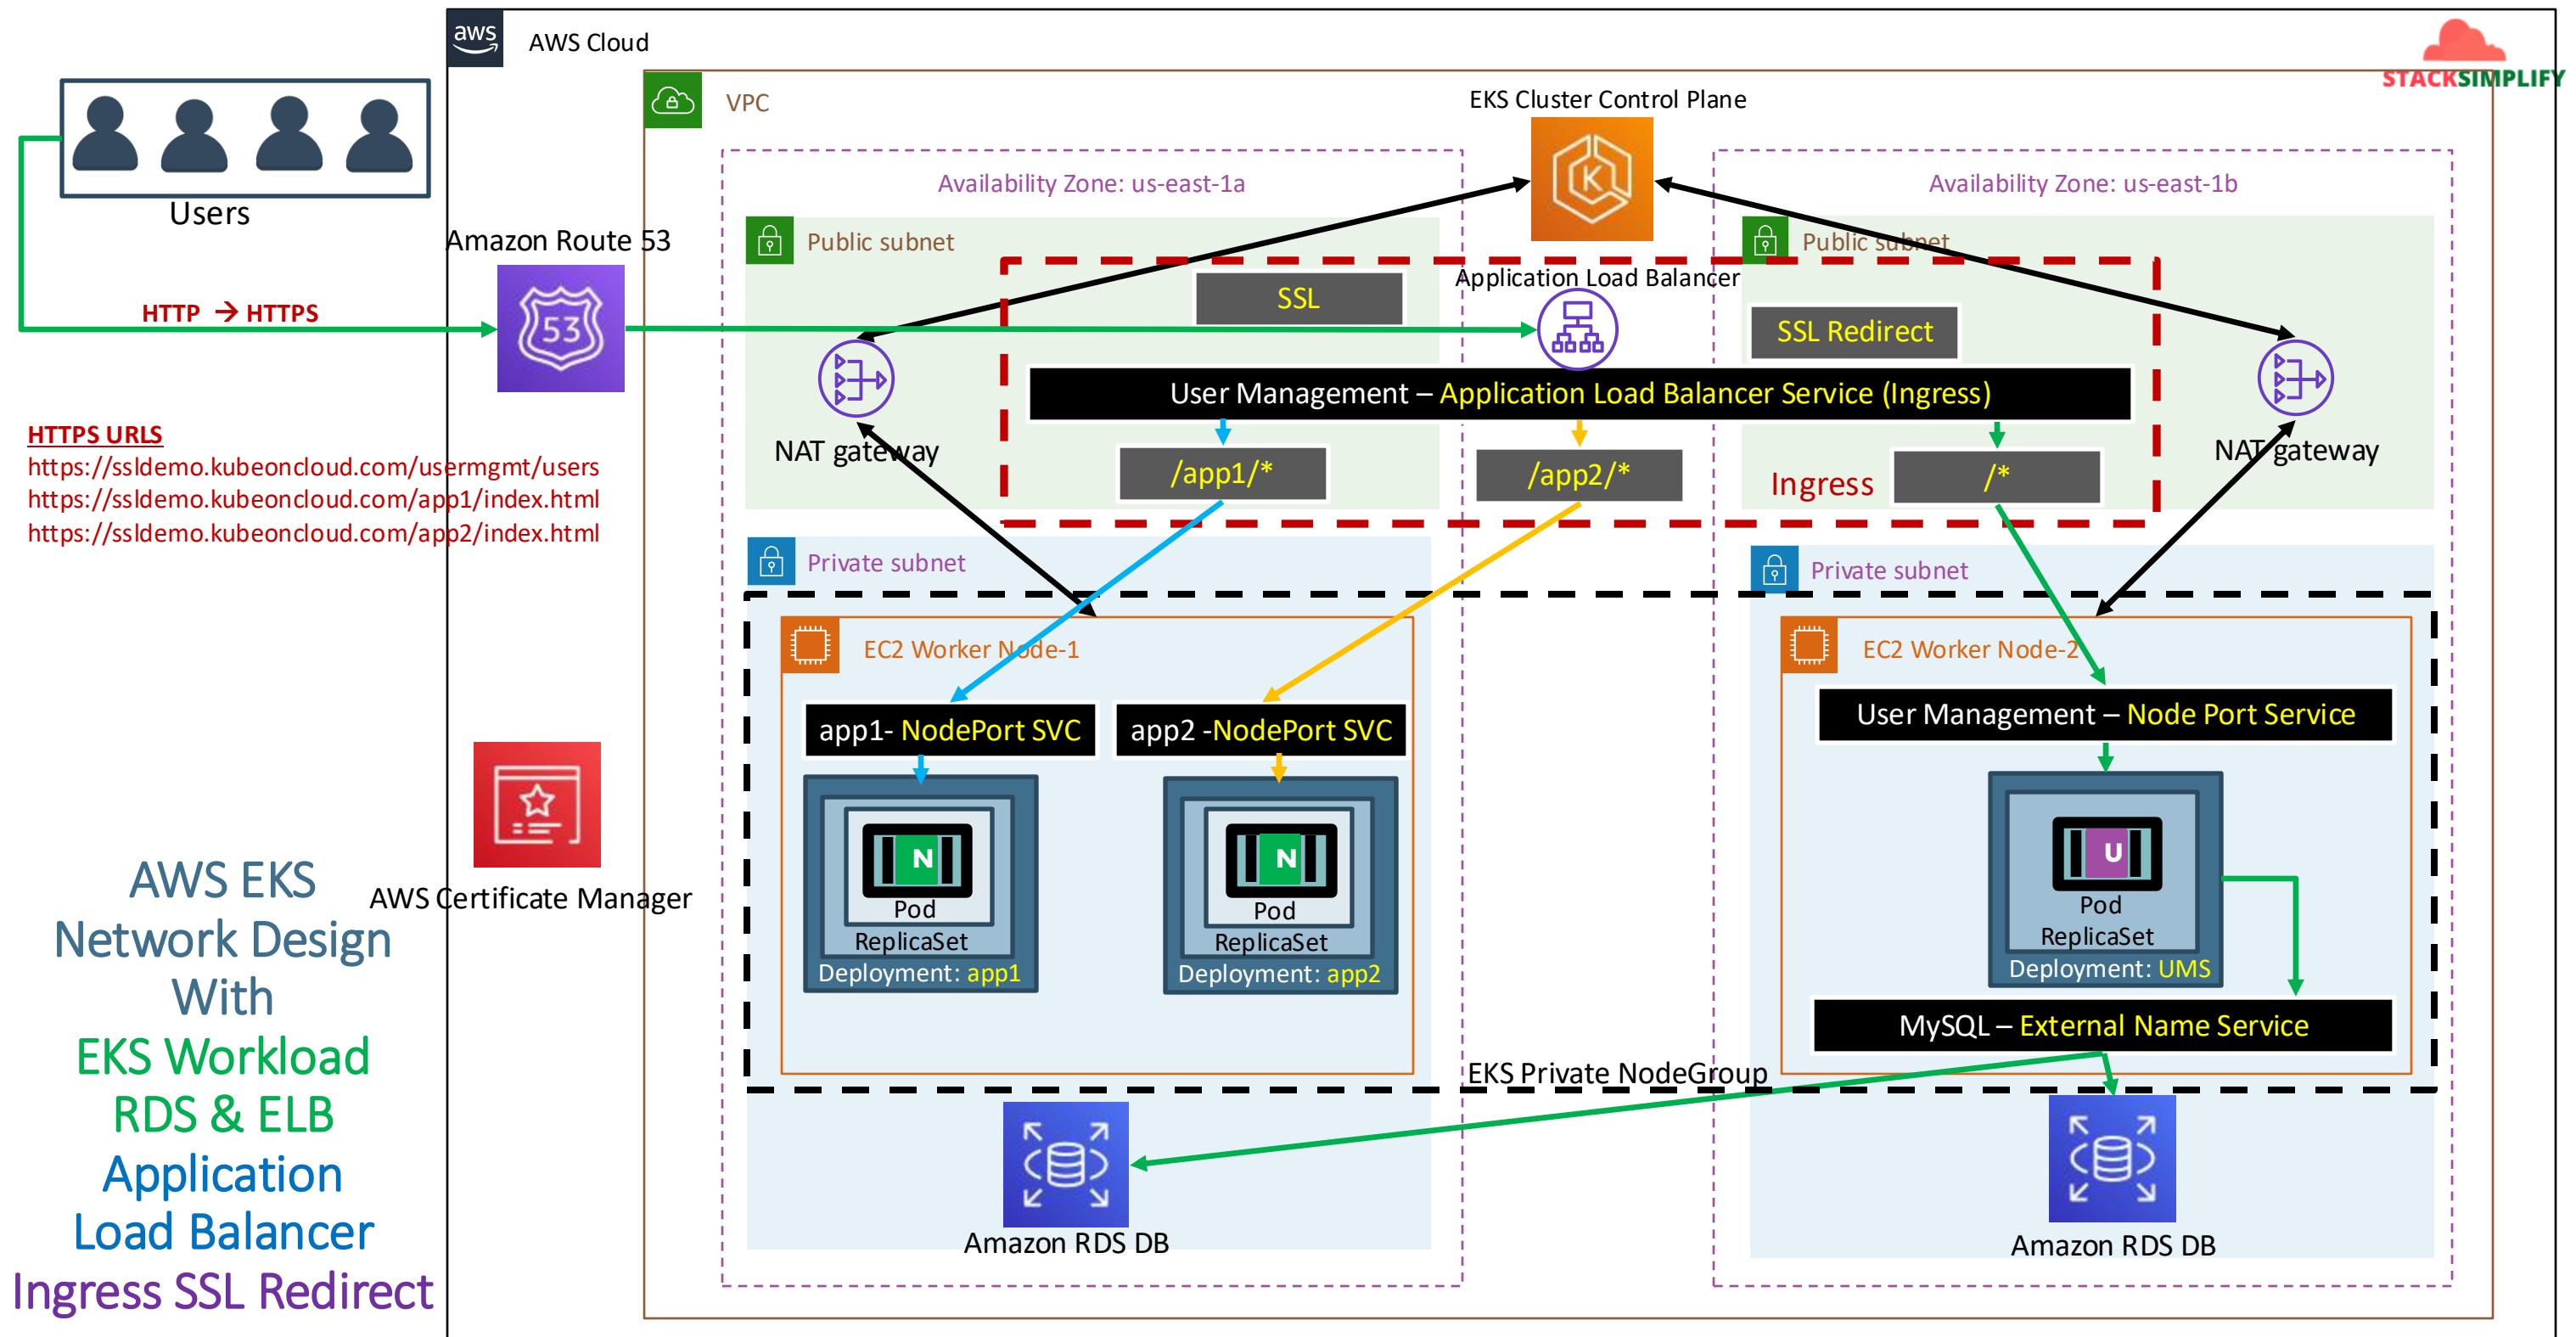





Elastic Load
Balancing



Classic
Load Balancer

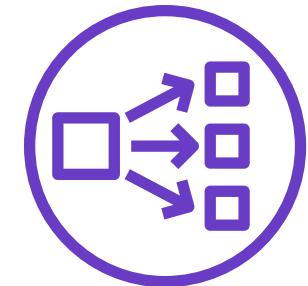

Network
Load Balancer

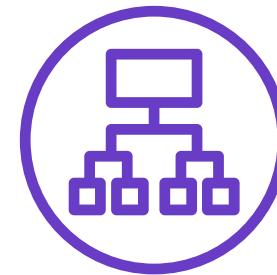

Application
Load Balancer



Amazon RDS



AWS EKS RDS & ELB Application Load Balancer & Route53



Ingress & External-DNS

