a Naive: reconstruct what you can see

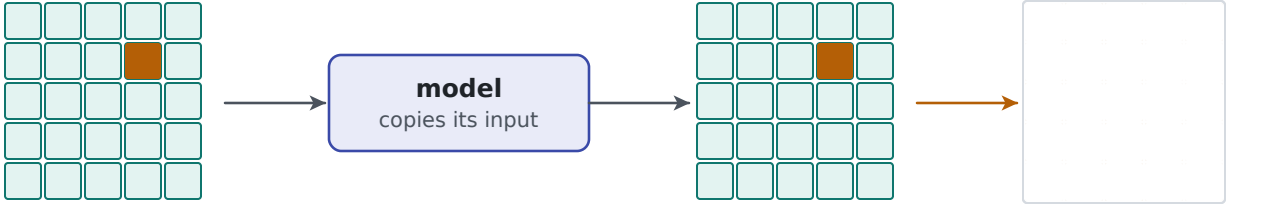

Copying is the optimal solution: nothing is found.

b Masked autoencoder: hide ~65% of tokens, predict them

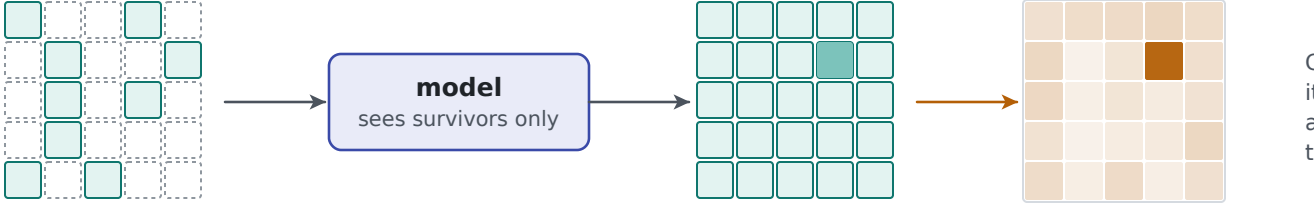

Graded only on hidden tokens: it must predict from context, and paints background over the unseen object.