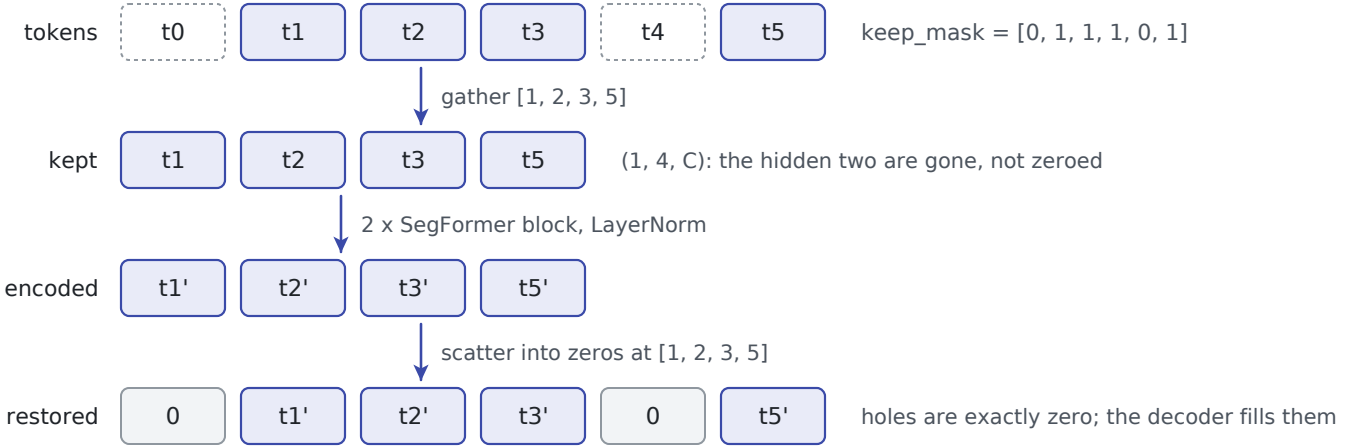
tokens
t0
t1
t2
t3
t4
t5
keep_mask = [0, 1, 1, 1, 0, 1]
gather [1, 2, 3, 5]
kept
t1
t2
t3
t5
(1, 4, C): the hidden two are gone, not zeroed
2 x SegFormer block, LayerNorm
encoded
t1'
t2'
t3'
t5'
scatter into zeros at [1, 2, 3, 5]
restored
0
t1'
t2'
t3'
0
t5'
holes are exactly zero; the decoder fills them