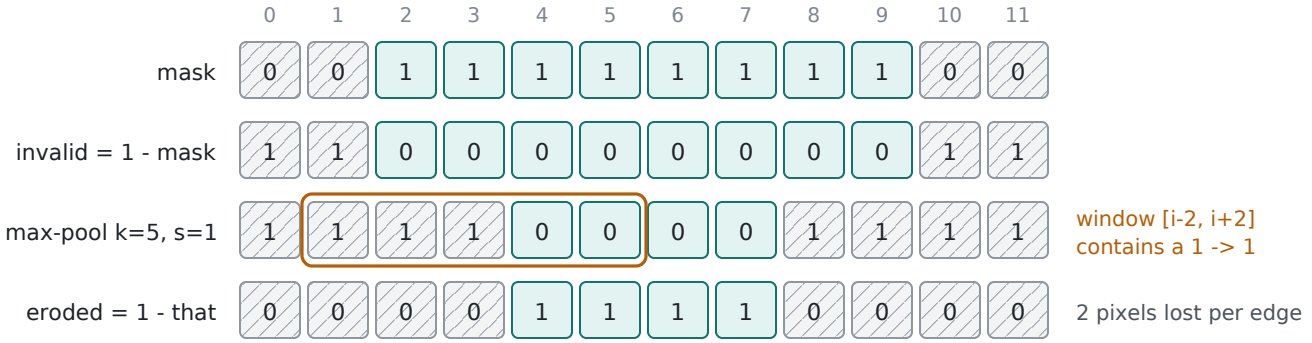

Radius = kernel_size // 2. Training default kernel 1 (no erosion); inference default 15, a 7-pixel collar around every cloud and scene edge. The eroded pixels are still reconstructed; they are left out of the loss or the score.

valid invalid or eroded