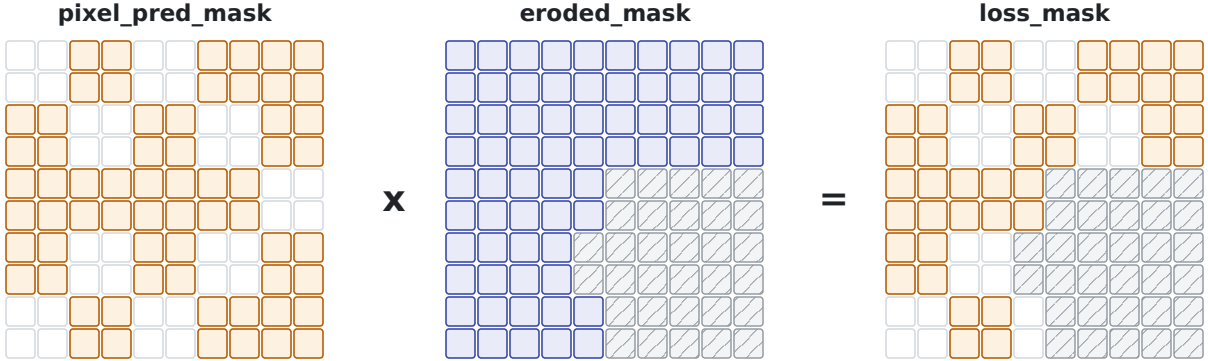


L1 for one graded pixel

x = [0.100, 0.200, 0.300]

x_hat = [0.120, 0.180, 0.330]

|diff| = [0.020, 0.020, 0.030]

mean = 0.070 / 3 = 0.02333

in reflectance units: each band is off by 0.023 on average

l1 = per-pixel mean over bands, then averaged where loss_mask = 1

Each 2 x 2 group of drawn pixels stands for one 4 x 4 token. Multiplying 0/1 masks is a logical AND: only hidden, valid, interior pixels are graded.